

Systematic Construction of Golay Complementary Sets of Arbitrary Lengths and Alphabet Sizes

Abhishek Roy

Department of Mathematics
Indian Institute of Technology Patna
Bihar, India- 801106
Email: 1821ma06@iitp.ac.in

Sudhan Majhi

Department of ECE
Indian Institute of Science, Bangalore
Karnataka, India- 560012
Email: smajhi@iisc.ac.in

Subhabrata Paul

Department of Mathematics
Indian Institute of Technology Patna
Bihar, India- 801106
Email: subhabrata@iitp.ac.in

Abstract—One of the important applications of Golay complementary sets (GCSs) is the reduction of peak-to-mean envelope power ratio (PMEPR) in orthogonal frequency division multiplexing (OFDM) systems. OFDM has played a major role in modern wireless systems such as long-term-evolution (LTE), 5th generation (5G) wireless standards, etc. This paper searches for systematic constructions of GCSs of arbitrary lengths and alphabet sizes. The proposed constructions are based on extended Boolean functions (EBFs). For the first time, we can generate codes of independent parameter choices.

Index Terms—Aperiodic auto-correlation function (AACF), Golay complementary set (GCS), peak-to-mean envelope power ratio (PMEPR), data rate, information theory.

I. INTRODUCTION

The importance of alphabet size has recently come to the forefront of the sequence design research community [1]. The foundation and theoretical development on the research of signaling alphabets have been done long ago in 1952 [2]. The authors found that the Shannon Capacity (C), which is given by

$$C = B \log_2 \left(1 + \frac{S}{N} \right),$$

where B is the bandwidth of the channel, S is the signal power, and N is the noise power, cannot be achieved without using a flexible choice of alphabets in the data bits. For binary channels, the channel capacity is given by

$$C = 1 + p \log_2(p) + (1 - p) \log_2(1 - p),$$

where p is the probability of error of a data bit. To elaborate more, the authors showed that for an alphabet with $p < 1/4$, one can achieve a rate higher than $R_{0,b} - \epsilon$, where

$$R_{0,b} = 1 + 2p \log_2(2p) + (1 - 2p) \log_2(1 - 2p),$$

with a suitable choice of alphabet. The analogous argument also holds true for non-binary channels. The corresponding value of $R_{0,b}$ for non-binary channel is given by

$$R_{0,nb} = \log_2(n + 1) + 2p \log_2 \left(\frac{2p}{n} \right) + (1 - 2p) \log_2(1 - 2p),$$

where n is the number of digits used to construct a letter of the alphabet, and the probability of each digit is $\frac{p}{n}$. In fact, considering an additive white Gaussian noise (AWGN)-channel [3], the authors in [2] have explicitly constructed different alphabets, which produces good efficiency curves with respect to the information-rate-per-bandwidth.

There are two notions of alphabets in information theory, and to clear any ambiguity, we discuss the second notion here that fits in the sequence design aspect. The sequence design in the context of information theory consists of constructing spreading sequences. For spreading sequences, the number of digits n of a non-binary channel is known as alphabet size, and we distinguish it with the notation q ($q > 1$ is a natural number). The alphabet size q plays the role of making the sequence elements uni-modular, explicitly saying, q -th roots of unity. The use of spreading sequences started with the famous Golay complementary pair (GCP) [4], [5], which shows the ideal aperiodic auto-correlation function (AACF) sum property. Ever since its discovery, it has been widely used in modern telecommunication systems, as the AACF property is suitable for interference-free signal detection in radar [6], [7], reduction of peak-to-mean envelope power ratio (PMEPR) in orthogonal frequency division multiplexing (OFDM) system [8], etc. But, as there are practical limits on how many such Golay sequences can be obtained, Tseng and Liu proposed the concept of the Golay complementary set (GCS), which holds the same ideal AACF sum property but with more than 2 sequences [9].

Till date, there have been many constructions of GCSs of variable lengths and alphabet sizes, both with direct methods, i.e., function-based, and indirect methods, i.e., initial sequence-based. The direct methods can be found in [10]–[18], and the indirect ones in [19]–[31]. The problem with these direct constructions is that they are mostly even-phased, except [18]. Although [18] offers more flexibility in the alphabet size for the sequence elements, it depends on the GCS length. Considering these limitations, in this paper, we propose a function-based direct construction of GCSs with the length and alphabet size chosen arbitrarily and independently.

The rest of the paper is organized as follows: Section II describes the useful definitions and tools for the construction. The main construction is proposed in Section III. The conclusion is drawn in Section IV.

II. PRELIMINARY

In this section, we define some preliminary notions and the definitions for the subsequent sections and subsections.

Definition 1 (ACCF): For a complex-valued sequence pair, (\mathbf{a}, \mathbf{b}) , where $\mathbf{a} = (a_1, a_2, \dots, a_L)$, $\mathbf{b} = (b_1, b_2, \dots, b_L)$, the aperiodic cross-correlation function (ACCF) at time shift τ is defined as

$$\rho(\mathbf{a}, \mathbf{b})(\tau) = \begin{cases} \sum_{i=1}^{L-\tau} a_i b_{i+\tau}^*, & 0 \leq \tau < L; \\ \sum_{i=1}^{L+\tau} a_{i-\tau} b_i^*, & -L < \tau < 0; \\ 0, & \text{otherwise,} \end{cases} \quad (1)$$

where $(\cdot)^*$ denotes the complex conjugate.

Note 1: When $\mathbf{a} = \mathbf{b}$, then the function is called the AACF and denoted by $\rho(\mathbf{a})(\tau)$.

Definition 2 (GCS): A GCS is a set of sequences $\mathbf{C} = \{\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_M\}$ of fixed length L (or codes) that exhibit the following property:

$$\sum_{\lambda=1}^M \rho(\mathbf{a}_\lambda)(\tau) = 0, \tau \neq 0. \quad (2)$$

In this paper, we denote a GCS of set size M , length L , and alphabet size q as an (q, M, L) -GCS.

Note 2: The property of a GCS is the ideal auto-correlation property. When $M = 2$, a GCS reduces to GCP.

A. Extended Boolean Function (EBF)

The EBF is an extension of the generalized Boolean function (GBF). For a set of integers modulo N defined by $\mathbb{Z}_N = \{0, 1, \dots, N-1\}$, a GBF is defined to be any function $f: \mathbb{Z}_2^m \rightarrow \mathbb{Z}_q$ which is a \mathbb{Z}_q -linear combination of the monomials:

$$\mathcal{M} = \{x_1, x_2, \dots, x_m, x_1 x_2, \dots, x_1 x_2 \cdots x_m\},$$

where $2 \mid q$, and the operations are done in the modulo q settings. This function form called the algebraic normal form (ANF), is unique to a GBF. An EBF can be regarded as a GBF-like function where we extend the domain of the GBF. Specifically, an EBF is defined as $f: \mathbb{Z}_p^m \rightarrow \mathbb{Z}_q$, which may be defined as the \mathbb{Z}_q -linear combination of the same monomials in \mathcal{M} , where p and q are any positive integers.

Note 3: The function form with monomials for an EBF may not be unique in general.

One can associate a \mathbb{Z}_q -valued and a complex-valued sequence corresponding to an EBF. Let $\vec{i} = (i_1, i_2, \dots, i_m)$ be the p -ary representation of the integer i , where $0 \leq i \leq p^m - 1$.

Then the \mathbb{Z}_q -valued sequence \mathbf{f} corresponding to the EBF f is given by

$$\mathbf{f} = \left(f(\vec{0}), f(\vec{1}), \dots, f(\vec{p^m - 1}) \right). \quad (3)$$

The complex-valued sequence $\psi(f)$ is defined similarly as

$$\psi(f) = \left(\zeta_q^{f(\vec{0})}, \zeta_q^{f(\vec{1})}, \dots, \zeta_q^{f(\vec{p^m - 1})} \right), \quad (4)$$

where $\zeta_q = e^{2\pi\sqrt{-1}/q}$ is the q -th primitive root of unity. Also, $\psi_L(f)$ denotes the complex-valued sequence derived from the sequence $\psi(f)$ after deleting the last $p^m - L$ elements. Similarly, $\phi_L(\mathbf{f})$ denotes the \mathbb{Z}_q -valued sequence derived from \mathbf{f} after deleting the last $p^m - L$ elements.

B. Peak-to-Mean Envelope Power Ratio (PMEPR)

The envelope power is an essential property of a transmission system of OFDM. It, in a way, measures the power efficiency of the system. PMEPR should be ideally low for efficient transmission. For a \mathbb{Z}_q -valued sequence $\mathbf{a} = (a_1, a_2, \dots, a_L)$, the PMEPR [8] is defined as

$$\text{PMEPR}(\mathbf{a}) = \sup_{0 \leq \Delta f t \leq 1} \frac{|S_{\mathbf{a}}(t)|^2}{L}, \quad (5)$$

where $S_{\mathbf{a}}(t) = \sum_{i=1}^L \zeta_q^{a_i + q f_i t}$ is the complex envelope of the transmitted signal, $f_i = f + (i-1)\Delta f$, f is the carrier frequency of the first sub-carrier of OFDM, Δf is the sub-carrier spacing in OFDM, t represents the time instance.

Lemma 1 ([8]): For a GCS with flock size M , the PMEPR of each sequence is bounded by M .

III. PROPOSED CONSTRUCTION

In this section, we propose the construction of a general q -ary GCS with arbitrary lengths with the help of EBFs.

Theorem 1: Let $p, m \in \mathbb{N}$ and π be a permutation on the set $\{1, 2, \dots, m-1\}$ with $\pi(1) = 1$. Let $L \in \mathbb{N}$, where $p^{m-1} \leq L < p^m$, $L-1 = \sum_{\alpha=1}^{m-1} d_\alpha p^{\alpha-1} + d_m p^{m-1}$, $d_m, d_\alpha \in \mathbb{Z}_p, \forall \alpha$, and either $d_m \neq 0$ or $d_\alpha = p-1, \forall \alpha \in \{1, 2, \dots, m-1\}$. Let k be the smallest number such that $d_\alpha = 0, \forall m-1 \geq \alpha \geq k$. If such a k does not exist, we set $k = 2$. Let $f: \mathbb{Z}_p^m \rightarrow \mathbb{Z}_q$, where q is any integer such that $p \mid q$ and the function f is defined by

$$\begin{aligned} f(x_1, x_2, \dots, x_m) = & \frac{q}{p} \sum_{\alpha=1}^{m-2} x_{\pi(\alpha)} x_{\pi(\alpha+1)} \\ & + g(x_1, \dots, x_{m-1}) \prod_{l=0}^{d_m-1} (x_m - l) \quad (6) \\ & + \sum_{\alpha=1}^m c_\alpha x_\alpha + c', \end{aligned}$$

where $c' \in \mathbb{Z}_q$ and $g(x_1, x_2, \dots, x_{m-1})$ is any function $g: \mathbb{Z}_p^{m-1} \rightarrow \mathbb{Z}_q$. Further, we define the functions a^γ for $\gamma = (\gamma_1, \gamma_2, \dots, \gamma_k) \in \mathbb{Z}_p^k$, such that

$$\begin{aligned}
a^\gamma(x_1, x_2, \dots, x_m) &= f(x_1, x_2, \dots, x_m) + \gamma_1 \frac{q}{p} x_{\pi(1)} \\
&\quad + \frac{q}{p} \sum_{\alpha=2}^{k-1} \gamma_\alpha x_\alpha + \gamma_k \frac{q}{p} x_m. \tag{7}
\end{aligned}$$

Then, the sequence set $\{\psi_L(a^\gamma) : \gamma \in \mathbb{Z}_p^k\}$ is a (q, p^k, L) -GCS.

Proof: We let $j = i + \tau$ and $(i_1, i_2, \dots, i_m), (j_1, j_2, \dots, j_m)$ be the p -ary representations of the natural numbers i and j , respectively. As $\rho(\mathbf{a})(-\tau) = \rho^*(\mathbf{a})(\tau)$, we shall only focus on the part where $\tau \geq 0$, in this proof. We divide this proof into two parts for easy understanding:

Case I: Let $0 < \tau < p^{m-1}$. In this case, we have two sub-cases:

Sub-case 1: Let $i_{\pi(1)} \neq j_{\pi(1)}$. Then, we have

$$\begin{aligned}
a^\gamma(\vec{i}) - a^\gamma(\vec{j}) &= (f(\vec{i}) - f(\vec{j})) + \gamma_1 \frac{q}{p} (i_{\pi(1)} - j_{\pi(1)}) \\
&\quad + \frac{q}{p} \sum_{\alpha=2}^{k-1} \gamma_\alpha (i_{\pi(\alpha)} - j_{\pi(\alpha)}) \\
&\quad + \gamma_k \frac{q}{p} (i_m - j_m). \tag{8}
\end{aligned}$$

This implies

$$\begin{aligned}
\sum_{\gamma \in \mathbb{Z}_p^k} \zeta_q^{a^\gamma(\vec{i}) - a^\gamma(\vec{j})} &= \zeta_q^{(f(\vec{i}) - f(\vec{j}))} \times \sum_{\gamma_1} \zeta_q^{\frac{q}{p} \gamma_1 (i_{\pi(1)} - j_{\pi(1)})} \\
&\quad \times \prod_{\alpha=2}^{k-1} \sum_{\gamma_\alpha} \zeta_q^{\frac{q}{p} \gamma_\alpha (i_{\pi(\alpha)} - j_{\pi(\alpha)})} \\
&\quad \times \sum_{\gamma_k} \zeta_q^{\frac{q}{p} \gamma_k (i_m - j_m)} \\
&= 0, \tag{9}
\end{aligned}$$

as $\sum_{\gamma_1=0}^{p-1} \zeta_q^{\frac{q}{p} \gamma_1 (i_{\pi(1)} - j_{\pi(1)})} = 0$.

Sub-case 2: Let $i_{\pi(1)} = j_{\pi(1)}$. As $0 < \tau < p^k$, it is impossible to have $i_\alpha = j_\alpha$ for $\alpha = 1, 2, \dots, m-1$. Hence, without loss of generality, let us assume that v is the greatest integer in $\{1, 2, \dots, m-1\}$ such that $i_{\pi(\alpha)} = j_{\pi(\alpha)}$ for $\alpha \leq v$. This implies that $i_{\pi(v+1)} \neq j_{\pi(v+1)}$. Here, we assume that two sets of integers i^δ and j^δ exists for $\delta = 1, 2, \dots, p-1$ such that $i^\delta = (i_1, i_2, \dots, (i_{\pi(v)} - \delta) \bmod p, \dots, i_m)$, $j^\delta = (j_1, j_2, \dots, (j_{\pi(v)} - \delta) \bmod p, \dots, j_m)$. If such sets of integers do not exist, then the corresponding procedure is elaborated later. Let by i'' denote the $(i_1, i_2, \dots, i_{m-1})$, where $\vec{i} = (i'', i_m)$.

Important observations:

- 1) The sets $\{i^\delta, j^\delta : \delta = 1, 2, \dots, p-1\}$ would exist only if $i_m = j_m$.
- 2) If $L-1 = \sum_{\alpha=1}^{m-1} d_\alpha p^{\alpha-1} + d_m p^{m-1}$ which follows the conditions of the theorem, then $p^{m-1} \leq L \leq (d_m + 1)p^{m-1}$.

Hence, we have

$$\begin{aligned}
a^\gamma(\vec{i}) - a^\gamma(\vec{i}^\delta) &= f(\vec{i}) - f(\vec{i}^\delta) \\
&= \frac{q}{p} i_{\pi(v-1)} (\delta \bmod p) + \frac{q}{p} i_{\pi(v+1)} (\delta \bmod p) \\
&\quad + \left(g(\vec{i}'') - g(\vec{i}^{\delta''}) \right) \prod_{l=0}^{d_m-1} (i_m - l) \\
&\quad + c_{\pi(v)} (\delta \bmod p) \\
&= \frac{q}{p} i_{\pi(v-1)} (\delta \bmod p) + \frac{q}{p} i_{\pi(v+1)} (\delta \bmod p) \\
&\quad + c_{\pi(v)} (\delta \bmod p)
\end{aligned} \tag{10}$$

as $\prod_{l=0}^{d_m-1} (i_m - l) = 0$ in this case. Similarly, we have

$$\begin{aligned}
a^\gamma(\vec{j}) - a^\gamma(\vec{j}^\delta) &= f(\vec{j}) - f(\vec{j}^\delta) \\
&= \frac{q}{p} j_{\pi(v-1)} (\delta \bmod p) + \frac{q}{p} j_{\pi(v+1)} (\delta \bmod p) \\
&\quad + c_{\pi(v)} (\delta \bmod p)
\end{aligned} \tag{11}$$

From the equations above, we have

$$\begin{aligned}
&\left(a^\gamma(\vec{i}) - a^\gamma(\vec{i}^\delta) \right) - \left(a^\gamma(\vec{j}) - a^\gamma(\vec{j}^\delta) \right) \\
&= \frac{q}{p} (i_{\pi(v+1)} - j_{\pi(v+1)}) (\delta \bmod p) \\
\text{or, } &\left(a^\gamma(\vec{i}) - a^\gamma(\vec{j}) \right) - \left(a^\gamma(\vec{i}^\delta) - a^\gamma(\vec{j}^\delta) \right) \\
&= \frac{q}{p} (i_{\pi(v+1)} - j_{\pi(v+1)}) (\delta \bmod p), \tag{12}
\end{aligned}$$

which implies

$$\begin{aligned}
&\zeta_q^{(a^\gamma(\vec{i}) - a^\gamma(\vec{j})) - (a^\gamma(\vec{i}^\delta) - a^\gamma(\vec{j}^\delta))} \\
&= \zeta_p^{(i_{\pi(v+1)} - j_{\pi(v+1)}) (\delta \bmod p)} \\
\text{or, } &\sum_{\delta=1}^{p-1} \zeta_q^{(a^\gamma(\vec{i}) - a^\gamma(\vec{j})) - (a^\gamma(\vec{i}^\delta) - a^\gamma(\vec{j}^\delta))} \\
&= \sum_{\delta=1}^{p-1} \zeta_p^{(i_{\pi(v+1)} - j_{\pi(v+1)}) \delta}. \tag{13}
\end{aligned}$$

So, we have

$$\begin{aligned}
\text{or, } \sum_{\delta=1}^{p-1} \zeta_q^{(a^\gamma(\vec{i})-a^\gamma(\vec{j}))-(a^\gamma(\vec{i}^\delta)-a^\gamma(\vec{j}^\delta))} &= -1 \\
\text{or, } \sum_{\delta=1}^{p-1} \zeta_q^{-(a^\gamma(\vec{i}^\delta)-a^\gamma(\vec{j}^\delta))} &= -\zeta_q^{-(a^\gamma(\vec{i})-a^\gamma(\vec{j}))} \quad (14) \\
\text{or, } \zeta_q^{(a^\gamma(\vec{i})-a^\gamma(\vec{j}))} + \sum_{\delta=1}^{p-1} \zeta_q^{(a^\gamma(\vec{i}^\delta)-a^\gamma(\vec{j}^\delta))} &= 0.
\end{aligned}$$

The above procedure shows that we get the result if i^δ, j^δ exists for $\delta = 1, 2, \dots, p-1$.

Now, we consider the other possibility: Let such sets of i^δ, j^δ do not exist, and on the other hand, we have $i_{\pi(1)} = j_{\pi(1)}$. As $0 < \tau < p^{m-1}$, two situations may arise: either $i_m = j_m$ or $i_m \neq j_m$. For $i_m \neq j_m$, we have

$$\sum_{\gamma_k=0}^{p-1} \zeta_q^{\frac{q}{p}\gamma_k(i_m-j_m)} = 0. \quad (15)$$

For $i_m = j_m$, we claim that there should exist $\alpha_0 < k$ such that $i_{\alpha_0} \neq j_{\alpha_0}$. If the claim is false, then it implies $i_\alpha = j_\alpha, \forall \alpha = 1, 2, \dots, m-1$, which in turn says $i = j$ (contradiction). Hence, we have

$$\begin{aligned}
&\sum_{\gamma \in \mathbb{Z}_p^k} \zeta_q^{a^\gamma(\vec{i})-a^\gamma(\vec{j})} \\
&= \zeta_q^{(f(\vec{i})-f(\vec{j}))} \times \sum_{\gamma_1} \zeta_q^{\frac{q}{p}\gamma_1(i_{\pi(1)}-j_{\pi(1)})} \\
&\times \prod_{\alpha=2}^{k-1} \sum_{\gamma_\alpha} \zeta_q^{\frac{q}{p}\gamma_\alpha(i_\alpha-j_\alpha)} \times \sum_{\gamma_k} \zeta_q^{\frac{q}{p}\gamma_k(i_m-j_m)} \\
&= 0,
\end{aligned} \quad (16)$$

$$\text{as } \sum_{\gamma_{\alpha_0}=0}^{p-1} \zeta_q^{\frac{q}{p}\gamma_{\alpha_0}(i_{\alpha_0}-j_{\alpha_0})} = 0.$$

Case II: Let $p^m \leq \tau < L$. This automatically implies that $i_m \neq j_m$. So, we have

$$\begin{aligned}
&\sum_{\gamma \in \mathbb{Z}_p^k} \zeta_q^{a^\gamma(\vec{i})-a^\gamma(\vec{j})} \\
&= \zeta_q^{(f(\vec{i})-f(\vec{j}))} \times \sum_{\gamma_1} \zeta_q^{\frac{q}{p}\gamma_1(i_{\pi(1)}-j_{\pi(1)})} \\
&\times \prod_{\alpha=2}^{k-1} \sum_{\gamma_\alpha} \zeta_q^{\frac{q}{p}\gamma_\alpha(i_\alpha-j_\alpha)} \times \sum_{\gamma_k} \zeta_q^{\frac{q}{p}\gamma_k(i_m-j_m)} \\
&= 0,
\end{aligned} \quad (17)$$

$$\text{as } \sum_{\gamma_k=0}^{p-1} \zeta_q^{\frac{q}{p}\gamma_k(i_m-j_m)} = 0.$$

This proves the theorem. \blacksquare

0000012302020321000
0123020203210000012
0202032100000123020
0321000001230202032
0000012302020321111
0123020203210000123
0202032100000123131
0321000001230202103
0000012302020321222
0123020203210000230
0202032100000123202
0321000001230202210
0000012302020321333
0123020203210000301
0202032100000123313
0321000001230202321

$$[\phi_{19}(a^\gamma)]_{\gamma \in \mathbb{Z}_4^2} =$$

TABLE I: \mathbb{Z}_4 -valued GCS of length 19, alphabet size 4 and flock size 16 constructed in *Example 1*

Remark 1: The term $g(x_1, \dots, x_{m-1}) \prod_{l=0}^{d_m-1} (x_m - l)$ in (6) indicates that monomials of degree higher than 2 can also be used to construct such GCSs.

Remark 2: For $L = p^{m-1}$ for some $m > 1$, $\overrightarrow{L-1} = (p-1, \dots, p-1, 0) \in \mathbb{Z}_p^m$. In that case, $k = 2$. So, the corresponding function for the GCS would be given by

$$\begin{aligned}
a^\gamma(x_1, x_2, \dots, x_m) &= \frac{q}{p} \sum_{\alpha=1}^{m-2} x_{\pi(\alpha)} x_{\pi(\alpha+1)} + \sum_{\alpha=1}^m c_\alpha x_\alpha \\
&+ \gamma_1 \frac{q}{p} x_{\pi(1)} + \gamma_2 \frac{q}{p} x_m,
\end{aligned} \quad (18)$$

for $\gamma = (\gamma_1, \gamma_2) \in \mathbb{Z}_p^2$. Although, it seems that the set $\{\psi_{p^{m-1}}(a^\gamma) : \gamma \in \mathbb{Z}_p^2\}$ is a GCS of length p^{m-1} and flock size p^2 , it is not quite correct. The actual flock size is p , as $x_m = 0$ for $\vec{i} = \vec{0}, \vec{1}, \dots, \overrightarrow{p^{m-1}-1}$. Hence, it produces a (q, p, p^{m-1}) -GCS.

Below, we validate the theorem with an example.

Example 1: Let $L = 19$ and $q = 4$. We take the function $f : \mathbb{Z}_4^3 \rightarrow \mathbb{Z}_4$, which is defined by $f(x_1, x_2, x_3) = x_1 x_2 + 3x_1 x_2 x_3 + 1$ with $\pi(1) = 1, \pi(2) = 2$, and satisfies the conditions of the theorem. The 4-ary representation of the integer $L-1 = 19-1 = 18$ is given by $(2, 0, 1)$ and hence $k = 2$. So, according to the theorem, we take the set of functions $a^\gamma : \mathbb{Z}_4^3 \rightarrow \mathbb{Z}_4$, for $\gamma = (\gamma_1, \gamma_2)$, which is defined by

$$a^\gamma = f + \gamma_1 x_1 + \gamma_2 x_3. \quad (19)$$

Then, $\{\psi_{19}(a^\gamma) : \gamma \in \mathbb{Z}_4^2\}$ gives us a $(4, 16, 19)$ -GCS, which is given in TABLE I. The AACF sum of this GCS is plotted in Fig. 1.

Construction	Length	Flock Size	Alphabet Size	Constraints	Based On
[10]	2^m	2^{k+1}	q	$m \geq 1, k < m, 2 \mid q$	GBF
[11]	2^m	2^{k+1}	q	$m \geq 1, k < m, 2 \mid q$	GBF
[12]	2^m	2^k	q	$m \geq 1, k \leq m, 2 \mid q$	GBF
[13]	$2^{m-1} + 2^v$	4	q	$m \geq 2, v < m, 2 \mid q$	GBF
[14]	$2^{m-1} + 2^v$	2^{k+1}	q	$m \geq 2, v < m, 1 \leq k \leq m, 2 \mid q$	GBF
[15]	$2^{m-1} + \sum_{\alpha=1}^{k-1} a_\alpha 2^{\pi(m-k+\alpha)+1} + 2^v$	2^{k+1}	q	$m \geq 2, v < m-k, k < m,$ $a_\alpha \in \{0, 1\}, 2 \mid q$	GBF
[16]	2^m	2^{k+1}	q	$m \geq 2, v < m, 1 \leq k \leq m, 2 \mid q$	GBF
[17]	$2^{m-1} + 2^v$	2^{k+1}	q	$m \geq 2, v < m, 1 \leq k \leq m, 2 \mid q$	GBF
[18]	$p_1^{m_1} p_2^{m_2} \dots p_k^{m_k}$	$p_1 p_2 \dots p_k$	q	p_i 's are prime, $m_i \geq 1, \forall i,$ $k \geq 1, q \mid p_i, \forall i$	Multivariable Function
Proposed	L	p^{m-k+1}	q	$p, L \in \mathbb{N}, m \geq 1, p^{m-1} \leq L < p^m,$ $L-1 = \sum_{\alpha=1}^{m-1} d_\alpha p^{\alpha-1} + d_m p^{m-1},$ $d_m, d_\alpha \in \mathbb{Z}_p, \forall \alpha, p \mid q,$ π is a permutation on $\{1, 2, \dots, m-1\},$ with $\pi(1) = 1,$ k depends on π	EBF

TABLE II: Comparison of Existing Direct Constructions with the Proposed One

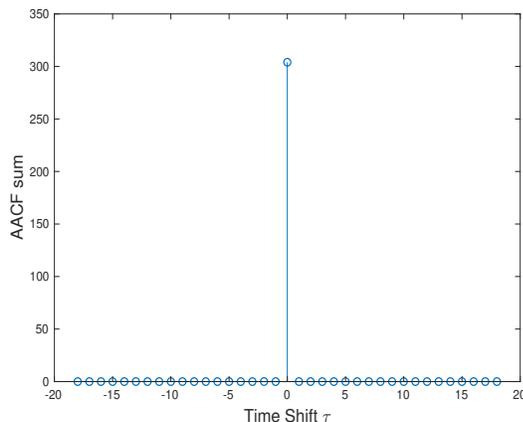


Fig. 1: AACF plot for the GCS in Example 1

Remark 3: One of the constructions of GCSs in [18] can be viewed as a special case of our construction when p is a prime and $L = p^m$. This can be easily seen from Remark 2. Moreover, the proposed construction can produce arbitrary lengths and alphabet sizes, while in [18], the constructed GCS is restricted by the alphabet size.

Remark 4: As the proposed construction has a flock size of the form p^k for $k \geq 1$, by using Lemma 1, we can say that the PMEPR of each sequence is upper bounded by p^k , for some prime p .

A. Comparison with the State-of-the-Art

In this subsection, we compare the proposed construction with the existing function-based constructions with respect to their parameter constraints. The detailed comparison is given in TABLE II.

IV. CONCLUSION

In this paper, we have proposed a new direct construction of GCS of arbitrary length and arbitrary alphabet size with the help of EBF. As the title suggests, the proposed construction achieves the maximum possible flexibility within the parameter restrictions in a particular way. This results in bounded and low PMEPRs for some cases. Also, for the first time, we are considering higher-order EBFs to produce GCSs.

REFERENCES

- [1] P. Sarkar, C. Li, S. Majhi, and Z. Liu, "New correlation bound and construction of quasi-complementary sequence sets," *IEEE Trans. Inf. Theory*, vol. 70, no. 3, pp. 2201–2223, 2024.
- [2] E. N. Gilbert, "A comparison of signalling alphabets," *The Bell System Technical Journal*, vol. 31, no. 3, pp. 504–522, 1952.
- [3] C. Shannon, "Communication in the presence of noise," *Proceedings of the IRE*, vol. 37, no. 1, pp. 10–21, 1949.
- [4] M. J. E. Golay, "Static multislit spectrometry and its application to the panoramic display of infrared spectra," *J. Opt. Soc. Am.*, vol. 41, no. 7, pp. 468–472, Jul. 1951.
- [5] M. Golay, "Complementary series," *IRE Trans. Inf. Theory*, vol. 7, no. 2, pp. 82–87, 1961.
- [6] A. Pezeshki, A. R. Calderbank, W. Moran, and S. D. Howard, "Doppler resilient Golay complementary waveforms," *IEEE Trans. Inf. Theory*, vol. 54, no. 9, pp. 4254–4266, 2008.
- [7] P. Spasojevic and C. Georghiadis, "Complementary sequences for ISI channel estimation," *IEEE Trans. Inf. Theory*, vol. 47, no. 3, pp. 1145–1152, 2001.
- [8] J. Davis and J. Jedwab, "Peak-to-mean power control in OFDM, Golay complementary sequences, and Reed-Muller codes," *IEEE Trans. Inf. Theory*, vol. 45, no. 7, pp. 2397–2417, 1999.
- [9] C.-C. Tseng and C. Liu, "Complementary sets of sequences," *IEEE Trans. Inf. Theory*, vol. 18, no. 5, pp. 644–652, 1972.
- [10] K. Paterson, "Generalized Reed-Muller codes and power control in OFDM modulation," *IEEE Trans. Inf. Theory*, vol. 46, no. 1, pp. 104–120, 2000.
- [11] K.-U. Schmidt, "Complementary sets, generalized Reed-Muller codes, and power control for OFDM," *IEEE Trans. Inf. Theory*, vol. 53, no. 2, pp. 808–814, 2007.

- [12] C.-Y. Chen, C.-H. Wang, and C.-C. Chao, "Complete complementary codes and generalized Reed-Muller codes," *IEEE Commun. Lett.*, vol. 12, no. 11, pp. 849–851, 2008.
- [13] C.-Y. Chen, "Complementary sets of non-power-of-two length for peak-to-average power ratio reduction in OFDM," *IEEE Trans. Inf. Theory*, vol. 62, no. 12, pp. 7538–7545, 2016.
- [14] —, "A new construction of Golay complementary sets of non-power-of-two length based on Boolean functions," in *IEEE Wireless Communications and Networking Conference (WCNC)*, 2017, pp. 1–6.
- [15] —, "A novel construction of complementary sets with flexible lengths based on Boolean functions," *IEEE Commun. Lett.*, vol. 22, no. 2, pp. 260–263, 2018.
- [16] P. Sarkar, S. Majhi, and Z. Liu, "A direct and generalized construction of polyphase complementary sets with low PMEPR and high code-rate for OFDM system," *IEEE Trans. Commun.*, vol. 68, no. 10, pp. 6245–6262, 2020.
- [17] S.-W. Wu, C.-Y. Chen, and Z. Liu, "How to construct mutually orthogonal complementary sets with non-power-of-two lengths?" *IEEE Trans. Inf. Theory*, vol. 67, no. 6, pp. 3464–3472, 2021.
- [18] P. Sarkar, Z. Liu, and S. Majhi, "Multivariable function for new complete complementary codes with arbitrary lengths," 2021. [Online]. Available: <https://arxiv.org/abs/2102.10517v3>
- [19] M. Parker and C. Tellambura, "A construction for binary sequence sets with low peak-to-average power ratio," in *Proceedings IEEE International Symposium on Information Theory*, 2002, pp. 239–.
- [20] D. Wu and P. Spasojevic, "Complementary set matrices satisfying a column correlation constraint," *IEEE Trans. Inf. Theory*, vol. 54, no. 7, pp. 3330–3339, 2008.
- [21] D. Ma, Z. Wang, and G. Gong, "A direct method to construct Golay complementary sets based on Boolean functions," in *29th Biennial Symposium on Communications (BSC)*, 2018, pp. 1–5.
- [22] D. Ma, Z. Wang, G. Gong, and H. Li, "A new method to construct Golay complementary set and near-complementary set by paraunitary matrices," in *Eighth International Workshop on Signal Design and Its Applications in Communications (IWSDA)*, 2017, pp. 9–13.
- [23] Z.-J. Wu, T.-L. Xu, Z.-Q. Zhou, and C.-X. Wang, "Fast algorithms for designing complementary sets of sequences under multiple constraints," *IEEE Access*, vol. 7, pp. 50 041–50 051, 2019.
- [24] C.-Y. Pai and C.-Y. Chen, "Construction of complementary sequence sets based on complementary pairs," *Electron. Lett.*, vol. 56, no. 18, pp. 966–968, 2020.
- [25] B. Shen, Y. Yang, and Z. Zhou, "A construction of binary Golay complementary sets based on even-shift complementary pairs," *IEEE Access*, vol. 8, pp. 29 882–29 890, 2020.
- [26] A. R. Adhikary and S. Majhi, "New constructions of complementary sets of sequences of lengths non-power-of-two," *IEEE Commun. Lett.*, vol. 23, no. 7, pp. 1119–1122, 2019.
- [27] G. Wang, A. R. Adhikary, Z. Zhou, and Y. Yang, "Generalized constructions of complementary sets of sequences of lengths non-power-of-two," *IEEE Signal Process. Lett.*, vol. 27, pp. 136–140, 2020.
- [28] Z. Wang, D. Ma, G. Gong, and E. Xue, "New construction of complementary sequence (or array) sets and complete complementary codes," *IEEE Trans. Inf. Theory*, vol. 67, no. 7, pp. 4902–4928, 2021.
- [29] L. Wang, H. Liu, X. Zeng, G. Zhang, and Q. Yu, "A novel construction of complementary sequences set from complementary sequences pairs," in *10th International Workshop on Signal Design and Its Applications in Communications (IWSDA)*, 2022, pp. 1–4.
- [30] Z. Wang and G. Gong, "Constructions of complementary sequence sets and complete complementary codes by ideal two-level autocorrelation sequences and permutation polynomials," *IEEE Trans. Inf. Theory*, vol. 69, no. 7, pp. 4723–4739, 2023.
- [31] C. Du and Y. Jiang, "Golay complementary sequences of arbitrary length and asymptotic existence of Hadamard matrices," 2024. [Online]. Available: <https://doi.org/10.48550/arXiv.2401.15381>