

DMT-optimal, Low ML-Complexity STBC-Schemes for Asymmetric MIMO Systems

K. Pavan Srinath and B. Sundar Rajan, *Senior Member, IEEE*
 Dept of ECE, The Indian Institute of Science,
 Bangalore 560012, India
 Email: {pavan,bsrajan}@ece.iisc.ernet.in

Abstract—For an n_t transmit, n_r receive antenna ($n_t \times n_r$) MIMO system with quasi-static Rayleigh fading, it was shown by Elia et. al that schemes based on minimal-delay space-time block codes (STBCs) with a symbol rate of n_t complex symbols per channel use (rate- n_t) and a non-vanishing determinant (NVD) are diversity-multiplexing gain tradeoff (DMT)-optimal for arbitrary values of n_r . Further, explicit linear STBC-schemes (LSTBC-schemes) with the NVD property were also constructed. However, for asymmetric MIMO systems (where $n_r < n_t$), with the exception of the Alamouti code-scheme for the 2×1 system and rate-1, diagonal STBC-schemes with NVD for an $n_t \times 1$ system, no known minimal-delay, rate- n_r STBC-scheme has been shown to be DMT-optimal. In this paper, we first obtain an enhanced sufficient criterion for an STBC-scheme to be DMT optimal and using this result, we show that for certain asymmetric MIMO systems, many well-known LSTBC-schemes which have low ML-decoding complexity are DMT-optimal, a fact that was unknown hitherto.

Index Terms—Asymmetric MIMO systems, diversity-multiplexing tradeoff, linear space-time block codes, low ML-decoding complexity, non-vanishing determinant, outage-probability, STBC-schemes.

I. INTRODUCTION AND BACKGROUND

Space-time coding (STC) [1] for multiple-input, multiple-output (MIMO) antenna systems has extensively been studied as a tool to exploit the diversity provided by the MIMO fading channel. MIMO systems have the capability of permitting reliable data transmission at higher rates compared to that provided by the single-input, single-output (SISO) antenna system. In particular, when the delay requirement of the system is less than the coherence time of the channel (the time frame during which the channel gains are constant and independent of the channel gains of other time frames), Zheng and Tse showed in their seminal paper [2] that for the Rayleigh fading channel with STC, there exists a fundamental tradeoff between the diversity gain and the multiplexing gain (the multiplexing gain and diversity gain are defined formally by Definition 3 and Definition 4, respectively, in Section II), referred to as the *diversity-multiplexing gain tradeoff* (DMT). The optimal DMT was also characterized with the assumption that the block length of the space-time block codes (STBC) of the scheme (“STBC-scheme” is defined by Definition 2, Section II) is at least $n_t + n_r - 1$, where n_t and n_r are the number of transmit and receive antennas, respectively. The first explicit DMT-optimal STBC-scheme was provided in [3] for 2 transmit antennas and subsequently, in another landmark paper

[4], explicit DMT-optimal STBC-schemes consisting of both square (minimal-delay) and rectangular STBCs from cyclic division algebras were presented for arbitrary values of n_t and n_r . In the same paper, for general STBC-schemes, a sufficient criterion for achieving DMT-optimality was given. For a class of STBC-schemes based on linear STBCs¹ (LSTBCs) which employ QAM constellations and transmit n_t complex information symbols per channel use, this criterion translates to the *non-vanishing determinant* property, a term first coined in [6], being sufficient for DMT-optimality. It was later shown in [7] that the DMT-optimal STBC-schemes constructed in [4] were also approximately universal for arbitrary number of receive antennas. Several other STBC-schemes with NVD have been proposed - for example, see [8], [9], [10] and references therein.

A. Motivation for our results

The Alamouti code-scheme [11] has the NVD property (a definition of NVD consistent with the notations used in this paper is provided as Definition 8, Section IV) and is known to be DMT-optimal for the 2×1 MIMO system. For any $n_t \times 1$ system, diagonal STBC-schemes with NVD that consist of STBCs transmitting 1 complex symbol per channel use are known to be DMT-optimal [7]. STBC-schemes based on fast-decodable STBCs [18] from division algebra that transmit n_r complex symbols per channel use for asymmetric MIMO systems (for which $n_r < n_t$) have been shown to have the NVD property, but have not been reported to be DMT-optimal. There exist several other LSTBCs which transmit less than n_t independent complex symbols per channel use, and STBC-schemes consisting of these LSTBCs have neither been reported to have the NVD property (although they do have the NVD property which is shown in this paper), nor have been claimed to be DMT-optimal in literature. Examples of such LSTBCs are the the full-diversity Quasi-orthogonal STBC (QOSTBC) [12], STBCs from co-ordinate interleaved orthogonal designs [13], four-group decodable STBCs [14]-[17], which all transmit one independent complex symbol per channel use and are characterized by low ML-decoding complexity. For these LSTBC-schemes, the sufficient criterion provided in [4] for DMT-optimality, which requires that LSTBCs transmit n_t independent complex symbols per channel use *irrespective* of the number of receive antennas, is not

¹In literature, linear STBCs are popularly called linear dispersion codes [5]

applicable. Hence, there is a clear need for obtaining a new DMT-criterion that can take into account LSTBC-schemes that consist of LSTBCs with a transmission rate of less than n_t independent complex symbols per channel use and have the NVD property.

Further, for asymmetric MIMO systems, the standard sphere decoder [19] or its variations (see, for example, [20], [21] and references therein) cannot be used in entirety to decode rate- n_t LSTBCs (Henceforth in this paper, a rate- p LSTBC means an LSTBC that transmits p independent complex symbols per channel use. This LSTBC is said to have a *symbol rate* of p complex symbols per channel use. A formal definition of “symbol rate” is given as Definition 6, Section IV). For an $n_t \times n_r$ MIMO system, the standard sphere decoder can be used to decode LSTBCs that transmit at most² $n_{min} = \min(n_t, n_r)$ complex symbols per channel use. Recent results on fixed complexity sphere decoders [22], [23] are extremely promising from the point of view of low complexity decoding. In particular, it has been shown analytically in [23] that the fixed complexity sphere decoder, although provides quasi-Maximum Likelihood (ML)-performance, helps achieve the *same* diversity order of ML-decoding with a complexity of the order of $M^{\sqrt{K}}$, where M is the number of possibilities for each symbol (or the size of the signal constellation employed when each symbol is encoded independently) and K is the dimension of the search, while an exhaustive ML-search would incur a complexity of the order of M^K . In the same paper, it has also been shown that the the gap between the quasi-ML-performance and the actual ML-performance approaches zero at high signal-to-noise ratio, independent of the constellation employed. This motivates one to investigate the DMT-optimality of LSTBC-schemes consisting of rate- n_{min} LSTBCs.

In literature, only certain LSTBC-schemes that are based on rate- n_r STBCs have been known to be DMT-optimal for asymmetric MIMO systems - the Alamouti code-scheme [11] for the 2×1 system [2], schemes with NVD that are based on rate-1 diagonal STBCs for any $n_t \times 1$ system [7], and schemes consisting of rate- n_r , rectangular STBCs for $n_r = 2$ and $n_r = n_t - 1$ [25]. In this paper, we prove the DMT-optimality of many STBC-schemes that are based on well-known rate- n_r LSTBCs [12]-[18] for $n_t \times n_r$ asymmetric MIMO systems.

B. Contributions and paper organization

The contributions of this paper are the following.

- 1) We present an enhanced criterion for DMT-optimality of general STBC-schemes. This criterion enables us to encompass all STBC-schemes with NVD that are based on rate- n_{min} LSTBCs, which was not possible using the DMT-criterion in [4].
- 2) In the context of LSTBCs, we show that transmission of n_{min} complex symbols per channel use is necessary

²when a rate- n_t STBC is used in an asymmetric MIMO system, there exist techniques (see [24] and references therein) to make use of the sphere decoder, but these either are sub-optimal decoding techniques with no guarantee on preserving the diversity order of ML-decoding or demand a high computational complexity when ML-decoding is employed.

for LSTBCs to be DMT-optimal, and for asymmetric MIMO systems, we show that STBC-schemes with rate- n_r LSTBCs whose real symbols take values from PAM constellations are DMT-optimal if they have the NVD property.

- 3) Finally, we show that some well known low ML-decoding complexity STBC-schemes (STBC-schemes based on STBCs with low ML-decoding complexity) are DMT-optimal for certain asymmetric MIMO systems (see Table I).

The rest of the paper is organized as follows. Section II deals with the system model and relevant definitions, Section III presents the main result of the paper, which is an enhanced sufficient criterion for DMT-optimality, while Section IV gives a brief introduction to linear STBCs along with a few relevant definitions, and provides a new criterion for DMT-optimality of LSTBCs for asymmetric MIMO systems. A discussion on the DMT-optimality of several low ML-decoding complexity STBC-schemes is presented in Section V and concluding remarks constitute Section VI.

Notations: Throughout the paper, bold, lowercase letters are used to denote vectors and bold, uppercase letters are used to denote matrices. For a complex matrix \mathbf{X} , the Hermitian, the transpose, the trace, the determinant and the Frobenius norm of \mathbf{X} are denoted by \mathbf{X}^H , \mathbf{X}^T , $tr(\mathbf{X})$, $det(\mathbf{X})$ and $\|\mathbf{X}\|$, respectively. The set of all real numbers, complex numbers and integers are denoted by \mathbb{R} , \mathbb{C} and \mathbb{Z} , respectively. The real and the imaginary parts of a complex-valued vector \mathbf{x} are denoted by \mathbf{x}_I and \mathbf{x}_Q , respectively. $|\mathcal{S}|$ denotes the cardinality of the set \mathcal{S} , $\mathcal{S} \times \mathcal{T}$ denotes the Cartesian product of sets \mathcal{S} and \mathcal{T} , meaning which $\mathcal{S} \times \mathcal{T} = \{(s, t) | s \in \mathcal{S}, t \in \mathcal{T}\}$, and $\mathcal{S} \subset \mathcal{T}$ denotes that \mathcal{S} is a proper subset of \mathcal{T} . The $T \times T$ identity matrix is denoted by \mathbf{I}_T and \mathbf{O} denotes the null matrix of appropriate dimension. For a complex number x , x^* denotes its complex conjugate and the (\cdot) operator acting on x is defined as

$$\tilde{x} \triangleq \begin{bmatrix} x_I & -x_Q \\ x_Q & x_I \end{bmatrix}.$$

The (\cdot) operator can similarly be applied to any matrix $\mathbf{X} \in \mathbb{C}^{n \times m}$ by replacing each entry x_{ij} with \tilde{x}_{ij} , $i = 1, 2, \dots, n, j = 1, 2, \dots, m$, resulting in a matrix denoted by $\tilde{\mathbf{X}} \in \mathbb{R}^{2n \times 2m}$. Given a complex vector $\mathbf{x} = [x_1, x_2, \dots, x_n]^T$, $\tilde{\mathbf{x}}$ is defined as $\tilde{\mathbf{x}} \triangleq [x_{1I}, x_{1Q}, \dots, x_{nI}, x_{nQ}]^T$. It follows that for matrices $\mathbf{A} \in \mathbb{C}^{m \times n}$, $\mathbf{B} \in \mathbb{C}^{n \times p}$ and $\mathbf{C} = \mathbf{A}\mathbf{B}$, the equalities $\tilde{\mathbf{C}} = \tilde{\mathbf{A}}\tilde{\mathbf{B}}$ and $vec(\mathbf{C}) = (\mathbf{I}_p \otimes \tilde{\mathbf{A}})vec(\mathbf{B})$ hold.

For a complex random matrix \mathbf{X} , $\mathbb{E}_{\mathbf{X}}(f(\mathbf{X}))$ denotes the expectation of a real-valued function $f(\mathbf{X})$ over \mathbf{X} . For any real number x , $\lfloor x \rfloor$ denotes the largest integer not greater than x , and $x^+ = \max(0, x)$. The Q-function of x is denoted by $Q(x)$ and given as

$$Q(x) = \int_x^\infty \frac{1}{\sqrt{2\pi}} e^{-\frac{t^2}{2}} dt.$$

For real-valued functions $f(x)$ and $g(x)$, we write $f(x) = o(g(x))$ as $x \rightarrow \infty$ if and only if

$$\lim_{x \rightarrow \infty} \frac{f(x)}{g(x)} = 0.$$

	LSTBC	No. of Tx antennas, n_t	Block length T of the STBC	Symbol rate*	No. of Rx antennas n_r for which STBC-scheme is DMT-optimal	Constellation used
DMT-optimal, well known STBC-schemes	Alamouti Code [11]	2	2	1	1	QAM
	Yao-Wornell Code [3], Dayal-Varanasi Code [26], Golden code [6], Silver code [27], [28], Serdar-Sari code [29], Srinath-Rajan code [30]	2	2	2	any n_r	QAM QAM QAM QAM QAM
	Perfect codes [9]	2, 3, 4, 6	n_t	n_t	any n_r	QAM/HEX
	Kiran-Rajan codes [8]	$2^n, 3(2^n)$ $2(3^n), q^n(q-1)/2,$ $n \in \mathbb{Z}^+, q$ is prime of the form $q = 4s + 3,$	n_t	n_t	any n_r	QAM/ HEX
	Codes from CDA [4]	any n_t	n_t	n_t	any n_r	QAM
	Codes from CDA [4]	any n_t	any $T > n_t$	n_t	any n_r	QAM
	Perfect STBCs [10]	any n_t	n_t	n_t	any n_r	QAM/HEX
	Diagonal STBCs with NVD [7]	any n_t	n_t	1	1	QAM
	Lu-Hollanti [25]	any $n_t > 2$	$T > n_t$	2	2	QAM
	Lu-Hollanti [25]	any $n_t > 2$	$T > n_t$	$n_t - 1$	$n_t - 1$	QAM
DMT optimal STBC-schemes obtained in this paper	STBCs from CIOD (Subsection V-B)	2 4	2 4	1 1	1 1	Rotated QAM
	QOSTBC (Subsection V-A)	4	4	1	1	Rotated QAM
	4-group decodable STBCs [14]-[17]	$n_t = 2^n, n \in \mathbb{Z}^+$	n_t	1	1	QAM
	Fast-decodable STBCs [30], [18]	4	4	2	$n_r \leq 2$	QAM
	Fast-decodable asymmetric STBCs [18]	any n_t	n_t	$n_r < n_t$	$n_r < n_t$	QAM
	Punctured Perfect STBCs [‡] for asymmetric MIMO	any n_t	n_t	$n_r < n_t$	$n_r < n_t$	QAM

* in complex symbols per channel use.

[‡] refer to rate- n_r STBCs obtained from rate- n_t Perfect STBCs [10] (which transmit n_t^2 complex symbols in n_t channel uses) by restricting the number of complex symbols transmitted to be only $n_t n_r$.

TABLE I
A TABLE OF DMT-OPTIMAL LINEAR STBC-SCHEMES

Further, $f(x) \doteq x^b$ implies that $\lim_{x \rightarrow \infty} \frac{\log f(x)}{\log x} = b$, and $\dot{\leq}, \dot{\geq}, \dot{>}, \dot{<}$ are similarly defined.

II. SYSTEM MODEL

We consider an n_t transmit antenna, n_r receive antenna MIMO system ($n_t \times n_r$ system) with perfect channel-state information available at the receiver (CSIR) alone. The channel is assumed to be quasi-static with Rayleigh fading. The system model is

$$\mathbf{Y} = \mathbf{H}\mathbf{X} + \mathbf{N}, \quad (1)$$

where $\mathbf{Y} \in \mathbb{C}^{n_r \times T}$ is the received signal matrix, $\mathbf{X} \in \mathbb{C}^{n_t \times T}$ is the codeword matrix that is transmitted over a block of T channel uses, $\mathbf{H} \in \mathbb{C}^{n_r \times n_t}$ is the channel matrix with its entries independently and identically distributed (i.i.d.) circularly symmetric complex Gaussian random variables with zero mean and unit variance, and $\mathbf{N} \in \mathbb{C}^{n_r \times T}$ is the noise matrix with its entries being i.i.d. Gaussian random variables

with zero mean and unit variance. The average signal-to-noise ratio at each receive antenna is denoted by SNR .

Definition 1: (Space-time block code) A space-time block code (STBC) of block-length T for an n_t transmit antenna MIMO system is a finite set of complex matrices of size $n_t \times T$.

An example is the Alamouti code [11] with its complex symbols taking values from 4-QAM, given by

$$\mathcal{X}_{Alamouti} = \left\{ \begin{bmatrix} x_1 & -x_2^* \\ x_2 & x_1^* \end{bmatrix} \mid x_1, x_2 \in 4\text{-QAM} \right\}$$

Definition 2: (STBC-scheme) An STBC-scheme \mathcal{X} is defined as a family of STBCs indexed by SNR , each of block length T so that $\mathcal{X} = \{\mathcal{X}(SNR)\}$, where the STBC $\mathcal{X}(SNR)$ corresponds to a signal-to-noise ratio of SNR at each receive antenna.

So, at a signal-to-noise ratio of SNR , the codeword matrices of $\mathcal{X}(SNR)$ are transmitted over the channel. Assuming that all the codeword matrices of $\mathcal{X}(SNR) \triangleq \{\mathbf{X}_i(SNR), i =$

$1, \dots, |\mathcal{X}(SNR)|$ are equally likely to be transmitted, we have

$$\frac{1}{|\mathcal{X}(SNR)|} \sum_{i=1}^{|\mathcal{X}(SNR)|} \|\mathbf{X}_i(SNR)\|^2 = T SNR. \quad (2)$$

It follows that for the STBC-scheme \mathcal{X} ,

$$\|\mathbf{X}_i(SNR)\|^2 \leq SNR, \quad \forall i = 1, 2, \dots, |\mathcal{X}(SNR)|. \quad (3)$$

The bit rate of transmission is $\frac{\log_2 |\mathcal{X}(SNR)|}{T}$ bits per channel use. Henceforth in this paper, a codeword $\mathbf{X}_i(SNR) \in \mathcal{X}(SNR)$ is simply referred to as $\mathbf{X}_i \in \mathcal{X}(SNR)$.

Definition 3: (Multiplexing gain) Let the bit rate of transmission of the STBC $\mathcal{X}(SNR)$ in bits per channel use be denoted by $R(SNR)$ (so that $R(SNR) = (1/T) \log_2 |\mathcal{X}(SNR)|$). Then, the multiplexing gain r of the STBC-scheme is defined [2] as

$$r = \lim_{SNR \rightarrow \infty} \frac{R(SNR)}{\log_2 SNR}.$$

Equivalently, $R(SNR) = r \log_2 SNR + o(\log_2 SNR)$, where, for reliable communication, $r \in (0, n_{min})$ [2].

Definition 4: (Diversity gain) Let the probability of codeword error of the STBC $\mathcal{X}(SNR)$ be denoted by $P_e(SNR)$. Then, the diversity gain $d(r)$ of the STBC-scheme corresponding to a multiplexing gain of r is given by

$$d(r) = - \lim_{SNR \rightarrow \infty} \frac{\log_2 P_e(SNR)}{\log_2 SNR}.$$

For an $n_t \times n_r$ MIMO system, the maximum achievable diversity gain is $n_t n_r$.

Definition 5: (Optimal DMT curve) [2] *The optimal diversity-multiplexing gain curve $d^*(r)$ that is achievable with any STBC-scheme for an $n_t \times n_r$ MIMO system is a piecewise-linear function connecting the points $(k, d(k))$, $k = 0, 1, \dots, n_{min}$, where*

$$d(k) = (n_t - k)(n_r - k). \quad (4)$$

Theorem 3 of [4], which provides a sufficient criterion for DMT-optimality of an STBC-scheme, is rephrased here with its statement consistent with the notations and terminology used in this paper.

Theorem 1: [4] For a quasi-static $n_t \times n_r$ MIMO channel with Rayleigh fading and perfect CSIR, an STBC-scheme \mathcal{X} that satisfies (3) is DMT-optimal for any value of n_r if for all possible pairs of distinct codewords $(\mathbf{X}_1, \mathbf{X}_2)$ of $\mathcal{X}(SNR)$, the difference matrix $\mathbf{X}_1 - \mathbf{X}_2 = \Delta\mathbf{X} \neq \mathbf{O}$ is such that,

$$\det(\Delta\mathbf{X}\Delta\mathbf{X}^H) \geq SNR^{n_t(1-\frac{r}{n_t})}.$$

Relying on Theorem 1, an explicit construction scheme was presented to obtain DMT-optimal LSTBC-schemes whose LSTBCs are minimal-delay ($T = n_t$) and obtained from cyclic division algebras (CDA). All these STBCs have a symbol rate of n_t complex symbols per channel use, irrespective of the value of n_r . However, Theorem 1 does not account for LSTBC-schemes whose LSTBCs transmit less than n_t complex symbols per channel use. In the following section, we present an enhanced DMT-criterion that brings within its

scope all STBC-schemes that consist of rate- n_{min} LSTBCs and have NVD.

III. MAIN RESULT

We present below the main result of our paper - arriving at an enhanced sufficient criterion for DMT-optimality of general STBC-schemes.

Theorem 2: For a quasi-static $n_t \times n_r$ MIMO channel with Rayleigh fading and perfect CSIR, an STBC-scheme \mathcal{X} that satisfies (3) is DMT-optimal for any value of n_r if for all possible pairs of distinct codewords $(\mathbf{X}_1, \mathbf{X}_2)$ of $\mathcal{X}(SNR)$, the difference matrix $\mathbf{X}_1 - \mathbf{X}_2 = \Delta\mathbf{X} \neq \mathbf{O}$ is such that,

$$\det(\Delta\mathbf{X}\Delta\mathbf{X}^H) \geq SNR^{n_t(1-\frac{r}{n_{min}})}.$$

Proof: To prove the theorem, we first show that the STBC-scheme \mathcal{X} is DMT-optimal when each codeword difference matrix $\Delta\mathbf{X} \neq \mathbf{O}$ of $\mathcal{X}(SNR)$ satisfies

$$\det(\Delta\mathbf{X}\Delta\mathbf{X}^H) \geq SNR^{n_t(1-\frac{r}{n_r})}, \quad (7)$$

and then conclude the proof taking aid of Theorem 1. Towards this end, we assume without loss of generality that the codeword \mathbf{X}_1 of $\mathcal{X}(SNR)$ is transmitted. It is also assumed that $T \geq n_t$, which is a prerequisite for achieving a diversity gain of $n_t n_r$ when the bit rate of the STBC-scheme is constant with SNR (a special case of the $r = 0$ condition). Let $\Delta\mathbf{X}_l = \mathbf{X}_1 - \mathbf{X}_l$, where \mathbf{X}_l , $l = 2, \dots, |\mathcal{X}(SNR)|$, are the remaining codewords of $\mathcal{X}(SNR)$. It is to be noted that the bit rate of transmission is $r \log_2 SNR + o(\log_2 SNR)$ bits per channels use and so, $|\mathcal{X}(SNR)| \doteq SNR^{rT}$, with $r \in (0, n_{min})$. Considering the channel model given by (1), with ML-decoding, the probability that \mathbf{X}_1 is wrongly decoded to \mathbf{X}_2 for a particular channel matrix \mathbf{H} is given by

$$P_e(\mathbf{X}_1 \rightarrow \mathbf{X}_2 | \mathbf{H}) = Q\left(\frac{\|\mathbf{H}\Delta\mathbf{X}_2\|}{\sqrt{2}}\right).$$

So, the probability that \mathbf{X}_1 is wrongly decoded conditioned on \mathbf{H} is given by

$$P_e(\mathbf{X}_1 | \mathbf{H}) = \sum_{l=2}^{|\mathcal{X}(SNR)|} Q\left(\frac{\|\mathbf{H}\Delta\mathbf{X}_l\|}{\sqrt{2}}\right). \quad (8)$$

The probability of codeword error averaged over all channel realizations is given by

$$P_e = \mathbb{E}_{\mathbf{H}}(P_e(\mathbf{X}_1 | \mathbf{H})) = \int p(\mathbf{H}) P_e(\mathbf{X}_1 | \mathbf{H}) d\mathbf{H},$$

where $p(\cdot)$ denotes ‘‘probability density function (pdf) of’’. Let

$$\mathcal{E} := \text{event that there is a codeword error}$$

and consider the set of channel realizations \mathcal{O} defined in (5) at the top of the next page. Now,

$$\begin{aligned} P_e &= \int_{\mathcal{O}} p(\mathbf{H}) P_e(\mathbf{X}_1 | \mathbf{H}) d\mathbf{H} + \int_{\mathcal{O}^c} p(\mathbf{H}) P_e(\mathbf{X}_1 | \mathbf{H}) d\mathbf{H} \\ &= \mathbf{P}(\mathcal{O}, \mathcal{E}) + \mathbf{P}(\mathcal{O}^c, \mathcal{E}) \\ &= \mathbf{P}(\mathcal{O})\mathbf{P}(\mathcal{E} | \mathcal{O}) + \mathbf{P}(\mathcal{O}^c, \mathcal{E}), \end{aligned} \quad (9)$$

$$\mathcal{O} \triangleq \left\{ \mathbf{H} \mid \log_2 \det \left(\mathbf{I}_{n_r} + \frac{SNR}{n_t} \mathbf{H} \mathbf{H}^H \right) \leq r \log_2 SNR + o(\log_2 SNR) \right\} \quad (5)$$

$$\bar{\mathcal{O}} \triangleq \left\{ \mathbf{H} \mid \sum_{i=1}^{n_r} \log_2 \left(1 + \frac{SNR}{n_t} \|\mathbf{h}_i\|^2 \right) > r \log_2 SNR + o(\log_2 SNR) \right\} \quad (6)$$

where $P(\cdot)$ denotes ‘‘probability of’’ and $\mathcal{O}^c = \{\mathbf{H} | \mathbf{H} \notin \mathcal{O}\}$. $P(\mathcal{O})$ is the well-known probability of outage³ [2] and $P(\mathcal{E}|\mathcal{O})$ is the probability of codeword error given that the channel is in outage. Both $P(\mathcal{O})$ and $P(\mathcal{E}|\mathcal{O})$ have been derived in [2] to be

$$P(\mathcal{O}) \doteq SNR^{-d^*(r)}, \quad (10)$$

$$P(\mathcal{E}|\mathcal{O}) \doteq SNR^0. \quad (11)$$

where $d^*(r)$ is given in Definition 5. So, the DMT curve of an STBC is determined completely by $P(\mathcal{O}^c, \mathcal{E})$, which is the probability that there is a codeword error and the channel is not in outage. To obtain an upper bound on $P(\mathcal{O}^c, \mathcal{E})$, we proceed as follows. Note that $\mathbf{I}_{n_r} + (SNR/n_t)\mathbf{H}\mathbf{H}^H$ is a positive definite matrix. Denoting the rows of \mathbf{H} by \mathbf{h}_i , $i = 1, \dots, n_r$, we have,

$$\log_2 \det \left(\mathbf{I}_{n_r} + \frac{SNR}{n_t} \mathbf{H} \mathbf{H}^H \right) \leq \sum_{i=1}^{n_r} \log_2 \left(1 + \frac{SNR}{n_t} \|\mathbf{h}_i\|^2 \right),$$

which is due to the Hadamard’s inequality which states that the determinant of a positive definite matrix is less than or equal to the product of its diagonal entries. Define the set of channel realizations $\bar{\mathcal{O}}$ as shown in (6) at the top of the page. Now, clearly, $\mathcal{O}^c \subseteq \bar{\mathcal{O}}$ and hence

$$P(\mathcal{O}^c, \mathcal{E}) \leq P(\bar{\mathcal{O}}, \mathcal{E}). \quad (12)$$

Hence, using (12) in (9), we have

$$P_e \leq P(\mathcal{O})P(\mathcal{E}|\mathcal{O}) + P(\bar{\mathcal{O}}, \mathcal{E}). \quad (13)$$

We now need to evaluate $P(\bar{\mathcal{O}}, \mathcal{E})$. Denoting the entries of \mathbf{H} by h_{ij} , $i = 1, \dots, n_r$, $j = 1, \dots, n_t$, we observe that

$$\begin{aligned} & \sum_{i=1}^{n_r} \log_2 \left(1 + \frac{SNR}{n_t} \|\mathbf{h}_i\|^2 \right) \\ &= \sum_{i=1}^{n_r} \log_2 \left(\frac{1}{n_t} \sum_{j=1}^{n_t} (1 + SNR|h_{ij}|^2) \right) \\ &\geq \frac{1}{n_t} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log_2 (1 + SNR|h_{ij}|^2), \end{aligned} \quad (16)$$

with (16) following from the concavity of $\log(\cdot)$ and Jensen’s inequality.

We now define two disjoint sets of channel realizations $\tilde{\mathcal{O}}$ and $\check{\mathcal{O}}$ as shown in (14) and (15) at the top of the next page. Clearly, $\bar{\mathcal{O}}$ is the disjoint union of $\tilde{\mathcal{O}}$ and $\check{\mathcal{O}}$. Therefore,

$$\begin{aligned} P(\bar{\mathcal{O}}, \mathcal{E}) &= P(\tilde{\mathcal{O}}, \mathcal{E}) + P(\check{\mathcal{O}}, \mathcal{E}) \\ &= P(\tilde{\mathcal{O}})P(\mathcal{E}|\tilde{\mathcal{O}}) + P(\check{\mathcal{O}}, \mathcal{E}) \\ &\leq P(\tilde{\mathcal{O}}) + P(\check{\mathcal{O}}, \mathcal{E}). \end{aligned} \quad (17)$$

In Appendix A, it is shown that

$$P(\tilde{\mathcal{O}}) \doteq SNR^{-n_t(n_r-r)}. \quad (18)$$

So, we are now left with the evaluation of $P(\check{\mathcal{O}}, \mathcal{E})$, which is done as follows.

$$\begin{aligned} P(\check{\mathcal{O}}, \mathcal{E}) &= \int_{\check{\mathcal{O}}} p(\mathbf{H}) P_e(\mathbf{X}_1 | \mathbf{H}) d\mathbf{H} \\ &= \sum_{l=2}^{|\mathcal{X}(SNR)|} \int_{\check{\mathcal{O}}} p(\mathbf{H}) Q \left(\frac{\|\mathbf{H} \Delta \mathbf{X}_l\|}{\sqrt{2}} \right) d\mathbf{H} \quad (19) \\ &= \sum_{l=2}^{|\mathcal{X}(SNR)|} \int_{\check{\mathcal{O}}} p(\mathbf{H}) Q \left(\frac{\|\mathbf{H} \mathbf{U}_l \mathbf{D}_l \mathbf{V}_l^H\|}{\sqrt{2}} \right) d\mathbf{H} \\ &= \sum_{l=2}^{|\mathcal{X}(SNR)|} \int_{\check{\mathcal{O}}} p(\mathbf{H}) Q \left(\frac{\|\mathbf{H} \mathbf{U}_l \mathbf{D}_l\|}{\sqrt{2}} \right) d\mathbf{H} \\ &= \sum_{l=2}^{|\mathcal{X}(SNR)|} \int_{\mathcal{O}_l} p(\mathbf{H}_l) Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|}{\sqrt{2}} \right) d\mathbf{H}_l, \end{aligned} \quad (20)$$

where (19) is obtained using (8) and $\Delta \mathbf{X}_l = \mathbf{U}_l \mathbf{D}_l \mathbf{V}_l^H$, obtained upon SVD, with $\mathbf{U}_l \in \mathbb{C}^{n_t \times n_t}$, $\mathbf{D}_l \in \mathbb{R}^{n_t \times T}$, $\mathbf{V}_l \in \mathbb{C}^{T \times T}$. In (20), $\mathbf{H}_l = \mathbf{H} \mathbf{U}_l$ and

$$\mathcal{O}_l \triangleq \left\{ \mathbf{H}_l \mid \sum_{i,j} \log_2 (1 + SNR|h_{ij}|^2) > \frac{n_t r \log_2 SNR}{+ o(\log_2 SNR)} \right\}.$$

Denoting the entries of $\mathbf{H}_l = \mathbf{H} \mathbf{U}_l$ by $h_{ij}(l)$, we define the set \mathcal{O}'_l as

$$\mathcal{O}'_l \triangleq \left\{ \mathbf{H}_l \mid \sum_{i,j} \log_2 (1 + SNR|h_{ij}(l)|^2) > \frac{n_t r \log_2 SNR}{+ o(\log_2 SNR)} \right\}.$$

In Appendix B, it is shown that $\mathcal{O}_l = \mathcal{O}'_l$ almost surely. As a result, (20) becomes

$$P(\check{\mathcal{O}}, \mathcal{E}) = \sum_{l=2}^{|\mathcal{X}(SNR)|} \int_{\mathcal{O}'_l} p(\mathbf{H}_l) Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|}{\sqrt{2}} \right) d\mathbf{H}_l. \quad (21)$$

Now, we evaluate each of the summands of (21). We have

³In literature, ‘<’ is often used instead of ‘≤’ in (5) to define the outage probability. However, for either definition, (10) holds true.

$$\tilde{\mathcal{O}} \triangleq \left\{ \mathbf{H} \mid \sum_{i=1}^{n_r} \log_2 \left(1 + \frac{SNR}{n_t} \|\mathbf{h}_i\|^2 \right) > r \log_2 SNR + o(\log_2 SNR) \geq \frac{1}{n_t} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log_2(1 + SNR|h_{ij}|^2) \right\}, \quad (14)$$

$$\ddot{\mathcal{O}} \triangleq \left\{ \mathbf{H} \mid \frac{1}{n_t} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log_2(1 + SNR|h_{ij}|^2) > r \log_2 SNR + o(\log_2 SNR) \right\} \quad (15)$$

$$\begin{aligned} \int_{\mathcal{O}'_l} p(\mathbf{H}_l) Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|}{\sqrt{2}} \right) d\mathbf{H}_l &\leq \int_{\mathcal{O}'_l} p(\mathbf{H}_l) Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|_{min}}{\sqrt{2}} \right) d\mathbf{H}_l \\ &\leq Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|_{min}}{\sqrt{2}} \right), \end{aligned} \quad (22)$$

where $\|\mathbf{H}_l \mathbf{D}_l\|_{min} \triangleq \inf_{\mathcal{O}'_l} \{\|\mathbf{H}_l \mathbf{D}_l\|\}$ (inf stands for 'infimum of'). Denoting the non-zero entries of \mathbf{D}_l by $d_j(l)$, $j, 1, 2, \dots, n_t$ (it is to be noted that these are the singular values of $\Delta \mathbf{X}_l$ and we assume that $\Delta \mathbf{X}_l$ is full-ranked, i.e. of rank n_t , which is necessary for the STBC to have a diversity gain of $n_t n_r$ when $r = 0$), we have

$$\|\mathbf{H}_l \mathbf{D}_l\|_{min}^2 = \inf_{\mathcal{O}'_l} \left\{ \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} |h_{ij}(l)|^2 d_j^2(l) \right\}. \quad (23)$$

Let $a_{ij} \triangleq |h_{ij}(l)|^2$. The problem of evaluating $\|\mathbf{H}_l \mathbf{D}_l\|_{min}^2$ can be interpreted as the following convex optimization problem:

$$\underset{a_{ij}}{\text{minimize}} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} a_{ij} d_j^2(l)$$

subject to

$$\begin{aligned} -\frac{1}{n_t} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log(1 + a_{ij} SNR) &\leq -(r + \delta) \log SNR, \\ -a_{ij} &\leq 0, \quad \begin{cases} \forall i = 1, \dots, n_r, \\ \forall j = 1, \dots, n_t, \end{cases} \end{aligned}$$

where $\delta \rightarrow 0^+$ (δ tends to zero through positive values⁴). The solution to this optimization problem is

$$a_{ij} = \frac{1}{SNR} \left[\frac{\lambda SNR}{n_t d_j^2(l)} - 1 \right]^+, \quad (24)$$

where λ is the Karush-Kuhn-Tucker (KKT) multiplier satisfying

$$\sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log \left(1 + \left[\frac{\lambda SNR}{n_t d_j^2(l)} - 1 \right]^+ \right) = n_t (r + \delta) \log SNR$$

with $\delta \rightarrow 0^+$ and hence,

$$\sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \left[\log \left(\frac{\lambda SNR}{n_t d_j^2(l)} \right) \right]^+ = n_t (r + \delta) \log SNR \quad (25)$$

⁴throughout the paper, ' $\delta \rightarrow 0^+$ ' implies that δ is an infinitesimal positive real number, i.e., immeasurably close to zero on the positive real line but not zero.

with $\delta \rightarrow 0^+$. Noting that $d_j^2(l)$ are the eigenvalues of $\Delta \mathbf{X}_l \Delta \mathbf{X}_l^H$, from (3), we have $\|\Delta \mathbf{X}_l\|^2 \leq SNR$ and hence, $\text{tr}(\Delta \mathbf{X}_l \Delta \mathbf{X}_l^H) \leq SNR$ which leads to $\sum_{j=1}^{n_t} d_j^2(l) \leq SNR$. Therefore, we obtain

$$d_j^2(l) \leq SNR, \quad \forall j = 1, 2, \dots, n_t. \quad (26)$$

As a result, when $\lambda \gtrsim SNR^0$, we are guaranteed to have $a_{ij} > 0$, for all $i = 1, \dots, n_r$, $j = 1, \dots, n_t$. Now, suppose that $a_{ij} > 0$ for all $i = 1, \dots, n_r$, $j = 1, \dots, n_t$. Then, (25) leads to

$$\lambda = n_t SNR^{-(1 - \frac{r+\delta}{n_r})} \left(\prod_{j=1}^{n_t} d_j^2(l) \right)^{\frac{1}{n_t}}, \quad \delta \rightarrow 0^+.$$

So, when $\det(\Delta \mathbf{X} \Delta \mathbf{X}^H) = \prod_{j=1}^{n_t} d_j^2(l) \gtrsim SNR^{n_t(1 - \frac{r}{n_r})}$, we have $\lambda \gtrsim SNR^0$ and hence $a_{ij} > 0$, $\forall i = 1, \dots, n_r$, $\forall j = 1, \dots, n_t$. So, from (24),

$$a_{ij} = \left[\frac{\lambda}{n_t d_j^2(l)} - \frac{1}{SNR} \right]^+.$$

Using this in (23), we obtain

$$\begin{aligned} \|\mathbf{H}_l \mathbf{D}_l\|_{min}^2 &= \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \left(\frac{\lambda}{n_t} - \frac{d_j^2(l)}{SNR} \right) \\ &\geq \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \left(\frac{\lambda}{n_t} - o(\log_2 SNR) \right) \\ &= n_r \lambda - o(\log_2 SNR) \\ &\gtrsim SNR^0 \end{aligned} \quad (27)$$

where (27) is due to (26) and (28) is due to the fact that $\lambda \gtrsim SNR^0$. Therefore, from (22) and the Chernoff bound $Q(x) \leq \frac{1}{2} e^{-\frac{x^2}{2}}$, $x \geq 0$, we obtain

$$\int_{\mathcal{O}'_l} p(\mathbf{H}_l) Q \left(\frac{\|\mathbf{H}_l \mathbf{D}_l\|}{\sqrt{2}} \right) d\mathbf{H}_l \leq \frac{1}{2} e^{-SNR^\delta}, \quad \delta \rightarrow 0^+. \quad (29)$$

Using (29) in (21), we have, as $\delta \rightarrow 0^+$

$$\begin{aligned} P(\ddot{\mathcal{O}}, \mathcal{E}) &\leq \frac{|\mathcal{X}(SNR)|}{2} e^{-SNR^\delta} \\ &= (c SNR^{rT} + o(\log_2 SNR)) e^{-SNR^\delta} \\ &\doteq SNR^{-\infty}, \end{aligned} \quad (30)$$

where (30) is due to the fact that $|\mathcal{X}(SNR)| \doteq SNR^{rT} = c SNR^{rT} + o(\log_2 SNR)$ with c a positive constant and (31) follows from the definition of exponential equality ' \doteq '. So,

using (18) and (31) in (17), we obtain

$$\begin{aligned} P(\bar{\mathcal{O}}, \mathcal{E}) &\leq SNR^{\max\{-n_t(n_r-r), -\infty\}} \\ &= SNR^{-n_t(n_r-r)}. \end{aligned} \quad (32)$$

Using (10), (11) and (32) in (13), we arrive at

$$\begin{aligned} P_e &\doteq SNR^{\max\{-d^*(r), -n_t(n_r-r)\}} \\ &= SNR^{-d^*(r)} \end{aligned}$$

where $d^*(r)$ is as defined in Definition 5 and this proves the DMT-optimality of the STBC-scheme when (7) is satisfied.

Now, combining the above result and that of Theorem 1, we see that an STBC-scheme is DMT-optimal if for each codeword difference matrix $\Delta \mathbf{X} \neq \mathbf{O}$ of $\mathcal{X}(SNR)$,

$$\begin{aligned} \det(\Delta \mathbf{X} \Delta \mathbf{X}^H) &\geq SNR^{(\min\{n_t(1-\frac{r}{n_r}), n_t(1-\frac{r}{n_t})\})} \\ &= SNR^{n_t(1-\frac{r}{n_{\min}})}. \end{aligned}$$

This completes the proof of the theorem. \blacksquare

Note: Theorem 1 can also be proved using the steps of the proof of Theorem 2. To do so, we need to redefine \mathcal{O} given by (5) as $\mathcal{O} \triangleq \{\mathbf{H} | \log_2 \det(\mathbf{I}_{n_t} + \frac{SNR}{n_t} \mathbf{H}^H \mathbf{H}) \leq r \log_2 SNR + o(\log_2 SNR)\}$. Redefining \mathcal{O} this way is justified because $\det(\mathbf{I} + \mathbf{A}\mathbf{B}) = \det(\mathbf{I} + \mathbf{B}\mathbf{A})$. With \mathcal{O} thus redefined, proceeding as in the proof of Theorem 2 from (5) onwards helps us arrive at the proof of Theorem 1.

The implication of Theorem 2 is that for asymmetric MIMO systems, it relaxes the requirement demanded by Theorem 1 on the minimum of the determinants of the codeword difference matrices of STBCs that the STBC-scheme consists of. In the following section, we show the usefulness of Theorem 2 in the context of LSTBCs for asymmetric MIMO systems.

IV. DMT-OPTIMALITY CRITERION FOR LSTBC-SCHEMES

In its most general form, an LSTBC \mathcal{X}_L is given by

$$\mathcal{X}_L = \left\{ \sum_{i=1}^k (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \begin{cases} [s_{1I}, s_{1Q}, \dots, s_{kI}, \\ s_{kQ}] \in \mathcal{A} \subset \mathbb{R}^{2k \times 1}, \\ \mathbf{A}_{iI}, \mathbf{A}_{iQ} \in \mathbb{C}^{n_t \times T} \end{cases} \right\}, \quad (33)$$

where \mathbf{A}_{iI} and \mathbf{A}_{iQ} are complex matrices, called *weight matrices* [13], associated with the real information symbols s_{iI} and s_{iQ} , respectively. It is to be noted that $\{\mathbf{A}_{iI}, \mathbf{A}_{iQ}, i = 1, \dots, k\}$ forms an independent set over \mathbb{R} . In the case of most known LSTBCs, either all the real symbols s_{iI} , s_{iQ} respectively take values independently from the same signal set \mathcal{A}' , in which case

$$\mathcal{A} = \underbrace{\mathcal{A}' \times \mathcal{A}' \times \dots \times \mathcal{A}'}_{2k \text{ times}},$$

or, each symbol pair (s_{iI}, s_{iQ}) jointly takes values from a real constellation $\mathcal{A}'' \subset \mathbb{R}^{2 \times 1}$ (the same can be viewed as each complex symbol $s_i = s_{iI} + js_{iQ}$ taking values from a complex constellation), independent of other symbol pairs, in which case

$$\mathcal{A} = \underbrace{\mathcal{A}'' \times \mathcal{A}'' \times \dots \times \mathcal{A}''}_{k \text{ times}}.$$

Definition 6: (Symbol rate) The symbol rate⁵ of the LSTBC given by (33) is k/T complex symbols per channel use. Such an STBC is called a rate- k/T STBC.

For the LSTBC given by (33), the system model given by (1) can be rewritten as

$$\widetilde{\text{vec}}(\mathbf{Y}) = \sqrt{\frac{SNR}{n_t}} (\mathbf{I}_T \otimes \check{\mathbf{H}}) \mathbf{G} \mathbf{s} + \widetilde{\text{vec}}(\mathbf{N}), \quad (34)$$

where $\mathbf{G} \in \mathbb{R}^{2Tn_t \times 2k}$ is called the *Generator matrix* of the STBC and $\mathbf{s} \in \mathbb{R}^{2k \times 1}$, both defined as

$$\mathbf{G} \triangleq \left[\widetilde{\text{vec}}(\mathbf{A}_{1I}) \widetilde{\text{vec}}(\mathbf{A}_{1Q}), \dots, \widetilde{\text{vec}}(\mathbf{A}_{kI}) \widetilde{\text{vec}}(\mathbf{A}_{kQ}) \right], \quad (35)$$

$$\mathbf{s} \triangleq [s_{1I}, s_{1Q}, \dots, s_{kI}, s_{kQ}], \quad (36)$$

with $\mathbb{E}_s \left(\text{tr}(\mathbf{G} \mathbf{s} \mathbf{s}^T \mathbf{G}^T) \right) = Tn_t$. A necessary condition for an LSTBC given by (33) to be sphere-decodable [19] is that the constellation \mathcal{A} should be a finite subset of a $2k$ -dimensional real lattice with each of the real symbols taking $|\mathcal{A}|^{\frac{1}{2k}}$ possible values. Further, if $k/T \leq n_{\min}$, all the symbols of the STBC can be entirely decoded using the standard sphere-decoder [19] or its variations [20], [21]. However, when $k/T > \min(n_t, n_r)$, for each of the $|\mathcal{A}|^{\left(1-\frac{n_{\min}T}{k}\right)}$ possibilities for any $2(k-n_{\min}T)$ real symbols, the remaining $2n_{\min}T$ real symbols can be evaluated using the sphere decoder. Hence, the ML-complexity of the rate- $\frac{k}{T}$ STBC in such a scenario is approximately $|\mathcal{A}|^{\left(1-\frac{n_{\min}T}{k}\right)}$ times the sphere-decoding complexity of a rate- n_{\min} STBC.

Definition 7: (LSTBC-scheme) An LSTBC-scheme \mathcal{X} is defined as a family of LSTBCs (indexed by SNR) of block length T so that $\mathcal{X} \triangleq \{\mathcal{X}_L(SNR)\}$, where the STBC $\mathcal{X}_L(SNR)$ corresponds to a signal-to-noise ratio of SNR at each receive antenna.

For an LSTBC $\mathcal{X}_L(SNR)$ of the form given by (33), from (3), we have that for each codeword matrix $\mathbf{X}_i \in \mathcal{X}_L(SNR)$, $i = 1, 2, \dots, |\mathcal{X}_L(SNR)|$,

$$\|\mathbf{X}_i\|^2 = \|\mathbf{G} \mathbf{s}\|^2 \leq SNR,$$

where \mathbf{G} and \mathbf{s} are as defined in (35) and (36), respectively. For convenience, we assume that

$$\max_{\mathcal{X}_L(SNR)} \{\|\mathbf{G} \mathbf{s}\|^2\} \doteq SNR$$

and hence,

$$\left. \begin{aligned} \max_{s_{iI}} |s_{iI}|^2 &\doteq SNR, \\ \max_{s_{iQ}} |s_{iQ}|^2 &\doteq SNR \end{aligned} \right\} \forall i = 1, \dots, k. \quad (37)$$

When the bit rate of $\mathcal{X}_L(SNR)$ is $r \log_2 SNR + o(\log_2 SNR)$ bits per channel use, we have $|\mathcal{A}(SNR)| \doteq SNR^{rT}$, where $\mathcal{A}(SNR)$ is the $2k$ dimensional real constellation of $\mathcal{X}_L(SNR)$. Further, when each of the $2k$ real symbols takes values from the same real constellation $\mathcal{A}'(SNR)$, it

⁵In literature, ‘symbol rate’ is referred to simply as ‘rate’. In this paper, to avoid confusion with the bit rate, which is $\frac{\log_2 |\mathcal{A}|}{T}$ bits per channel use, we have opted to use the term ‘symbol rate’.

follows that

$$|A'(SNR)| \doteq SNR^{\frac{rT}{2k}}. \quad (38)$$

For the special case of $A'(SNR) = \mu A_{\text{PAM}}$ where, μ is a scalar normalizing constant designed to satisfy the constraints in (37), $A_{M\text{-PAM}}$ is the regular M -PAM constellation given by

$$A_{M\text{-PAM}} = \left\{ 2l - 1, l = \left\lfloor -\frac{M}{2} \right\rfloor, \left\lfloor -\frac{M}{2} \right\rfloor + 1, \dots, \left\lfloor \frac{M}{2} \right\rfloor \right\}, \quad (39)$$

and $\mu A_{M\text{-PAM}} = \{\mu a | a \in A_{M\text{-PAM}}\}$, we have from (38) and (37),

$$\begin{aligned} M &\doteq SNR^{\frac{rT}{2k}}, \\ \mu M &\doteq SNR^{\frac{1}{2}} \end{aligned}$$

and hence $\mu^2 \doteq SNR^{(1-\frac{rT}{k})}$.

For an LSTBC-scheme \mathcal{X} that satisfies (3) and has a bit rate of $r \log_2 SNR + o(\log_2 SNR)$ bits per channel use with the real symbols of its LSTBCs taking values from a scaled M -PAM, the LSTBCs $\mathcal{X}_L(SNR)$ can be expressed as $\mathcal{X}_L(SNR) = \{\mu \mathbf{X} | \mathbf{X} \in \mathcal{X}_U(SNR)\}$, where $\mu^2 \doteq SNR^{(1-\frac{rT}{k})}$ and $\mathcal{X}_U(SNR)$ is the *unnormalized* (so that it does not satisfy the energy constraint given in (3)) LSTBC given by

$$\mathcal{X}_U(SNR) = \left\{ \sum_{i=1}^k (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in A_{M\text{-PAM}}, \\ i = 1, 2, \dots, k, \\ M \doteq SNR^{\frac{rT}{k}}. \end{array} \right. \right\} \quad (40)$$

With $\mathcal{X}_L(SNR)$ and $\mathcal{X}_U(SNR)$ thus defined, we define the non-vanishing determinant property of an LSTBC-scheme as follows.

Definition 8: (Non-vanishing determinant) An LSTBC-scheme \mathcal{X} is said to have the non-vanishing determinant property if the codeword difference matrices $\Delta \mathbf{X}$ of $\mathcal{X}_U(SNR)$ are such that

$$\min_{\Delta \mathbf{X} \neq \mathbf{0}} \det(\Delta \mathbf{X} \Delta \mathbf{X}^H) \doteq SNR^0.$$

A necessary and sufficient condition for an LSTBC-scheme $\mathcal{X} = \{\mathcal{X}_L(SNR)\}$, where $\mathcal{X}_L(SNR)$ has weight matrices $\mathbf{A}_{iI}, \mathbf{A}_{iQ}, i = 1, \dots, k$ and encodes its real symbols using PAM, to have the non-vanishing determinant property is that the design \mathcal{X}_Z , defined as

$$\mathcal{X}_Z = \left\{ \sum_{i=1}^k (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathbb{Z}, \\ i = 1, 2, \dots, k. \end{array} \right. \right\}, \quad (41)$$

is such that for any non-zero matrix \mathbf{X} of \mathcal{X}_Z ,

$$\det(\mathbf{X} \mathbf{X}^H) \geq C,$$

where C is some strictly positive constant bounded away from 0.

Remark: Any LSTBC is completely specified by a set of weight matrices (equivalently, its generator matrix, defined in (35)) and a $2k$ -dimensional real constellation \mathcal{A} that its real

symbol vector takes values from, as evident from (33). However, for an LSTBC, the set of weight matrices (equivalently, its generator matrix) and the $2k$ -dimensional constellation need not be unique. As an example, consider the Perfect code for 3 transmit antennas, which encodes 9 independent complex symbols, and can be expressed as

$$\mathcal{X}_P = \left\{ \sum_{i=1}^9 (x_{iI} \mathbf{A}_{iI} + x_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} x_i \in A_{M^2\text{-HEX}}, \\ i = 1, 2, \dots, 9. \end{array} \right. \right\},$$

where $A_{M^2\text{-HEX}}$ is an M^2 -HEX constellation given by

$$A_{M^2\text{-HEX}} = \left\{ a + \omega b \left| \begin{array}{l} a, b \in A_{M\text{-PAM}}, \\ \omega = e^{j\frac{2\pi}{3}}. \end{array} \right. \right\}$$

We can equivalently express \mathcal{X}_P as

$$\mathcal{X}_P = \left\{ \sum_{i=1}^9 (s_{iI} \mathbf{A}'_{iI} + s_{iQ} \mathbf{A}'_{iQ}) \left| \begin{array}{l} s_{iI}, s_{iQ} \in A_{M\text{-PAM}}, \\ i = 1, 2, \dots, 9. \end{array} \right. \right\},$$

where

$$\left. \begin{array}{l} \mathbf{A}'_{iI} = \mathbf{A}_{iI}, \\ \mathbf{A}'_{iQ} = -\frac{1}{2} \mathbf{A}_{iI} + \frac{\sqrt{3}}{2} \mathbf{A}_{iQ}. \end{array} \right\} \quad i = 1, 2, \dots, 9.$$

In general, any LSTBC \mathcal{X}_L with a generator matrix \mathbf{G} and a $2k$ dimensional constellation \mathcal{A} that is a subset of a $2k$ -dimensional real lattice \mathcal{L} can be alternatively viewed to have $\mathbf{G} \mathbf{G}_{\mathcal{L}}$ as its generator matrix and a $2k$ -dimensional constellation \mathcal{A}' that is a subset of $\mathbb{Z}^{2k \times 1}$, where $\mathbf{G}_{\mathcal{L}} \in \mathbb{R}^{2k \times 2k}$ is the generator matrix of \mathcal{L} .

In the following lemma, we prove that for an LSTBC-scheme to be DMT-optimal, the symbol rate of its LSTBCs has to be at least equal to n_{min} .

Lemma 1: An LSTBC-scheme whose LSTBCs have a symbol rate less than $n_{min} = \min(n_t, n_r)$ is not DMT-optimal.

Proof: With the system model for an LSTBC given by (34), from (2), we have $\mathbb{E}_s \left(\text{tr} \left(\mathbf{G} \mathbf{s} \mathbf{s}^T \mathbf{G}^T \right) \right) = T n_t$. The instantaneous capacity $C(\mathbf{H})$ of the equivalent channel [31] is given by

$$C(\mathbf{H}) = \frac{1}{2T} \log_2 \det \left(\mathbf{I}_{2T n_r} + \frac{SNR}{n_t} \bar{\mathbf{H}} \mathbf{G} \mathbf{G}^T \bar{\mathbf{H}}^T \right),$$

where $\bar{\mathbf{H}} = \mathbf{I}_T \otimes \check{\mathbf{H}}$ and this capacity is achieved by letting the input $\mathbf{s} \sim \mathcal{N}(\mathbf{0}_{2k \times 1}, \frac{1}{2} \mathbf{I}_{2k})$ (“ s be a real Gaussian vector with zero mean and covariance matrix $\frac{1}{2} \mathbf{I}_{2k}$ ”). The ergodic capacity [32] C is given as

$$\begin{aligned} C &= \mathbb{E}_{\mathbf{H}}(C(\mathbf{H})) \\ &= \frac{1}{2T} \mathbb{E}_{\mathbf{H}} \left(\log_2 \det \left(\mathbf{I}_{2T n_r} + \frac{SNR}{n_t} \bar{\mathbf{H}} \mathbf{G} \mathbf{G}^T \bar{\mathbf{H}}^T \right) \right) \\ &= \frac{1}{2T} \mathbb{E}_{\mathbf{H}} \left(\log_2 \det \left(\mathbf{I}_{2k} + \frac{SNR}{n_t} \mathbf{G}^T \bar{\mathbf{H}}^T \bar{\mathbf{H}} \mathbf{G} \right) \right) \quad (42) \\ &\leq \frac{1}{2T} \log_2 \det \left(\mathbb{E}_{\mathbf{H}} \left(\mathbf{I}_{2k} + \frac{SNR}{n_t} \mathbf{G}^T \bar{\mathbf{H}}^T \bar{\mathbf{H}} \mathbf{G} \right) \right) \quad (43) \\ &= \frac{1}{2T} \log_2 \det \left(\mathbf{I}_{2k} + \frac{n_r SNR}{n_t} \mathbf{G}^T \mathbf{G} \right) \\ &= \frac{1}{2T} \log_2 \det \left(\mathbf{I}_{2k} + \frac{n_r SNR}{n_t} \mathbf{D} \right), \quad (44) \end{aligned}$$

where (42) is due to the identity $\det(\mathbf{I} + \mathbf{A}\mathbf{B}) = \det(\mathbf{I} + \mathbf{B}\mathbf{A})$, (43) is due to Jensen's inequality and the fact that $\log \det(\cdot)$ is concave [33] on the convex set of positive definite matrices, and (44) is obtained upon the singular value decomposition of $\mathbf{G}^T \mathbf{G}$, resulting in $\mathbf{G}^T \mathbf{G} = \mathbf{U}\mathbf{D}\mathbf{U}^T$. We note that \mathbf{G} is full-ranked since $\{\mathbf{A}_{iI}, \mathbf{A}_{iQ}, i = 1, 2, \dots, k\}$ forms an independent set over \mathbb{R} and denoting the diagonal entries of \mathbf{D} by $d_i, i = 1, 2, \dots, 2k$, we have

$$C \leq \frac{1}{2T} \sum_{i=1}^{2k} \log_2 \left(1 + \left(\frac{n_r d_i}{n_t} \right) SNR \right).$$

The above equation reveals that $C \leq \frac{k}{T} \log_2 SNR + o(\log_2 SNR)$. Since the ergodic capacity itself is at most $\frac{k}{T} \log_2 SNR + o(\log_2 SNR)$, if $\frac{k}{T} < n_{min}$, the error probability of the LSTBC-scheme is bounded away from 0 when $r > k/T$. Hence, the diversity gain $d(r)$ of the LSTBC-scheme is not given by (4), making the LSTBC-scheme strictly sub-optimal with respect to DMT. ■

So, for DMT-optimality, the LSTBCs of the LSTBC-scheme should have a symbol rate of at least n_{min} complex symbols per channel use. Now, we give a sufficiency criterion for an LSTBC-scheme to be DMT-optimal.

Corollary 1: An LSTBC-scheme \mathcal{X} , whose LSTBCs are given by $\mathcal{X}_L(SNR) = \{\mu \mathbf{X} | \mathbf{X} \in \mathcal{X}_U(SNR)\}$ with $\mu \doteq SNR^{(1 - \frac{r}{n_{min}})}$ and

$$\mathcal{X}_U(SNR) = \left\{ \sum_{i=1}^{n_{min}T} (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM}, \\ i = 1, 2, \dots, n_{min}T, \\ M \doteq SNR^{\frac{r}{n_{min}}}. \end{array} \right. \right\},$$

is DMT optimal for the quasi-static Rayleigh faded $n_t \times n_r$ MIMO channel with CSIR if it has the non-vanishing determinant property.

The proof follows from the application of Theorem 2. Notice the difference between the above result and the result from Theorem 2 of [4]. The latter result relies on STBC-schemes that are based on rate- n_t LSTBCs, irrespective of the values of n_r , while our result only requires that the symbol rate of the LSTBC be $\min(n_t, n_r)$ complex symbols per channel use which, together with NVD, guarantees DMT-optimality of the LSTBC-scheme. The usefulness of our result for asymmetric MIMO systems is discussed in the following section.

V. DMT-OPTIMAL LSTBC-SCHEMES FOR ASYMMETRIC MIMO SYSTEMS

LSTBC-schemes consisting of rate- n_t LSTBCs and having the NVD property are known to be DMT-optimal for arbitrary number of receive antennas. The methods to construct such LSTBCs for arbitrary values of n_t with minimal-delay ($T = n_t$) have been proposed in [4], [10] and such constructions with additional properties have also been proposed for specific number of transmit antennas - the perfect codes for 2, 3, 4 and 6 transmit antennas [9]. For the case $n_r < n_t$, Corollary 1 establishes that an LSTBC-scheme based on rate- n_r LSTBCs

and having the NVD property achieves the optimal DMT and such LSTBCs can make use of the sphere decoder efficiently. LSTBC-schemes with these properties can be obtained directly from the rate- n_t LSTBC based LSTBC-schemes with NVD, as shown in the following corollary.

Corollary 2: Consider an LSTBC-scheme \mathcal{X} with NVD, consisting of rate- n_t , minimal-delay LSTBCs $\mathcal{X}(SNR) = \{\mu \mathbf{X} | \mathbf{X} \in \mathcal{X}_U(SNR)\}$ with $\mu^2 \doteq SNR^{(1 - \frac{r}{n_t})}$ and

$$\mathcal{X}_U(SNR) = \left\{ \sum_{i=1}^{n_t^2} (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM}, \\ i = 1, 2, \dots, n_t^2, \\ M \doteq SNR^{\frac{r}{n_t}}. \end{array} \right. \right\},$$

and let $\mathcal{I} \subset \{1, 2, \dots, n_t^2\}$, with $|\mathcal{I}| = n_t n_r$, where $n_r < n_t$. Then, the LSTBC-scheme \mathcal{X}' consisting of LSTBCs $\mathcal{X}'(SNR) = \{\mu \mathbf{X} | \mathbf{X} \in \mathcal{X}'_U(SNR)\}$, with $\mu^2 \doteq SNR^{(1 - \frac{r}{n_r})}$ and

$$\mathcal{X}'_U(SNR) = \left\{ \sum_{i \in \mathcal{I}} (s_{iI} \mathbf{A}_{iI} + s_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM}, \\ i \in \mathcal{I}, \\ M \doteq SNR^{\frac{r}{n_r}}. \end{array} \right. \right\},$$

is DMT-optimal for the $n_t \times n_r$ quasi-static MIMO channel with Rayleigh fading and CSIR.

The proof is a trivial application of Corollary 1 and the fact that \mathcal{X}' also has the NVD property. As an example, consider the Golden code-scheme [6] $\mathcal{X}_G = \{\mathcal{X}_G(SNR)\}$, where

$$\mathcal{X}_G(SNR) = \left\{ \mu \left[\begin{array}{cc} \alpha(s_1 + s_2\theta) & \alpha(s_3 + s_4\theta) \\ \gamma\bar{\alpha}(s_3 + s_4\bar{\theta}) & \bar{\alpha}(s_1 + s_2\bar{\theta}) \end{array} \right] \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM}, \\ i = 1, 2, 3, 4, \\ M \doteq SNR^{\frac{r}{2}}, \end{array} \right. \right\}$$

and $\mu^2 \doteq SNR^{(1 - \frac{r}{2})}$, $\theta = (1 + \sqrt{5})/2$, $\bar{\theta} = (1 - \sqrt{5})/2$, $\bar{\alpha} = 1 + j\theta$ and $\alpha = 1 + j\bar{\theta}$. It is known that \mathcal{X}_G is DMT-optimal for arbitrary values of n_r . So, from Corollary 2, the LSTBC-scheme $\mathcal{X}'_G = \{\mathcal{X}'_G(SNR)\}$, where

$$\mathcal{X}'_G(SNR) = \left\{ \mu \left[\begin{array}{cc} \alpha(s_1 + s_2\theta) & 0 \\ 0 & \bar{\alpha}(s_1 + s_2\bar{\theta}) \end{array} \right] \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM}, \\ i = 1, 2, \\ M \doteq SNR^r, \\ \mu^2 \doteq SNR^{1-r}, \end{array} \right. \right\}$$

is DMT-optimal for a 2×1 MIMO system.

A. Full-diversity QOSTBC-scheme for the 4×1 MIMO system

The QOSTBC of [12], which is a rate-1 LSTBC, is given by

$$\mathcal{X}_Q = \left\{ \left[\begin{array}{cccc} x_1 & x_2 & x_3 & x_4 \\ -x_2^* & x_1^* & -x_4^* & x_3^* \\ x_3 & x_4 & x_1 & x_2 \\ -x_4^* & x_3^* & -x_2^* & x_1^* \end{array} \right] \left| \begin{array}{l} x_1, x_2 \in \mathcal{A}_{M^2-QAM}, \\ x_3, x_4 \in e^{j\frac{\pi}{4}} \mathcal{A}_{M^2-QAM} \end{array} \right. \right\}. \quad (45)$$

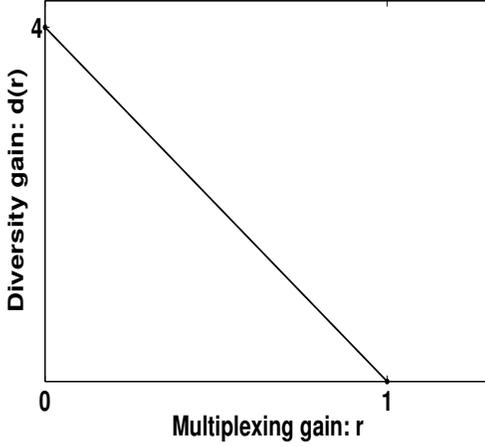


Fig. 1. DMT curve for the QOSTBC-scheme, the CIOD-STBC-scheme and the Perfect code-scheme [9] for a 4×1 MIMO system.

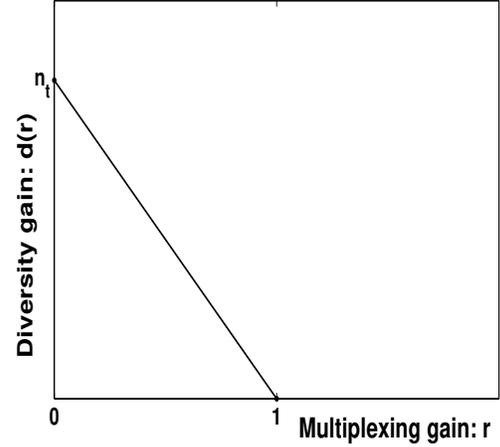


Fig. 2. DMT curve for rate-1, 4-group decodable STBC-schemes [14] and the Perfect code-scheme [10] for an $n_t \times 1$ MIMO system, $n_t = 2^n$.

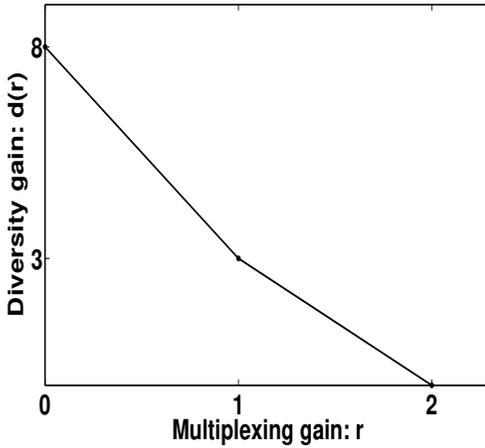


Fig. 3. DMT curve for the fast-decodable LSTBC-schemes [30], [18] and the Perfect code-scheme [9] for a 4×2 MIMO system.

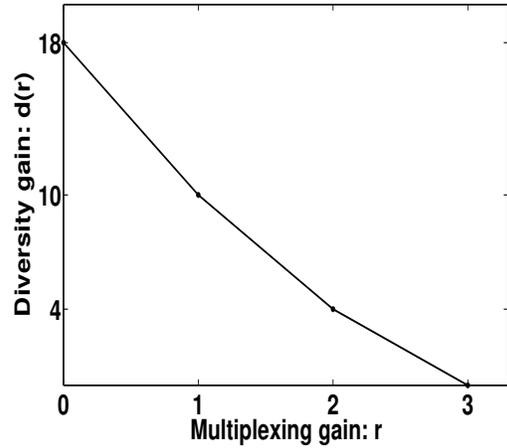


Fig. 4. DMT curve for the fast-decodable LSTBC-scheme [18] and the Perfect code-scheme [10] for a 6×3 MIMO system.

where the M^2 -QAM, denoted by \mathcal{A}_{M^2-QAM} is given by $\mathcal{A}_{M^2-QAM} \triangleq \{a + jb, a, b \in \mathcal{A}_{M-PAM}\}$, and $e^{j\frac{\pi}{4}}\mathcal{A}_{M^2-QAM} \triangleq \{e^{j\frac{\pi}{4}}(a + ib), a, b \in \mathcal{A}_{M-PAM}\}$, is the $\pi/4$ radian rotated M^2 -QAM. The QOSTBC has a minimum determinant⁶ of 256 [12], irrespective of the value of M . Expressing (45) as

$$\mathcal{X}_Q = \left\{ \sum_{i=1}^4 (x_{iI}\mathbf{A}_{iI} + x_{iQ}\mathbf{A}_{iQ}), \left| \begin{array}{l} x_1, x_2 \in \mathcal{A}_{M^2-QAM}, \\ x_3, x_4 \in e^{j\frac{\pi}{4}}\mathcal{A}_{M^2-QAM}. \end{array} \right. \right\},$$

we note that \mathcal{X}_Q can also be written as

$$\mathcal{X}_Q = \left\{ \sum_{i=1}^4 (s_{iI}\mathbf{A}'_{iI} + s_{iQ}\mathbf{A}'_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM} \end{array} \right. \right\},$$

where

$$\left. \begin{array}{l} \mathbf{A}'_{iI} = \mathbf{A}_{iI}, \\ \mathbf{A}'_{iQ} = \mathbf{A}_{iQ}, \end{array} \right\} \quad i = 1, 2,$$

$$\left. \begin{array}{l} \mathbf{A}'_{iI} = \frac{1}{\sqrt{2}}(\mathbf{A}_{iI} + \mathbf{A}_{iQ}), \\ \mathbf{A}'_{iQ} = \frac{1}{\sqrt{2}}(-\mathbf{A}_{iI} + \mathbf{A}_{iQ}). \end{array} \right\} \quad i = 3, 4.$$

Since \mathcal{X}_Q has a minimum determinant of 256 that is invariant with M ,

$$\mathcal{X}_Z = \left\{ \sum_{i=1}^4 (s_{iI}\mathbf{A}'_{iI} + s_{iQ}\mathbf{A}'_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathbb{Z} \end{array} \right. \right\},$$

is such that for any non-zero matrix \mathbf{X} of \mathcal{X}_Z ,

$$\det(\mathbf{X}\mathbf{X}^H) \geq 1.$$

Hence, the QOSTBC-scheme has the NVD property and is DMT-optimal for an 4×1 MIMO system.

⁶The minimum determinant of a square STBC $\mathcal{X}_L = \{\mathbf{X}_i, i = 1, \dots, |\mathcal{X}_L|\}$ is defined as $\min\{|\det(\mathbf{X}_i - \mathbf{X}_j)|^2, \mathbf{X}_i, \mathbf{X}_j \in \mathcal{X}_L, i \neq j\}$.

$$\mathcal{X}_C = \left\{ \left[\begin{array}{cccc|cc} x_{1I} + jx_{3Q} & x_{2I} + jx_{4Q} & 0 & 0 & x_i \in e^{j\theta} \mathcal{A}_{M^2-QAM}, \\ -x_{2I} + jx_{4Q} & x_{1I} - jx_{3Q} & 0 & 0 & i = 1, 2, 3, 4, \\ 0 & 0 & x_{3I} + jx_{1Q} & x_{4I} + jx_{2Q} & \theta = \frac{1}{2} \tan^{-1}(2) \\ 0 & 0 & -x_{4I} + jx_{2Q} & x_{3I} - jx_{1Q} & \end{array} \right] \right\}. \quad (46)$$

B. Schemes based on CIOD for the 2×1 and 4×1 MIMO systems

The STBC from CIOD [13] for 4 transmit antennas, denoted by \mathcal{X}_C and defined by (46) at the top of the page, is a rate-1 LSTBC with symbol-by-symbol ML-decodability. \mathcal{X}_C has a minimum determinant of 10.24 when its symbols x_i , $i = 1, 2, 3, 4$ take values from a $\tan^{-1}(2)/2$ radian rotated M^2 -QAM constellation, irrespective of value of M . Expressing (46) as

$$\mathcal{X}_C = \left\{ \sum_{i=1}^4 (x_{iI} \mathbf{A}_{iI} + x_{iQ} \mathbf{A}_{iQ}), \left| \begin{array}{l} x_i \in e^{j\theta} \mathcal{A}_{M^2-QAM}, \\ i = 1, 2, 3, 4, \\ \theta = \frac{1}{2} \tan^{-1}(2). \end{array} \right. \right\}, \quad (47)$$

we note that (47) can be alternatively written as

$$\mathcal{X}_C = \left\{ \sum_{i=1}^4 (s_{iI} \mathbf{A}'_{iI} + s_{iQ} \mathbf{A}'_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathcal{A}_{M-PAM} \end{array} \right. \right\},$$

where

$$\left. \begin{array}{l} \mathbf{A}'_{iI} = \cos \theta \mathbf{A}_{iI} + \sin \theta \mathbf{A}_{iQ}, \\ \mathbf{A}'_{iQ} = -\sin \theta \mathbf{A}_{iI} + \cos \theta \mathbf{A}_{iQ}. \end{array} \right\} \begin{array}{l} i = 1, 2, 3, 4, \\ \theta = \frac{1}{2} \tan^{-1}(2). \end{array}$$

Since \mathcal{X}_C has a minimum determinant of 10.24 independent of the value of M , any non-zero matrix \mathbf{X} of

$$\mathcal{X}_Z = \left\{ \sum_{i=1}^4 (s_{iI} \mathbf{A}'_{iI} + s_{iQ} \mathbf{A}'_{iQ}), \left| \begin{array}{l} s_{iI}, s_{iQ} \in \mathbb{Z} \end{array} \right. \right\},$$

is such that

$$\det(\mathbf{X}\mathbf{X}^H) \geq 0.04.$$

Hence, the CIOD based STBC-scheme has the NVD property and is DMT-optimal for a 4×1 MIMO system. Hence, the CIOD based STBC-scheme is DMT-optimal for a 4×1 MIMO system. Using the same analysis, one can show that the STBC-scheme based on the CIOD for 2 transmit antennas is DMT-optimal for the 2×1 MIMO system.

C. Four-group decodable STBC-schemes for $n_t \times 1$ MIMO systems

For the special case of n_t being a power of 2, rate-1, 4-group decodable STBCs have been extensively studied in literature [14]-[17]. For all these STBCs, the $2n_t$ real symbols taking values from PAM constellations can be separated into four equal groups such that the symbols of each group can be decoded independently of the symbols of all the other groups. For all these STBCs, the minimum determinant, irrespective of the size of the signal constellation, is given by [17]

$$\min_{\Delta \mathbf{X} \neq \mathbf{0}} = d_{p,\min}^4,$$

where $d_{p,\min}$ is the minimum product distance in $n_t/2$ real dimensions, which has been shown to be a constant bounded

away from 0 in [34]. Hence, from Corollary 1, LSTBC-schemes consisting of these 4-group decodable STBCs are DMT-optimal for $n_t \times 1$ MIMO systems, with n_t being a power of 2.

D. Fast-decodable STBCs

In [17] a rate-2, LSTBC was constructed for the 4×2 MIMO system and this code was conjectured to have a minimum determinant of 10.24 when the real symbols take values from regular M -PAM without regards to the value of M . An interesting property of this LSTBC is that it allows fast-decoding, meaning which, for ML-decoding the 16 real symbols (or 8 complex symbols) of the STBC using sphere decoding, it suffices to use a 9 real-dimensional sphere decoder instead of a 16 real-dimensional one. We conjecture that the LSTBC-scheme based on this fast-decodable STBC has the NVD property and hence is DMT-optimal for the 4×2 MIMO system.

Several rate- n_r , fast-decodable STBCs have been constructed in [18] for various asymmetric MIMO configurations - for example, for 4×2 , 6×2 , 6×3 , 8×2 , 8×3 , 8×4 MIMO systems. For an $n_t \times n_r$ asymmetric MIMO system, these STBCs transmit a total of $n_t n_r$ complex symbols in n_t channel uses and with regards to ML-decoding, only an $n_t n_r - \frac{n_t}{2}$ complex-dimensional sphere decoder is required, as against an $n_t n_r$ complex-dimensional sphere decoder required for decoding general rate- n_r LSTBCs. These STBCs are constructed from division algebra and STBC-schemes based on these STBCs have the NVD property [18]. Hence, for an $n_t \times n_r$ asymmetric MIMO system, LSTBC-schemes consisting of these rate- n_r fast-decodable STBCs are DMT-optimal. The DMT curves for some well known DMT-optimal LSTBC-schemes are shown in Fig. 1, Fig. 2, Fig. 3 and Fig. 4. In all the figures, the Perfect code-scheme refers to the LSTBC-scheme that is based on rate- n_t perfect codes [9], [10] and this scheme is known to be DMT-optimal for arbitrary number of receive antennas [4]. The DMT-curves of the LSTBC-schemes that are based on rate- n_r LSTBCs coincide with that of the rate- n_t perfect code-scheme.

VI. CONCLUDING REMARKS

In this paper, we have presented an enhanced sufficient criterion for DMT-optimality of STBC-schemes using which we have established the DMT optimality of several low ML-decoding complexity LSTBC-schemes for certain asymmetric MIMO systems. However, obtaining a necessary and sufficient condition for DMT-optimality of STBC-schemes is still an open problem. Further, obtaining low ML-decoding complexity STBC-schemes with NVD for arbitrary number of transmit antennas is another possible direction of research.

$$\tilde{\mathcal{O}} \triangleq \left\{ |h_{ij}|^2 \left| \sum_{i=1}^{n_r} \log_2 \left(1 + \frac{SNR}{n_t} \sum_{j=1}^{n_t} |h_{ij}|^2 \right) \right. > r \log_2 SNR + o(\log_2 SNR) \geq \frac{1}{n_t} \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \log_2(1 + SNR|h_{ij}|^2) \right\} \quad (48)$$

APPENDIX A

EVALUATION OF $P(\tilde{\mathcal{O}})$

We have

$$\begin{aligned} P(\tilde{\mathcal{O}}) &= \int_{\tilde{\mathcal{O}}} p(\mathbf{H}) d\mathbf{H} \\ &= \int_{\tilde{\mathcal{O}}} \prod_{i=1}^{n_r} \prod_{j=1}^{n_t} p(h_{ij}) d(h_{ij}) \end{aligned} \quad (49)$$

$$= \int_{\tilde{\mathcal{O}}} \prod_{i=1}^{n_r} \prod_{j=1}^{n_t} p(|h_{ij}|^2) d(|h_{ij}|^2), \quad (50)$$

where (49) is because of the independence of the entries of \mathbf{H} and (50) is by change of variables, with $\tilde{\mathcal{O}}$ defined as shown in (48) at the top of the page. It is well known that $p(|h_{ij}|^2) = e^{-|h_{ij}|^2}$ for Rayleigh fading. Let $|h_{ij}^2| = SNR^{-\alpha_{ij}}$. Now, $p(\alpha_{ij}) = (\log_e SNR) e^{-SNR^{-\alpha_{ij}}} SNR^{-\alpha_{ij}}$. Defining the vector α as $\alpha = [\alpha_{ij}]_{i=1, \dots, n_r, j=1, \dots, n_t}$, we have

$$P(\tilde{\mathcal{O}}) = \kappa \int_{\tilde{\mathcal{O}}} e^{-\sum_{i,j} SNR^{-\alpha_{ij}}} SNR^{-\sum_{i,j} \alpha_{ij}} d\alpha, \quad (51)$$

where $\kappa = (\log_e SNR)^{n_t n_r}$ and

$$\tilde{\mathcal{O}} = \left\{ \alpha \left| \begin{array}{l} \sum_i \log_2 \left(1 + \sum_j \frac{SNR^{1-\alpha_{ij}}}{n_t} \right) > r \log_2 SNR \\ \quad + o(\log_2 SNR), \\ \sum_{i,j} \log_2 (1 + SNR^{1-\alpha_{ij}}) \leq n_t r \log_2 SNR \\ \quad + o(\log_2 SNR) \end{array} \right. \right\}$$

$$= \left\{ \alpha \left| \begin{array}{l} \sum_i \max\{0, \{1 - \alpha_{ij}\}_{j=1, \dots, n_t}\} > r, \\ \sum_{i,j} (1 - \alpha_{ij})^+ \leq n_t r \end{array} \right. \right\}$$

where $\max\{\cdot\}$ denotes ‘‘the largest element of’’. Note that in (51), the integrand is exponentially decaying with SNR when any one of the α_{ij} is negative, unlike a polynomial decay when all the α_{ij} are non-negative. Hence, using the concept developed in [2],

$$P(\tilde{\mathcal{O}}) \doteq SNR^{-f(\alpha^*)},$$

where

$$f(\alpha^*) = \inf_{\tilde{\mathcal{O}} \cap \mathbb{R}^+} \left\{ \sum_{i=1}^{n_r} \sum_{j=1}^{n_t} \alpha_{ij} \right\},$$

with \mathbb{R}^+ representing the set of non-negative real numbers. It is easy to check that the infimum occurs when all but two of α_{ij} are $1 - \frac{r}{n_r}$, while the other two are $1 - \frac{r}{n_r} + \delta$ and $1 - \frac{r}{n_r} - \delta$ respectively, where $\delta \rightarrow 0^+$. Hence,

$$P(\tilde{\mathcal{O}}) \doteq SNR^{-n_t(n_r - r)}.$$

APPENDIX B

We prove here that $\mathcal{O}_l = \mathcal{O}'_l$ almost surely. As before, the rows of \mathbf{H} are denoted by \mathbf{h}_i , $i = 1, 2, \dots, n_r$. Let $|h_{ij}|^2 = SNR^{-\alpha_{ij}}$ and $\mathbf{u} \triangleq [u_1, u_2, \dots, u_{n_t}]^T$ be a complex column vector independent of \mathbf{h}_i , with either $|u_j|^2 \doteq SNR^0$ or $u_j = 0$, $j = 1, 2, \dots, n_t$. Defining the indicators I_1, I_2, \dots, I_{n_t} as

$$I_j = \begin{cases} 1, & \text{if } |u_j|^2 \doteq SNR^0 \\ 0 & \text{otherwise,} \end{cases}$$

we have

$$\begin{aligned} |\mathbf{h}_i \mathbf{u}|^2 &= \sum_{j=1}^{n_t} h_{ij} u_j \sum_{k=1}^{n_t} h_{ik}^* u_k^* \\ &= \sum_{j=1}^{n_t} |h_{ij}|^2 |u_j|^2 + 2 \sum_{j=1}^{n_t-1} \sum_{k=j+1}^{n_t} \text{Re}(h_{ij} h_{ik}^* u_j u_k^*) \\ &\doteq SNR^{-\beta} \text{ almost surely,} \end{aligned} \quad (52)$$

where $\text{Re}(\cdot)$ denotes ‘‘the real part of’’ and

$$\beta = \min\{\alpha_{ij} \mid I_j \neq 0\}_{j=1, 2, \dots, n_t}.$$

Note that (52) is due to the fact that the h_{ij} 's are independent random variables. Now, denoting the i^{th} row of $\mathbf{H}\mathbf{U}_l$ by $\mathbf{h}_i(l)$, let $|h_{ij}(l)|^2 \doteq SNR^{-\beta_{ij}}$. It is to be noted that since \mathbf{U}_l is unitary, each row and column of \mathbf{U}_l has at least one non-zero entry. Denoting the positions of these non-zero entries in the i^{th} column by η_i , $i = 1, 2, \dots, n_t$, $\eta_i \neq \eta_j$ for $i \neq j$ (note that $[\eta_1, \dots, \eta_{n_t}] = [1, 2, \dots, n_t] \mathbf{P}$, where \mathbf{P} is some permutation matrix of size $n_t \times n_t$), from (52), we have

$$\beta_{ij} \leq \alpha_{i\eta_j} \text{ almost surely.}$$

Hence,

$$\begin{aligned} \sum_{j=1}^{n_t} \log_2 (1 + SNR |h_{ij}(l)|^2) &= \sum_{j=1}^{n_t} \log_2 (1 + SNR^{1-\beta_{ij}}) \\ &\geq \sum_{j=1}^{n_t} \log_2 (1 + SNR^{1-\alpha_{ij}}) \\ &= \sum_{j=1}^{n_t} \log_2 (1 + SNR |h_{ij}|^2) \end{aligned}$$

almost surely and this is true for all $i = 1, 2, \dots, n_r$. Hence, almost surely

$$\sum_{i,j} \log_2 (1 + SNR |h_{ij}(l)|^2) \geq \sum_{i,j} \log_2 (1 + SNR |h_{ij}|^2).$$

So, $\sum_{i,j} \log_2 (1 + SNR |h_{ij}|^2) > n_t r \log_2 SNR + o(\log_2 SNR) \Rightarrow \sum_{i,j} \log_2 (1 + SNR |h_{ij}(l)|^2) > n_t r \log_2 SNR + o(\log_2 SNR)$ almost surely. Since \mathbf{U}_l is unitary, it can be similarly proven that $\sum_{i,j} \log_2 (1 + SNR |h_{ij}(l)|^2) > n_t r \log_2 SNR + o(\log_2 SNR) \Rightarrow \sum_{i,j} \log_2 (1 + SNR |h_{ij}|^2) > n_t r \log_2 SNR + o(\log_2 SNR)$

almost surely. Hence,

$$\begin{aligned} \sum_{i,j} \log_2 (1 + SNR|h_{ij}|^2) &> n_{tr} \log_2 SNR + o(\log_2 SNR) \\ &\iff \\ \sum_{i,j} \log_2 (1 + SNR|h_{ij}(l)|^2) &> n_{tr} \log_2 SNR + o(\log_2 SNR) \end{aligned}$$

almost surely and hence, $\mathcal{O}_l = \mathcal{O}'_l$ almost surely.

ACKNOWLEDGEMENTS

This work was partly supported by the DRDO-IISc program on Advanced Research in Mathematical Engineering through research grants, and the INAE Chair Professorship to B. Sundar Rajan. We thank L. P. Natarajan for useful discussions on DMT-optimality of STBCs.

REFERENCES

- [1] V. Tarokh, N. Seshadri, and A. R. Calderbank, "Space time codes for high data rate wireless communication : performance criterion and code construction," *IEEE Trans. Inf. Theory.*, vol. 44, no. 2, pp. 744 - 765, Mar. 1998.
- [2] L. Zheng and D. Tse, "Diversity and Multiplexing: A Fundamental Tradeoff in Multiple-Antenna Channels," *IEEE Trans. Inf. Theory.*, vol. 49, no. 5, pp. 1073-1096, May 2003.
- [3] H. Yao and G. W. Wornell, "Achieving the full MIMO diversity-multiplexing frontier with rotation-based space-time codes," in *Proc. 41st Annual Allerton Conf. on Comm. Control and Comput.*, Monticello, IL, Oct. 02-04, 2003.
- [4] P. Elia, K. R. Kumar, S. A. Pawar, P. V. Kumar, and H.-F. Lu, "Explicit Space-Time Codes Achieving the Diversity-Multiplexing Gain Tradeoff," *IEEE Trans. Inf. Theory.*, vol. 52, no. 9, pp. 3869-3884, Sep. 2006.
- [5] B. Hassibi and B. Hochwald, "High-rate codes that are linear in space and time," *IEEE Trans. Inf. Theory.*, vol. 48, no. 7, pp. 1804-1824, July 2002.
- [6] J. C. Belfiore, G. Rekaya, and E. Viterbo, "The Golden Code: A 2×2 full rate space-time code with non-vanishing determinants," *IEEE Trans. Inform. Theory.*, vol. 51, no. 4, pp. 1432-1436, Apr. 2005.
- [7] S. Tavildar and P. Vishwanath, "Approximately universal codes over slow-fading channels," *IEEE Trans. Inf. Theory.*, vol. 52, no. 7, pp. 3233-3258, July 2006.
- [8] T. Kiran and B. S. Rajan, "STBC-schemes with non-vanishing determinant for certain number of transmit antennas," *IEEE Trans. Inf. Theory.*, vol. 51, no. 8, pp. 2984-2992, Aug. 2005.
- [9] F. Oggier, G. Rekaya, J. C. Belfiore, and E. Viterbo, "Perfect space time block codes," *IEEE Trans. Inf. Theory.*, vol. 52, no. 9, pp. 3885-3902, Sep. 2006.
- [10] P. Elia, B. A. Sethuraman, and P. V. Kumar, "Perfect Space-Time Codes for Any Number of Antennas," *IEEE Trans. Inf. Theory.*, vol. 53, no. 11, pp. 3853-3868, Nov. 2007.
- [11] S. M. Alamouti, "A simple transmit diversity technique for wireless communications," *IEEE J. Sel. Areas Commun.*, vol. 16, no. 8, pp. 1451-1458, Oct. 1998.
- [12] W. Su and X.-G. Xia, "Signal Constellations for Quasi-Orthogonal Space-Time Block Codes With Full Diversity," *IEEE Trans. Inf. Theory.*, vol. 50, no. 10, pp. 2331-2347, Oct. 2004.
- [13] Z. A. Khan and B. S. Rajan, "Single-Symbol Maximum-Likelihood Decodable Linear STBCs," *IEEE Trans. Inf. Theory.*, vol. 52, no. 5, pp. 2062-2091, May 2006.
- [14] D. N. Dao, C. Yuen, C. Tellambura, Y. L. Guan, and T. T. Tjhung, "Four-group decodable space-time block codes," *IEEE Trans. Signal Process.*, vol. 56, no. 1, pp. 424-430, Jan. 2008.
- [15] S. Karmakar and B. S. Rajan, "Multigroup-Decodable STBCs from Clifford Algebras," *IEEE Trans. Inf. Theory.*, vol. 55, no. 1, pp. 223-231, Jan. 2009.
- [16] G. S. Rajan and B. S. Rajan, "Multi-group ML Decodable Collocated and Distributed Space Time Block Codes," *IEEE Trans. Inf. Theory.*, vol. 56, no. 7, pp. 3221-3247, Jul. 2010.
- [17] K. P. Srinath and B. S. Rajan, "Generalized Silver Codes," *IEEE Trans. Inf. Theory.*, vol. 57, no. 9, pp. 6134-6147, Sep. 2011.
- [18] R. Vehkalahti, C. Hollanti, and F. Oggier, "Fast-Decodable Asymmetric Space-Time Codes from Division Algebras," *IEEE Trans. Inf. Theory.*, vol. 57, no. 12, pp. , Dec. 2011.
- [19] E. Viterbo and J. Boutros, "A universal lattice code decoder for fading channels," *IEEE Trans. Inf. Theory.*, vol. 45, no. 5, pp. 1639-1642, July 1999.
- [20] A.M. Chan and I. Lee, "A new reduced-complexity sphere decoder for multiple antenna systems," in *Proc. ICC 2002*, pp. 460 - 464, Apr. 28 - May 02, 2002.
- [21] M. O. Damen, K. A.-Meraim, and M. S. Lemdani, "Further results on the sphere decoder," in *Proc. IEEE ISIT 2001*, pp. 333, Jun. 24-29, 2001.
- [22] L. G. Barbero and J. S. Thompson, "Fixing the Complexity of the Sphere Decoder for MIMO Detection," *IEEE Trans. Wireless Commun.*, vol. 7, no. 6, pp. 2131-2142, June 2008.
- [23] J. Jalden, L. G. Barbero, B. Ottersten, and J. S. Thompson, "The Error Probability of the Fixed-Complexity Sphere Decoder," *IEEE Trans. Signal Process.*, vol. 57, no. 7, pp. 2711-2720, July 2009.
- [24] W. Ping, Le-Ngoc Tho, "A low-complexity generalized sphere decoding approach for underdetermined linear communication systems: performance and complexity evaluation," *IEEE Trans. Commun.*, vol. 57, no. 11, pp. 3376-3388, Nov. 2009.
- [25] H.-F. Lu and C. Hollanti, "Optimal Diversity-Multiplexing Tradeoff and Code Constructions of Some Constrained Asymmetric MIMO Systems," *IEEE Trans. Inf. Theory.*, vol. 56, no. 5, pp. 2121-2129, May 2010.
- [26] P. Dayal and M. K. Varanasi, "An optimal two transmit antenna space-time code and its stacked extensions," *IEEE Trans. Inf. Theory.*, vol. 51, no. 12, pp. 4348-4355, Dec. 2005.
- [27] A. Hottinen, O. Tirkkonen, and R. Wichman, *Multi-antenna Transceiver Techniques for 3G and Beyond*. John Wiley and Sons, Feb. 2003.
- [28] J. Paredes, A.B. Gershman, and M. G.-Alkhansari, "A 2×2 Space-Time Code with Non-Vanishing Determinants and Fast Maximum Likelihood Decoding," in *Proc IEEE ICASSP 2007*, vol. 2, pp. 877-880, Apr. 2007.
- [29] S. Sezginer and H. Sari, "Full-Rate Full-Diversity 2×2 Space-Time Codes of Reduced Decoder Complexity," *IEEE Commun. Letters.*, vol. 11, no. 12, Dec. 2007.
- [30] K. P. Srinath and B. S. Rajan, "Low ML-Decoding Complexity, Large Coding Gain, Full-Rate, Full-Diversity STBCs for 2×2 and 4×2 MIMO Systems," *IEEE J. Sel. Topics Signal Process.*, vol. 3, no. 6, pp. 916-927, Dec. 2009.
- [31] J.-K. Zhang, J. Liu, and K. M. Wong, "Trace-Orthonormal Full-Diversity Cyclotomic SpaceTime Codes," *IEEE Trans. Signal Process.*, vol. 55, no. 2, pp. 618-630, Feb. 2007.
- [32] I. E. Telatar, "Capacity of multi-antenna Gaussian channels," *Europ. Trans. Telecomm.*, vol. 10, no. 6, pp. 585-595, Nov. 1999.
- [33] R. A. Horn and C. R. Johnson, *Matrix Analysis*. Cambridge, U.K.: Cambridge Univ. Press, 1985.
- [34] <http://www1.tlc.polito.it/~viterbo/rotations/rotations.html>.