

# On the Dispersions of Three Network Information Theory Problems

Vincent Y. F. Tan\* and Oliver Kosut†

## Abstract

We characterize fundamental limits for distributed lossless source coding (the Slepian-Wolf problem), the multiple-access channel and the asymmetric broadcast channel in the finite blocklength setting. For the Slepian-Wolf problem, we introduce a fundamental quantity known as the entropy dispersion matrix, which is analogous to the scalar dispersion quantities that have gained interest in the recent literature. We show that if this matrix is positive-definite, the optimal rate region under the constraint of a fixed blocklength and non-zero error probability has a curved boundary compared to being polyhedral for the asymptotic Slepian-Wolf scenario. In addition, the entropy dispersion matrix governs the rate of convergence of the non-asymptotic region to the asymptotic one. We develop a general universal achievability procedure for finite blocklength analyses of other network information theory problems such as the multiple-access channel and broadcast channel. We provide inner bounds to these problems using a key result known as the vector rate redundancy theorem which is proved using a multidimensional version of the Berry-Essèen theorem. We show that a so-called information dispersion matrix characterizes these inner bounds. Numerical examples show how the non-asymptotic Slepian-Wolf region and multiple-access inner bound compare to their asymptotic counterparts. We also demonstrate numerically that the required blocklengths predicted by dispersion analysis are generally smaller than that predicted by error exponent analysis.

## Index Terms

Dispersion, Finite blocklength, Second-order coding rates, Network information theory, Slepian-Wolf, Multiple-access channel, Asymmetric broadcast channel

## I. INTRODUCTION

*Network information theory* [1] aims to find the fundamental limits of communication in networks with multiple senders and receivers. The primary goal is to characterize the *optimal rate region* or *capacity region* — that is, the set of rate tuples for which there exists codes with reliable transmission. Such rate tuples are known as being *achievable*. While the characterization of capacity regions is a difficult problem in general, there have been positive results for several special classes of networks such as the multiple-access channel [2], [3] and the asymmetric [4] or degraded broadcast channels [5], [6]. A prominent example in multi-terminal lossless source coding in which the optimal rate region is known is the so-called Slepian-Wolf problem [7] which involves *separately* encoding two (or more) correlated sources and subsequently estimating them from their rate-limited representations.

The capacity region for a specific source or channel model is an asymptotic notion. One is allowed to design codes that operate over arbitrarily long blocks (or channel uses) in order to drive either the maximal or average probabilities of error to zero. To illustrate this point, let us recap Shannon's point-to-point channel coding theorem [8]. He showed that up to  $nC$  bits can be reliably transmitted over  $n$  uses of a discrete memoryless channel (DMC)  $W$  as  $n$  becomes large. Here,  $C = \max_{p_X} I(p_X, W)$  is termed the *capacity* of the channel  $W$ . However, this fundamental result for reliable communication over a noisy channel can be optimistic in practice as there may be system constraints on the delay in decoding. One can thus ask a slightly different and more challenging question: What is the maximal rate of transmission  $R^*(n, \epsilon)$  as a function of a fixed blocklength  $n$  and target average error probability  $\epsilon$ ? This problem has been studied rather extensively recently. Perhaps the most prominent work is that by Polyanskiy, Poor and Verdú [9] who showed using Gaussian approximations (and the Berry-Essèen theorem [10, Ch. XVI.5]) that

$$R^*(n, \epsilon) \approx C - \sqrt{\frac{V}{n}} Q^{-1}(\epsilon). \quad (1)$$

\* Department of Electrical and Computer Engineering, University of Wisconsin-Madison (Emails: vtan@wisc.edu, vyftan@gmail.com).

† Laboratory for Information and Decision Systems, Massachusetts Institute of Technology (Email: okosut@mit.edu).

The constant  $V$  coincides with an operational quantity known as the *channel dispersion*. It can be shown that the channel dispersion is the variance of the log-likelihood ratio of the channel  $W$  and the capacity-achieving output distribution  $p_{Y^*}$  assuming uniqueness of the capacity-achieving input distribution  $p_{X^*} := \arg \max_p I(p, W)$ . The term  $\sqrt{V/n} Q^{-1}(\epsilon)$  is the rate penalty in the finite blocklength setting. In another prominent work, Hayashi [11] studied the so-called second-order channel coding rates from an information spectrum perspective. Both [11] and [12] noted that (1) holds verbatim for the additive white Gaussian noise (AWGN) channel [13].

In this paper, we ask similar non-asymptotic, dispersion-centered questions for three multi-user problems: distributed lossless source coding, also known as the Slepian-Wolf (SW) problem, the multiple-access channel (MAC) and the asymmetric broadcast channel (ABC). We show that the network analogue of the scalar dispersion quantity  $V$  is a positive-semidefinite matrix  $\mathbf{V}$  that generally depends on the channel, input distributions or sources. Our results are of practical importance due to the ubiquity of communication networks where numerous users simultaneously share a data compression system or utilize a common channel. There is also an pressing need to understand the *finite blocklength* behaviour of such multi-terminal systems since there may be hard constraints on the permissible number of channel uses, i.e., the delay in decoding. For example, given a tolerable average error probability of  $\epsilon$  and a blocklength  $n$ , what is the set of achievable rate pairs  $(R_1, R_2)$  for two non-cooperating parties to communicate to a common destination? Our results in Section III for the MAC provide a partial answer (achievability/inner bound) to this question. As the method of types [14] is used as a key proof technique in this paper, we focus on discrete memoryless systems but, at various points in the paper, we will also comment on how our techniques can be generalized to systems with arbitrary alphabets.

#### A. Summary of Main Results

There are three main results in this paper:

- For the Slepian-Wolf (SW) problem, we define the  $(n, \epsilon)$ -optimal rate region  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  as the set of rate pairs  $(R_1, R_2)$  for which there exists a code that guarantees that the error probability in reconstructing the sources does not exceed  $\epsilon$ . We characterize  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  up to an  $O(\frac{\log n}{n})$  factor. Furthermore, the implied constants in the  $O(\frac{\log n}{n})$  terms depend only on the cardinality of the alphabets. Roughly speaking, our SW result (Theorem 1) says that  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  is the set of rate pairs  $(R_1, R_2)$  satisfying

$$\begin{bmatrix} R_1 \\ R_2 \\ R_1 + R_2 \end{bmatrix} \in \begin{bmatrix} H(X_1|X_2) \\ H(X_2|X_1) \\ H(X_1, X_2) \end{bmatrix} + \frac{\mathcal{S}(\mathbf{V}, \epsilon)}{\sqrt{n}} \pm O\left(\frac{\log n}{n}\right) \mathbf{1}, \quad (2)$$

where the set  $\mathcal{S}(\mathbf{V}, \epsilon) \subset \mathbb{R}^3$ , defined precisely in (6) and diagrammed in Fig. 1, is a multidimensional analogue of the cumulative distribution function for a zero-mean multivariate Gaussian with covariance matrix  $\mathbf{V}$ . See Fig. 2 for a plot of  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  ignoring the  $O(\frac{\log n}{n})$  terms. To prove the direct part of this result, we introduce a coding scheme based on random binning and empirical entropy thresholding and we analyze the error probability. We argue, by providing a converse proof, that such a coding scheme is indeed optimal up to the  $O(\frac{\log n}{n})$  term. In the course of doing so, we introduce a fundamental quantity called the *entropy dispersion matrix* of  $p_{X_1, X_2}$ . This is the matrix  $\mathbf{V}$  that appears in (2). We show that if this matrix is non-singular, the boundary of  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  is, unlike that of the asymptotic SW region, a *smooth* curve. We demonstrate numerically how our region compares to the SW region and to the problem of finite blocklength source coding with side information both at decoder *and* at the encoders. Importantly, we also derive the effective dispersion as a pair of rates approaches a point on the boundary of the asymptotic rate region along a line with a specified gradient. Finally, we conduct some numerical experiments to compare the blocklengths predicted by our bounds in (2) to that of Gallager-style error exponent analysis for the SW problem [15], [16].

The analysis of the coding scheme for the SW problem is based on a multidimensional Berry-Essèen theorem [17], a Gaussian approximation for the distribution of the sum of independent random vectors. We use this powerful theorem to derive a general result known as the *vector rate redundancy theorem*, which, as we will see, is applicable to several other network information theory problems.

- For the discrete memoryless MAC, we leverage on unified and conceptually simple achievability techniques to derive an inner bound to the  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$ . We show that this inner bound for a fixed time-sharing distribution and two fixed input distributions is, in general, not a pentagon, unlike the traditional

capacity region [2], [3]. More precisely, we show that for these fixed input distributions, if the *information dispersion matrix* (the mutual information analogue of the entropy dispersion matrix) is full rank, then the region has a curved boundary. Indeed, the inner bound for the MAC is dual to the non-asymptotic SW region in (2). We discuss the obstacles to proving a converse that matches the inner bound. We demonstrate using numerical examples how the non-asymptotic MAC region compares with the asymptotic MAC region.

- To demonstrate the full utility of our achievability proof technique, we apply it to derive an inner bound for the  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{ABC}}^*(n, \epsilon)$  of the discrete memoryless asymmetric broadcast channel (also known as the broadcast channel with degraded message sets). We use the superposition coding technique [5] and a version of maximum mutual information (MMI) decoding [18] but we apply a more delicate analysis to bound the error probabilities of the constituent error events. Similar to the MAC, we show that an appropriately defined information dispersion matrix governs the rate at which our inner bound approaches the capacity region first proved by Körner and Marton [4]. Unfortunately as with the MAC, we currently do not have a converse.

## B. Related Work

Dispersion or finite blocklength analysis for channel coding was studied extensively in the work by Polyanskiy et al. [9], who introduced new and tight channel coding rate bounds and use these bounds to strengthen the results in the seminal work by Strassen [19]. Baron et al. [20] focused on the binary symmetric channel and compared the results to that by Shannon for the AWGN channel [13]. Such finite blocklength analysis has promptly been extended to lossy source coding [21], [22], joint source-channel coding [23], channel coding with states [24], [25], and infinite constellations [26] among others. The study of the effect of finite blocklengths on information theory problems is also connected to second-order coding rates [11], [27], [28] and moderate deviations analysis [29]–[31]. It was noted in [32] that the relation in (1) may be derived in an alternative manner using saddlepoint (or Laplace) approximations of the random-coding union (RCU) and dependence testing (DT) bounds in [9]. Dispersion analysis is complementary to that of traditional error exponent analysis [15], [16], [33], [34]. In the latter, we fix a rate tuple in the capacity region and ask how rapidly the error probability decays as an exponential function of the blocklength. In the former, the error probability and the blocklength are fixed. The spotlight is now shone on achievable rates at the specified blocklength and error probability. We compare our dispersion analysis to traditional error exponent analysis for the SW problem.

The problem of SW coding in the finite blocklength, fixed error probability setting was discussed by Baron et al. [35], Sarvotham et al. [36] and He et al. [37]. However, in these works, the authors considered a single source  $X_1$  to be compressed and (non-coded) side information  $X_2$  available only at the decoder. Thus,  $X_2$  is neither coded nor estimated. They showed that a scalar dispersion quantity governs the second-order coding rate. He et al. [37] also analyzed a variable-length variant of the SW problem and showed that the dispersion is, in general, smaller than in the fixed-length setting. Due to the duality between SW coding and channel coding, this variable-length dispersion shown to be similar to that for channel coding [9]. Sarvotham et al. [38] considered the SW problem with two sources to be compressed but limited their setting to the case the sources are binary and symmetric. They demonstrated a result analogous to [35]. The three constraints on the individual rates  $R_1$ ,  $R_2$  and the sum rate  $R_1 + R_2$  are decoupled when the sources are binary and symmetric. Similar conclusions were made by Chang and Sahai [39] from an error exponent perspective. Our work generalizes their setting in that we consider *all* finite alphabet sources with *multiple* encoders. We discuss further connections in Sections II-B2 and VI-A4.

To the best of the authors' knowledge, the SW problem is the only network information theory problem in which second-order coding rates and/or finite blocklength behaviours have been studied and published. Through personal communication with Prof. Pierre Moulin (UIUC) [40], the authors also came to know that Prof. Moulin has been working concurrently on finite blocklength analysis for the MAC.

## C. Paper Organization

This paper is organized as follows: In the following subsection, we introduce our notation. In Section II, we present our finite blocklength results for the problem of distributed lossless source coding (the SW problem). Following that in Sections III and IV, we present our inner bounds for the MAC and ABC respectively. The organization within each of Sections II–IV is common: We first remind the reader of existing asymptotic results. Then we provide precise definitions for the problem at hand. We then state the finite blocklength theorem and finally we discuss the

implications of the theorem. In Section V, we discuss the effect of approaching a specific point on the asymptotic capacity region from a specified angle. We also compute the effective dispersion. In Section VI, we present several numerical examples to illustrate our finite blocklength regions for the SW problem and the MAC. We conclude our discussion and suggest avenues for further research in Section VII. Most of the proofs are presented in Section VIII where start by presenting a general result known as the vector rate redundancy theorem. We subsequently apply it in the achievability proofs for the SW problem, the MAC and the ABC. Proofs of auxiliary results are relegated to the appendices.

#### D. Notation

Throughout the paper, we adopt the following set of notation: Random variables and the values they take on will be denoted by upper case (e.g.,  $X$ ) and lower case (e.g.,  $x$ ) respectively. Random vectors will be denoted by upper case bold font or with a superscript indicating its length (e.g.,  $\mathbf{X}$  or  $X^n = (X_1, \dots, X_n)$ ). Their realizations will be denoted by lower case bold font or with a superscript (e.g.,  $\mathbf{x}$  or  $x^n = (x_1, \dots, x_n)$ ). Matrices will also be denoted by upper case bold font (e.g.,  $\mathbf{M}$ ); this should hopefully cause no confusion with random vectors. The notation  $\mathbf{M}^T$  denotes the transpose of  $\mathbf{M}$ . The notations  $\mathbf{M} \succ 0$  and  $\mathbf{M} \succeq 0$  mean that  $\mathbf{M}$  is (symmetric) positive-definite and positive-semidefinite respectively. In addition,  $\lambda_{\min}(\mathbf{M})$  and  $\lambda_{\max}(\mathbf{M})$  denote, respectively, the minimum and maximum eigenvalues of  $\mathbf{M}$ . The  $(i, j)$  element of  $\mathbf{M}$  is denoted as  $[\mathbf{M}]_{i,j}$ . For a vector  $\mathbf{v} \in \mathbb{R}^d$ ,  $\|\mathbf{v}\|_q = (\sum_{t=1}^d |v_t|^q)^{1/q}$  designates the  $\ell_q$  norm for  $q \in [1, \infty]$ . The notation  $\mathbf{1}$  denotes the vector of all ones; the length will be clear from the context. For two vectors  $\mathbf{u}, \mathbf{v} \in \mathbb{R}^d$ , the notation  $\mathbf{u} \leq \mathbf{v}$  means  $u_t \leq v_t$  for all  $t = 1, \dots, d$ . The notation  $\mathbf{u} \geq \mathbf{v}$  is defined similarly. Sets and events will be denoted by calligraphic font (e.g.,  $\mathcal{X}$ ). The complement of  $\mathcal{E}$  is denoted as  $\mathcal{E}^c$ . Subsets of Euclidean space will be denoted by script font (e.g.,  $\mathcal{R}$ ).

Types (empirical distributions) will be denoted by upper case (e.g.,  $P$ ) and distributions by lower case (e.g.,  $p$ ). The set of distributions supported on a finite set  $\mathcal{X}$  and the set of  $n$ -types supported on  $\mathcal{X}$  will be denoted by  $\mathcal{P}(\mathcal{X})$  and  $\mathcal{P}_n(\mathcal{X})$  respectively. For a sequence  $x^n \in \mathcal{X}^n$ , the type is denoted as  $P_{x^n}$ . The set of all sequences whose type is some  $P$  is denoted as  $\mathcal{T}_P = \mathcal{T}_P^n$ , the type class. The superscript  $n$  is suppressed throughout. For two sequences  $x^n \in \mathcal{X}^n, y^n \in \mathcal{Y}^n$ , the conditional type of  $y^n$  given  $x^n$  is the stochastic matrix  $V : \mathcal{X} \rightarrow \mathcal{Y}$  satisfying  $P_{x^n}(a)V(b|a) = P_{x^n, y^n}(a, b)$  for all  $(a, b) \in \mathcal{X} \times \mathcal{Y}$ . The set of  $y^n$  with conditional type  $V$  given  $x^n$  is denoted by  $\mathcal{T}_V(x^n) = \mathcal{T}_V^n(x^n)$ , the  $V$ -shell of  $x^n$ . The family of stochastic matrices  $V : \mathcal{X} \rightarrow \mathcal{Y}$  for which the  $V$ -shell  $\mathcal{T}_V(x^n)$  of a sequence  $x^n$  of type  $P \in \mathcal{P}_n(\mathcal{X})$  is not empty is denoted as  $\mathcal{V}_n(\mathcal{Y}; P)$  [14, Sec. 2.5]. In other words,  $V \in \mathcal{V}_n(\mathcal{Y}; P)$  if and only if  $nP(a)V(b|a)$  is an integer for all  $(a, b) \in \mathcal{X} \times \mathcal{Y}$ .

Entropy and conditional entropy are denoted as  $H(X) = H(p_X)$  and  $H(Y|X) = H(p_{Y|X}|p_X)$  respectively. Mutual information is denoted as  $I(X; Y) = I(p_X, p_{Y|X})$ . We often times make the dependence on the distribution explicit. Let  $x^n, y^n$  be a pair of sequences for which the  $y^n$  has conditional type  $V$  given  $x^n$  and let  $\tilde{X}$  and  $\tilde{Y}$  be dummy random variables with joint distribution  $P_{x^n, y^n}$ . Then, the notations  $\hat{H}(x^n) = H(P_{x^n}) = H(\tilde{X})$  and  $\hat{H}(y^n|x^n) = H(V|P_{x^n}) = H(\tilde{Y}|\tilde{X})$  denote, respectively, the empirical marginal and conditional entropies respectively. Note that empirical information quantities will generally be denoted with hats. So for example, the empirical mutual information of the random variables  $\tilde{X}, \tilde{Y}$  above will be denoted interchangeably as  $\hat{I}(x^n \wedge y^n) = I(P_{x^n}, V) = I(\tilde{X}; \tilde{Y})$ . Empirical conditional mutual information is defined similarly.

The multivariate Gaussian probability density function with mean  $\mathbf{m}$  and covariance  $\mathbf{\Lambda}$  is denoted as  $\mathcal{N}(\mathbf{u}; \mathbf{m}, \mathbf{\Lambda})$  or more simply as  $\mathcal{N}(\mathbf{m}, \mathbf{\Lambda})$ . For a standard univariate Gaussian  $\mathcal{N}(u; 0, 1)$ , the cumulative distribution function and Q-function are defined as  $\Phi(z) := \int_{-\infty}^z \mathcal{N}(u; 0, 1) du$  and  $Q(z) := 1 - \Phi(z)$  respectively. The functional inverse of the Q-function is denoted as  $Q^{-1}(\epsilon)$ . The Bernoulli random variable  $X \sim \text{Bern}(q)$  if  $P(X = 1) = q$  and  $P(X = 0) = 1 - q$ . Logarithms are to the base 2 (except when specifically indicated in Section VI). We also use the discrete interval notation  $[2^{nR}] := \{1, \dots, \lceil 2^{nR} \rceil\}$ . Asymptotic notation such as  $o(\cdot)$ ,  $O(\cdot)$  and  $\Theta(\cdot)$  is used throughout. See [41, Sec. I.3] for definitions.

## II. DISPERSION OF DISTRIBUTED LOSSLESS SOURCE CODING

Distributed lossless source coding consists in *separately* encoding two (or more) correlated sources  $(X_1^n, X_2^n) \sim \prod_{k=1}^n p_{X_1, X_2}(x_{1k}, x_{2k})$  into a pair of rate-limited messages  $(M_1, M_2) \in [2^{nR_1}] \times [2^{nR_2}]$ . Subsequently, given these compressed versions of the sources, a decoder seeks to reconstruct  $(X_1^n, X_2^n)$ . One of the most remarkable results in information theory, proved by Slepian and Wolf in 1973 [7], states that the set of achievable rate pairs  $(R_1, R_2)$

is asymptotically equal to that when each of the encoders is also given knowledge of the other source, i.e., encoder 1 knows  $X_2^n$  and vice versa. The optimal rate region  $\mathcal{R}_{\text{SW}}^*$  is given by the polyhedron

$$\begin{aligned} R_1 &\geq H(X_1|X_2) \\ R_2 &\geq H(X_2|X_1) \\ R_1 + R_2 &\geq H(X_1, X_2). \end{aligned} \quad (3)$$

As with most other statements in information theory [14], this result is asymptotic in nature. In this section, we analyze the finite blocklength limits of distributed lossless source coding, which is also known as the SW problem.

We will focus on the two-sender case. Generalizations will turn out to be straightforward. A two-sender SW code is characterized by four parameters; the *blocklength*  $n$ , the *rates* of the first and second sources  $(R_1, R_2)$  and the *probability of error* defined as

$$P_e^{(n)} := \mathbb{P}((\hat{X}_1^n, \hat{X}_2^n) \neq (X_1^n, X_2^n)), \quad (4)$$

where  $\hat{X}_1^n$  and  $\hat{X}_2^n$  are the reconstructed versions of  $X_1^n$  and  $X_2^n$  respectively. Traditionally, we require the error probability  $P_e^{(n)} \rightarrow 0$  as the blocklength  $n \rightarrow \infty$ . In this section (as with the rest of this paper), we fix the blocklength  $n$  and require the code to be such that  $P_e^{(n)} \leq \epsilon$ . We then ask what the set of achievable pairs of rates as a function of  $(n, \epsilon)$  is. A more challenging task would be to consider constituent error probabilities  $\mathbb{P}(\hat{X}_1^n \neq X_1^n)$ ,  $\mathbb{P}(\hat{X}_2^n \neq X_2^n)$  and  $P_e^{(n)}$  and place three different upper bounds  $\epsilon_1, \epsilon_2$  and  $\epsilon_3$  on these probabilities. We choose to consider the single compound error probability in (4) for simplicity. Our main result in this section is a characterization of the  $(n, \epsilon)$ -optimal rate region up to a small  $O(\frac{\log n}{n})$  factor. The implied constants in the  $O(\cdot)$ -notation are also specified. The main technical tool that we use in our proofs is a multidimensional version of the Berry-Essèen theorem developed by Bentkus [17]. This is stated as Theorem 6 in Section VIII. We start with definitions followed by the statement of the theorem. We then discuss the implications of the result. The proof of the main theorem is provided in Section VIII-B.

#### A. Definitions

Let  $(\mathcal{X}_1, \mathcal{X}_2, p_{X_1, X_2}(x_1, x_2))$  be a discrete memoryless multiple source (DMMS). This means that  $(X_1^n, X_2^n) \sim \prod_{k=1}^n p_{X_1, X_2}(x_{1k}, x_{2k})$ , i.e., the source is independent and identically distributed (i.i.d.). We remind the reader that the alphabets  $\mathcal{X}_1, \mathcal{X}_2$  are finite. We also assume throughout that  $p_{X_1, X_2}(x_1, x_2) > 0$  for every  $(x_1, x_2) \in \mathcal{X}_1 \times \mathcal{X}_2$ .

**Definition 1.** An  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -SW code consists of two encoders  $f_{j,n} : \mathcal{X}_j^n \rightarrow \mathcal{M}_j = [2^{nR_j}]$ ,  $j = 1, 2$ , and a decoder  $\varphi_n : \mathcal{M}_1 \times \mathcal{M}_2 \rightarrow \mathcal{X}_1^n \times \mathcal{X}_2^n$  such that the error probability in (4) with  $(\hat{X}_1^n, \hat{X}_2^n) := \varphi_n(f_{1,n}(X_1^n), f_{2,n}(X_2^n))$  does not exceed  $\epsilon$ . The compression rates are defined in the usual way as

$$R_j := \frac{\log |\mathcal{M}_j|}{n}. \quad (5)$$

**Definition 2.** A rate pair  $(R_1, R_2)$  is  $(n, \epsilon)$ -achievable if there exists an  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -SW code for the DMMS  $p_{X_1, X_2}(x_1, x_2)$ . The  $(n, \epsilon)$ -optimal rate region  $\mathcal{R}_{\text{SW}}^*(n, \epsilon) \subset \mathbb{R}^2$  is the set of all  $(n, \epsilon)$ -achievable rate pairs.

Traditionally, optimal rate regions are defined with an additional closure operation [1]. However, as our analysis is on the finite blocklength setting, we do not take the closure in Definition 2.

For a positive-semidefinite symmetric matrix  $\mathbf{V} \in \mathbb{R}^{d \times d}$ , let the random vector  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . Note that  $\mathcal{N}(\mathbf{0}, \mathbf{V})$  is a degenerate Gaussian if  $\mathbf{V}$  is singular. If  $\text{rank}(\mathbf{V}) = r < d$ , all the probability mass of  $p(\mathbf{u}) = \mathcal{N}(\mathbf{u}; \mathbf{0}, \mathbf{V})$  lies in a subspace of dimension  $r$  in  $\mathbb{R}^d$ . Define the set

$$\mathcal{S}(\mathbf{V}, \epsilon) := \{\mathbf{z} \in \mathbb{R}^3 : \mathbb{P}(\mathbf{Z} \leq \mathbf{z}) \geq 1 - \epsilon\}. \quad (6)$$

Note that  $\mathcal{S}(\mathbf{V}, \epsilon) \subset \mathbb{R}^3$  is well-defined even if  $\mathbf{V}$  is singular. Furthermore,  $\mathcal{S}(\mathbf{V}, \epsilon') \subset \mathcal{S}(\mathbf{V}, \epsilon)$  if  $\epsilon' \leq \epsilon$ . This set is analogous to the (inverse) cumulative distribution function of a zero-mean Gaussian with covariance matrix  $\mathbf{V}$ . Indeed, the probability in (6) can be written out as  $\mathbb{P}(\mathbf{Z} \leq \mathbf{z}) = \int_{-\infty}^{z_1} \int_{-\infty}^{z_2} \int_{-\infty}^{z_3} \mathcal{N}(\mathbf{u}; \mathbf{0}, \mathbf{V}) \, d\mathbf{u}$ . If  $\epsilon \leq \frac{1}{2}$ ,  $\mathcal{S}(\mathbf{V}, \epsilon)$  is a convex, unbounded set in the positive orthant in  $\mathbb{R}^3$ . The boundary of  $\mathcal{S}(\mathbf{V}, \epsilon)$  is smooth if  $\mathbf{V}$  is positive-definite. We shall see that this set scaled by  $\frac{1}{\sqrt{n}}$ , namely  $\frac{1}{\sqrt{n}}\mathcal{S}(\mathbf{V}, \epsilon)$ , plays an important role in specification of the  $(n, \epsilon)$ -optimal rate region. This set is diagrammed in two dimensions (for ease of visualization) in Fig. 1. We

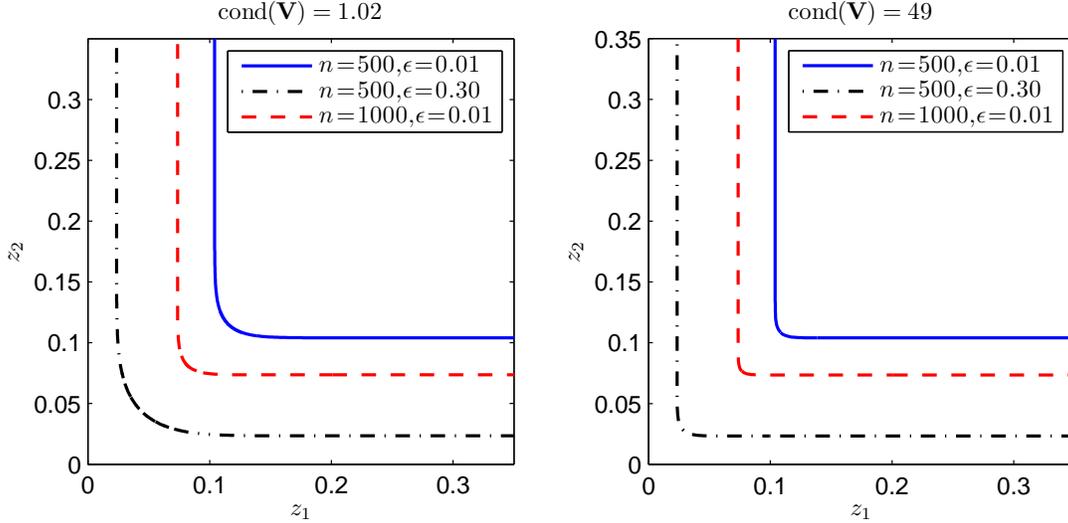


Fig. 1. The boundaries of the region  $\frac{1}{\sqrt{n}}\mathcal{S}(\mathbf{V}, \epsilon)$  for different values  $n$ ,  $\epsilon$  and  $\mathbf{V}$ . On the left plot,  $\mathbf{V} = [1 \ 0.01; 0.01 \ 1]$  (small condition number) and on the right,  $\mathbf{V} = [1 \ 0.96; 0.96 \ 1]$  (large condition number). The regions  $\frac{1}{\sqrt{n}}\mathcal{S}(\mathbf{V}, \epsilon)$  lie to the top right corner of the boundaries.  $\mathcal{S}(\mathbf{V}, \epsilon)$  defined in (6) is a subset of  $\mathbb{R}^3$  but in the figures, we only illustrate the projection of the set in two dimensions.

note that the boundaries are indeed curved due to the fact that  $\mathbf{V} \succ 0$ . Note that as  $n$  increases to infinity or  $\epsilon$  increases towards  $1/2$ , the boundaries are translated closer to the horizontal and vertical axes. Also observe that as the condition number<sup>1</sup>  $\mathbf{V}$  increases, i.e.,  $\mathbf{V}$  tends towards being singular, the corners of the curves become “sharper” (or “less rounded”). Indeed, in the limiting case when  $\mathbf{V}$  has rank one, the support of  $p(\mathbf{u}) = \mathcal{N}(\mathbf{u}; \mathbf{0}, \mathbf{V})$  belongs to a subspace of dimension one. In this case, the set  $\mathcal{S}(\mathbf{V}, \epsilon)$  is an axis-aligned, unbounded rectangle (a cuboid in higher dimensions). See further discussions in Section II-B2.

**Definition 3.** The entropy density vector is defined as

$$\mathbf{h}(X_1, X_2) := \begin{bmatrix} -\log p_{X_1|X_2}(X_1|X_2) \\ -\log p_{X_2|X_1}(X_2|X_1) \\ -\log p_{X_1, X_2}(X_1, X_2) \end{bmatrix}. \quad (7)$$

The mean of the entropy density vector is the vector of entropies, i.e.,

$$\mathbb{E}[\mathbf{h}(X_1, X_2)] = \mathbf{H}(p_{X_1, X_2}) := \begin{bmatrix} H(X_1|X_2) \\ H(X_2|X_1) \\ H(X_1, X_2) \end{bmatrix}. \quad (8)$$

**Definition 4.** The entropy dispersion matrix  $\mathbf{V}(p_{X_1, X_2})$  is the covariance matrix of the random vector  $\mathbf{h}(X_1, X_2)$  i.e.,

$$\mathbf{V}(p_{X_1, X_2}) = \text{Cov}(\mathbf{h}(X_1, X_2)). \quad (9)$$

We abbreviate the deterministic quantities  $\mathbf{H}(p_{X_1, X_2}) \in \mathbb{R}^3$  and  $\mathbf{V}(p_{X_1, X_2}) \succeq 0$  as  $\mathbf{H}$  and  $\mathbf{V}$  respectively. Observe that  $\mathbf{V}$  is an analogue of the scalar dispersion quantities that have gained attention in recent years [9], [21]–[23]. We will find it convenient, in this and following sections, to define the non-negative rate vector  $\mathbf{R} \in \mathbb{R}^3$  as

$$\mathbf{R} := \begin{bmatrix} R_1 \\ R_2 \\ R_1 + R_2 \end{bmatrix}. \quad (10)$$

**Definition 5.** Define the region  $\mathcal{R}_{\text{in}}(n, \epsilon) \subset \mathbb{R}^2$  to be the set of rate pairs  $(R_1, R_2)$  that satisfy

$$\mathbf{R} \in \mathbf{H} + \frac{1}{\sqrt{n}}\mathcal{S}(\mathbf{V}, \epsilon) + \frac{\nu \log n}{n}\mathbf{1}, \quad (11)$$

<sup>1</sup>Recall that the condition number of  $\mathbf{V}$  is the ratio of its maximum to minimum eigenvalues, i.e.,  $\text{cond}(\mathbf{V}) = \lambda_{\max}(\mathbf{V})/\lambda_{\min}(\mathbf{V})$ .

where  $\nu := |\mathcal{X}_1||\mathcal{X}_2| + 1$ . Also define the region  $\mathcal{R}_{\text{out}}(n, \epsilon) \subset \mathbb{R}^2$  to be the set of rate pairs  $(R_1, R_2)$  that satisfy

$$\mathbf{R} \in \mathbf{H} + \frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon) - \frac{\log n}{n} \mathbf{1}. \quad (12)$$

An illustration of the regions, disregarding the  $O(\frac{\log n}{n})$  factors, is provided in Fig. 2. Also see Fig. 3 for how the regions vary with  $n$  and  $\epsilon$ .

### B. Main Result and Interpretation

**Theorem 1** (Finite Blocklength Slepian-Wolf Region). *Let  $\epsilon \in (0, 1)$ . The  $(n, \epsilon)$ -optimal rate region  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  satisfies*

$$\mathcal{R}_{\text{in}}(n, \epsilon) \subset \mathcal{R}_{\text{SW}}^*(n, \epsilon) \subset \mathcal{R}_{\text{out}}(n, \epsilon) \quad (13)$$

for all  $n$  sufficiently large.

The proof is provided in Section VIII-B. Several aspects of the region are studied numerically in Section VI-A.

1) *Discussion of Theorem 1:* The direct part of Theorem 1 is proved using the usual random binning argument [7], [42] together with a multidimensional Berry-Essèen theorem [17]. The latter allows us to prove an important vector rate redundancy theorem (Theorem 5). This theorem is a recurring proof technique — it is also used to prove the direct parts of the analogous results for the multiple-access and broadcast channels. The decoder is a modification of a minimum empirical entropy [14] decoding rule. More precisely, we require the three empirical entropies  $\hat{H}(X_1^n|X_2^n)$ ,  $\hat{H}(X_2^n|X_1^n)$  and  $\hat{H}(X_1^n, X_2^n)$  to be *jointly* smaller than some perturbed rate vector  $\mathbf{R} - \delta_n \mathbf{1}$ , where  $\delta_n = O(\frac{\log n}{n})$ . By Taylor's theorem, it can be seen that the empirical entropy vector behaves like a multivariate Gaussian with mean  $\mathbf{H}$  and covariance  $\mathbf{V}$ , explaining the presence of these terms in (11) and (12). The converse is proved by leveraging on an information spectrum theorem by Han [43]. Theorem 1 extends naturally to the case where there are more than two senders.

By examining  $\mathcal{R}_{\text{in}}(n, \epsilon)$  and  $\mathcal{R}_{\text{out}}(n, \epsilon)$ , it can be seen that we have characterized the  $(n, \epsilon)$ -optimal rate region up to an  $O(\frac{\log n}{n})$  factor. This residual is a consequence of (i) loss in universal decoding for the direct part and (ii) the residual (approximation) terms resulting from the use of the multidimensional Berry-Essèen theorem [17] to approximate the distribution of a sum of i.i.d. random vectors with a multivariate Gaussian. In Section VIII-B3, we suggest a maximum-likelihood-based [15], non-universal decoding rule (i.e., one that assumes knowledge of the source statistics  $p_{X_1, X_2}$ ) in which the symmetry between the direct and converse parts become apparent. Also see the symmetry in [43, Lemmas 7.2.1-2].

Roughly speaking, the  $(n, \epsilon)$ -rate region approaches the SW region [7] at a rate of  $O(\frac{1}{\sqrt{n}})$ . This follows from the multidimensional central limit theorem. The *redundancy* of the SW problem where there are two sources to be coded and estimated is characterized by the set  $\frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon)$  shown in Fig. 1. The boundary of this set represents the three rates needed to be *added* on to the entropies  $H(X_1|X_2)$ ,  $H(X_2|X_1)$  and  $H(X_1, X_2)$  if one desires to operate in the finite blocklength setting. This *redundancy set*  $\frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon)$  also governs the interaction among the two senders. Somewhat unexpectedly, if  $\mathbf{V} \succ 0$ , which is true for almost all finite alphabet sources,<sup>2</sup> the  $(n, \epsilon)$ -rate region is not-polyhedral. Note that the SW region  $\mathcal{R}_{\text{SW}}^*$ , given in (3), is polyhedral.

2) *Singular Entropy Dispersion Matrices:* What are the implications of the  $(n, \epsilon)$ -SW region for singular  $\mathbf{V}$ 's? Note that Theorem 1 holds regardless of whether  $\mathbf{V}$  is singular or positive-definite (but not for the trivial case where  $\mathbf{V} = \mathbf{0}$  so we assume throughout that  $\text{rank}(\mathbf{V}) \geq 1$ ). Sources for which  $\mathbf{V}$  is singular include those which are (i) independent, i.e.,  $I(X_1; X_2) = 0$ , (ii) either  $X_1$  or  $X_2$  is uniform over their alphabets. It is easy to see why  $I(X_1; X_2) = 0$  results in a singular  $\mathbf{V}$  — this is because the third entry in the entropy density vector is a linear combination of the first two. Thus  $\mathbf{V}$  loses rank. Case (ii) was analyzed by Sarvotham et al. [38] where  $X_1, X_2 \in \mathbb{F}_2$ ,  $X_1 \sim \text{Bern}(\frac{1}{2})$ ,  $X_2 = X_1 \oplus N$  with  $N \sim \text{Bern}(\alpha)$ ,  $\alpha \in (0, \frac{1}{2})$ . The pair of random variables  $(X_1, X_2)$  is the so-called *discrete symmetric binary source* (DSBS) with crossover probability  $\alpha$ . For the DSBS, Theorem 1 in [38] asserts that the  $(n, \epsilon)$ -optimal rate region is (up to terms in  $o(1/\sqrt{n})$ )

$$\mathbf{R} \geq \mathbf{H} + \sqrt{\frac{V_\alpha}{n}} \mathbf{Q}^{-1}(\epsilon) \mathbf{1}, \quad (14)$$

<sup>2</sup>If the entries of the matrix  $p_{X_1, X_2}(x_1, x_2)$  are chosen according to a distribution which is absolutely continuous with respect to the Lebesgue measure and subsequently normalized to sum to unity, then  $\text{P}(\text{rank}(\mathbf{V}(p_{X_1, X_2})) = 3) = 1$ .

where  $V_\alpha$  is a scalar entropy dispersion [to be specified precisely in (15)]. Thus, the three inequalities are *decoupled*. In contrast, in Theorem 1, we showed that the  $(n, \epsilon)$ -optimal rate region for general DMMSes is such that the constraints on  $R_1$ ,  $R_2$  and  $R_1 + R_2$  are *coupled* through the set  $\mathcal{S}(\mathbf{V}, \epsilon)$ .

Let us relate (14) to our Theorem 1. For the DSBS, it can be verified that  $\text{rank}(\mathbf{V}) = 1$  and that  $\mathbf{V}$  is a scalar multiple of the all ones matrix, i.e.,  $\mathbf{V} = V_\alpha \mathbf{1}_{3 \times 3}$  where  $V_\alpha = \text{Var}(-\log p_{X_1|X_2}(X_1|X_2)) = \text{Var}(-\log p_{X_2|X_1}(X_2|X_1)) = \text{Var}(-\log p_{X_1, X_2}(X_1, X_2))$ . Intuitively, this is because there is only one *degree of freedom* in a DSBS with crossover probability  $\alpha$ . The parameter  $V_\alpha$  is exactly the scalar dispersion in (14). In fact, it can be calculated in closed-form for the DSBS with crossover probability  $\alpha$  as

$$V_\alpha = \alpha(1 - \alpha) \left[ \log \left( \frac{1 - \alpha}{\alpha} \right) \right]^2. \quad (15)$$

For this source, since  $\text{rank}(\mathbf{V}) = 1$ , all the probability mass of the degenerate Gaussian  $\mathcal{N}(\mathbf{0}, \mathbf{V})$  lies in a subspace of dimension one. Therefore, it is easy to see that  $\mathcal{S}(\mathbf{V}, \epsilon)$  defined in (6) degenerates to the axis-aligned cuboid

$$\mathcal{S}(\mathbf{V}, \epsilon) = \{\mathbf{z} \in \mathbb{R}^3 : \mathbf{z} \geq \sqrt{V_\alpha} \mathbf{Q}^{-1}(\epsilon) \mathbf{1}\}. \quad (16)$$

The quantity  $\sqrt{V_\alpha/n} \mathbf{Q}^{-1}(\epsilon)$  is the *rate redundancy* [35]–[38] for fixed-length SW coding in the finite blocklength regime for a DSBS. In this case, with  $\mathcal{S}(\mathbf{V}, \epsilon)$  as in (16), the inner and outer bounds of the  $(n, \epsilon)$ -optimal rate region degenerate to (14). Thus the fixed-length results in [35]–[38] are special cases of our general result. This argument for singular dispersion matrices can be formalized and we do so in the latter half of the proof of Theorem 5.

### III. DISPERSION OF THE MULTIPLE-ACCESS CHANNEL

The multiple-access channel or MAC is the channel coding dual to the Slepian-Wolf problem described in Section II [14, Sec. 3.2]. The MAC model has found numerous applications, especially in wireless communications where multiple parties would like to communicate to a single base station reliably. For a MAC, there are two (or more) independent messages  $M_1 \in [2^{nR_1}]$  and  $M_2 \in [2^{nR_2}]$ . The two messages, which are uniformly distributed over their respective message sets, are *separately* encoded into sequence codewords  $X_1^n \in \mathcal{X}_1^n$  and  $X_2^n \in \mathcal{X}_2^n$  respectively. These codewords are the inputs to a discrete memoryless multiple-access channel (DM-MAC)  $W : \mathcal{X}_1 \times \mathcal{X}_2 \rightarrow \mathcal{Y}$ . The decoder receives  $Y^n$  from the output of the DM-MAC and provides estimates of the messages  $\hat{M}_1$  and  $\hat{M}_2$  or declares that a decoding error has occurred. It is usually desired to send both messages *reliably*, that is, to ensure that the average probability of error

$$P_e^{(n)} := \mathbb{P}(\{\hat{M}_1 \neq M_1\} \cup \{\hat{M}_2 \neq M_2\}) \quad (17)$$

tends to zero as  $n \rightarrow \infty$ . The set of achievable rates, or the *capacity region*  $\mathcal{C}_{\text{MAC}}^*$ , is given by

$$\begin{aligned} R_1 &\leq I(X_1; Y|X_2, Q) \\ R_2 &\leq I(X_2; Y|X_1, Q) \\ R_1 + R_2 &\leq I(X_1, X_2; Y|Q) \end{aligned} \quad (18)$$

for some  $p_Q$ ,  $p_{X_1|Q}$  and  $p_{X_2|Q}$  and  $|Q| \leq 2$ . This asymptotic result was proved independently by Ahlswede [2] and Liao [3] and can be written in an alternative form which involves taking the convex hull instead of the introduction of the auxiliary time-sharing variable  $Q$ . See [1] for further discussions. A somewhat surprising result in the theory of MACs, which differs from point-to-point channel coding, is that the capacity region for average probability of error is strictly larger than that for maximal probability of error [44]. We emphasize that we focus on the average probability of error defined in (17) throughout. Note that as with the SW case, we can consider  $\mathbb{P}(\hat{M}_1 \neq M_1)$ ,  $\mathbb{P}(\hat{M}_2 \neq M_2)$  and  $P_e^{(n)}$  separately and place upper bounds on each of these constituent error probabilities but, for simplicity, we consider only  $P_e^{(n)}$  in (17).

In this section, we ask what the finite blocklength analogue of the region in (18) is. More precisely, we fix a blocklength  $n$  and a tolerable average error probability  $\epsilon$ . We then attempt to find the set of achievable rate pairs as a function of  $(n, \epsilon)$ . We call this the  $(n, \epsilon)$ -capacity region and denote it by  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$ . Our main result in this section is the derivation of an inner bound to  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$ . In other words, we propose a coding and decoding

procedure over a finite block of symbols of length  $n$  that satisfies  $P_e^{(n)} \leq \epsilon$ . Our coding scheme is the coded time-sharing procedure by Han and Kobayashi [45]. The decoding scheme is similar to MMI decoding [18]. However, the error probability analysis is rather different.

As with the SW region, note that the capacity region in (18) is a polyhedron (in fact a pentagon) for a given set of time-sharing and input distributions  $p_Q, p_{X_1|Q}$  and  $p_{X_2|Q}$ . While we currently do not have a full characterization of the  $(n, \epsilon)$ -capacity region and proving a converse appears to be difficult, we remark that, somewhat surprisingly, the boundary of the inner bound for fixed  $p_Q, p_{X_1|Q}$  and  $p_{X_2|Q}$  is *curved* if the so-called information dispersion matrix, to be defined in (24), is non-singular. This is likened to the  $(n, \epsilon)$ -SW region (Theorem 1) and the information dispersion matrix is analogous to the entropy dispersion matrix defined in (9) for the SW problem. As in the SW case, the main tool that we use is a multidimensional version of the Berry-Essèen theorem [17] and the vector rate redundancy theorem (Theorem 5). We focus on the two-sender case. Generalizations to more than two senders are straightforward. We begin with definitions then state the main result. We also provide some hints on how a possible converse theorem could be proved after the main achievability result is stated.

### A. Definitions

Let  $(\mathcal{X}_1, \mathcal{X}_2, W, \mathcal{Y})$  be a DM-MAC, i.e., for any input codeword sequences  $x_1^n \in \mathcal{X}_1^n$  and  $x_2^n \in \mathcal{X}_2^n$ ,

$$W^n(y^n|x_1^n, x_2^n) = \prod_{k=1}^n W(y_k|x_{1k}, x_{2k}). \quad (19)$$

**Definition 6.** An  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -code for the DM-MAC  $(\mathcal{X}_1, \mathcal{X}_2, W, \mathcal{Y})$  consists of two encoders  $f_{j,n} : \mathcal{M}_j = [2^{nR_j}] \rightarrow \mathcal{X}_j^n, j = 1, 2$ , and a decoder  $\varphi_n : \mathcal{Y}^n \rightarrow \mathcal{M}_1 \times \mathcal{M}_2$  such that the average error probability defined in (17) does not exceed  $\epsilon$ . Note that the outputs of the encoders are  $f_{j,n}(M_j), j = 1, 2$  and the output of the decoder are the estimates  $(\hat{M}_1, \hat{M}_2) = \varphi_n(Y^n)$ . The coding rates are defined in the usual way as in (5).

**Definition 7.** A rate pair  $(R_1, R_2)$  is  $(n, \epsilon)$ -achievable if there exists an  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -code for the DM-MAC  $(\mathcal{X}_1, \mathcal{X}_2, W, \mathcal{Y})$ . The  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon) \subset \mathbb{R}^2$  is the set of all  $(n, \epsilon)$ -achievable rate pairs.

Again traditionally, capacity regions are defined with an additional closure operation [1]. However, as we are analyzing the finite blocklength regime, we refrain from doing so. Also, in contrast to the asymptotic setting, it is not obvious that  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$  is convex. The usual Time Sharing argument [14, Lemma 3.2.2] — that the juxtaposition of two good multiple-access codes leads to a good but longer code — does not hold because the blocklength is constrained to be a fixed integer  $n$  so juxtaposition is not allowed. Fix a triple of distributions  $p_Q(q), p_{X_1|Q}(x_1|q)$  and  $p_{X_2|Q}(x_2|q)$ . Given the channel  $W$ , these distributions induce the following output conditional distributions

$$p_{Y|X_2, Q}(y|x_2, q) := \sum_{x_1} p_{X_1|Q}(x_1|q)W(y|x_1, x_2) \quad (20)$$

$$p_{Y|Q}(y|q) := \sum_{x_1, x_2} p_{X_1|Q}(x_1|q)p_{X_2|Q}(x_2|q)W(y|x_1, x_2). \quad (21)$$

The output conditional distribution  $p_{Y|X_1, Q}$  is defined similarly to  $p_{Y|X_2, Q}$  with 1 replaced by 2 and vice versa.

**Definition 8.** The information density vector is defined as

$$\mathbf{i}(Q, X_1, X_2, Y) := \begin{bmatrix} \log[W(Y|X_1, X_2)/p_{Y|X_2, Q}(Y|X_2, Q)] \\ \log[W(Y|X_1, X_2)/p_{Y|X_1, Q}(Y|X_1, Q)] \\ \log[W(Y|X_1, X_2)/p_{Y|Q}(Y|Q)] \end{bmatrix}. \quad (22)$$

where the distributions  $p_{Y|X_2, Q}, p_{Y|X_1, Q}$  and  $p_{Y|Q}$  are defined in (20)–(21). The random variables  $(Q, X_1, X_2, Y)$  have joint distribution  $p_Q p_{X_1|Q} p_{X_2|Q} W$ .

Observe that the expectation of the information density vector with respect to  $p_Q p_{X_1|Q} p_{X_2|Q} W$  is the vector of mutual information quantities in (18), i.e.,

$$\mathbb{E}[\mathbf{i}(Q, X_1, X_2, Y)] = \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) := \begin{bmatrix} I(X_1; Y|X_2, Q) \\ I(X_2; Y|X_1, Q) \\ I(X_1, X_2; Y|Q) \end{bmatrix}. \quad (23)$$

**Definition 9.** The information dispersion matrix  $\mathbf{V}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)$  is the covariance matrix of the random vector  $\mathbf{i}(Q, X_1, X_2, Y)$  i.e.,

$$\mathbf{V}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) = \text{Cov}(\mathbf{i}(Q, X_1, X_2, Y)). \quad (24)$$

If there is no risk of confusion, we abbreviate the deterministic vector  $\mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) \in \mathbb{R}^3$  and the deterministic matrix  $\mathbf{V}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) \succeq 0$  as  $\mathbf{I}$  and  $\mathbf{V}$  respectively. We assume throughout that the channel and the input distributions are such that  $\text{rank}(\mathbf{V}) \geq 1$ , i.e.,  $\mathbf{V}$  is not the all-zeros matrix. Recall the definition of the rate vector  $\mathbf{R} = [R_1, R_2, R_1 + R_2]^T$  in (10).

**Definition 10.** Given triple of input distributions  $(p_Q, p_{X_1|Q}, p_{X_2|Q})$ , define the region  $\mathcal{R}(n, \epsilon; p_Q, p_{X_1|Q}, p_{X_2|Q}) \subset \mathbb{R}^2$  to be the set of rate pairs  $(R_1, R_2)$  that satisfy

$$\mathbf{R} \in \mathbf{I} - \frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon) - \frac{\nu \log n}{n} \mathbf{1}, \quad (25)$$

where  $\nu := |\mathcal{Q}||\mathcal{X}_1||\mathcal{X}_2||\mathcal{Y}| + 1$ . Here  $\mathbf{I} := \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)$  and  $\mathbf{V} := \mathbf{V}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)$  and the set  $\mathcal{S}(\mathbf{V}, \epsilon) \subset \mathbb{R}^3$  is defined in (6).

## B. Main Result and Interpretation

**Theorem 2** (Inner Bound to Finite Blocklength DM-MAC Capacity Region). *Let  $\epsilon \in (0, 1)$ . The  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$  for the DM-MAC satisfies*

$$\bigcup_{p_Q, p_{X_1|Q}, p_{X_2|Q}} \mathcal{R}(n, \epsilon; p_Q, p_{X_1|Q}, p_{X_2|Q}) \subset \mathcal{C}_{\text{MAC}}^*(n, \epsilon) \quad (26)$$

for all  $n$  sufficiently large. Furthermore, the union over  $p_Q$  can be restricted to those discrete distributions with support  $\mathcal{Q}$  whose cardinality  $|\mathcal{Q}| \leq 9$ .

This theorem is proved in Section VIII-C. The bounds on cardinality can be proved using the support lemma [14, Theorem 3.4]. See Section VIII-C2. The inner bound is illustrated for various  $n$ 's and  $\epsilon$ 's in Fig. 8. It is relatively straightforward to extend the result to the case where there is a cost constraint on the codewords, i.e.,

$$\frac{1}{n} \sum_{k=1}^n \Lambda_j(x_{jk}(m_j)) \leq \Gamma_j, \quad (27)$$

for  $j = 1, 2$  and all  $(m_1, m_2) \in \mathcal{M}_1 \times \mathcal{M}_2$ . We omit the statement and proof. In Section VIII-C3, we comment on how the coding scheme can be modified to deal with channels with arbitrary input and output alphabets at the cost of universality in decoding.

From (25), we see that the inner bound to the  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$  approaches the usual MAC region (18) at a rate of  $O(\frac{1}{\sqrt{n}})$  for fixed input distributions. Unsurprisingly, this rate is a consequence of the multidimensional central limit theorem. The *redundancy set*  $\frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon)$  which manifests itself in (25) is exactly the loss in rate to the three mutual information quantities in (18) one must incur when operating in the finite blocklength setting with average error probability  $\epsilon$ .

For the proof of Theorem 2, we use the coded time-sharing scheme introduced by Han and Kobayashi in their seminal work on interference channels [45]. The decoding step, however, is novel and is a modification of the maximum mutual information (MMI) decoding rule [14], [18]. This MMI-decoding step allows us to define a new notion of typicality for empirical mutual information quantities. Interestingly, the error event that contributes to the  $\epsilon$  probability of error is the one in which the transmitted pair of codewords  $x_1^n(m_1), x_2^n(m_2)$  is not jointly typical (in a refined sense of typicality) with the output of the channel  $y^n$  (and a time-sharing sequence  $q^n$ ). The probabilities of the other error events — that there exists another codeword jointly typical with the output — can be shown to be vanishingly small relative to  $\epsilon$ . Intuitively, this is because we are operating close to the boundaries of the rate region for given input distributions, i.e., at very high rates. The sphere-packing argument [14], [33], [46] implies that the dominant (typical) error events at high rates are of the form where a large number of incorrect codewords are jointly typical with the transmitted one, i.e., what Forney calls Type I error [46]. Thus, the probability of error is dominated by an atypically large noise event and expurgation does not improve the exponents.

A converse (outer bound to  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$ ) has unfortunately remained elusive. To the best of the authors' knowledge, there are three strong converse proof techniques for the average probability of error of the DM-MAC. The first is by Han [43, Lemma 7.10.2] [47, Lemma 4] and is based on information spectrum ideas. Applying it is difficult because the specified input distributions  $p_{X_1^n}, p_{X_2^n}$  are the Fano-distributions on the codewords.<sup>3</sup> Since  $p_{X_j^n}$  does not decompose into independent factors, the Berry-Essèden theorem is not directly applicable. The second is by Dueck [48] who used the blowing-up lemma [14, Sec. 1.5]. The third and most promising technique is by Ahlswede [49] who built on Dueck's work [48]. Ahlswede first applies Augustin's strong converse for DMCs [50] to the so-called Fano\*-distribution<sup>4</sup> which factorizes. Then, he obtains a region that resembles the capacity region for the DM-MAC. Finally, he utilizes a *wringing* technique to remove (or *wring out*) the dependence between  $X_1$  and  $X_2$ . Unfortunately, it appears that the use of both the blowing-up lemma and the wringing technique results in estimates of an outer bound that are too loose to match the  $O(\frac{1}{\sqrt{n}})$  dispersion term in the inner bound in Theorem 2. Another major obstacle to proving a finite blocklength-style converse is the need to introduce the time-sharing variable  $Q$  or the convex hull operation judiciously. Hence, we believe that genuinely new strong converse techniques for the DM-MAC (and other multi-user problems) have to be developed to prove a tight outer bound that matches (or approximately matches) our inner bound.

#### IV. DISPERSION OF THE ASYMMETRIC BROADCAST CHANNEL

We now turn our attention to the broadcast channel [5], which is another fundamental problem in network information theory. Despite more than 40 years of research, the capacity region has resisted attempts at proof. One special instance in which the capacity is known is the so-called *asymmetric broadcast channel* or ABC [4], [14]. The ABC is also known as the broadcast channel with *degraded message sets*. In fact, the analysis in this section applies to the general broadcast channel. We focus on the ABC for concreteness.

In the ABC problem, there are two independent messages  $M_1 \in [2^{nR_1}]$  and  $M_2 \in [2^{nR_2}]$  at the sender. These two messages, which are uniformly distributed over their respective message sets, are encoded into a codeword  $X^n \in \mathcal{X}^n$ . These codewords are then the inputs to a discrete memoryless asymmetric broadcast channel (DM-ABC)  $W : \mathcal{X} \rightarrow \mathcal{Y}_1 \times \mathcal{Y}_2$ . Decoder 1 receives  $Y_1^n$  and estimates *both* messages  $M_1$  and  $M_2$ , while decoder 2 receives  $Y_2^n$  and estimates *only*  $M_2$ . Let the estimates of the messages at decoder 1 be denoted at  $(\hat{M}_1, \hat{M}_2)$  and let the estimate of message 2 at decoder 2 be denoted as  $\check{M}_2$ . The average error probability is defined as

$$P_e^{(n)} := \mathbb{P}(\{\hat{M}_1 \neq M_1\} \cup \{\hat{M}_2 \neq M_2\} \cup \{\check{M}_2 \neq M_2\}), \quad (28)$$

Note that the error event above corresponds to receiver 1 not decoding either message correctly *or* receiver 2 not decoding her intended message  $M_2$  correctly. An alternative formulation, which turns out to be more challenging, would be to define average probabilities of error for receiver 1 and receiver 2 and to put *different* upper bounds on these error probabilities.

Returning to our setup, it usually is desired to drive  $P_e^{(n)}$ , defined in (28), to zero as the blocklength  $n \rightarrow \infty$ . The set of achievable rate pairs  $(R_1, R_2)$  first derived by Körner and Marton [4] is then given by the region

$$\begin{aligned} R_1 &\leq I(X; Y_1 | U) \\ R_2 &\leq I(U; Y_2) \\ R_1 + R_2 &\leq I(X; Y_1) \end{aligned} \quad (29)$$

for some  $p_{U, X}(u, x)$  where  $|\mathcal{U}| \leq |\mathcal{X}| + 1$ , i.e.,  $U - X - (Y_1, Y_2)$  form a Markov chain in that order. The proof for the direct part uses the superposition coding technique [5]. The auxiliary variable  $U$  basically plays the role of the cloud center while the input random variable  $X$  plays the role of a satellite codeword centered at the cloud center  $U$ . A weak converse can be proved using the Csiszár-sum-identity [1]. For a strong converse, see [14, Sec 3.3] or the original work by Körner and Marton [4].

In this section, we again depart from the traditional asymptotic setting. More specifically, we fix a (finite) blocklength  $n$  and a tolerable upper bound on the average error probability in (28), say  $\epsilon$ . We attempt to characterize the so-called  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{ABC}}^*(n, \epsilon)$ , i.e., the set of  $(n, \epsilon)$ -achievable rate pairs  $(R_1, R_2)$  for the ABC

<sup>3</sup>Given DM-MAC codebooks  $\mathcal{C}_j := \{x_j^n(m_j) : m_j \in \mathcal{M}_j\}$ ,  $j = 1, 2$ , the *Fano-distribution*  $p_{X_j^n}$  is the uniform distribution over  $\mathcal{C}_j$ .

<sup>4</sup>The *Fano\*-distribution* is  $p_{X_j^n} = \prod_{k=1}^n p_{X_{jk}}(a) := |\mathcal{M}_j|^{-1} |\{m_j : x_{jk}(m_j) = a\}|$  for all  $a \in \mathcal{X}_j$ .

$W$ . As with the DM-MAC, a rate pair  $(R_1, R_2)$  is said to be  $(n, \epsilon)$ -achievable for the ABC  $W$  if there exists a code, i.e., an encoder and two decoders operating on blocks of symbols of length  $n$  for which  $P_e^{(n)} \leq \epsilon$ . Precise definitions will be provided in Section IV-A.

We show in this section that the tools we have developed for SW coding and the MAC, such as the vector rate redundancy theorem, are versatile enough for us to provide an inner bound to  $\mathcal{C}_{\text{ABC}}^*(n, \epsilon)$ . Our coding scheme is based on superposition coding [5] but the analysis is somewhat different and uses a variant of MMI-decoding. Like the DM-MAC, all three inequalities that characterize the capacity region in (29) are ‘‘coupled’’ through an information dispersion matrix for a given input distribution  $p_{U,X}$ . Thus, the main result in this section is conceptually very similar to that for the DM-MAC. And as with the DM-MAC, we do not yet have an outer bound for this problem but we note that strong converses for this problem are available [4], [51]. We start with relevant definitions.

#### A. Definitions

Let  $(\mathcal{X}, W, \mathcal{Y}_1, \mathcal{Y}_2)$  be a 2-receiver DM-ABC. That is given an input codeword sequence  $x^n \in \mathcal{X}^n$ ,

$$W^n(y_1^n, y_2^n | x^n) = \prod_{k=1}^n W(y_{1k}, y_{2k} | x_k). \quad (30)$$

We will use the notations  $W_1$  and  $W_2$  to denote the  $\mathcal{Y}_1$ - and  $\mathcal{Y}_2$ -marginal of  $W$  respectively, i.e.,  $W_1(y_1|x) := \sum_{y_2} W(y_1, y_2|x)$  and similarly for  $W_2(y_2|x)$ .

**Definition 11.** An  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -code for the DM-ABC  $(\mathcal{X}, W, \mathcal{Y}_1, \mathcal{Y}_2)$  consists of one encoder  $f_n : \mathcal{M}_1 \times \mathcal{M}_2 = [2^{nR_1}] \times [2^{nR_2}] \rightarrow \mathcal{X}^n$ , and two decoders  $\varphi_{1,n} : \mathcal{Y}_1^n \rightarrow \mathcal{M}_1 \times \mathcal{M}_2$  and  $\varphi_{2,n} : \mathcal{Y}_2^n \rightarrow \mathcal{M}_2$  such that the average error probability defined in (28) does not exceed  $\epsilon$ . Note that the output of the encoder is  $f_n(M_1, M_2)$  and the output of the decoders are the estimates  $(\hat{M}_1, \hat{M}_2) = \varphi_{1,n}(Y_1^n)$  and  $\hat{M}_2 = \varphi_{2,n}(Y_2^n)$ . The coding rates are defined in the usual way as in (5).

**Definition 12.** A rate pair  $(R_1, R_2)$  is  $(n, \epsilon)$ -achievable if there exists an  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -code for the DM-ABC  $(\mathcal{X}, W, \mathcal{Y}_1, \mathcal{Y}_2)$ . The  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{ABC}}^*(n, \epsilon) \subset \mathbb{R}^2$  is the set of all  $(n, \epsilon)$ -achievable rate pairs.

Fix an input distribution  $p_{U,X} \in \mathcal{P}(\mathcal{U} \times \mathcal{X})$  where the auxiliary random variable  $U$  takes values on some finite set  $\mathcal{U}$ . Given the channel  $W$  and input distribution  $p_{U,X}$ , the following distributions are defined as:

$$p_{Y_j|U}(y_j|u) = \sum_x W_j(y_j|x) p_{X|U}(x|u), \quad (31)$$

$$p_{Y_j}(y_j) = \sum_x W_j(y_j|x) p_X(x), \quad j = 1, 2. \quad (32)$$

**Definition 13.** The information density vector for the ABC is defined as

$$\mathbf{i}(U, X, Y_1, Y_2) := \begin{bmatrix} \log[W_1(Y_1|X)/p_{Y_1|U}(Y_1|U)] \\ \log[p_{Y_2|U}(Y_2|U)/p_{Y_2}(Y_2)] \\ \log[W_1(Y_1|X_1)/p_{Y_1}(Y_1)] \end{bmatrix}. \quad (33)$$

where the distributions  $p_{Y_1|U}, p_{Y_1}, p_{Y_2|U}, p_{Y_2}$  are defined in (31) and (32) respectively. The random variables  $(U, X, Y_1, Y_2)$  have joint distribution  $p_{U,X}W$ .

Observe that the expectation of the information density vector with respect to  $p_{U,X}W$  is the vector of mutual information quantities, i.e.,

$$\mathbb{E}[\mathbf{i}(U, X, Y_1, Y_2)] = \mathbf{I}(p_{U,X}, W) := \begin{bmatrix} I(X; Y_1|U) \\ I(U; Y_2) \\ I(X; Y_1) \end{bmatrix}. \quad (34)$$

**Definition 14.** The information dispersion matrix  $\mathbf{V}(p_{U,X}, W)$  is the covariance matrix of the random vector  $\mathbf{i}(U, X, Y_1, Y_2)$  i.e.,

$$\mathbf{V}(p_{U,X}, W) = \text{Cov}(\mathbf{i}(U, X, Y_1, Y_2)). \quad (35)$$

As with the SW and MAC cases, we usually abbreviate  $\mathbf{I}(p_{U,X}, W)$  and  $\mathbf{V}(p_{U,X}, W)$  as  $\mathbf{I}$  and  $\mathbf{V}$  respectively. We will again use the definition of the rate vector  $\mathbf{R} = [R_1, R_2, R_1 + R_2]^T$  in (10).

**Definition 15.** Given an input distribution  $p_{U,X}$ , define the region  $\mathcal{R}(n, \epsilon; p_{U,X}) \subset \mathbb{R}^2$  to be the set of rate pairs  $(R_1, R_2)$  that satisfy

$$\mathbf{R} \in \mathbf{I} - \frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon) - \frac{\nu \log n}{n} \mathbf{1}, \quad (36)$$

where  $\nu := |\mathcal{U}| |\mathcal{X}| \max\{|\mathcal{Y}_1|, |\mathcal{Y}_2|\} + 1$ . Here  $\mathbf{I} := \mathbf{I}(p_{U,X}, W)$  and  $\mathbf{V} := \mathbf{V}(p_{U,X}, W)$  and the set  $\mathcal{S}(\mathbf{V}, \epsilon) \subset \mathbb{R}^3$  is defined in (6).

### B. Main Result and Interpretation

**Theorem 3** (Inner Bound to Finite Blocklength DM-ABC Capacity Region). Let  $\epsilon \in (0, 1)$ . The  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{ABC}}^*(n, \epsilon)$  for the DM-ABC satisfies

$$\bigcup_{p_U, p_{X|U}} \mathcal{R}(n, \epsilon; p_{U,X}) \subset \mathcal{C}_{\text{ABC}}^*(n, \epsilon) \quad (37)$$

for all  $n$  sufficiently large. Furthermore, the union over  $p_U$  can be restricted to those discrete distributions with support  $\mathcal{U}$  whose cardinality  $|\mathcal{U}| \leq |\mathcal{X}| + 6$ .

The proof of this result can be found in Section VIII-D.

Conceptually, this result is very similar to that for the DM-MAC. The reason for its inclusion in this paper is to demonstrate that the proof techniques we have developed here are general and widely applicable to many network information theory problems, including problems whose capacity regions involve auxiliary random variables. Indeed, it is easy to apply our vector rate redundancy theorem to prove a finite blocklength analogue of the inner bound to the  $(n, \epsilon)$ -capacity region of the discrete memoryless interference channel (DM-IC) [45], [52]. However, for the DM-IC, there is an additional Fourier-Motzkin step to eliminate the common and private message rates. This step can indeed be done for deriving the finite blocklength inner bound.

Loosely speaking, for the DM-ABC and for a fixed  $p_{U,X}$ , the inner bound approaches to the capacity region in (29) at a rate of  $O(\frac{1}{\sqrt{n}})$  as prescribed by the multidimensional central limit theorem. The redundancy set is, as per the DM-MAC,  $\frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon)$ . It would be interesting to extend the above result to derive a finite blocklength version of Marton's inner bound [53], [54], which is the best (largest) inner bound for the broadcast channel. This problem, however, appears to be rather challenging because of the need to generalize the mutual covering lemma [1].

## V. DISPERSION ALONG SLICES OF THE $(n, \epsilon)$ -RATE REGIONS

While we have a single-letter characterization of the  $(n, \epsilon)$ -optimal rate region for SW coding and inner bounds for the  $(n, \epsilon)$ -capacity regions for the DM-MAC and DM-ABC problems, it is instructive to study the behavior along certain "slices" of the region. We would also like to compute, if possible, the dispersion (second-order coding rate) as a rate pair converges to a particular point on the boundaries of the asymptotic regions. To be concrete, we will focus solely on the SW setting (Theorem 1) but we note that similar conclusions can be made for the inner bound to the  $(n, \epsilon)$ -capacity region for the DM-MAC for fixed input distributions (Theorem 2). We start by defining the set

$$\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon) := \left\{ (R_1, R_2) \in \mathbb{R}^2 : \mathbf{R} \in \mathbf{H} + \frac{1}{\sqrt{n}} \mathcal{S}(\mathbf{V}, \epsilon) \right\}. \quad (38)$$

Observe that  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  is essentially the same as  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  but the former ignores the  $O(\frac{\log n}{n})$  terms in the inner and outer bounds of Theorem 1. The set in (38) is shown in Fig. 2. Assume for the rest of this section that the entropy dispersion matrix  $\mathbf{V}(p_{X_1, X_2}) \succ 0$  so in particular, conditioning strictly reduces entropy, i.e.,  $H(X_1|X_2) < H(X_1)$ . This ensures that the SW region is non-degenerate.

As we see in Fig. 2, we can approach a point on the asymptotic SW boundary, denoted as  $\mathcal{B}_{\text{SW}}^*$ , from a number of different directions. We formalize this as follows: Let  $\theta$  be an *angle of approach* towards a point  $(R_1^*, R_2^*)$  lying

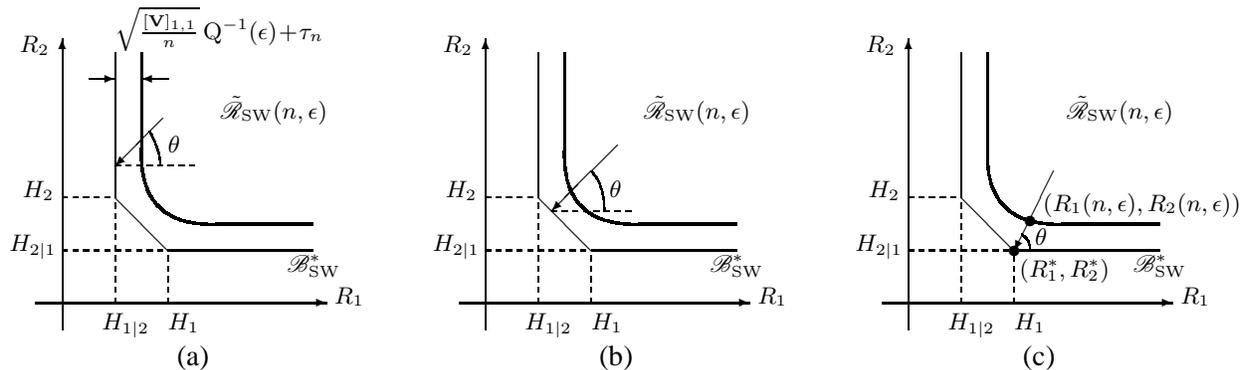


Fig. 2. Plots of the approximation to the  $(n, \epsilon)$ -optimal rate region  $\tilde{\mathcal{R}}_{SW}(n, \epsilon)$  defined in (38) and the asymptotic SW region in (3) whose boundary is indicated by  $\mathcal{B}_{SW}^*$ . We use the simplified notation  $H_1 := H(X_1)$ ,  $H_2 := H(X_2)$ ,  $H_{1|2} := H(X_1|X_2)$ ,  $H_{2|1} := H(X_2|X_1)$  and  $H_{1,2} = H(X_1, X_2)$ . The directions of approach are indicated by the arrows in the different subplots. In subplot (a), we approach the vertical boundary. The dispersion  $F$  is given in (42). In subplot (b), we approach the sum rate boundary. The dispersion  $F$  is given in (44). In subplot (c), we approach the corner point  $(H_1, H_{2|1})$ . The dispersion  $F$  is given implicitly in (46). The point  $(R_1(n, \epsilon), R_2(n, \epsilon))$  (defined in (39) and (40)) and the point target point  $(R_1^*, R_2^*)$  are also indicated in (c).

on the SW boundary  $\mathcal{B}_{SW}^*$ . We use a single *dispersion-like* quantity  $F = F(\theta, \epsilon)$  to parametrize the approach of a pair of rates towards  $(R_1^*, R_2^*)$ . More precisely, define

$$R_1(n, \epsilon) := R_1^* + \sqrt{\frac{F}{n}} (\cos \theta) Q^{-1}(\epsilon) \quad (39)$$

$$R_2(n, \epsilon) := R_2^* + \sqrt{\frac{F}{n}} (\sin \theta) Q^{-1}(\epsilon). \quad (40)$$

In other words,  $(R_1(n, \epsilon), R_2(n, \epsilon))$  is a rate pair on the boundary of the region  $\tilde{\mathcal{R}}_{SW}(n, \epsilon)$  that approaches  $(R_1^*, R_2^*)$  at a rate governed by the angle of approach  $\theta$ , the error probability in the form of the Gaussian approximation term  $Q^{-1}(\epsilon)$ , and the *effective dispersion*  $F$ . The following proposition leverages on Theorem 1 to quantify the minimum  $F$  achieving  $\epsilon$  probability of error for various  $(R_1^*, R_2^*, \theta)$ . To state our result cleanly, we define

$$\Psi(\rho; x', y') := \frac{1}{2\pi\sqrt{1-\rho^2}} \int_{x'}^{\infty} \int_{y'}^{\infty} \exp\left\{-\frac{x^2 - 2\rho xy + y^2}{2(1-\rho^2)}\right\} dy dx, \quad (41)$$

as the bivariate generalization of the Q-function.

**Proposition 4** (Dispersion Along Slices of  $(n, \epsilon)$ -SW Region). *Let  $\tau_n$  be an exponentially decaying sequence<sup>5</sup> that may change from line to line. There are five different cases. First, assume that  $(R_1^*, R_2^*)$  is not a corner point. In particular, let  $R_1^* = H(X_1|X_2)$  and let  $R_2^* > H(X_2)$  (vertical boundary). Then,*

$$F = \frac{[\mathbf{V}]_{1,1}}{\cos^2 \theta} + \tau_n. \quad (42)$$

*Similarly if  $R_2^* = H(X_2|X_1)$  and  $R_1^* > H(X_1)$  (horizontal boundary) then,*

$$F = \frac{[\mathbf{V}]_{2,2}}{\sin^2 \theta} + \tau_n. \quad (43)$$

*Similarly if  $R_1^* + R_2^* = H(X_1, X_2)$ ,  $R_1^* > H(X_1|X_2)$  and  $R_2^* > H(X_2|X_1)$  (sum rate boundary) then,*

$$F = \frac{[\mathbf{V}]_{3,3}}{(\cos \theta + \sin \theta)^2} + \tau_n. \quad (44)$$

*Now assume that  $(R_1^*, R_2^*)$  is a corner point. In particular, let  $R_1^* = H(X_1|X_2)$  and  $R_2^* = H(X_2)$ . Then  $F$  is the solution to*

$$\Psi\left(\rho_{1,3}; -\sqrt{\frac{F}{[\mathbf{V}]_{1,1}}} (\cos \theta) Q^{-1}(\epsilon), -\sqrt{\frac{F}{[\mathbf{V}]_{3,3}}} (\cos \theta + \sin \theta) Q^{-1}(\epsilon)\right) = 1 - \epsilon + \tau_n, \quad (45)$$

<sup>5</sup>The sequence  $\{\tau_n\}_{n=1}^{\infty}$  is exponentially decaying if  $\limsup_{n \rightarrow \infty} \frac{1}{n} \log \tau_n < 0$ .

where  $\rho_{1,3} := [\mathbf{V}]_{1,3}/\sqrt{[\mathbf{V}]_{1,1}[\mathbf{V}]_{3,3}}$  is the correlation coefficient of the random variables  $-\log p_{X_1|X_2}(X_1|X_2)$  and  $-\log p_{X_1,X_2}(X_1, X_2)$ . Finally, if  $R_1^* = H(X_1)$  and  $R_2^* = H(X_2|X_1)$ , then  $F$  is the solution to

$$\Psi \left( \rho_{2,3}; -\sqrt{\frac{F}{[\mathbf{V}]_{2,2}}} (\sin \theta) \mathcal{Q}^{-1}(\epsilon), -\sqrt{\frac{F}{[\mathbf{V}]_{3,3}}} (\cos \theta + \sin \theta) \mathcal{Q}^{-1}(\epsilon) \right) = 1 - \epsilon + \tau_n, \quad (46)$$

This proposition is proved in Appendix A.

The interpretations of (42) to (44) are fairly clear. The dispersion-like quantity  $F$  depends on the angle of approach to the boundary  $\theta$  and the corresponding entry in the diagonal of the entropy dispersion matrix. So for example, if we are approaching the vertical boundary as in Fig. 2(a), then substituting the result (42) into (39) and (40) yields

$$R_1(n, \epsilon) = H(X_1|X_2) + \sqrt{\frac{[\mathbf{V}]_{1,1}}{n}} \mathcal{Q}^{-1}(\epsilon) + \tau_n \quad (47)$$

$$R_2(n, \epsilon) = H(X_2) + \sqrt{\frac{[\mathbf{V}]_{1,1}}{n}} (\tan \theta) \mathcal{Q}^{-1}(\epsilon) + \tau_n, \quad (48)$$

which is simply a scalar dispersion result. If instead we are approaching either one of the corner points, say  $(H(X_1), H(X_2|X_1))$ , at an angle  $\theta$  as in Fig. 2(c), then the situation is much more complicated and  $F$  is given as in (46). Intuitively, this is because there are several forces at play — the contribution from the marginal dispersion  $[\mathbf{V}]_{2,2}$ , the contribution from the sum rate dispersion  $[\mathbf{V}]_{3,3}$  and also their correlation coefficient  $\rho_{2,3}$ . These interact to give an effective dispersion that can only be expressed implicitly in the form shown in (46). Note that now  $F$  depends on the angle of approach and the correlation coefficient of  $-\log p_{X_2|X_1}(X_2|X_1)$  and  $-\log p_{X_1,X_2}(X_1, X_2)$  namely  $\rho_{2,3}$ . Interestingly,  $F$  also depends on  $\epsilon$  unlike the corresponding scalar results in (42)–(44). We will verify this numerically in Section VI-A3.

We now interpret Proposition 4 operationally from the perspective of another source coding problem. Consider the  $(n, \epsilon)$ -region for lossless source coding with side information at encoders and decoder (SI-ED), also known as *cooperative* source coding. Specifically, first consider the problem of source coding  $X_1$  with  $X_2$  available as (full non-coded) side information at the encoder and the decoder. Second, we swap the roles of  $X_1$  and  $X_2$ . Third, we consider a source coding problem for the pair  $(X_1, X_2)$ . Up to  $O(\frac{\log n}{n})$  terms, this region  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon) \subset \mathbb{R}^2$  is the set of rate pairs  $(R_1, R_2)$  satisfying the three scalar constraints

$$\begin{aligned} R_1 &\geq H(X_1|X_2) + \sqrt{\frac{[\mathbf{V}]_{1,1}}{n}} \mathcal{Q}^{-1}(\epsilon) \\ R_2 &\geq H(X_2|X_1) + \sqrt{\frac{[\mathbf{V}]_{2,2}}{n}} \mathcal{Q}^{-1}(\epsilon) \\ R_1 + R_2 &\geq H(X_1, X_2) + \sqrt{\frac{[\mathbf{V}]_{3,3}}{n}} \mathcal{Q}^{-1}(\epsilon). \end{aligned} \quad (49)$$

The three *decoupled* constraints in (49) represent three single-user simplifications of the problem and therefore are three crude outer bounds to  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$ . The first two inequalities characterizing the region in (49) can be derived in a straightforward manner using a side information (conditional) version of Strassen's original result [19] for hypothesis testing. The last inequality is simply one of Strassen's original results on source coding. Also see Problem 1.1.8 in Csiszár and Körner [14] and Theorem 1 in Kontoyiannis [27]. Our Theorem 1 says that this *scalar* perspective on dispersion is insufficient for multi-user problems. However, away from corner points, Proposition 4 asserts that SW coding is very close to the boundaries of the  $(n, \epsilon)$ -SI-ED region  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)$ . For example, we see from (47), which is consequence of (42), that the rate  $R_1$  for SW coding and SI-ED coding are the same up to an exponentially decaying term, which is subsumed by the Berry-Essèen residual term of order  $O(\frac{\log n}{n})$ . Thus, SW coding and SI-ED coding are essentially the same away from the corner points. At the corner points, the story is different and more complicated as we observed in (45) and (46).

## VI. NUMERICAL EXAMPLES

In this section, we illustrate the  $(n, \epsilon)$ -SW region  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  derived in Theorem 1 and relate it to error exponent analysis [15], [16]. We also illustrate the inner bound to the  $(n, \epsilon)$ -capacity region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$  for the MAC. Before

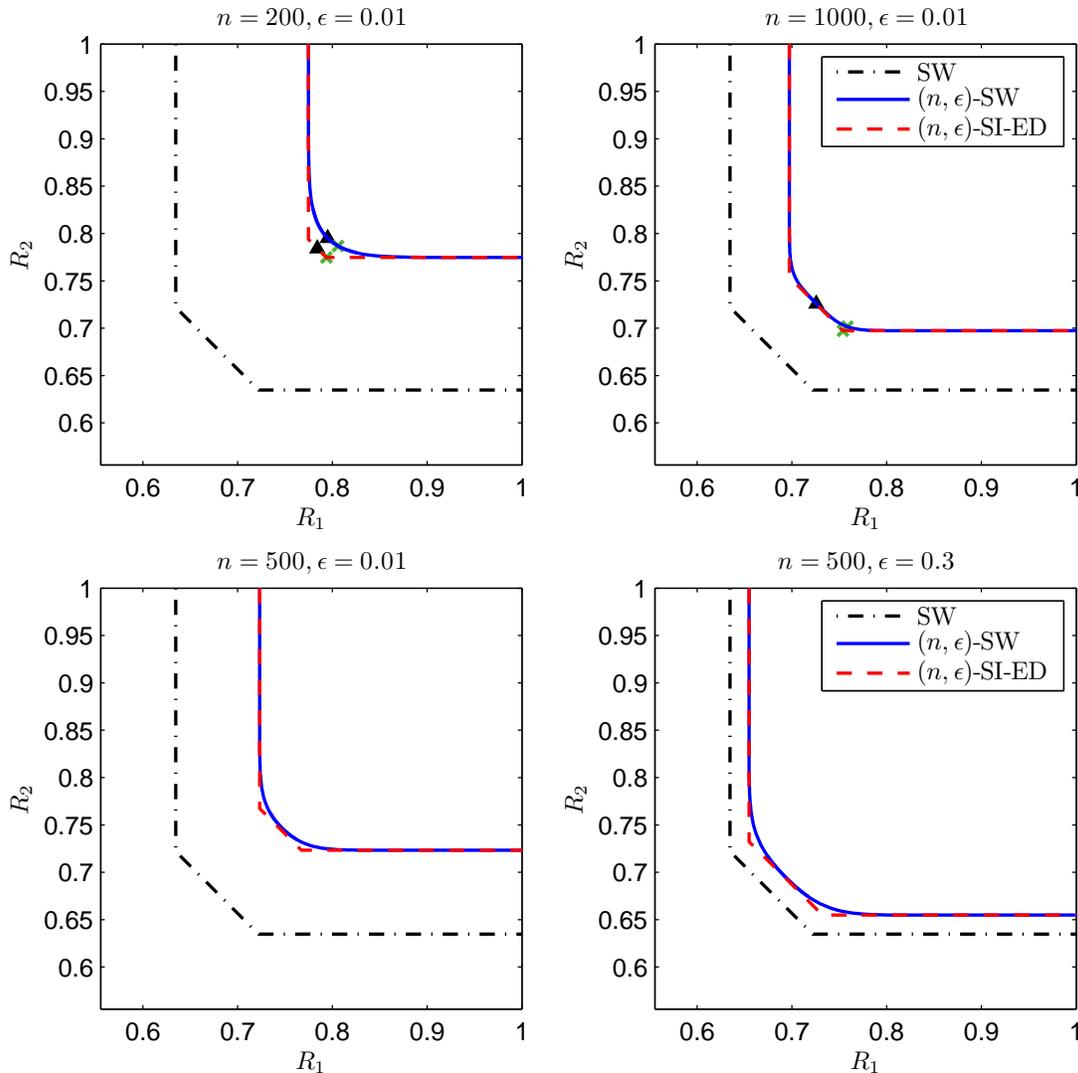


Fig. 3. Plots of the SW boundary (dash-dotted black) in (3),  $(n, \epsilon)$ -SW boundary (solid blue) in (11), and the  $(n, \epsilon)$ -SI-ED boundary (dashed red) in (49) for different blocklengths and error probabilities. Notice that  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  and  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)$  are rather different near the equal rate and corner points when  $n$  is small. Plots of  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$  and  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)$  as functions of  $n$  along the equal rate and corner point slices of  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)$  are given in Figs. 4 and 5 respectively. These are indicated by the black  $\blacktriangle$  and the green  $\times$  on the plots. The legends apply to all plots.

we begin, we address some computational issues. In order to, for example, graph the  $(n, \epsilon)$ -optimal rate region for the SW problem, we find pairs of rates  $(R_1, R_2)$  that lie on the boundary of  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$ . To do so, we fixed a point  $R_1$  and we performed a bisection search for  $R_2$ . We also used the Matlab function `mvncdf` which returns the cumulative probability of the multivariate normal distribution with a user-specified covariance matrix  $\mathbf{V}$ .

#### A. Distributed Lossless Source Coding: Slepian-Wolf

In this section, we use an example to illustrate the  $(n, \epsilon)$ -SW region  $\mathcal{R}_{\text{SW}}^*(n, \epsilon)$ . We neglect the small  $O(\frac{\log n}{n})$  terms in (11) and (12) throughout so in fact we will plot  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  defined in (38). The source is taken to be

$$p_{X_1, X_2} = \begin{bmatrix} 1 - 3a & a \\ a & a \end{bmatrix} \quad (50)$$

where  $a = 0.1$ . This source has a positive-definite entropy dispersion matrix  $\mathbf{V}(p_{X_1, X_2})$ . In addition,  $H(X_1) = H(X_2) = H_b(2a)$  and  $H(X_1|X_2) = H(X_2|X_1) = (1 - 2a)H_b(\frac{a}{1-2a}) + 2a$  for this  $p_{X_1, X_2}$ .

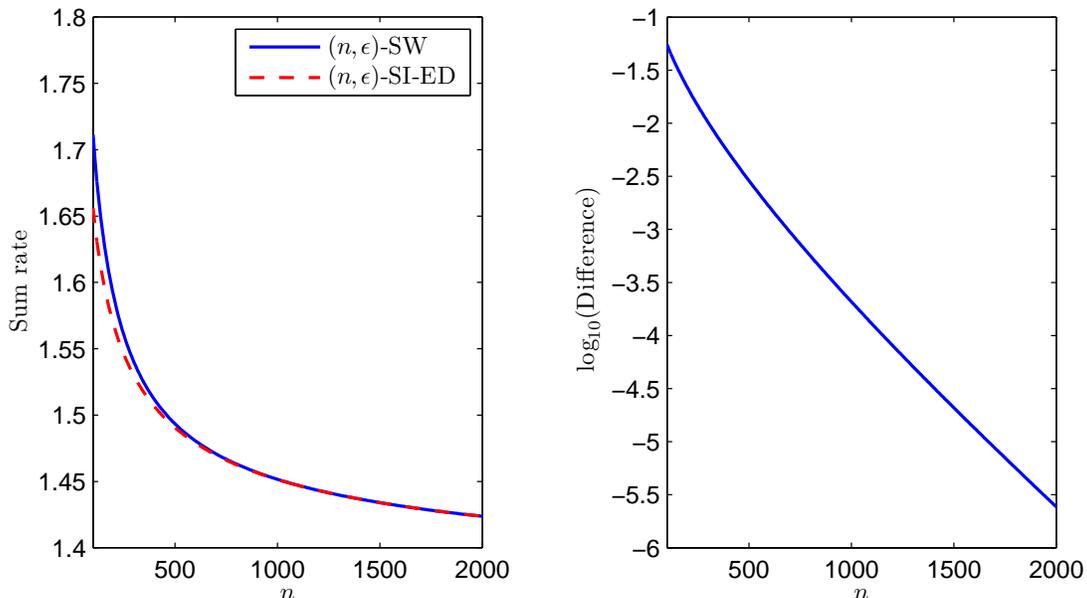


Fig. 4. Comparison between the  $(n, \epsilon)$ -SW equal rate point and the  $(n, \epsilon)$ -SI-ED equal rate point as functions of  $n$ . The right plot shows that the difference in rates decays exponentially fast as predicted by (44) in Proposition 4 where  $\theta = \pi/4$ .

1) *Comparison to Asymptotic SW Region and  $(n, \epsilon)$ -SI-ED Region:* In Fig. 3, we plot the boundary of the SW region  $\mathcal{B}_{\text{SW}}^*$  and the boundary of  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  for different error probabilities  $\epsilon$  and blocklengths  $n$ . We also plot the boundary of the  $(n, \epsilon)$ -SI-ED region defined in (49). From Fig. 3, we see that since  $\mathbf{V} \succ 0$ ,  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  has a curved boundary, reflecting the correlatedness of  $X_1$  and  $X_2$  and the non-degeneracy in  $\mathbf{V}$ . We observe from the top plots of Fig. 3 that  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  approaches the asymptotic SW boundary  $\mathcal{R}_{\text{SW}}^*$  as  $n \rightarrow \infty$ . In addition, the bottom plots of Fig. 3 show that  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  approaches  $\mathcal{R}_{\text{SW}}^*$  as  $\epsilon \rightarrow 1/2$ .

2) *Behaviour Along Certain Slices of the Regions:* There are several interesting “slices” of the regions shown in Fig. 3. Firstly, we are interested in the equal rate slice, which follows along the  $45^\circ$  diagonal line. This is the scenario in Fig. 2(b) with  $\theta = \pi/4$ . Secondly, we are also interested in the slice passing through the origin  $(0, 0)$  and a corner point of  $\mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)$ , namely  $(\hat{R}_1(n, \epsilon), \hat{R}_2(n, \epsilon))$  defined as follows:

$$\begin{aligned} \hat{R}_2(n, \epsilon) &:= \min\{R_2 : (R_1, R_2) \in \mathcal{R}_{\text{SI-ED}}^*(n, \epsilon) \text{ for some } R_1\} \\ \hat{R}_1(n, \epsilon) &:= \min\{R_1 : (R_1, \hat{R}_2(n, \epsilon)) \in \mathcal{R}_{\text{SI-ED}}^*(n, \epsilon)\}. \end{aligned} \quad (51)$$

Note that the latter in (51) is *not* the scenario shown in Fig. 2(c) because we are *not* approaching  $(H(X_1), H(X_2|X_1))$  along a straight line of a fixed slope. These two slices are indicated by markers  $(\blacktriangle, \times)$  in Fig. 3. The sum rates along both slices are plotted as functions of  $n$  in Figs. 4 and 5 respectively. We observe from Fig. 4 that the two sum rates on the  $45^\circ$  equal rate line approach each other as  $n$  grows. We computed their difference and noted that it decays as  $\exp(-\Theta(n))$ . This is corroborated by (44) in Proposition 4 where the difference is denoted by the exponentially decaying term  $\tau_n$ . This term is dominated by the  $O(\frac{\log n}{n})$  residual term in Theorem 1. We conclude, as we did theoretically in Section V, that when  $n$  is sufficiently large (say  $n \geq 10^3$  as seen in Fig. 4), there is essentially no difference in performing SW coding versus cooperative encoding (SI-ED) if we wish to optimize (minimize) the sum rate. The SW and SI-ED dispersions are the same and are equal to  $[\mathbf{V}]_{3,3}$ .

On the other hand, from Fig. 5, we see that the corresponding difference in corner points decays at a much slower rate of  $\mu n^{-1/2}$  for some constant  $\mu > 0$ . Thus, the corner rate *dispersions are different* and consequently, if we wish to operate in the neighbourhood of a corner point, SW coding *loses second-order coding rate* relative to the cooperative scenario. Intuitively, this is due to the fact that the effective dispersion approaching  $(H(X_1), H(X_2|X_1))$  is a complicated function of the conditional dispersion  $[\mathbf{V}]_{2,2}$ , the joint dispersion  $[\mathbf{V}]_{3,3}$  and their correlation coefficient  $\rho_{2,3}$ . We discuss this in greater detail next.

3) *Approaching a Corner Point at an Angle  $\theta$ :* To better understand how the dispersion (or second-order coding rate) varies as a function of the angle of approach to a corner point, let us consider the setup in Fig. 2(c) and the

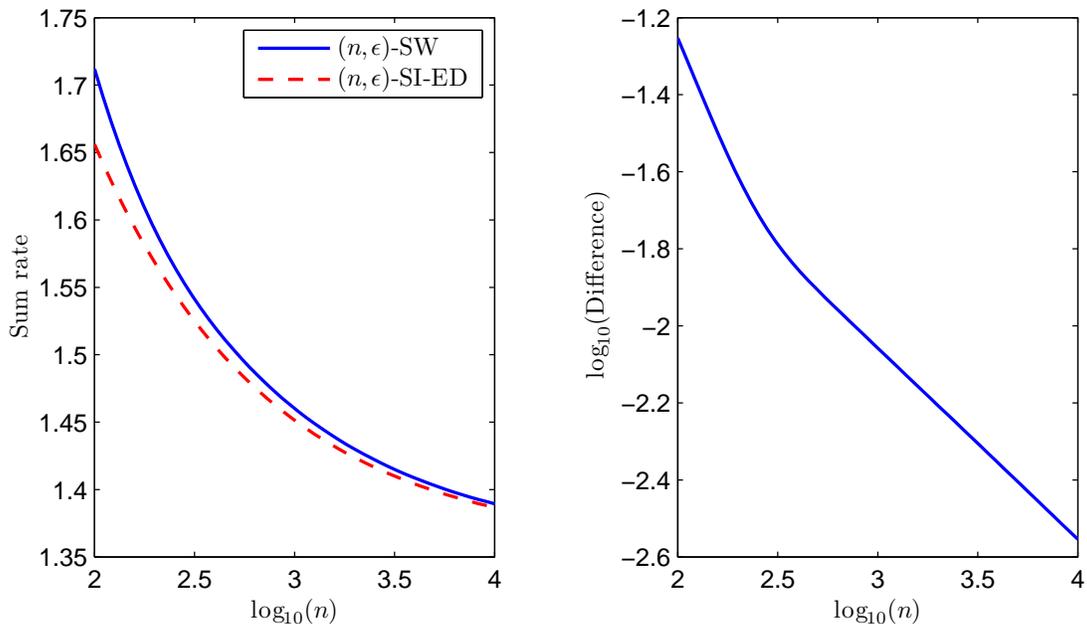


Fig. 5. Comparison between the  $(n, \epsilon)$ -SW and  $(n, \epsilon)$ -SI-ED corner rates as well as their difference on a log-log plot. See (51) for definitions. In contrast to Fig. 4, note that the horizontal axis is  $\log_{10}(n)$ , where  $n$  is the blocklength. The difference decays at a rate of  $\Theta(n^{-1/2})$  so the dispersions of SW and SI-ED coding along this corner rate slice are different.

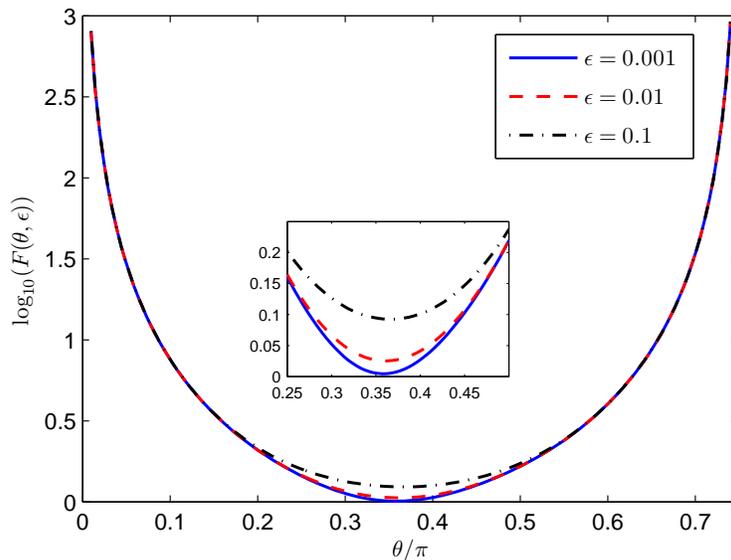


Fig. 6. Plot of  $\log_{10}(F(\theta, \epsilon))$  against  $\theta \in (0, 3\pi/4)$  for different  $\epsilon$ 's. This plot shows the “effective dispersion” (or second-order coding rate) as we approach the corner point  $(H(X_1), H(X_2|X_1))$  from various angles. See Fig. 2(c) and the definition of  $F(\theta, \epsilon)$  in (39) and (40).

definitions of  $R_1(n, \epsilon)$  and  $R_2(n, \epsilon)$  in (39) and (40) respectively. Recall that this rate pair  $(R_1(n, \epsilon), R_2(n, \epsilon))$  lies on the boundary of  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  and is parametrized by  $F$ , a dispersion-like parameter. For the source defined in (50), we solve for  $F$  in (46). Hence, we are approaching the corner point  $(H(X_1), H(X_2|X_1))$  at an angle  $\theta$ . Note that  $F$  is in general a function of  $\theta$  and  $\epsilon$  so we write  $F = F(\theta, \epsilon)$ .<sup>6</sup> In Fig. 6, we plot  $\log_{10}(F(\theta, \epsilon))$  as a function of  $\theta \in (0, 3\pi/4)$  for different  $\epsilon$ 's. It can be seen that as  $\theta \rightarrow 0$ , the second-order coding rate  $F(\theta, \epsilon)$  increases. This agrees with intuition because when  $\theta$  is small, we are approaching the corner point  $(H(X_1), H(X_2|X_1))$  almost

<sup>6</sup>In fact,  $F$  is also a function of  $n$  as can be seen in Proposition 4. However, it has an exponentially small dependence on  $n$ . In Fig. 6, we neglect this exponentially small term when computing  $F(\theta, \epsilon)$ .

parallel to the horizontal boundary of  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$ . When  $\theta$  is close to  $3\pi/4$ , similarly, we are almost parallel to the sum rate boundary. In either of these two cases, we are very close to the boundary of the  $(n, \epsilon)$ -rate region. On the other hand, when  $\theta$  is moderate (say  $\theta \approx 3\pi/8$ ), the rate pair is further into the interior of  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$ , hence the effective dispersion is smaller. The constant  $3\pi/8$  is in fact not arbitrary because the angle between the horizontal boundary and the sum rate boundary of  $\tilde{\mathcal{R}}_{\text{SW}}(n, \epsilon)$  is exactly  $3\pi/4$ . Hence  $3\pi/8$  is the half-angle, which means that the rate pair is furthest away from either boundary. However, the smallest dispersion does not occur at exactly  $\theta = 3\pi/8$  because of some asymmetry between the entropy densities  $-\log p_{X_2|X_1}(X_2|X_1)$  and  $-\log p_{X_1,X_2}(X_1, X_2)$ . One would also expect  $F(\theta, \epsilon)$  to be independent of  $\epsilon$  [cf. (42)–(44)]. However, Fig. 6 shows that this is *not* the case. We conclude that the rate of convergence toward a corner point is  $O(\frac{1}{\sqrt{n}})$  but the coefficient is a complicated function of  $\theta$ ,  $\epsilon$  and the model parameters in the  $2 \times 2$  submatrix  $[\mathbf{V}]_{2:3,2:3}$ .

4) *Comparison to Error Exponent Analysis:* In this section, we estimate the required blocklengths to attain an error probability  $\epsilon$  using dispersion analysis and error exponent analysis and we compare these estimates. Before doing so, we remind the reader of the error exponent setup and existing results. A rate pair  $(R_1, R_2)$  in the (interior of the) SW region is fixed. One then asks how rapidly the error probability in (4) decays as a function of  $n$ . We attempt to find the *error exponent* (or *reliability function*)  $E(R_1, R_2)$  defined as

$$E(R_1, R_2) := \limsup_{n \rightarrow \infty} -\frac{1}{n} \log P_e^{(n)}, \quad (52)$$

where here,  $P_e^{(n)}$  is the smallest possible error probability of length- $n$  SW block codes with compression rates  $R_1$  and  $R_2$ . Gallager [15] derived a lower bound to the error exponent under maximum-likelihood decoding (MLD) for lossless source coding of  $X_1$  with decoder side information  $X_2$ . This was followed up by Koshelev [16] who derived a lower bound to the error exponent for the two-encoder SW problem (which is our setup in Section II). In particular, Koshelev [16] showed that the error probability under MLD can be bounded from above as

$$P_e^{(n)} \leq 3 \exp_2 \left\{ -n \max_{\rho \in [0,1]} \min \left[ E_{1|2}(R_1, \rho), E_{2|1}(R_2, \rho), E_{1,2}(R_1, R_2, \rho) \right] \right\} \quad (53)$$

where  $\exp_2(t) := 2^t$  and the constituent exponents are defined as

$$E_{1|2}(R_1, \rho) := \rho R_1 - \log \sum_{x_2} \left[ \sum_{x_1} p_{X_1, X_2}(x_1, x_2)^{\frac{1}{1+\rho}} \right]^{1+\rho} \quad (54)$$

$$E_{1,2}(R_1, R_2, \rho) := \rho(R_1 + R_2) - \log \left[ \sum_{x_1, x_2} p_{X_1, X_2}(x_1, x_2)^{\frac{1}{1+\rho}} \right]^{1+\rho}. \quad (55)$$

The exponent  $E_{2|1}(R_2, \rho)$  is similar to  $E_{1|2}(R_1, \rho)$  with 1 replaced by 2 and vice versa. Thus, the error exponent in (52) can be lower bounded as

$$E(R_1, R_2) \geq \underline{E}(R_1, R_2) := \max_{\rho \in [0,1]} \min \left[ E_{1|2}(R_1, \rho), E_{2|1}(R_2, \rho), E_{1,2}(R_1, R_2, \rho) \right]. \quad (56)$$

The following facts can be readily verified [15], [29] and are indeed well-known:

$$\left. \frac{\partial}{\partial \rho} E_{1|2}(R_1, \rho) \right|_{\rho=0} = R_1 - H(X_1|X_2) \quad (57)$$

$$\left. \frac{\partial^2}{\partial \rho^2} E_{1|2}(R_1, \rho) \right|_{\rho=0} = \text{Var}[-\log p_{X_1|X_2}(X_1|X_2)]. \quad (58)$$

Similar relations hold for the derivatives of  $E_{2|1}(R_2, \rho)$  and  $E_{1,2}(R_1, R_2, \rho)$ . Eq. (57), together with the analogous results for  $E_{2|1}(R_2, \rho)$  and  $E_{1,2}(R_1, R_2, \rho)$ , implies that if  $(R_1, R_2)$  belongs to the interior of  $\mathcal{R}_{\text{SW}}^*$ , the lower bound  $\underline{E}(R_1, R_2)$  is positive so  $P_e^{(n)}$  decays exponentially fast. Eq. (58) shows that the second derivative of the exponent with respect to the tilting parameter  $\rho$  evaluated at  $\rho = 0$  is precisely the (conditional) dispersion. This relation has found several applications in moderate deviations analysis for information-theoretic problems [29]–[31].

As is also well-known, the types-based characterization by Csiszár and Körner [34] (see also [14, Probs. 3.1.5-6]) coincides with the Gallager-style exponents in (53)–(56), i.e., the exponents are the same. See [14, Prob. 1.2.13].

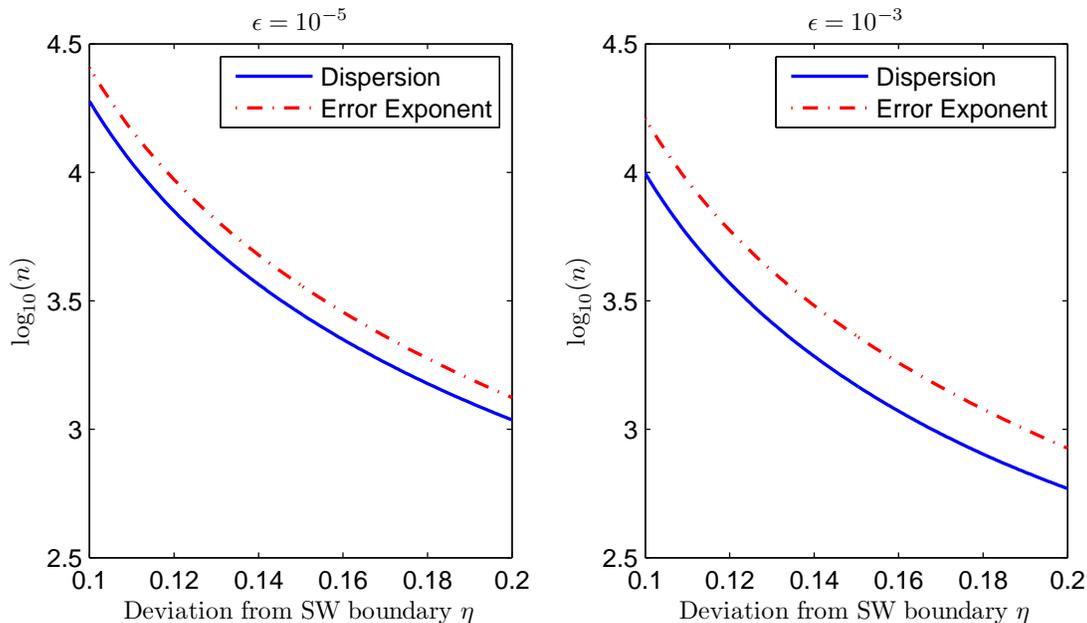


Fig. 7. Comparisons of the required blocklengths estimated by dispersion and error exponent analyses. The vertical axis is  $\log_{10}(n)$ , where  $n$  is the blocklength. See further descriptions in (59) and (60).

Even though Csiszár-Körner-style exponents are more intuitive, they are less amenable to numerical evaluation because they involve optimizing over joint distributions on  $\mathcal{X}_1 \times \mathcal{X}_2$  rather than a single scalar tilting parameter  $\rho \in [0, 1]$ . Thus, we choose to compare our bounds to Gallager-style error exponents. Upper bounds on the error exponent for SW coding are provided in [14, Prob. 3.1.7]. It is also known that they match the lower bound  $\underline{E}(R_1, R_2)$  in (56) when  $(R_1, R_2)$  is within but close to the boundary of the achievable region [14, Prob. 3.1.7]. Thus for low rates, (56) is in fact an equality. This is likened to channel coding where the sphere-packing and random coding exponents coincide above the critical rate [14, Sec. 2.5]. This does not come as a surprise because of the duality between Slepian-Wolf coding and channel coding [14, Sec. 3.2].

We study estimates of the required blocklength  $n$  in the following way: We parametrize  $(R_1, R_2)$  as follows:  $R_1(\eta) := (1 + \eta)H(X_1|X_2)$ ,  $R_2(\eta) := (1 + \eta)H(X_2|X_1)$  for some positive number  $\eta$ . We ensured that  $\eta$  is sufficiently large so that  $R_1(\eta) + R_2(\eta) > H(X_1, X_2)$  and hence the rate pair  $(R_1(\eta), R_2(\eta)) \in \mathcal{R}_{\text{SW}}^*$ . With this parametrization, as the *deviation from the SW boundary*  $\eta$  increases, the rate pair moves further into the interior of the SW region in (3). We can then use two methods to estimate the critical  $n$  required to achieve a target error probability  $\epsilon$ . The first is *dispersion analysis* — we solve for the  $n$  in the bounds we derived in Theorem 1, i.e., the least integer  $n_{\text{D}}$  satisfying

$$\mathbb{P}[\mathbf{Z} \leq \sqrt{n_{\text{D}}}(\mathbf{R} - \mathbf{H})] \geq 1 - \epsilon, \quad (59)$$

where  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$  and  $\mathbf{V}$  is the dispersion of  $p_{X_1, X_2}$ . The second method is *error exponent analysis* — for the rate pair  $(R_1, R_2)$ , we solve for the lower bound to the error exponent  $\underline{E}(R_1, R_2)$  in (56) and invert the relationship in (53) to obtain the estimate

$$n_{\text{E}} = \left\lceil \frac{1}{\underline{E}(R_1, R_2)} \log \left( \frac{3}{\epsilon} \right) \right\rceil. \quad (60)$$

Plots of  $n_{\text{D}}$  and  $n_{\text{E}}$  as functions of  $\eta$  and  $\epsilon$  are shown in Fig. 7 for the source in (50). Firstly, we observe that  $n$  decreases as  $\eta$  increases, which agrees with our intuition that smaller blocklengths are required if the compression rates are large. Both dispersion and error exponent analysis exhibit the same trend. Secondly, we observe that dispersion analysis generally predicts a smaller blocklength compared to Gallager-style error exponent analysis. As an example, when  $\eta = 0.1$  and  $\epsilon = 10^{-3}$ ,  $n_{\text{D}} \approx 9.9 \times 10^3$  while  $n_{\text{E}} \approx 1.6 \times 10^4$ . Thus, the required blocklength estimated by dispersion analysis is about 39% less than error exponent analysis for this setting. Dispersion analysis is, in a sense, *more delicate* (or *finer*) than that of error exponents [15], [16], [34]. The difference, however, is less

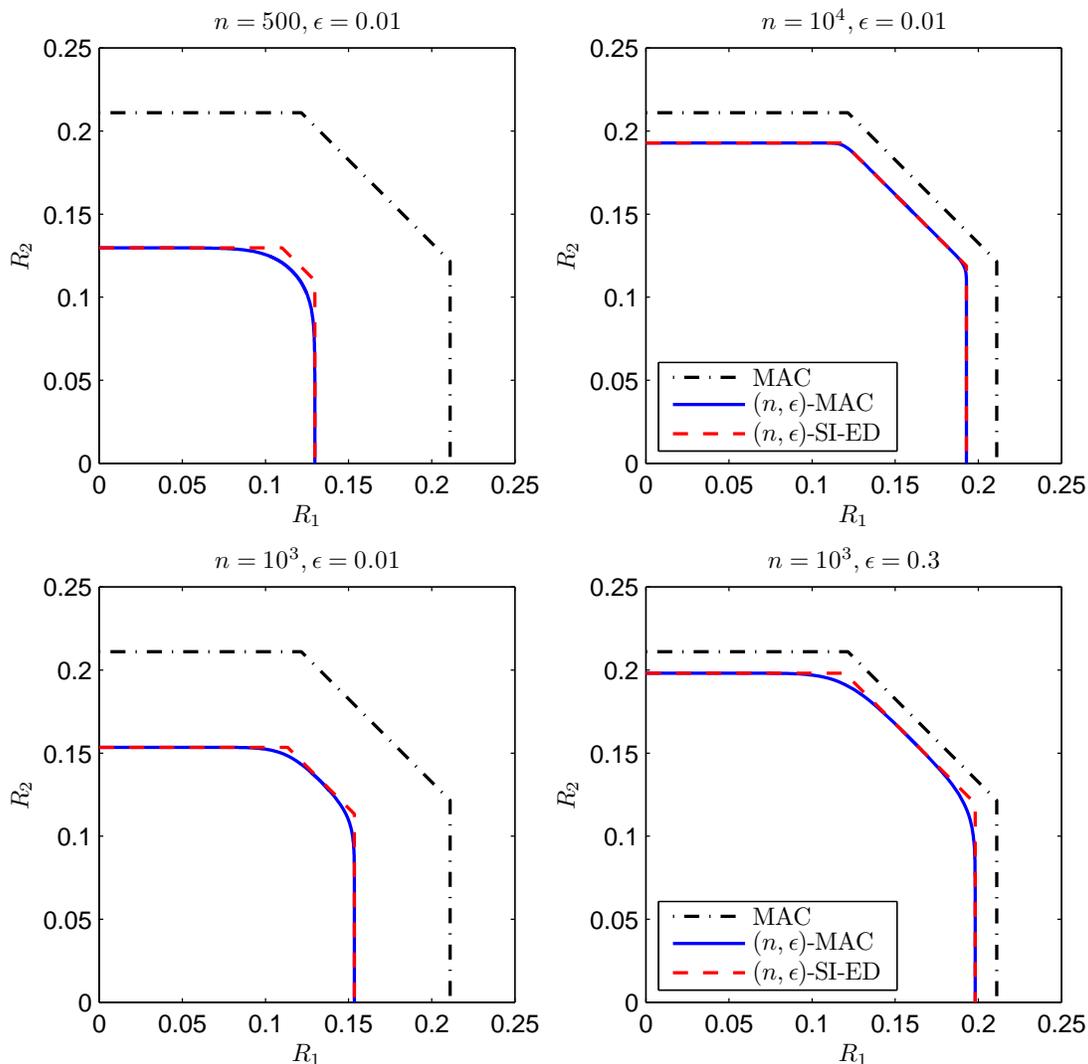


Fig. 8. Plots of the MAC boundary in (18) and the  $(n, \epsilon)$ -inner bound in (25) for different blocklengths and error probabilities. Here  $p_{X_1} = \text{Bern}(0.1)$  and  $p_{X_2} = \text{Bern}(0.9)$  are fixed input distributions. The time-sharing variable  $Q = \emptyset$ . The legends apply to all plots.

pronounced as the rates increase. In other words, the estimates of  $n$  become closer (on a linear not logarithmic scale) as the rates are further into the SW region.

### B. Multiple-Access Channel

In this section, we illustrate the differences between the asymptotic MAC region and the finite blocklength MAC region  $\mathcal{C}_{\text{MAC}}^*(n, \epsilon)$ . In fact, we only graph the inner bound in Definition 10 as we do not yet have an outer bound. We fix a channel with binary inputs and binary outputs:

$$W(\cdot : |x_1, x_2) = \begin{cases} [\bar{b} & b] & \text{if } x_1 \oplus x_2 = 0, \\ [b & \bar{b}] & \text{if } x_1 \oplus x_2 = 1, \end{cases} \quad (61)$$

where  $b = 0.1$  and  $\bar{b} := 1 - b$ . We also fix input distributions  $p_{X_1} = \text{Bern}(b)$  and  $p_{X_2} = \text{Bern}(\bar{b})$ . The time-sharing variable  $Q = \emptyset$ . This channel and input distributions result in a positive-definite information dispersion matrix  $\mathbf{V}$  defined in (24). These settings also ensure that we have symmetry in the sense that  $I(X_1; Y) = I(X_2; Y)$  and  $I(X_1; Y|X_2) = I(X_2; Y|X_1)$ . In Fig. 8, we graph the MAC region in (18) which is well known to be a pentagon. We also plot the inner bound in (25) for the chosen  $p_{X_1}, p_{X_2}$  for different values of the blocklength  $n$  and error probability  $\epsilon$ . Note again that the  $O(\frac{\log n}{n})$  term is neglected because we are primarily interested in this paper

with first- and second-order coding rates. In addition, we plot the  $(n, \epsilon)$ -SI-ED boundary. This is the analogue of (49) for the SW case. More precisely, the vertical (resp. horizontal) boundary represents the  $(n, \epsilon)$ -capacity of a DMC when  $X_2$  (resp.  $X_1$ ) is available as side information at the decoder together with channel output  $Y$ . The sloping (dotted-red) line  $R_1 + R_2 = I(X_1, X_2; Y) - \sqrt{[\mathbf{V}]_{3,3}/n} \mathcal{Q}^{-1}(\epsilon)$  represents the  $(n, \epsilon)$ -sum rate constraint of the DM-MAC. Operationally, it represents the  $(n, \epsilon)$ -capacity of the ‘‘cooperative MAC’’ but with independent messages. These are three crude outer bounds that turn out to be insufficient for the DM-MAC.

We see that as in the SW case, the inner bound to the  $(n, \epsilon)$ -capacity region is, as expected, strictly contained in the asymptotic MAC region. Furthermore, it has a curved boundary in general and the larger the blocklength  $n$ , the closer the inner bound is to the asymptotic region. The different behaviours of the  $(n, \epsilon)$ -region along the equal rate line and the line that passes through a corner point [cf. (51)] are qualitatively similar to the SW case described in Section VI-A so we will omit the corresponding plots. We do note that, in analogy to Proposition 4 for the SW case, at any rate  $R_1 < I(X; Y_1)$ , the difference between the two different  $R_2$ ’s (asymptotic and finite blocklength) is essentially  $\sqrt{[\mathbf{V}]_{2,2}/n} \mathcal{Q}^{-1}(\epsilon)$  where  $[\mathbf{V}]_{2,2} = \text{Var}(\log[W(Y|X_1, X_2)/p_{Y|X_1}(Y|X_1)])$  is the conditional channel dispersion. Finally, the corner points exhibit more complex behaviours; the effective dispersion depends on the angle of approach and the correlation between the marginal and joint information densities.

## VII. DISCUSSION AND OPEN PROBLEMS

To summarize, we characterized the  $(n, \epsilon)$ -optimal rate region for the SW problem. We also provided corresponding inner bounds for the DM-MAC and DM-ABC problems. We unified our achievability proofs through an important theorem known as the vector rate redundancy theorem. We believe this general result would be useful in other network information theory problems.

Clearly, it would be desirable to derive outer bounds for the  $(n, \epsilon)$ -capacity region of the DM-MAC and DM-ABC. We have discussed the difficulties to obtaining tight outer bounds. To prove tight outer bounds  $(n, \epsilon)$ -capacity region for the DM-MAC, it appears that generalizations of Polyanskiy et al.’s meta (or minimax) strong converse [9, Theorem 26] or Augustin’s strong converse [50] to multi-terminal settings are required. For the MAC, it was mentioned that a sharpening of Ahlswede’s wringing technique [49] seems necessary for a converse proof.

It is also of interest to extend these finite blocklength results to channel and lossy source coding problem with side information. These include the Gel’fand-Pinsker problem (channel coding with non-causal state information at the encoder) and the Wyner-Ziv problem (lossy source coding with side information at the decoder). Again, the authors believe that versatile strong converses, such as that in [55] and [56], have to be developed and strengthened for meaningful finite blocklength results. Preliminary work for channels with random state which is known at the receiver was presented by Ingber and Feder [25].

Finally, for the relay channel, the most well-known achievability schemes are decode-forward and compress-forward. These coding procedures rely on block-Markov coding [1]. Essentially, one codes over  $b$  (correlated) blocks each of length  $n$ , achieving rate of approximately  $\frac{b-1}{b}R$  for some rate  $R$ . Given a fixed super-blocklength  $N$ , how can we resolve the tradeoff between the number of blocks  $b$  and the sub-blocklength  $n$  to maximize the overall rate subject to an error probability of  $\epsilon$ ?

## VIII. PROOFS OF MAIN RESULTS

In this section, we provide the proofs for the results in the previous sections. We start in Section VIII-A by stating and proving a preliminary but important result known as the vector rate redundancy theorem. This result is a generalization of the (scalar) rate redundancy theorem in [22], [23]. We then prove finite blocklength results for the SW problem, the MAC, and the ABC in Sections VIII-B, VIII-C, and VIII-D respectively.

### A. A Preliminary Result

**Theorem 5** (Vector Rate Redundancy Theorem). *Let  $\mathbf{g} : \mathcal{P}(\mathcal{X}) \rightarrow \mathbb{R}^d$  be twice continuously differentiable. Let*

$$g'_t(x) := \left. \frac{\partial g_t(p_X)}{\partial p_X(x)} \right|_{p_X(x)}, \quad (62)$$

for  $t = 1, \dots, d$  be the component-wise derivatives of  $\mathbf{g}$ . Denote the vector of derivatives (the gradient vector) as  $\mathbf{g}'(x) = [g'_1(x), \dots, g'_d(x)]^T$ . Let  $\mathbf{V} \in \mathbb{R}^{d \times d}$  be the covariance matrix of the random vector  $\mathbf{g}'(X)$ , i.e.,

$$\mathbf{V} = \text{Cov}_X[\mathbf{g}'(X)] = \mathbb{E}[(\mathbf{g}'(X) - \mathbb{E}[\mathbf{g}'(X)])(\mathbf{g}'(X) - \mathbb{E}[\mathbf{g}'(X)])^T]. \quad (63)$$

Assume that  $\text{rank}(\mathbf{V}) \geq 1$  and  $\xi := \mathbb{E}[\|\mathbf{g}'(X) - \mathbb{E}[\mathbf{g}'(X)]\|_2^3] < \infty$ . Furthermore, let  $X^n = (X_1, \dots, X_n)$  be an i.i.d. random vector with  $X_k \sim p_X(x)$ . Let the sequence  $\{b_n\}_{n=1}^\infty$  satisfy

$$b_n \geq \frac{\alpha \log n}{n} \quad (64)$$

for any  $\alpha > 0$ . Then, for any vector  $\mathbf{z} \in \mathbb{R}^d$ , we have

$$\mathbb{P}\left(\mathbf{g}(P_{X^n}) \geq \mathbf{g}(p_X) + \frac{\mathbf{z}}{\sqrt{n}} - b_n \mathbf{1}\right) \geq \mathbb{P}(\mathbf{Z} \geq \mathbf{z}) + O\left(\frac{\log n}{\sqrt{n}}\right), \quad (65)$$

where  $P_{X^n} \in \mathcal{P}_n(\mathcal{X})$  is the type of the sequence  $X^n$  and  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ .

Before we prove Theorem 5, let us state Bentkus' version of the multidimensional Berry-Essèen theorem.

**Theorem 6** (Bentkus [17]). Let  $\mathbf{U}_1, \dots, \mathbf{U}_n$  be normalized i.i.d. random vectors in  $\mathbb{R}^d$  with zero mean and identity covariance matrix, i.e.,  $\mathbb{E}[\mathbf{U}_1] = \mathbf{0}$  and  $\text{Cov}[\mathbf{U}_1] = \mathbf{I}$ . Let  $\mathbf{S}_n := \frac{1}{\sqrt{n}}(\mathbf{U}_1 + \dots + \mathbf{U}_n)$  and  $\xi = \mathbb{E}[\|\mathbf{U}_1\|_2^3]$ . Let  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$  be a standard Gaussian random vector in  $\mathbb{R}^d$ . Then, for all  $n \in \mathbb{N}$ ,

$$\sup_{\mathcal{C} \in \mathcal{C}_d} |\mathbb{P}(\mathbf{S}_n \in \mathcal{C}) - \mathbb{P}(\mathbf{Z} \in \mathcal{C})| \leq \frac{400d^{1/4}\xi}{\sqrt{n}} \quad (66)$$

where  $\mathcal{C}_d$  is the family of all convex, Borel measurable subsets of  $\mathbb{R}^d$ .

Bentkus remarks in [17] that the constant 400 in Theorem 6 can be “considerably improved especially for large  $d$ ”. For simplicity, we will simply use (66). Because we will frequently encounter random vectors with non-identity covariance matrices and “whitening” is not applicable, it is necessary to modify Theorem 6 as follows:

**Corollary 7.** Assume the same setup as in Theorem 6 with the exception that  $\text{Cov}[\mathbf{U}_1] = \mathbf{V} \succ 0$  and  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . Then (66) becomes

$$\sup_{\mathcal{C} \in \mathcal{C}_d} |\mathbb{P}(\mathbf{S}_n \in \mathcal{C}) - \mathbb{P}(\mathbf{Z} \in \mathcal{C})| \leq \frac{400d^{1/4}\xi}{\lambda_{\min}(\mathbf{V})^{3/2}\sqrt{n}}. \quad (67)$$

The proof of the corollary is by simple linear algebra and is presented in Appendix B. We are now ready to prove the important vector rate redundancy theorem.

*Proof:* First we assume that  $\lambda_{\min}(\mathbf{V}) > 0$ . In the latter part of the proof, we relax this assumption. By Taylor's theorem applied component-wise, we can rewrite  $\mathbf{g}(P_{X^n})$  as

$$\mathbf{g}(P_{X^n}) = \mathbf{g}(p_X) + \sum_{x \in \mathcal{X}} \mathbf{g}'(x)[P_{X^n}(x) - p_X(x)] + \mathbf{\Delta}. \quad (68)$$

Recall that  $\mathbf{g}$  is twice continuously differentiable and the probability simplex  $\mathcal{P}(\mathcal{X})$  is compact. As such, we can conclude that each entry of the second-order residual term in (68) can be bounded above as

$$|\Delta_t| \leq \beta_t \|P_{X^n} - p_X\|_2^2, \quad (69)$$

where  $\beta_t > 0$  is some function of the second-order partial derivatives (Hessian) of  $g_t$  with respect to the vector  $[p_X(0), p_X(1), \dots, p_X(|\mathcal{X}| - 1)]^T$ . Setting  $\beta := \max_{t=1, \dots, d} \beta_t$  gives

$$\|\mathbf{\Delta}\|_\infty \leq \beta \|P_{X^n} - p_X\|_2^2. \quad (70)$$

We now evaluate the probability that  $\|\mathbf{\Delta}\|_\infty$  exceeds  $c_n > 0$ :

$$\mathbb{P}(\|\mathbf{\Delta}\|_\infty \geq c_n) \leq \mathbb{P}(\beta \|P_{X^n} - p_X\|_2^2 \geq c_n) \quad (71)$$

$$\leq \mathbb{P}(\|P_{X^n} - p_X\|_1^2 \geq c_n/\beta) \quad (72)$$

$$\leq 2^{|\mathcal{X}|} 2^{-nc_n/(2\beta)}, \quad (73)$$

where (71) uses the bound on  $\|\Delta\|_\infty$  in (70), (72) follows because the  $\ell_2$ -norm dominates the  $\ell_1$ -norm for finite-dimensional vectors, and finally (73) follows from a sharpened bound on the  $\ell_1$ -deviation of the type from the generating distribution by Weissman et al. [57]. Setting  $c_n := 2\beta(|\mathcal{X}| + 1)/n$  establishes that

$$\mathbb{P}(\|\Delta\|_\infty \geq c_n) \leq \frac{1}{n}. \quad (74)$$

For convenience, let us denote the left-hand-side (LHS) of (65) as  $q_n$ . Then, using (68),

$$q_n = \mathbb{P}\left(\sum_{x \in \mathcal{X}} \mathbf{g}'(x)[P_{X^n}(x) - p_X(x)] + \Delta \geq \frac{\mathbf{z}}{\sqrt{n}} - b_n \mathbf{1}\right). \quad (75)$$

Now, we note the following fact which is proved in Appendix C.

**Lemma 8.** *Let  $\mathbf{G}$  and  $\Delta$  be random vectors in  $\mathbb{R}^d$ . Let  $\mathbf{v}$  be a vector in  $\mathbb{R}^d$ . Then for any  $\phi \geq 0$ ,*

$$\mathbb{P}(\mathbf{G} + \Delta \geq \mathbf{v}) \geq \mathbb{P}(\mathbf{G} \geq \mathbf{v} + \phi \mathbf{1}) - \mathbb{P}(\|\Delta\|_\infty \geq \phi). \quad (76)$$

Using the identifications  $\mathbf{G} \leftarrow \sum_x \mathbf{g}'(x)[P_{X^n}(x) - p_X(x)]$ ,  $\phi \leftarrow c_n$ ,  $\Delta \leftarrow \Delta$  and  $\mathbf{v} \leftarrow \mathbf{z}/\sqrt{n} - b_n \mathbf{1}$ , we can lower bound the right hand side of (75) as follows,

$$q_n \geq \mathbb{P}\left(\sum_{x \in \mathcal{X}} \mathbf{g}'(x)[P_{X^n}(x) - p_X(x)] \geq \frac{\mathbf{z}}{\sqrt{n}} - b_n \mathbf{1} + c_n \mathbf{1}\right) - \mathbb{P}(\|\Delta\|_\infty \geq c_n) \quad (77)$$

$$\geq \mathbb{P}\left(\sum_{x \in \mathcal{X}} \mathbf{g}'(x)[P_{X^n}(x) - p_X(x)] \geq \frac{\mathbf{z}}{\sqrt{n}} - b_n \mathbf{1} + c_n \mathbf{1}\right) - \frac{1}{n}. \quad (78)$$

In the last inequality, we used the result in (74) for the chosen  $c_n$ . Because the type  $P_{X^n}$  puts a probability mass of  $1/n$  on each sample  $X_k$ ,

$$\sum_{x \in \mathcal{X}} \mathbf{g}'(x)P_{X^n}(x) = \frac{1}{n} \sum_{k=1}^n \mathbf{g}'(X_k). \quad (79)$$

By definition of the expectation, we also have

$$\sum_{x \in \mathcal{X}} \mathbf{g}'(x)p_X(x) = \mathbb{E}[\mathbf{g}'(X)]. \quad (80)$$

The substitution of (79) and (80) in (78) yields

$$q_n \geq \mathbb{P}\left(\frac{1}{n} \sum_{k=1}^n (\mathbf{g}'(X_k) - \mathbb{E}[\mathbf{g}'(X)]) \geq \frac{\mathbf{z}}{\sqrt{n}} - b_n \mathbf{1} + c_n \mathbf{1}\right) - \frac{1}{n} \quad (81)$$

$$= \mathbb{P}\left(\frac{1}{\sqrt{n}} \sum_{k=1}^n (\mathbf{g}'(X_k) - \mathbb{E}[\mathbf{g}'(X)]) \geq \mathbf{z} - \sqrt{n}(b_n - c_n) \mathbf{1}\right) - \frac{1}{n}. \quad (82)$$

Now note that the random vectors  $\{\mathbf{g}'(X_k) - \mathbb{E}[\mathbf{g}'(X)]\}_{k=1}^n$  are i.i.d. and have zero-mean and covariance  $\mathbf{V}$  defined in (63). In addition, the set  $\{\mathbf{g} \in \mathbb{R}^d : \mathbf{g} \geq \mathbf{z}'\}$  is convex so it belongs to  $\Gamma$ . Using the multidimensional Berry-Essèen theorem in (67) to further lower bound (82) yields

$$q_n \geq \mathbb{P}(\mathbf{Z} \geq \mathbf{z} - \sqrt{n}(b_n - c_n) \mathbf{1}) - \frac{400d^{1/4}\xi}{\lambda_{\min}(\mathbf{V})\sqrt{n}} - \frac{1}{n} \quad (83)$$

where the third moment  $\xi = \mathbb{E}[\|\mathbf{g}'(X) - \mathbb{E}[\mathbf{g}'(X)]\|_2^3] < \infty$  by assumption. In addition, we assumed that  $\lambda_{\min}(\mathbf{V}) > 0$  so the second term is finite. Now, note that the sequence  $\sqrt{n}(b_n - c_n) = O(\frac{\log n}{\sqrt{n}})$  since  $b_n$  can be taken to be  $\Theta(\frac{\log n}{n})$  from (64) and  $c_n = O(\frac{1}{n})$ . Since  $\delta \mapsto \mathbb{P}(\mathbf{Z} \geq \mathbf{z} - \delta \mathbf{1})$  is continuously differentiable and monotonically increasing, we have

$$\mathbb{P}(\mathbf{Z} \geq \mathbf{z} - \delta \mathbf{1}) = \mathbb{P}(\mathbf{Z} \geq \mathbf{z}) + O(\delta) \quad (84)$$

by Taylor's approximation theorem. Applying (84) to (83) with  $\delta = \sqrt{n}(b_n - c_n)$  yields the lower bound

$$q_n \geq \mathbb{P}(\mathbf{Z} \geq \mathbf{z}) + O\left(\frac{\log n}{\sqrt{n}}\right) - \frac{400d^{1/4}\xi}{\lambda_{\min}(\mathbf{V})\sqrt{n}} - \frac{1}{n}, \quad (85)$$

whence the desired result follows for the case  $\mathbf{V} \succ 0$ .

Now we consider the case where  $\mathbf{V}$  is singular but recall that we assume  $\text{rank}(\mathbf{V}) \geq 1$ . The only step in which we have to modify in the proof for the case  $\mathbf{V} \succ 0$  is in the application of the multidimensional Berry-Essèen theorem in (83). This is because we would be dividing by  $\lambda_{\min}(\mathbf{V}) = 0$ . To fix this, we reduce the problem to the non-singular case. Concretely, assume that  $\text{rank}(\mathbf{V}) = r < d$  and define the zero-mean i.i.d. random vectors  $\mathbf{A}_k := \mathbf{g}'(X_k) - \mathbb{E}[\mathbf{g}'(X)]$ . Then there exists a  $d \times r$  matrix  $\mathbf{T}$  such that  $\mathbf{A}_k = \mathbf{T}\mathbf{B}_k$  where  $\mathbf{B}_k$  are i.i.d. random vectors in  $\mathbb{R}^r$  with positive-definite covariance matrix. The matrix  $\mathbf{T}$  can be taken to be composed of the  $r$  eigenvectors corresponding to the non-zero eigenvalues of  $\mathbf{V}$ . We can now replace the  $\mathbf{A}_k$  vectors in (82) with  $\mathbf{T}\mathbf{B}_k$  and apply the multidimensional Berry-Essèen theorem [17] for the vectors  $\{\mathbf{B}_k\}_{k=1}^n \subset \mathbb{R}^r$ . The theorem clearly applies since the set  $\{\mathbf{b} \in \mathbb{R}^r : \mathbf{T}\mathbf{b} \geq \mathbf{z}'\}$  is convex. This gives the same conclusion as in (85). ■

### B. Proofs for the Slepian-Wolf Problem

We now present the proof of Theorem 1 on the  $(n, \epsilon)$ -optimal rate region for distributed lossless source coding. We present the achievability proof in Section VIII-B1 and the converse proof in Section VIII-B2. We will see that the achievability procedure (coding scheme) is universal. In Section VIII-B3, we discuss the implications of choosing not to use a universal decoding rule but a rule that is akin to maximum-likelihood decoding [15].

#### 1) Achievability:

*Proof:* Let  $(R_1, R_2)$  be a rate pair in the inner bound  $\mathcal{R}_{\text{in}}(n, \epsilon)$  defined in (11).

*Codebook Generation:* For  $j = 1, 2$ , randomly and independently assign an index  $f_{1,n}(x_j^n) \in [2^{nR_j}]$  to each sequence  $x_j^n \in \mathcal{X}_j^n$  according to a uniform probability mass function. The sequences of the same index form a *bin*, i.e.,  $\mathcal{B}_j(m_j) := \{x_j^n \in \mathcal{X}_j^n : f_{1,n}(x_j^n) = m_j\}$ . Note that  $\mathcal{B}_j(m_j), m_j \in [2^{nR_j}]$  are random subsets of  $\mathcal{X}_j^n$ . The bin assignments are revealed to all parties. In particular, the decoder knows the bin rates  $R_j$ .

*Encoding:* Given  $x_j^n \in \mathcal{X}_j^n$ , encoder  $j$  transmits the bin index  $f_{j,n}(x_j^n)$ . Hence, for length- $n$  sequence, the rates of  $m_1$  and  $m_2$  are  $R_1$  and  $R_2$  respectively.

*Decoding:* The decoder, upon receipt of the bin indices  $(m_1, m_2)$  finds the unique sequence pair  $(\hat{x}_1^n, \hat{x}_2^n) \in \mathcal{B}_1(m_1) \times \mathcal{B}_2(m_2)$  such that the empirical entropy vector

$$\hat{\mathbf{H}}(\hat{x}_1^n, \hat{x}_2^n) := \begin{bmatrix} \hat{H}(\hat{x}_1^n | \hat{x}_2^n) \\ \hat{H}(\hat{x}_2^n | \hat{x}_1^n) \\ \hat{H}(\hat{x}_1^n, \hat{x}_2^n) \end{bmatrix} \leq \mathbf{R} - \delta_n \mathbf{1}, \quad (86)$$

where the thresholding sequence  $\delta_n$  is defined as

$$\delta_n := \left( |\mathcal{X}_1| |\mathcal{X}_2| + \frac{1}{2} \right) \frac{\log(n+1)}{n}. \quad (87)$$

Define  $\mathcal{T}(\mathbf{R}, \delta_n) := \{\mathbf{z} \in \mathbb{R}^3 : \mathbf{z} \leq \mathbf{R} - \delta_n \mathbf{1}\}$  to be the *typical empirical entropy set*. Then, (86) is equivalent to  $\hat{\mathbf{H}}(\hat{x}_1^n, \hat{x}_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)$ . If there is more than one pair or no such pair in  $\mathcal{B}_1(m_1) \times \mathcal{B}_2(m_2)$ , declare a decoding error. Note that our decoding scheme is *universal* [14], i.e., the decoder does not depend on knowledge of the true distribution  $p_{X_1, X_2}$ . It does depend on the rate pair which is known to the decoder since the codebook (bin assignments) is known to all parties.

*Analysis of error probability:* Let the sequences sent by the two users be  $(X_1^n, X_2^n)$  and let their corresponding bin indices be  $(M_1, M_2)$ . We bound the probability of error averaged over the random code construction. Clearly, the ensemble probability of error is bounded above by the sum of the probabilities of the following four events:

$$\mathcal{E}_1 := \{\hat{\mathbf{H}}(X_1^n, X_2^n) \notin \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (88)$$

$$\mathcal{E}_2 := \{\exists \tilde{x}_1^n \in \mathcal{B}_1(M_1) \setminus \{X_1^n\} : \hat{\mathbf{H}}(\tilde{x}_1^n, X_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (89)$$

$$\mathcal{E}_3 := \{\exists \tilde{x}_2^n \in \mathcal{B}_2(M_2) \setminus \{X_2^n\} : \hat{\mathbf{H}}(X_1^n, \tilde{x}_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (90)$$

$$\mathcal{E}_4 := \{\exists \tilde{x}_1^n \in \mathcal{B}_1(M_1) \setminus \{X_1^n\}, \tilde{x}_2^n \in \mathcal{B}_2(M_2) \setminus \{X_2^n\} : \hat{\mathbf{H}}(\tilde{x}_1^n, \tilde{x}_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (91)$$

We bound the probabilities of these events in turn. Consider

$$\mathbb{P}(\mathcal{E}_1) = 1 - \mathbb{P}(\hat{\mathbf{H}}(P_{X_1^n, X_2^n}) \in \mathcal{T}(\mathbf{R}, \delta_n)) \quad (92)$$

$$= 1 - \mathbb{P}(\hat{\mathbf{H}}(P_{X_1^n, X_2^n}) \leq \mathbf{R} - \delta_n \mathbf{1}) \quad (93)$$

$$= 1 - \mathbb{P}\left(\hat{\mathbf{H}}(P_{X_1^n, X_2^n}) \leq \mathbf{H}(p_{X_1, X_2}) + \frac{\tilde{\mathbf{z}}}{\sqrt{n}} + (a_n - \delta_n) \mathbf{1}\right) \quad (94)$$

where we made the dependence of the empirical entropy vector on the type explicit in (92). In (93), we invoked the definition of  $\mathcal{T}(\mathbf{R}, \delta_n)$ . In (94), we used the fact that  $\mathbf{R} = \mathbf{H}(p_{X_1, X_2}) + \frac{\tilde{\mathbf{z}}}{\sqrt{n}} + a_n$  for some vector  $\tilde{\mathbf{z}} \in \mathbb{R}^3$  that satisfies  $\mathbb{P}(\mathbf{Z} \leq \tilde{\mathbf{z}}) \geq 1 - \epsilon$  where  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$  and  $a_n = \frac{\nu \log n}{n}$  for  $\nu = |\mathcal{X}_1| |\mathcal{X}_2| + 1$ .

We now bound the probability in (94) using the vector rate redundancy theorem with the following identifications: random variable  $X \leftarrow (X_1, X_2)$ , smooth function  $\mathbf{g}(p_{X_1, X_2}) \leftarrow -\mathbf{H}(p_{X_1, X_2})$ , evaluation vector  $\mathbf{z} \leftarrow -\tilde{\mathbf{z}}$  and sequence  $b_n \leftarrow a_n - \delta_n$ . Note that the coefficient of  $a_n$  here just has to be larger than  $|\mathcal{X}_1| |\mathcal{X}_2| + 1/2$  for the sequence  $a_n - \delta_n = \Theta\left(\frac{\log n}{n}\right)$  to be positive, satisfying (64). This has been ensured with the choice of  $\nu$  in (11). Also, the third moment is uniformly bound as stated in (186) in Appendix D.

With the above identifications and the realization that the matrix  $\mathbf{V}$  in the vector rate redundancy theorem equals  $\text{Cov}(\mathbf{h}(X_1, X_2))$  (by direct differentiation of entropy functionals),

$$\mathbb{P}(\mathcal{E}_1^c) \geq \mathbb{P}(\mathbf{Z} \geq -\tilde{\mathbf{z}}) + O\left(\frac{\log n}{\sqrt{n}}\right) \quad (95)$$

$$= \mathbb{P}(\mathbf{Z} \leq \tilde{\mathbf{z}}) + O\left(\frac{\log n}{\sqrt{n}}\right) \quad (96)$$

$$\geq 1 - \epsilon + O\left(\frac{\log n}{\sqrt{n}}\right), \quad (97)$$

where in (96) we used the fact that  $\mathbb{P}(\mathbf{Z} \geq -\tilde{\mathbf{z}}) = \mathbb{P}(\mathbf{Z} \leq \tilde{\mathbf{z}})$  because  $\mathbf{Z}$  has zero mean. Consequently,

$$\mathbb{P}(\mathcal{E}_1) \leq \epsilon - O\left(\frac{\log n}{\sqrt{n}}\right). \quad (98)$$

For the second event, by symmetry and uniformity,  $\mathbb{P}(\mathcal{E}_2) = \mathbb{P}(\mathcal{E}_2 | X_1^n \in \mathcal{B}_1(1))$ . For ease of notation, let  $p := p_{X_1^n, X_2^n}$ . Now consider the chain of inequalities:

$$\begin{aligned} & \mathbb{P}(\mathcal{E}_2 | X_1^n \in \mathcal{B}_1(1)) \\ &= \sum_{x_1^n, x_2^n} p(x_1^n, x_2^n) \mathbb{P}\left[\exists \tilde{x}_1^n \in \mathcal{B}_1(1) \setminus \{X_1^n\} : \right. \\ & \quad \left. \hat{\mathbf{H}}(\tilde{x}_1^n, x_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n) \mid (X_1^n, X_2^n) = (x_1^n, x_2^n), X_1^n \in \mathcal{B}_1(1)\right] \end{aligned} \quad (99)$$

$$\leq \sum_{x_1^n, x_2^n} p(x_1^n, x_2^n) \sum_{\tilde{x}_1^n \neq x_1^n: \hat{\mathbf{H}}(\tilde{x}_1^n, x_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)} \mathbb{P}(\tilde{x}_1^n \in \mathcal{B}_1(1)) \quad (100)$$

$$\leq \sum_{x_1^n, x_2^n} p(x_1^n, x_2^n) \sum_{\tilde{x}_1^n \neq x_1^n: \hat{H}(\tilde{x}_1^n | x_2^n) \leq R_1 - \delta_n} \mathbb{P}(\tilde{x}_1^n \in \mathcal{B}_1(1)) \quad (101)$$

$$= \sum_{x_1^n, x_2^n} p(x_1^n, x_2^n) \sum_{\tilde{x}_1^n \neq x_1^n: \hat{H}(\tilde{x}_1^n | x_2^n) \leq R_1 - \delta_n} \frac{1}{\lceil 2^{nR_1} \rceil} \quad (102)$$

$$\leq \sum_{Q \in \mathcal{P}_n(\mathcal{X}_2)} \sum_{x_2^n \in \mathcal{T}_Q} p(x_2^n) \sum_{\substack{V \in \mathcal{V}_n(\mathcal{X}_1; Q): \\ H(V | P_{x_2^n}) \leq R_1 - \delta_n}} \sum_{\tilde{x}_1^n \in \mathcal{T}_V(x_2^n)} 2^{-nR_1} \quad (103)$$

$$\leq \sum_{Q \in \mathcal{P}_n(\mathcal{X}_2)} \sum_{x_2^n \in \mathcal{T}_Q} p(x_2^n) \sum_{\substack{V \in \mathcal{V}_n(\mathcal{X}_1; Q): \\ H(V | P_{x_2^n}) \leq R_1 - \delta_n}} 2^{nH(V | P_{x_2^n})} 2^{-nR_1} \quad (104)$$

$$\leq \sum_{x_2^n} p(x_2^n) (n+1)^{|\mathcal{X}_1| |\mathcal{X}_2|} 2^{n(R_1 - \delta_n)} 2^{-nR_1} \quad (105)$$

where (99) follows from the definition of  $\mathcal{E}_2$ , (100) follows from the union bound and because for  $\tilde{x}_1^n \neq x_1^n$ , the events  $\{x_1^n \in \mathcal{B}_1(1)\}$ ,  $\{\tilde{x}_1^n \in \mathcal{B}_1(1)\}$  and  $\{(X_1^n, X_2^n) = (x_1^n, x_2^n)\}$  are mutually independent, and (101) follows from the inclusion  $\{\tilde{x}_1^n : \mathbf{H}(\tilde{x}_1^n, x_2^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \subset \{\tilde{x}_1^n : \dot{H}(\tilde{x}_1^n | x_2^n) \leq R_1 - \delta_n\}$ . Equality (102) follows from the uniformity in the random binning. In (103), we first dropped the constraint  $\tilde{x}_1^n \neq x_1^n$  and marginalized over  $x_1^n$ . Then, we partitioned the sum over  $x_2^n$  into disjoint type classes indexed by  $Q \in \mathcal{P}_n(\mathcal{X}_2)$  and we partitioned the sum over  $\tilde{x}_1^n \in \mathcal{X}_1^n$  into sums over stochastic matrices  $V \in \mathcal{V}_n(\mathcal{X}_1; Q)$  (for notation see Section I-D). In (104), we upper bounded the cardinality of the  $V$ -shell as  $|\mathcal{T}_V(x_2^n)| \leq 2^{nH(V|P_{x_2^n})}$  [14, Lem. 1.2.5]. In (105), we used the Type Counting Lemma [14, Eq. (2.5.1)]. By the choice of  $\delta_n$  in (87), inequality (105) reduces to

$$\mathbb{P}(\mathcal{E}_2) \leq \frac{1}{\sqrt{n+1}}. \quad (106)$$

Similarly  $\mathbb{P}(\mathcal{E}_3) \leq (n+1)^{-1/2}$  and  $\mathbb{P}(\mathcal{E}_4) \leq (n+1)^{-1/2}$ .

Together with (98), we conclude that the error probability defined in (4) averaged over the random binning is upper bounded as

$$\mathbb{P}(\mathcal{E}) \leq \sum_{i=1}^4 \mathbb{P}(\mathcal{E}_i) \leq \epsilon, \quad (107)$$

for all  $n$  sufficiently large. Hence, there is a deterministic code whose error probability in (4) is no greater than  $\epsilon$  if the rate pair  $(R_1, R_2)$  belongs to  $\mathcal{R}_{\text{in}}(n, \epsilon)$ . ■

2) *Converse:*

*Proof:* To prove the outer bound, we use Lemma 7.2.2. in Han [43] which asserts that every  $(n, 2^{nR_1}, 2^{nR_2}, \epsilon)$ -SW code must satisfy

$$\begin{aligned} \epsilon &\geq \mathbb{P} \left[ \frac{1}{n} \log p_{X_1^n | X_2^n}(X_1^n | X_2^n) \geq R_1 + \gamma \right. \\ &\quad \text{or } \frac{1}{n} \log p_{X_2^n | X_1^n}(X_2^n | X_1^n) \geq R_2 + \gamma \\ &\quad \left. \text{or } \frac{1}{n} \log p_{X_1^n, X_2^n}(X_1^n, X_2^n) \geq R_1 + R_2 + \gamma \right] - 3(2^{-n\gamma}) \end{aligned} \quad (108)$$

$$= 1 - \mathbb{P} \left[ \frac{1}{n} \mathbf{h}(X_1^n, X_2^n) \leq \mathbf{R} + \gamma \mathbf{1} \right] - 3(2^{-n\gamma}), \quad (109)$$

for any  $\gamma > 0$ . This result is typically used for proving strong converses for general (non-stationary, non-ergodic) sources but as we will see it is also very useful for proving a converse in the finite blocklength setting. Recall that  $\mathbf{h}(X_1^n, X_2^n)$  is the entropy density vector in (7) evaluated at  $(X_1^n, X_2^n)$ . By the memorylessness of the source, it can be written as a sum of i.i.d. random vectors  $\{\mathbf{h}(X_{1k}, X_{2k})\}_{k=1}^n$ .

We assume that  $\mathbf{V} \succ 0$ . The case where  $\mathbf{V}$  is singular can be handled in exactly the same way as we did in the proof of the vector rate redundancy theorem. See discussion after (85). Fix  $\gamma := \frac{\log n}{2n}$  and define  $\tilde{\mathbf{z}} := \sqrt{n}(\mathbf{R} - \mathbf{H} + \frac{\log n}{n} \mathbf{1})$ . Now consider the probability in (109), denoted as  $s_n$ :

$$s_n = \mathbb{P} \left[ \frac{1}{n} \sum_{k=1}^n \mathbf{h}(X_{1k}, X_{2k}) \leq \mathbf{H} + \frac{\tilde{\mathbf{z}}}{\sqrt{n}} - \frac{\log n}{n} \mathbf{1} + \gamma \mathbf{1} \right] \quad (110)$$

$$= \mathbb{P} \left[ \frac{1}{\sqrt{n}} \sum_{k=1}^n (\mathbf{h}(X_{1k}, X_{2k}) - \mathbf{H}) \leq \tilde{\mathbf{z}} - \frac{\log n}{2\sqrt{n}} \mathbf{1} \right] \quad (111)$$

We are now ready to use the multidimensional Berry-Essén theorem. We can easily verify that the third moment  $\xi_{\text{SW}} = \mathbb{E}[\|\mathbf{h}(X_1, X_2) - \mathbf{H}(p_{X_1, X_2})\|_2^3]$  is uniformly bounded. See (186) in Appendix D. As such, using (67) we can upper bound  $s_n$  as follows:

$$s_n \leq \mathbb{P} \left[ \mathbf{Z} \leq \tilde{\mathbf{z}} - \frac{\log n}{2\sqrt{n}} \mathbf{1} \right] + \frac{400(3^{1/4})\xi_{\text{SW}}}{\lambda_{\min}(\mathbf{V})^{3/2}\sqrt{n}} \quad (112)$$

$$= \mathbb{P}(\mathbf{Z} \leq \tilde{\mathbf{z}}) - O\left(\frac{\log n}{\sqrt{n}}\right). \quad (113)$$

The last step follows by Taylor's approximation theorem. See (84). On account of (109) and (113),

$$\epsilon \geq 1 - \mathbb{P}(\mathbf{Z} \leq \tilde{\mathbf{z}}) + O\left(\frac{\log n}{\sqrt{n}}\right) - \frac{3}{\sqrt{n}} \quad (114)$$

which, upon rearrangement, means that  $\tilde{\mathbf{z}} \in \mathcal{S}(\mathbf{V}, \epsilon - O(\frac{\log n}{\sqrt{n}}))$ . Since  $\mathcal{S}(\mathbf{V}, \epsilon') \subset \mathcal{S}(\mathbf{V}, \epsilon)$  if  $\epsilon' \leq \epsilon$ , the vector  $\tilde{\mathbf{z}} \in \mathcal{S}(\mathbf{V}, \epsilon)$ . This implies that  $(R_1, R_2) \in \mathcal{R}_{\text{out}}(n, \epsilon)$  from the definition of  $\tilde{\mathbf{z}}$ . ■

3) *Comments on the proof and Universal Decoding:* In place of the universal decoding rule in (86), one could use a non-universal one by comparing the normalized entropy density vector (instead of the empirical entropy vector) evaluated at  $(\hat{x}_1^n, \hat{x}_2^n)$  with the rate vector, i.e.,

$$-\frac{1}{n} \begin{bmatrix} \log p_{X_1^n|X_2^n}(\hat{x}_1^n|\hat{x}_2^n) \\ \log p_{X_2^n|X_1^n}(\hat{x}_2^n|\hat{x}_1^n) \\ \log p_{X_1^n, X_2^n}(\hat{x}_1^n, \hat{x}_2^n) \end{bmatrix} \leq \mathbf{R} - \delta_n \mathbf{1}. \quad (115)$$

In this case, Taylor expansion as in the proof of the vector rate redundancy theorem [cf. (68)] would not be required because the above criterion can be written a normalized sum of i.i.d. random vectors. The multidimensional Berry-Essèen theorem can thus be applied directly. Under the decoding strategy in (115), close examination of the proofs shows that there is symmetry between the error probability bounds in the direct and converse parts as in [43, Lemmas 7.2.1-2]. In [36], the authors also suggested a universal strategy for finite blocklength SW coding. They suggested the use of feedback to estimate the source statistics, whereas we use the empirical entropy here, cf. (86).

### C. Proofs for the MAC

We now present the proof of Theorem 2 on the  $(n, \epsilon)$ -capacity region for the DM-MAC. We present the proof of the inner bound in Section VIII-C1 and the proof that the cardinality of  $\mathcal{Q}$  can be restricted to 9 in Section VIII-C2. In Section VIII-C3, we comment on how the proof and the statement of the result can be modified if the input and output alphabets of the MAC are not discrete but are arbitrary.

#### 1) Achievability:

*Proof:* Fix a finite alphabet  $\mathcal{Q}$  and a tuple of input distributions  $(p_Q, p_{X_1|Q}, p_{X_2|Q})$ . Fix a pair of  $(n, \epsilon)$ -achievable rates  $(R_1, R_2) \in \mathcal{R}(n, \epsilon; p_Q, p_{X_1|Q}, p_{X_2|Q})$ . See definitions in Section III-A.

*Codebook Generation:* Randomly generate a sequence  $q^n \sim \prod_{k=1}^n p_Q(q_k)$ . For  $j = 1, 2$ , randomly and conditionally independently generate codewords  $x_j^n(m_j) \sim \prod_{k=1}^n p_{X_j|Q}(x_{jk}|q_k)$  where  $m_j \in [2^{nR_j}]$ . The codebook consisting of  $q^n, x_1^n(m_1), m_1 \in [2^{nR_1}]$ , and  $x_2^n(m_2), m_2 \in [2^{nR_2}]$  is revealed to all parties.

*Encoding:* For  $j = 1, 2$ , given  $m_j \in [2^{nR_j}]$ , encoder  $j$  sends codeword  $x_j^n(m_j) \in \mathcal{X}_j^n$ .

*Decoding:* The decoder, upon receipt of the output of the DM-MAC  $y^n \in \mathcal{Y}^n$  finds the unique message pair  $(\hat{m}_1, \hat{m}_2) \in [2^{nR_1}] \times [2^{nR_2}]$  such that the empirical mutual information vector

$$\hat{\mathbf{I}}(q^n, x_1^n(\hat{m}_1), x_2^n(\hat{m}_2), y^n) := \begin{bmatrix} \hat{I}(x_1^n(\hat{m}_1) \wedge y^n | x_2^n(\hat{m}_2), q^n) \\ \hat{I}(x_2^n(\hat{m}_2) \wedge y^n | x_1^n(\hat{m}_1), q^n) \\ \hat{I}(x_1^n(\hat{m}_1), x_2^n(\hat{m}_2) \wedge y^n | q^n) \end{bmatrix} \geq \mathbf{R} + \delta_n \mathbf{1}, \quad (116)$$

where  $\delta_n := (|\mathcal{Q}||\mathcal{X}_1||\mathcal{X}_2||\mathcal{Y}| + \frac{1}{2}) \frac{\log(n+1)}{n}$ . If there is no such message pair or there is not a unique message pair, declare a decoding error. We remind the reader that  $\hat{I}(x_1^n(\hat{m}_1) \wedge y^n | x_2^n(\hat{m}_2), q^n)$  is the conditional mutual information  $I(\tilde{X}_1; \tilde{Y} | \tilde{X}_2, \tilde{Q})$  where the dummy random variable  $(\tilde{Q}, \tilde{X}_1, \tilde{X}_2, \tilde{Y})$  has distribution, an  $n$ -type,  $P_{q^n, x_1^n(\hat{m}_1), x_2^n(\hat{m}_2), y^n}$ . Let  $\mathcal{T}(\mathbf{R}, \delta_n) := \{\mathbf{z} \in \mathbb{R}^d : \mathbf{z} \geq \mathbf{R} + \delta_n \mathbf{1}\}$  be the *typical empirical mutual information set*. Then the criterion in (116) is can be written compactly as  $\hat{\mathbf{I}}(q^n, x_1^n(\hat{m}_1), x_2^n(\hat{m}_2), y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)$ . Note that, unlike typicality set decoding [1] or maximum-likelihood decoding [33], the decoding rule in (116) is *universal*, i.e., the decoder does not need to be given knowledge of the channel statistics  $W$ .

*Analysis of error probability:* By the uniformity of the messages  $M_1$  and  $M_2$  and the random code construction, we can assume that  $(M_1, M_2) = (1, 1)$ . The average ensemble error probability is upper bounded by the sum of

the probabilities of the following four events:

$$\mathcal{E}_1 := \{\hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(1), Y^n) \notin \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (117)$$

$$\mathcal{E}_2 := \{\exists \tilde{m}_1 \neq 1 : \hat{\mathbf{I}}(Q^n, X_1^n(\tilde{m}_1), X_2^n(1), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (118)$$

$$\mathcal{E}_3 := \{\exists \tilde{m}_2 \neq 1 : \hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(\tilde{m}_2), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (119)$$

$$\mathcal{E}_4 := \{\exists \tilde{m}_1 \neq 1, \tilde{m}_2 \neq 1 : \hat{\mathbf{I}}(Q^n, X_1^n(\tilde{m}_1), X_2^n(\tilde{m}_2), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \quad (120)$$

We use the definition of  $\mathcal{R}(n, \epsilon; p_Q, p_{X_1|Q}, p_{X_2|Q})$  in (25) to express  $\mathbb{P}(\mathcal{E}_1)$  as follows:

$$\mathbb{P}(\mathcal{E}_1) = 1 - \mathbb{P}\left(\hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(1), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\right) \quad (121)$$

$$= 1 - \mathbb{P}\left(\hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(1), Y^n) \geq \mathbf{R} + \delta_n \mathbf{1}\right) \quad (122)$$

$$= 1 - \mathbb{P}\left(\hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(1), Y^n) \geq \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) + \frac{\mathbf{z}}{\sqrt{n}} - a_n \mathbf{1} + \delta_n \mathbf{1}\right), \quad (123)$$

where (122) follows from the definition of  $\mathcal{T}(\mathbf{R}, \delta_n)$ . In (123), we used the definition of  $\mathcal{S}(\mathbf{V}, \epsilon)$  to assert that  $\mathbf{z} \in \mathbb{R}^3$  is a vector satisfying  $\mathbb{P}(\mathbf{Z} \geq \mathbf{z}) \geq 1 - \epsilon$  for  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . Also, the sequence  $a_n = \frac{\nu \log n}{n}$  where  $\nu = |\mathcal{Q}||\mathcal{X}_1||\mathcal{X}_2||\mathcal{Y}| + 1$ .

Now we use the vector rate redundancy theorem with the following identifications: random variable  $X \leftarrow (Q, X_1, X_2, Y)$ , smooth function  $\mathbf{g}(p_Q p_{X_1|Q} p_{X_2|Q} W) \leftarrow \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)$ , evaluation vector  $\mathbf{z} \leftarrow \mathbf{z}$  and sequence  $b_n \leftarrow a_n - \delta_n$ . If the coefficient of  $a_n$  is larger than that of  $\delta_n$ , say  $\nu = |\mathcal{Q}||\mathcal{X}_1||\mathcal{X}_2||\mathcal{Y}| + 1$  as in (25),  $a_n - \delta_n$  is a positive sequence of order  $\Theta(\frac{\log n}{n})$ , satisfying (64). Also, the third moment  $\xi_{\text{MAC}} := \mathbb{E}[\|\hat{\mathbf{i}}(Q, X_1, X_2, Y) - \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)\|_2^3]$  is uniformly bounded by (187) in Appendix D. As such, the probability in (123) satisfies

$$\begin{aligned} & \mathbb{P}\left(\hat{\mathbf{I}}(Q^n, X_1^n(1), X_2^n(1), Y^n) \geq \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W) + \frac{\mathbf{z}}{\sqrt{n}} - a_n \mathbf{1} + \delta_n \mathbf{1}\right) \\ & \geq \mathbb{P}(\mathbf{Z} \geq \mathbf{z}) + O\left(\frac{\log n}{\sqrt{n}}\right) \end{aligned} \quad (124)$$

$$\geq 1 - \epsilon + O\left(\frac{\log n}{\sqrt{n}}\right), \quad (125)$$

where in the first inequality, we used the fact that the  $\mathbf{V}$  in the vector rate redundancy theorem coincides with the information dispersion matrix  $\mathbf{V}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)$ . This can easily be verified by direct differentiation of (conditional) mutual information quantities with respect to the joint distribution  $p_{Q, X_1, X_2, Y} := p_Q p_{X_1|Q} p_{X_2|Q} W$ . Combining (123) and (125) yields

$$\mathbb{P}(\mathcal{E}_1) \leq \epsilon - O\left(\frac{\log n}{\sqrt{n}}\right). \quad (126)$$

To bound the probabilities of  $\mathcal{E}_2, \mathcal{E}_3$  and  $\mathcal{E}_4$ , we use the following lemma whose proof is relegated to Appendix E. This result is a types-based analogue of the (*conditional*) *joint typicality lemma* used extensively for channel coding problems in [1].

**Lemma 9** (Atypicality of Empirical Mutual Information). *Fix a joint distribution  $p_{U, X, Y} = p_U p_{X|U} p_{Y|U}$ , i.e.,  $X - U - Y$  form a Markov chain in that order. Let  $(U^n, X^n, Y^n) \sim \prod_{k=1}^n p_{U, X, Y}(u_k, x_k, y_k)$  so  $X^n - U^n - Y^n$ . Then for any  $t > 0$  and any  $n \in \mathbb{N}$ , the empirical mutual information  $\hat{I}(X^n \wedge Y^n | U^n)$  satisfies*

$$\mathbb{P}(\hat{I}(X^n \wedge Y^n | U^n) \geq t) \leq (n+1)^{|\mathcal{X}||\mathcal{Y}||\mathcal{U}|} 2^{-nt}. \quad (127)$$

Now we use this lemma to bound  $\mathbb{P}(\mathcal{E}_2)$ . By the union bound and the symmetry in the generation of the codewords,

$$\mathbb{P}(\mathcal{E}_2) \leq \sum_{\tilde{m}_2 \neq 1} \mathbb{P}(\hat{\mathbf{I}}(Q^n, X_1^n(\tilde{m}_2), X_2^n(1), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)) \quad (128)$$

$$= (\lceil 2^{nR_1} \rceil - 1) \mathbb{P}(\hat{\mathbf{I}}(Q^n, X_1^n(2), X_2^n(1), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)) \quad (129)$$

$$\leq 2^{nR_1} \mathbb{P}(\hat{I}(X_1^n(2) \wedge Y^n | X_2^n(1), Q^n) \geq R_1 + \delta_n) \quad (130)$$

$$\leq 2^{nR_1} \mathbb{P}(\hat{I}(X_1^n(2) \wedge (X_2^n(1), Y^n) | Q^n) \geq R_1 + \delta_n) \quad (131)$$

$$\leq (n+1)^{|\mathcal{Q}||\mathcal{X}_1||\mathcal{X}_2||\mathcal{Y}|} 2^{nR_1} 2^{-n(R_1 + \delta_n)} \quad (132)$$

where (130) follows from the inclusion  $\{\hat{\mathbf{I}}(Q^n, X_1^n(2), X_2^n(1), Y^n) \in \mathcal{T}(\mathbf{R}, \delta_n)\} \subset \{\hat{I}(X_1^n(2) \wedge Y^n | X_2^n(1), Q^n) \geq R_1 + \delta_n\}$  and  $\lceil t \rceil - 1 \leq t$ , (131) follows from the fact that  $I(\tilde{X}_1; \tilde{Y} | \tilde{X}_2, \tilde{Q}) \leq I(\tilde{X}_1; \tilde{X}_2, \tilde{Y} | \tilde{Q})$  for any four random variables  $\tilde{Q}, \tilde{X}_1, \tilde{X}_2, \tilde{Y}$ . For (132), we applied the atypicality of empirical mutual information lemma with the following identifications:  $t \leftarrow R_1 + \delta_n$ ,  $U \leftarrow Q$ ,  $X \leftarrow X_1$  and  $Y \leftarrow (X_2, Y)$ . Note that for  $\tilde{m}_1 \neq 1$ ,  $X_1^n(\tilde{m}_2)$  is conditionally independent of  $(X_2^n(1), Y^n)$  given  $Q^n$  so the lemma applies. Using the definition of  $\delta_n$ , we have

$$P(\mathcal{E}_2) \leq \frac{1}{\sqrt{n+1}}. \quad (133)$$

Similarly,  $P(\mathcal{E}_3) \leq (n+1)^{-1/2}$  and  $P(\mathcal{E}_3) \leq (n+1)^{-1/2}$ . Uniting (126) and (133) reveals that the average probability of error of the random code ensemble is bounded above as  $P(\mathcal{E}) \leq \sum_{i=1}^4 P(\mathcal{E}_i) \leq \epsilon$ . Therefore, there must exist a code whose average probability of error for the DM-MAC  $W$  is bounded above by  $\epsilon$  as desired. ■

## 2) Cardinality Bounds:

*Proof:* We now argue that  $|Q|$  can be restricted to be no greater than 9. The following 9 functionals are continuous in  $p_{X_1, X_2 | Q} := p_{X_1 | Q} p_{X_2 | Q}$ : Three mutual information quantities  $I(X_1; Y | X_2, Q)$ ,  $I(X_2; Y | X_1, Q)$  and  $I(X_1, X_2; Y | Q)$ , three variances on the diagonals of  $\mathbf{V}(p_Q, p_{X_1 | Q}, p_{X_2 | Q}, W)$  and three covariances in the strict upper triangular part of  $\mathbf{V}(p_Q, p_{X_1 | Q}, p_{X_2 | Q}, W)$ . By the support lemma [14, Lemma 3.4] (or Eggleston's theorem), there exists a discrete random variable  $Q'$ , whose support has cardinality  $|Q'| \leq 9$ , that preserves these 9 continuous functionals in  $p_{X_1, X_2 | Q}$ . Thus, the inner bound is preserved if the auxiliary time-sharing random variable  $Q$  is restricted to have cardinality 9. ■

3) *Extension to Arbitrary Alphabets:* In place of the universal decoding rule in (116), one could use a non-universal one by comparing the normalized information density vector (instead of the empirical mutual information vector) with the rate vector, i.e.,

$$\frac{1}{n} \begin{bmatrix} i(x_1^n(\hat{m}_1); y^n | x_2^n(\hat{m}_2), q^n) \\ i(x_2^n(\hat{m}_2); y^n | x_1^n(\hat{m}_1), q^n) \\ i(x_1^n(\hat{m}_1), x_2^n(\hat{m}_2); y^n | q^n) \end{bmatrix} \geq \mathbf{R} + \delta_n \mathbf{1}, \quad (134)$$

where  $i(x_1^n(\hat{m}_1); y^n | x_2^n(\hat{m}_2), q^n) := \log[W^n(y^n | x_1^n(\hat{m}_1), x_2^n(\hat{m}_2)) / p_{Y^n | X_2^n, Q^n}(y^n | x_2^n(\hat{m}_2), q^n)]$  and similarly for the other two information densities. For this non-universal decoding strategy, Taylor expansion as in the proof of the vector rate redundancy theorem [cf. (68)] would not be required because the above criterion can be written as a normalized sum of i.i.d. random vectors. One can verify that a simpler version of the vector rate redundancy theorem can be proved for the decoding rule in (134) if the channel and input distributions are such that the third moment is bounded. In addition, we need to generalize the atypicality of empirical mutual information lemma for the steps in (128)–(133) to hold. This can be done using standard Chernoff bounding techniques. Indeed, if  $X - U - Y$  form a Markov chain and  $(U^n, X^n, Y^n) \sim \prod_{k=1}^n p_{U, X, Y}(u_k, x_k, y_k)$ , then

$$P\left(\frac{1}{n} \log \frac{p_{Y^n | X^n}(Y^n | X^n)}{p_{Y^n | U^n}(Y^n | U^n)} \geq t\right) \leq 2^{-nt}, \quad (135)$$

for every  $t \geq 0$ . This is the analogue of Lemma 9. Finally, note that we have used i.i.d. codebooks for simplicity. For the AWGN-MAC, a codebook containing codewords of *exact* power may result in a smaller dispersion. See [11], [12] for the single-user case.

## D. Proofs for the Asymmetric Broadcast Channel

We now present the proof of Theorem 3 on the  $(n, \epsilon)$ -capacity region for the DM-ABC. Conceptually, it is simple — it uses the superposition coding technique [5] and the vector rate redundancy theorem.

### 1) Achievability:

*Proof:* Fix an input alphabet  $\mathcal{U}$  and also an input distribution  $p_{U, X} \in \mathcal{P}(\mathcal{U} \times \mathcal{X})$ . This input distribution induces the distributions  $p_U$  and  $p_{X|U}$ . Also fix a pair of achievable rates  $(R_1, R_2)$  belonging to the region  $\mathcal{R}(n, \epsilon; p_{U, X})$  (Definition 15).

*Codebook Generation* Randomly and independently generate  $2^{nR_2}$  cloud centers  $u^n(m_2) \sim \prod_{k=1}^n p_U(u_k)$ ,  $m_2 \in [2^{nR_2}]$ . For every  $m_2$ , randomly and conditionally independently generate  $2^{nR_1}$  satellite codewords  $x^n(m_1, m_2) \sim \prod_{k=1}^n p_{X|U}(x_k | u_k(m_2))$ ,  $m_1 \in [2^{nR_1}]$ . The codebooks consisting of the  $u^n$  and  $x^n$  codewords are revealed to the encoder and the two decoders.

*Encoding:* Given  $(m_1, m_2) \in [2^{nR_1}] \times [2^{nR_2}]$ , the encoder transmits  $x^n(m_1, m_2)$ .

*Decoding:* Decoder 2 only has to decode the common message  $m_2$ . When it receives  $y_2^n \in \mathcal{Y}_2^n$ , it finds the unique  $\tilde{m}_2 \in [2^{nR_2}]$  such that

$$\hat{I}(u^n(\tilde{m}_2) \wedge y_2^n) \geq R_2 + \delta_n, \quad (136)$$

where the sequence  $\delta_n := (|\mathcal{U}||\mathcal{X}| \max\{|\mathcal{Y}_1|, |\mathcal{Y}_2|\} + \frac{1}{2}) \frac{\log(n+1)}{n}$ . If there is no such message or there is not a unique one, declare a decoding error. Decoder 1 has to decode both the common message  $m_2$  and its own message  $m_1$ . When it receives  $y_1^n \in \mathcal{Y}_1^n$ , it finds the unique pair  $(\hat{m}_1, \hat{m}_2) \in [2^{nR_1}] \times [2^{nR_2}]$  such that

$$\hat{\mathbf{J}}(u^n(\hat{m}_2), x^n(\hat{m}_1, \hat{m}_2), y_1^n) := \begin{bmatrix} \hat{I}(x^n(\hat{m}_1, \hat{m}_2) \wedge y_1^n | u^n(\hat{m}_2)) \\ \hat{I}(x^n(\hat{m}_1, \hat{m}_2) \wedge y_1^n) \end{bmatrix} \geq \begin{bmatrix} R_1 \\ R_1 + R_2 \end{bmatrix} + \delta_n \mathbf{1}. \quad (137)$$

If there is no such message pair or there is not a unique one, again declare a decoding error. For convenience in stating the error events, we use the notation  $\mathcal{T}(R_1, R_2, \delta_n) := \{\mathbf{z} \in \mathbb{R}^2 : z_1 \geq R_1 + \delta_n, z_2 \geq R_1 + R_2 + \delta_n\}$ . We remind the reader that the notation  $\hat{I}(x^n(\hat{m}_1, \hat{m}_2) \wedge y_1^n | u^n(\hat{m}_2))$  denotes the conditional mutual information  $I(\tilde{X}; \tilde{Y} | \tilde{U})$  where  $(\tilde{U}, \tilde{X}, \tilde{Y})$  is a dummy random variable with distribution, an  $n$ -type,  $P_{u^n(\hat{m}_2), x^n(\hat{m}_1, \hat{m}_2), y_1^n}$ .

*Analysis of Error Probability:* By symmetry and the random codebook generation, we can assume that  $(M_1, M_2) = (1, 1)$ . The error event at decoder 2, namely  $\mathcal{E}_2 := \{\tilde{M}_2 \neq M_2\}$ , can be decomposed into the following 2 events:

$$\mathcal{E}_{2,1} := \{\hat{I}(U^n(1) \wedge Y_2^n) \leq R_2 + \delta_n\} \quad (138)$$

$$\mathcal{E}_{2,2} := \{\exists \tilde{m}_2 \neq 1 : \hat{I}(U^n(\tilde{m}_2) \wedge Y_2^n) \geq R_2 + \delta_n\} \quad (139)$$

Decoder 1's error event, namely  $\mathcal{E}_1 := \{\hat{M}_1 \neq M_1\} \cup \{\hat{M}_2 \neq M_2\}$ , can be decomposed into the following 3 events:

$$\mathcal{E}_{1,1} := \{\hat{\mathbf{J}}(U^n(1), X^n(1, 1), Y_1^n) \notin \mathcal{T}(R_1, R_2, \delta_n)\} \quad (140)$$

$$\mathcal{E}_{1,2} := \{\exists \tilde{m}_1 \neq 1 : \hat{\mathbf{J}}(U^n(1), X^n(\tilde{m}_1, 1), Y_1^n) \in \mathcal{T}(R_1, R_2, \delta_n)\} \quad (141)$$

$$\mathcal{E}_{1,3} := \{\exists \tilde{m}_1 \neq 1, \tilde{m}_2 \neq 1 : \hat{\mathbf{J}}(U^n(\tilde{m}_2), X^n(\tilde{m}_1, \tilde{m}_2), Y_1^n) \in \mathcal{T}(R_1, R_2, \delta_n)\} \quad (142)$$

The vector  $\hat{\mathbf{J}}(u^n, x^n, y_1^n)$  is defined in (137). Clearly the average error probability for the ABC defined in (28) can be bounded above as

$$P_e^{(n)} \leq \mathbb{P}(\mathcal{E}_{2,1} \cup \mathcal{E}_{1,1}) + \mathbb{P}(\mathcal{E}_{2,2}) + \mathbb{P}(\mathcal{E}_{1,2}) + \mathbb{P}(\mathcal{E}_{1,3}). \quad (143)$$

Note that in contrast to the DM-MAC, we bound the probability of the union  $\mathcal{E}_{2,1} \cup \mathcal{E}_{1,1}$  instead of bounding the probabilities of the constituent events separately. This is an important distinction. By doing so, we can use the vector rate redundancy theorem on an empirical mutual information vector of length-3. See (145) below. We bound the first term in (143), which can be written as

$$\mathbb{P}(\mathcal{E}_{2,1} \cup \mathcal{E}_{1,1}) = 1 - \mathbb{P}(\hat{\mathbf{I}}(U^n(1), X^n(1, 1), Y_1^n, Y_2^n) \geq \mathbf{R} + \delta_n \mathbf{1}), \quad (144)$$

where the length-3 empirical mutual information vector is defined as

$$\hat{\mathbf{I}}(U^n, X^n, Y_1^n, Y_2^n) := \begin{bmatrix} \hat{I}(X^n \wedge Y_1^n | U^n) \\ \hat{I}(U^n \wedge Y_2^n) \\ \hat{I}(X^n \wedge Y_1^n) \end{bmatrix}. \quad (145)$$

Using the fact that  $(R_1, R_2) \in \mathcal{R}(n, \epsilon; p_{U,X})$ , we can rewrite (144) as

$$\mathbb{P}((\mathcal{E}_{2,1} \cup \mathcal{E}_{1,1})^c) = \mathbb{P}\left(\hat{\mathbf{I}}(U^n(1), X^n(1, 1), Y_1^n, Y_2^n) \geq \mathbf{I}(p_{U,X}, W) + \frac{\mathbf{z}}{\sqrt{n}} - a_n \mathbf{1} + \delta_n \mathbf{1}\right), \quad (146)$$

where from the definition of  $\mathcal{S}(\mathbf{V}, \epsilon)$  in (6),  $\mathbf{z} \in \mathbb{R}^3$  is a vector satisfying  $\mathbb{P}(\mathbf{Z} \geq \mathbf{z}) \geq 1 - \epsilon$  and  $\mathbf{Z} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . The sequence  $a_n = \frac{\nu \log n}{n}$  with  $\nu$  defined in (36). Now we again invoke the vector rate redundancy theorem (Theorem 5) with the following identifications: random variable  $X \leftarrow (U, X, Y_1, Y_2)$ , smooth function  $\mathbf{g}(p_{U,X}, W) \leftarrow \mathbf{I}(p_{U,X}, W)$ , evaluation vector  $\mathbf{z} \leftarrow \mathbf{z}$  and sequence  $b_n \leftarrow a_n - \delta_n$ . Then if the coefficient of  $a_n$  is larger than that of  $\delta_n$ , say  $\nu = |\mathcal{U}||\mathcal{X}| \max\{|\mathcal{Y}_1|, |\mathcal{Y}_2|\} + 1$  as in (36),  $a_n - \delta_n$  is a positive sequence of order  $\Theta(\frac{\log n}{n})$ , satisfying (64).

Furthermore, the third moment  $\xi_{ABC} := \mathbb{E}[\|\mathbf{i}(U, X, Y_1, Y_2) - \mathbf{I}(p_{U,X}, W)\|_2^3]$  is uniformly bounded as shown in (188) in Appendix D. Hence, going through the same argument as for the MAC (see (124)–(125)),

$$\mathbb{P}((\mathcal{E}_{2,1} \cup \mathcal{E}_{1,1})^c) \geq 1 - \epsilon + O\left(\frac{\log n}{\sqrt{n}}\right). \quad (147)$$

The rest of the error events can be bounded using the atypicality of empirical mutual information lemma (Lemma 9). Since the calculations are similar, we focus solely on  $\mathcal{E}_{1,2}$ . For this event, we have

$$\mathbb{P}(\mathcal{E}_{1,2}) \leq \sum_{\tilde{m}_1 \neq 1} \mathbb{P}(\hat{\mathbf{J}}(U^n(1), X^n(\tilde{m}_1, 1), Y_1^n) \in \mathcal{T}(R_1, R_2, \delta_n)) \quad (148)$$

$$\leq (\lceil 2^{nR_2} \rceil - 1) \mathbb{P}(\hat{\mathbf{J}}(U^n(1), X^n(2, 1), Y_1^n) \in \mathcal{T}(R_1, R_2, \delta_n)) \quad (149)$$

$$\leq 2^{nR_2} \mathbb{P}(\hat{I}(X^n(2, 1) \wedge Y_1^n | U^n(1)) \geq R_1 + \delta_n) \quad (150)$$

$$\leq (n+1)^{|\mathcal{U}||\mathcal{X}||\mathcal{Y}_1|} 2^{nR_2} 2^{-n(R_2 + \delta_n)}. \quad (151)$$

The reasoning for each of these steps is similar to that for the DM-MAC. See steps (128) to (132). The crucial realization to get from (150) to (151) via the use of the atypicality of empirical mutual information lemma is that for  $\tilde{m}_1 \neq 1$ , the satellite codeword  $X^n(\tilde{m}_1, 1)$  is conditionally independent of  $Y_1^n$  given the cloud center  $U^n(1)$ . By the choice of  $\delta_n$  introduced at the decoding step, we have

$$\mathbb{P}(\mathcal{E}_{1,2}) \leq \frac{1}{\sqrt{n+1}}. \quad (152)$$

Similarly,  $\mathbb{P}(\mathcal{E}_{2,2}) \leq (n+1)^{-1/2}$  and  $\mathbb{P}(\mathcal{E}_{2,3}) \leq (n+1)^{-1/2}$ . This, combined with (143) and (147), shows that the average error probability for the DM-ABC, defined in (28), is no greater than  $\epsilon$ . Hence, there exists a deterministic code whose average error probability is no greater than  $\epsilon$  as desired. ■

## 2) Cardinality Bounds:

*Proof:* The bound on  $|\mathcal{U}|$  can be argued in the same way as we did for the DM-MAC in Section VIII-C2. We need  $|\mathcal{X}| - 1$  elements to preserve  $p_X(x), x \in \{0, \dots, |\mathcal{X}| - 2\}$  and 7 additional elements to preserve the two mutual information quantities  $I(U; Y_2)$  and  $I(X; Y_1 | U)$ , two variances along the diagonals of  $\mathbf{V}(p_{U,X}, W)$ , i.e.,  $\text{Var}(\log[W_1(Y_1|X)/p_{Y_1|U}(Y_1|U)])$  and  $\text{Var}(\log[p_{Y_2|U}(Y_2|U)/p_{Y_2}(Y_2)])$  and three covariances in the off-diagonal positions in  $\mathbf{V}(p_{U,X}, W)$ . Note that  $I(X; Y_1)$  and  $\text{Var}(\log[W_1(Y_1|X)/p_X(X)])$  are automatically preserved given that we have preserved  $p_X(x)$  and they do not depend on  $U$ . Hence,  $|\mathcal{U}| \leq |\mathcal{X}| + 6$ . ■

## APPENDIX A

### PROOF OF PROPOSITION 4

*Proof:* We now prove (42), i.e., that  $F = [\mathbf{V}]_{1,1}/(\cos^2 \theta) + \tau_n$ , where  $\tau_n$  is exponentially decaying. Recall that we assumed that  $R_2^* > H(X_2)$ . Define  $\delta := R_2^* - H(X_2) > 0$ . Let  $\mathbf{Z} := (Z_1, Z_2, Z_3) \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . From the definition of  $\mathcal{S}(\mathbf{V}, \epsilon)$ , we see that  $F$  is the solution to the equation

$$\mathbb{P}\left(\begin{bmatrix} Z_1 \\ Z_2 \\ Z_3 \end{bmatrix} \leq \sqrt{n} \begin{bmatrix} R_1(n, \epsilon) - H(X_1|X_2) \\ R_2(n, \epsilon) - H(X_2|X_1) \\ R_1(n, \epsilon) + R_2(n, \epsilon) - H(X_1, X_2) \end{bmatrix}\right) = 1 - \epsilon \quad (153)$$

where  $R_1(n, \epsilon)$  and  $R_2(n, \epsilon)$  are defined in (39) and (40) respectively. Also see (59). Note that the condition in (153) can be rewritten as

$$\mathbb{P}(\mathcal{A}_1 \cap \mathcal{A}_2 \cap \mathcal{A}_3) = 1 - \epsilon, \quad (154)$$

where after performing some basic information-theoretic manipulations, we see that the events can be expressed as

$$\mathcal{A}_1 = \left\{ Z_1 \leq \sqrt{F}(\cos \theta) \mathbb{Q}^{-1}(\epsilon) \right\} \quad (155)$$

$$\mathcal{A}_2 = \left\{ Z_2 \leq \sqrt{n}(I(X_1; X_2) + \delta) + \sqrt{F}(\cos \theta) \mathbb{Q}^{-1}(\epsilon) \right\} \quad (156)$$

$$\mathcal{A}_3 = \left\{ Z_3 \leq \sqrt{n}\delta + \sqrt{F}(\cos \theta) \mathbb{Q}^{-1}(\epsilon) \right\}. \quad (157)$$

We claim that  $P(\mathcal{A}_2^c)$  and  $P(\mathcal{A}_3^c)$  converge to zero exponentially fast. Indeed,

$$P(\mathcal{A}_2^c) = Q \left( \sqrt{\frac{n}{[\mathbf{V}]_{2,2}}} (I(X_1; X_2) + \delta) + \sqrt{\frac{F}{[\mathbf{V}]_{2,2}}} (\cos \theta) Q^{-1}(\epsilon) \right) \quad (158)$$

$$\leq \frac{1}{2} \exp \left( -\frac{n}{2[\mathbf{V}]_{2,2}} (I(X_1; X_2) + \delta)^2 \right) =: \tau_{1,n}, \quad (159)$$

where  $\tau_{1,n}$  is an exponentially decaying sequence and the inequality is due to the Chernoff bound for the Q-function, i.e.,  $Q(t) \leq \frac{1}{2} \exp(-\frac{t^2}{2})$  for all  $t \geq 0$ . By the same argument that led to (159),

$$P(\mathcal{A}_3^c) \leq \frac{1}{2} \exp \left( -\frac{n\delta^2}{2[\mathbf{V}]_{3,3}} \right) =: \tau_{2,n}, \quad (160)$$

where  $\tau_{2,n}$  is another exponentially decaying sequence. Knowing that  $P(\mathcal{A}_2^c)$  and  $P(\mathcal{A}_3^c)$  are small means that  $P(\mathcal{A}_1)$  must be close to  $1 - \epsilon$  from (154). Indeed, we have

$$1 - \epsilon \leq P(\mathcal{A}_1) \quad (161)$$

$$\leq P(\mathcal{A}_1 \cap \mathcal{A}_2 \cap \mathcal{A}_3) + P(\mathcal{A}_2^c) + P(\mathcal{A}_3^c) \quad (162)$$

$$\leq 1 - \epsilon + \tau_{1,n} + \tau_{2,n}, \quad (163)$$

where the second inequality is from the union bound. From (155) and the definition of the Q-function,

$$P(\mathcal{A}_1) = 1 - Q \left( \sqrt{\frac{F}{[\mathbf{V}]_{1,1}}} (\cos \theta) Q^{-1}(\epsilon) \right). \quad (164)$$

On account of (163),

$$Q^{-1}(\epsilon) \leq \sqrt{\frac{F}{[\mathbf{V}]_{1,1}}} (\cos \theta) Q^{-1}(\epsilon) \leq Q^{-1}(\epsilon - (\tau_{1,n} + \tau_{2,n})). \quad (165)$$

In addition, by Taylor's approximation theorem,  $Q^{-1}(\epsilon - (\tau_{1,n} + \tau_{2,n})) = Q^{-1}(\epsilon) + \tau'_n$  for some exponentially decaying  $\tau'_n$ . This completes the proof of (42). The proofs of (43) and (44) follow analogously so we omit them.

For (45), note that  $(R_1^*, R_2^*)$  is a corner point. In particular,  $R_1^* = H(X_1|X_2)$  and  $R_2^* = H(X_2)$ . Clearly,  $F$  is the solution of the equation:

$$P(\mathcal{B}_1 \cap \mathcal{B}_2 \cap \mathcal{B}_3) = 1 - \epsilon, \quad (166)$$

where the events can be written as

$$\mathcal{B}_1 = \left\{ Z_1 \leq \sqrt{F} (\cos \theta) Q^{-1}(\epsilon) \right\} \quad (167)$$

$$\mathcal{B}_2 = \left\{ Z_2 \leq \sqrt{n} I(X_1; X_2) + \sqrt{F} (\sin \theta) Q^{-1}(\epsilon) \right\} \quad (168)$$

$$\mathcal{B}_3 = \left\{ Z_3 \leq \sqrt{F} (\cos \theta + \sin \theta) Q^{-1}(\epsilon) \right\}. \quad (169)$$

By the same argument that led to (159),  $P(\mathcal{B}_2^c) \rightarrow 0$  exponentially fast. Hence,

$$1 - \epsilon \leq P(\mathcal{B}_1 \cap \mathcal{B}_3) \leq 1 - \epsilon + \tau_n, \quad (170)$$

where  $\tau_n$  decays exponentially fast. By a simple (diagonal) change of coordinates,

$$P(\mathcal{B}_1 \cap \mathcal{B}_3) = \Psi \left( \rho_{1,3}; -\sqrt{\frac{F}{[\mathbf{V}]_{1,1}}} (\cos \theta) Q^{-1}(\epsilon), -\sqrt{\frac{F}{[\mathbf{V}]_{3,3}}} (\cos \theta + \sin \theta) Q^{-1}(\epsilon) \right), \quad (171)$$

where  $\Psi$  is the bivariate generalization of the Q-function, defined in (41). Eq. (45) follows upon the substitution of (171) into (170). The result in (46) follows by the same argument with 1 in place of 2 and vice versa. ■

APPENDIX B  
PROOF OF COROLLARY 7

*Proof:* We use Theorem 6 to prove Corollary 7. Let  $\mathbf{V} = \mathbf{L}\mathbf{L}^T$  be the Cholesky decomposition of the matrix  $\mathbf{V}$ , defined in (63). The lower-triangular matrix  $\mathbf{L} \in \mathbb{R}^{d \times d}$  is the left Cholesky factor of  $\mathbf{V}$ . Define the change of coordinates  $\tilde{\mathbf{U}}_k := \mathbf{L}\mathbf{U}_k \in \mathbb{R}^d$  for all  $k = 1, \dots, n$ . Then,  $\text{Cov}(\tilde{\mathbf{U}}_k) = \mathbb{E}[(\mathbf{L}\mathbf{U}_k)(\mathbf{L}\mathbf{U}_k)^T] = \mathbf{L}\mathbb{E}[\mathbf{U}_k\mathbf{U}_k^T]\mathbf{L}^T = \mathbf{V}$  because  $\mathbb{E}[\mathbf{U}_k\mathbf{U}_k^T] = \mathbf{I}$  by assumption. Substituting this into (66) yields

$$\sup_{\mathcal{C}_d} \left| \mathbb{P} \left( \frac{1}{\sqrt{n}} \sum_{k=1}^n \tilde{\mathbf{U}}_k \in \mathbf{L}\mathcal{C} \right) - \mathbb{P}(\mathbf{L}\mathbf{Z} \in \mathbf{L}\mathcal{C}) \right| \leq \frac{400d^{1/4}\xi}{\sqrt{n}}. \quad (172)$$

Clearly, the family of convex, Borel subsets in  $\mathbb{R}^d$ , namely  $\mathcal{C}_d$ , remains closed under matrix multiplication, i.e.,  $\mathcal{C}_d = \mathbf{L}\mathcal{C}_d$ . Thus, (172) can be rewritten as

$$\sup_{\tilde{\mathcal{C}} \in \mathcal{C}_d} \left| \mathbb{P} \left( \frac{1}{\sqrt{n}} \sum_{k=1}^n \tilde{\mathbf{U}}_k \in \tilde{\mathcal{C}} \right) - \mathbb{P}(\tilde{\mathbf{Z}} \in \tilde{\mathcal{C}}) \right| \leq \frac{400d^{1/4}\xi}{\sqrt{n}}, \quad (173)$$

where  $\tilde{\mathcal{C}} = \mathbf{L}\mathcal{C}$  and  $\tilde{\mathbf{Z}} \sim \mathcal{N}(\mathbf{0}, \mathbf{V})$ . Now, recall that  $\xi = \mathbb{E}[\|\mathbf{U}_1\|_2^3]$ . We upper bound this quantity as follows: Replacing  $\mathbf{U}_1$  by  $\mathbf{L}^{-1}\tilde{\mathbf{U}}_1$  yields

$$\xi = \mathbb{E} \left[ \|\mathbf{L}^{-1}\tilde{\mathbf{U}}_1\|_2^3 \right] \quad (174)$$

$$= \mathbb{E} \left[ (\tilde{\mathbf{U}}_1^T \mathbf{L}^{-T} \mathbf{L}^{-1} \tilde{\mathbf{U}}_1)^{3/2} \right] \quad (175)$$

$$= \mathbb{E} \left[ (\tilde{\mathbf{U}}_1^T \mathbf{V}^{-1} \tilde{\mathbf{U}}_1)^{3/2} \right] \quad (176)$$

$$\leq \lambda_{\max}(\mathbf{V}^{-1})^{3/2} \mathbb{E} \left[ (\tilde{\mathbf{U}}_1^T \tilde{\mathbf{U}}_1)^{3/2} \right] \quad (177)$$

$$= \frac{1}{\lambda_{\min}(\mathbf{V})^{3/2}} \mathbb{E} \left[ \|\tilde{\mathbf{U}}_1\|_2^3 \right], \quad (178)$$

where (177) holds because  $\mathbf{y}^T \mathbf{A} \mathbf{y} \leq \lambda_{\max}(\mathbf{A}) \|\mathbf{y}\|_2^2$  for all vectors  $\mathbf{y}$ . The proof is completed upon the substitution of the upper bound in (178) into (173) and the identification of the third moment of  $\tilde{\mathbf{U}}_1$  namely,  $\xi := \mathbb{E}[\|\tilde{\mathbf{U}}_1\|_2^3]$ . ■

APPENDIX C  
PROOF OF LEMMA 8

*Proof:* Define the events  $\mathcal{F} := \{\mathbf{G} \geq \mathbf{v} + \phi \mathbf{1}\}$  and  $\mathcal{G} := \{\mathbf{\Delta} > -\phi \mathbf{1}\}$ . Then,  $\mathcal{F} \cap \mathcal{G} \subset \{\mathbf{G} + \mathbf{\Delta} \geq \mathbf{v}\}$ . As such

$$\mathbb{P}(\mathbf{G} + \mathbf{\Delta} \geq \mathbf{v}) = \mathbb{P}(\mathcal{F} \setminus (\mathcal{F} \cap \mathcal{G}^c)) \quad (179)$$

$$= \mathbb{P}(\mathcal{F}) - \mathbb{P}(\mathcal{F} \cap \mathcal{G}^c) \quad (180)$$

$$\geq \mathbb{P}(\mathcal{F}) - \mathbb{P}(\mathcal{G}^c). \quad (181)$$

In addition, we have

$$\mathbb{P}(\mathcal{G}^c) = \mathbb{P}(\mathbf{\Delta} \leq -\phi \mathbf{1}) \leq \mathbb{P}(\|\mathbf{\Delta}\|_\infty \geq \phi). \quad (182)$$

The combination of (181) and (182) yields (76) as desired. ■

APPENDIX D  
FINITENESS OF THIRD MOMENTS

In this appendix, we prove that the third moments are finite. For notation, see Sections II-A, III-A and IV-A.

**Lemma 10.** *For the SW, MAC and ABC problems, let the third moments be defined as*

$$\xi_{\text{SW}} := \mathbb{E} \left[ \|\mathbf{h}(X_1, X_2) - \mathbf{H}(p_{X_1, X_2})\|_2^3 \right] \quad (183)$$

$$\xi_{\text{MAC}} := \mathbb{E} \left[ \|\mathbf{i}(Q, X_1, X_2, Y) - \mathbf{I}(p_Q, p_{X_1|Q}, p_{X_2|Q}, W)\|_2^3 \right] \quad (184)$$

$$\xi_{\text{ABC}} := \mathbb{E} \left[ \|\mathbf{i}(U, X, Y_1, Y_2) - \mathbf{I}(p_{U, X}, W)\|_2^3 \right]. \quad (185)$$

Then, all three quantities are uniformly bounded. More precisely,

$$\xi_{\text{SW}} \leq 5\sqrt{3} \cdot (|\mathcal{X}_1| + |\mathcal{X}_2| + |\mathcal{X}_1||\mathcal{X}_2|) \quad (186)$$

$$\xi_{\text{MAC}} \leq 15\sqrt{3} \cdot |\mathcal{Y}| \quad (187)$$

$$\xi_{\text{ABC}} \leq 5\sqrt{3} \cdot (2|\mathcal{Y}_1| + |\mathcal{Y}_2|). \quad (188)$$

*Proof:* We will only prove the second assertion in (187). The other two assertions for the SW and ABC follow *mutatis mutandis* and essentially leverage on the fact that the ranges of the random variables are finite.

For brevity, let  $A_1$ ,  $A_2$  and  $A_3$  be the components of the random vector  $\mathbf{i}(Q, X_1, X_2, Y)$  defined in (22). So for example,  $A_1 := \log[W(Y|X_1, X_2)/p_{Y|X_2, Q}(Y|X_2, Q)] - I(X_1; Y|X_2, Q)$ . Because  $a \mapsto a^{3/2}$  is convex,

$$\xi = \mathbb{E} \left[ (A_1^2 + A_2^2 + A_3^2)^{3/2} \right] \quad (189)$$

$$\leq \frac{1}{3} \sum_{t=1}^3 \mathbb{E} \left[ (3A_t^2)^{3/2} \right] \quad (190)$$

$$= \sqrt{3} \sum_{t=1}^3 \mathbb{E} [A_t^3] \quad (191)$$

Subsequently, we simplify notation by dropping the subscripts on the distributions, e.g.,  $p(y|x_2, q) := p_{Y|X_2, Q}(y|x_2, q)$  [see (20)]. We focus on the first term in the sum in (191), which can be bounded as

$$\mathbb{E} [A_1^3] = \mathbb{E} \left[ \left( \log \frac{W(Y|X_1, X_2)}{p(Y|X_2, Q)} - I(X_1; Y|X_2, Q) \right)^3 \right] \quad (192)$$

$$\leq \mathbb{E} \left[ \left( \log \frac{W(Y|X_1, X_2)}{p(Y|X_2, Q)} \right)^3 \right] \quad (193)$$

$$\leq \mathbb{E} \left[ \left( \log \frac{1}{p(Y|X_2, Q)} \right)^3 \right] \quad (194)$$

$$= \sum_{q, x_2} p(q)p(x_2|q) \sum_y p(y|x_2, q) \left( \log \frac{1}{p(y|x_2, q)} \right)^3, \quad (195)$$

where (193) follows from the fact that  $t \mapsto t^3$  is monotonically increasing and mutual information is non-negative. Inequality (194) follows because  $W(y|x_1, x_2) \leq 1$  for all  $(x_1, x_2, y) \in \mathcal{X}_1 \times \mathcal{X}_2 \times \mathcal{Y}$ . Now by simple calculus, the function  $u \mapsto u(-\log u)^3$  is bounded above by  $(\frac{3}{\ln 2})^3 \exp_2(-\frac{3}{\ln 2}) < 5$  for all  $u \in [0, 1]$ . Hence, (195) reduces to

$$\mathbb{E} [A_1^3] \leq 5|\mathcal{Y}|. \quad (196)$$

All the other terms can be bounded similarly. This completes the proof.  $\blacksquare$

#### APPENDIX E PROOF OF LEMMA 9

*Proof:* For convenience, we introduce dummy random variables  $(\tilde{U}, \tilde{X}, \tilde{Y})$  distributed according to  $P_{U^n, X^n, Y^n}$ , the type of  $(U^n, X^n, Y^n)$ . This means that  $p_{\tilde{U}, \tilde{X}, \tilde{Y}} = P_{U^n, X^n, Y^n}$ . Then, note that

$$I(\tilde{X}; \tilde{Y}|\tilde{U}) = I(\tilde{X}; \tilde{Y}|\tilde{U}) - \mathbb{E}_{p_{\tilde{U}, \tilde{X}, \tilde{Y}}} \left[ \log \frac{p_{X, Y|U}(X, Y|U)}{p_{X|U}(\tilde{X}|U)p_{Y|U}(Y|U)} \right] \quad (197)$$

since  $X - U - Y$  form a Markov chain in that order so  $p_{X, Y|U}(x, y|u)/(p_{X|U}(x|u)p_{Y|U}(y|u)) = 1$  for all  $(x, y, u) \in \mathcal{X} \times \mathcal{Y} \times \mathcal{U}$ . Let  $p_{\tilde{X}, \tilde{Y}|\tilde{U}} := p_{\tilde{U}, \tilde{X}, \tilde{Y}}/p_{\tilde{U}}$  be the conditional type and let  $p_{\tilde{X}|\tilde{U}}$  and  $p_{\tilde{Y}|\tilde{U}}$  be the  $\mathcal{X}$ - and  $\mathcal{Y}$ -marginals of  $p_{\tilde{X}, \tilde{Y}|\tilde{U}}$  respectively. Now, by expressing the mutual information  $I(\tilde{X}; \tilde{Y}|\tilde{U})$  as an expectation, we readily see that (197) simplifies as

$$I(\tilde{X}; \tilde{Y}|\tilde{U}) = D(p_{\tilde{X}, \tilde{Y}|\tilde{U}} \| p_{X, Y|U} p_{\tilde{U}}) - D(p_{\tilde{X}|\tilde{U}} \| p_{X|U} p_{\tilde{U}}) - D(p_{\tilde{Y}|\tilde{U}} \| p_{Y|U} p_{\tilde{U}}). \quad (198)$$

Because conditional relative entropies in (198) are non-negative,

$$I(\tilde{X}; \tilde{Y}|\tilde{U}) \leq D(p_{\tilde{X}, \tilde{Y}|\tilde{U}} \| p_{X, Y|U} | p_{\tilde{U}}). \quad (199)$$

To simplify notation, let  $W := p_{X, Y|U}$ . Fix  $t > 0$ . Now consider

$$P(I(\tilde{X}; \tilde{Y}|\tilde{U}) \geq t) \leq P(D(p_{\tilde{X}, \tilde{Y}|\tilde{U}} \| W | p_{\tilde{U}}) \geq t) \quad (200)$$

$$= \sum_{Q \in \mathcal{P}_n(\mathcal{U})} \sum_{u^n \in \mathcal{T}_Q} p_{\tilde{U}}^n(u^n) \sum_{\substack{V \in \mathcal{V}_n(\mathcal{X} \times \mathcal{Y}; Q): \\ D(V \| W | Q) \geq t}} W^n(\mathcal{T}_V(u^n) | u^n) \quad (201)$$

$$\leq \sum_{Q \in \mathcal{P}_n(\mathcal{U})} \sum_{u^n \in \mathcal{T}_Q} p_{\tilde{U}}^n(u^n) \sum_{\substack{V \in \mathcal{V}_n(\mathcal{X} \times \mathcal{Y}; Q): \\ D(V \| W | Q) \geq t}} 2^{-nD(V \| W | Q)} \quad (202)$$

$$\leq \sum_{Q \in \mathcal{P}_n(\mathcal{U})} \sum_{u^n \in \mathcal{T}_Q} p_{\tilde{U}}^n(u^n) (n+1)^{|\mathcal{U}||\mathcal{X}||\mathcal{Y}|} 2^{-nt} \quad (203)$$

$$= (n+1)^{|\mathcal{U}||\mathcal{X}||\mathcal{Y}|} 2^{-nt} \quad (204)$$

where in (200) we used the bound in (199). For (201), we noted that the type of  $u^n$  in the innermost sum is  $P_{u^n} = Q$ . In (202), we used [14, Lemma 1.2.6] to upper bound the  $W^n(\cdot | u^n)$ -probability of a  $V$ -shell. In (203), we applied the Type Counting Lemma for conditional types [14, Eq. (2.5.1)] which asserts that  $|\mathcal{V}_n(\mathcal{X} \times \mathcal{Y}; Q)| \leq (n+1)^{|\mathcal{U}||\mathcal{X}||\mathcal{Y}|}$ . This completes the proof. ■

### Acknowledgements

The authors acknowledge discussions with Y. Polyanskiy, S. C. Draper, L. Zheng, Y. Kochman, D. Wang and J. Sun. This work was performed during the first author's visit to the Stochastic Systems Group (SSG) at MIT from Oct 2011 to Jan 2012. He would like to thank Prof. A. S. Willsky and the members of SSG for their hospitality during the visit.

V. Tan is supported by a fellowship from A\*STAR, Singapore. O. Kosut is supported by Shell Global Solutions International B.V.

### REFERENCES

- [1] A. El Gamal and Y.-H. Kim, *Network Information Theory*. Cambridge, U.K.: Cambridge University Press, 2012.
- [2] R. Ahlswede, "Multiway communication channels," in *Intl. Symp. on Inf. Th.*, Tsahkadsor, Armenian S.S.R, 1971, pp. 23–52.
- [3] H. H. J. Liao, "Multiple access channels," Ph.D. dissertation, University of Hawaii, Honolulu, 1972.
- [4] J. Körner and K. Marton, "General broadcast channels with degraded message sets," *IEEE Trans. on Inf. Th.*, vol. 23, no. 1, pp. 60–64, 1977.
- [5] T. Cover, "Comments on broadcast channels," *IEEE Trans. on Inf. Th.*, vol. 44, no. 6, pp. 2524–30, 1998.
- [6] P. P. Bergmans, "Random coding theorems for broadcast channels with degraded components," *IEEE Trans. Inf. Th.*, vol. 19, pp. 197–207, 1973.
- [7] D. Slepian and J. K. Wolf, "Noiseless coding of correlated information sources," *IEEE Trans. on Inf. Th.*, vol. 19, pp. 471–80, 1973.
- [8] C. E. Shannon, "A mathematical theory of communication," *Bell System Tech. Journal*, vol. 27, pp. 379–423, 1948.
- [9] Y. Polyanskiy, H. V. Poor, and S. Verdú, "Channel coding in the finite blocklength regime," *IEEE Trans. on Inf. Th.*, vol. 56, pp. 2307–59, May 2010.
- [10] W. Feller, *An Introduction to Probability Theory and Its Applications*, 2nd ed. John Wiley and Sons, 1971.
- [11] M. Hayashi, "Information spectrum approach to second-order coding rate in channel coding," *IEEE Trans. on Inf. Th.*, vol. 55, pp. 4947–66, Nov 2009.
- [12] Y. Polyanskiy, H. V. Poor, and S. Verdú, "Dispersion of Gaussian channels," in *Int. Symp. Inf. Th.*, 2008.
- [13] C. E. Shannon, "Probability of error for optimal codes in a Gaussian channel," *Bell System Tech. Journal*, vol. 38, pp. 611–656, 1959.
- [14] I. Csiszár and J. Körner, *Information Theory: Coding Theorems for Discrete Memoryless Systems*. Akademiai Kiado, 1981.
- [15] R. G. Gallager, "Source coding with side information and universal coding," MIT LIDS, Tech. Rep., 1976.
- [16] V. N. Koshlev, "On a problem of separate coding of two dependent sources," *Prob. Peredachi Informatsii*, vol. 13, no. 1, pp. 26–32, 1977.
- [17] V. Bentkus, "On the dependence of the Berry-Esseen bound on dimension," *J. Stat. Planning and Inference*, vol. 113, pp. 385–402, 2003.
- [18] V. D. Goppa, "Nonprobabilistic mutual information without memory," *Probl. of Control and Inf. Th.*, vol. 4, pp. 97–102, 1975.
- [19] V. Strassen, "Asymptotische Abschätzungen in Shannons Informationstheorie," in *Trans. Third. Prague Conf. Inf. Th.*, 1962, pp. 689–723.

- [20] D. Baron, M. A. Khojastepour, and R. G. Baraniuk, "How quickly can we approach channel capacity?" in *Asilomar Conf.*, 2004.
- [21] V. Kostina and S. Verdú, "Fixed-length lossy compression in the finite blocklength regime: Discrete memoryless sources," in *Int. Symp. Inf. Th.*, 2011.
- [22] A. Ingber and Y. Kochman, "The dispersion of lossy source coding," in *Data Compression Conference (DCC)*, 2011.
- [23] D. Wang, A. Ingber, and Y. Kochman, "The dispersion of joint source-channel coding," in *Allerton Conference*, 2011, arXiv:1109.6310.
- [24] Y. Polyanskiy, H. V. Poor, and S. Verdú, "Dispersion of the Gilbert-Elliott channel," *IEEE Trans. on Inf. Th.*, vol. 57, pp. 1829 – 48, Apr 2011.
- [25] A. Ingber and M. Feder, "Finite blocklength coding for channels with side information at the receiver," in *Convention of Electrical and Electronics Engineers in Israel (IEEEI)*, 2010.
- [26] A. Ingber, R. Zamir, and M. Feder, "Finite dimensional infinite constellations," in *Int. Symp. Inf. Th.*, 2011.
- [27] I. Kontoyiannis, "Second-order noiseless source coding theorems," *IEEE Trans. on Inf. Th.*, pp. 1339–41, Jul 1997.
- [28] M. Hayashi, "Second-order asymptotics in fixed-length source coding and intrinsic randomness," *IEEE Trans. on Inf. Th.*, vol. 54, pp. 4619–37, Oct 2008.
- [29] Y. Altug and A. B. Wagner, "Moderate deviation analysis of channel coding: Discrete memoryless case," in *Int. Symp. Inf. Th.*, 2010.
- [30] V. Y. F. Tan, "Moderate-deviations of lossy source coding for discrete and Gaussian sources," in *arXiv:1111.2217*, 2011.
- [31] I. Sason, "On refined versions of the Azuma-Hoeffding inequality with applications in information theory," *arXiv:1111.1977*, Nov 2011.
- [32] A. Martinez and A. Guillén i Fàbregas, "Saddlepoint approximation of random-coding bounds," in *Information Theory and Applications Workshop (ITA)*, 2011.
- [33] R. G. Gallager, *Information theory and reliable communication*. New York: Wiley, 1968.
- [34] I. Csiszár and J. Körner, "Towards a general theory of source networks," *IEEE Trans. on Inf. Th.*, vol. 26, pp. 155–567, 1980.
- [35] D. Baron, M. A. Khojastepour, and R. G. Baraniuk, "Redundancy rates of Slepian-Wolf coding," in *Allerton Conf.*, 2004.
- [36] S. Sarvotham, D. Baron, and R. G. Baraniuk, "Variable-rate universal Slepian-Wolf coding with feedback," in *Asilomar Conference on Signals, Systems and Computers*, 2005.
- [37] D.-K. He, L. A. Lastras-Montaño, E.-H. Yang, A. Jagmohan, and J. Chen, "On the redundancy of Slepian-Wolf coding," *IEEE Trans. on Inf. Th.*, vol. 55, no. 12, pp. 5607–27, Dec 2009.
- [38] S. Sarvotham, D. Baron, and R. G. Baraniuk, "Non-asymptotic performance of symmetric Slepian-Wolf coding," in *Conference on Information Sciences and Systems*, 2005.
- [39] C. Chang and A. Sahai, "Universal quadratic lower bounds on source coding error exponents," in *Conference on Information Sciences and Systems*, 2007.
- [40] P. Moulin, Personal communication, Dec 2011.
- [41] T. Cormen, C. Leiserson, R. Rivest, and C. Stein, *Introduction to Algorithms*, 2nd ed. McGraw-Hill Science/Engineering/Math, 2003.
- [42] T. M. Cover, "A proof of the data compression theorem of Slepian and Wolf for ergodic sources," *IEEE Trans. Inf. Th.*, vol. 21, pp. 226–228, Mar. 1975.
- [43] T. S. Han, *Information-Spectrum Methods in Information Theory*. Springer Berlin Heidelberg, Feb 2010.
- [44] G. Dueck, "Maximal error capacity regions are smaller than average error capacity regions for multi-user channels," *Probl. Control Inf. Theory*, vol. 7, pp. 11–19, 1978.
- [45] T. S. Han and K. Kobayashi, "A new achievable rate region for the interference channel," *IEEE Trans. Inf. Theory*, vol. 27, no. 1, pp. 49–60, 1981.
- [46] G. D. Forney, "On exponential error bounds for random codes on the BSC," 2001, Unpublished manuscript.
- [47] T. S. Han, "An information-spectrum approach to capacity theorems for the general multiple-access channel," *IEEE Trans. on Inf. Th.*, vol. 44, no. 7, pp. 2773–95, Jul 1998.
- [48] G. Dueck, "The strong converse coding theorem for the multiple-access channel," *J. Combinatorics, Information & System Science*, pp. 187–196, 1981.
- [49] R. Ahlswede, "An elementary proof of the strong converse theorem for the multiple access channel," *J. of Combinatorics, Information & System Sciences*, pp. 216–230, 1982.
- [50] U. Augustin, "Gedachtnisfreie kannale for diskrete zeit," *Z. Wahrscheinlichkeits theory verw*, pp. 10–61, 1966.
- [51] S. Boucheron and M. R. Salamatian, "About priority encoding transmission," *IEEE Trans. on Inf. Th.*, vol. 46, no. 2, pp. 699–705, 2000.
- [52] H.-F. Chong, M. Motani, H. K. Garg, and H. E. Gamal, "On the Han-Kobayashi region for the interference channel," *IEEE Trans. Inf. Theory*, vol. 54, no. 7, pp. 3188–3195, 2008.
- [53] K. Marton, "A coding theorem for the discrete memoryless broadcast channel," *IEEE Trans. on Inf. Th.*, vol. 25, pp. 306–311, Mar 1979.
- [54] A. El Gamal and E. C. van der Meulen, "A proof of Marton's coding theorem for the discrete memoryless broadcast channel," *IEEE Trans. on Inf. Th.*, vol. 27, no. 1, pp. 120–122, Jan 1981.
- [55] H. Tyagi and P. Narayan, "The Gelfand-Pinsker channel: Strong converse and upper bound for the reliability function," in *Proc. of IEEE Intl. Symp. on Info. Theory*, Seoul, Korea, 2009.
- [56] B. Kelly and A. B. Wagner, "Error exponents and test channel optimization for the Wyner-Ziv problem," in *Allerton Conference*, 2007.
- [57] T. Weissman, E. Ordentlich, G. Seroussi, S. Verdú, and M. L. Weinberger, "Inequalities for the  $l_1$  deviation of the empirical distribution," Hewlett-Packard Labs, Tech. Rep., 2003.