

Composite Learning Control With Application to Inverted Pendulums

Yongping Pan, and Haoyong Yu

Abstract— Composite adaptive control (CAC) that integrates direct and indirect adaptive control techniques has been shown to be superior in many control occasions. Yet, the condition of persistent excitation (PE) still has to be satisfied to guarantee parameter convergence in CAC. This paper proposes a model reference composite learning control (MRCLC) strategy for a class of affine nonlinear systems with parametric uncertainties to guarantee parameter convergence without the PE condition. In the composite learning, an integral during a moving-time window is utilized to construct a prediction error, a command filter is applied to eliminate the derivation of plant states, and both the tracking error and the prediction error are applied to update adaptive parameters. It is proven that the closed-loop system achieves global exponential-like stability under time-interval excitation of regression functions. The effectiveness of the proposed approach has been verified by the application to an inverted pendulum control problem.

I. INTRODUCTION

Adaptive control is one of the major control techniques of handling uncertainties in nonlinear systems and has still attracted great concern in recent years [1]–[4]. In particular, *model reference adaptive control* (MRAC) is a popular adaptive control architecture which aims to make an uncertain dynamical system behave like a chosen reference model. The way of parameter estimation in adaptive control gives rise to two different schemes, namely indirect and direct schemes [5]. *Composite adaptive control* (CAC) is an integrated direct and indirect adaptive control technique which aims to achieve better tracking and parameter estimation through faster and smoother parameter adaptation [6]. In the CAC, prediction errors, which are related to parameter estimation errors, are generated by identification models, and both tracking errors and prediction errors are applied to update adaptive parameters. The superiority of CAC on performance improvement has been demonstrated in many control designs, where some latest results can be referred to [7]–[14]. Nevertheless, as in the classical direct/indirect adaptive control, CAC only achieves asymptotic convergence of tracking errors and does not guarantee parameter convergence, i.e. accurate parameter estimation, unless plant states satisfy the condition of persistent excitation (PE) [5]. It is well known that the PE condition is very strict and often infeasible to monitor online in practical control systems [15].

Learning is one of the fundamental features of autonomous intelligent behavior, and it is closely related to parameter

convergence in adaptive control [18]. The benefits brought by parameter convergence include accurate closed-loop identification, exponential stability and robustness against measurement noise [16]. An emerging *concurrent learning* technique provides a feasible and promising way of achieving parameter convergence without the PE condition in MRAC [15]–[17]. The difference between the concurrent learning and the composite adaptation lies in how to construct prediction errors. In the concurrent learning, a dynamic data stack constituted by online recorded data is used in constructing prediction errors, singular value maximization is applied to maximize the singular value of the data stack, and exponential convergence of both tracking errors and estimation errors is guaranteed if regression functions of plant uncertainties are excited over a time interval such that sufficiently rich data are recorded in the data stack. Yet in this innovative design, the singular value maximization leads to an exhaustive search over all recorded data, and the derivatives of all plant states are required to calculate prediction errors.

This paper proposes a novel model reference composite learning control (MRCLC) strategy for a class of parametric uncertain affine nonlinear systems. In the composite learning, a modified modelling error that can utilize online recorded data is defined as the prediction error, a second-order linear filter is applied to avoid the derivation of plant states, and both the tracking error and the prediction error are applied to update adaptive parameters. It is proven that the closed-loop system achieves global exponential-like stability under time-interval excitation, rather than PE, of regression functions. Consequently, the limitations of concurrent learning are eliminated by the proposed MRCLC design. The effectiveness of the proposed approach is verified by the application to an inverted pendulum control problem.

The notations of this paper are relatively standard, where \mathbb{R} , \mathbb{R}^+ , \mathbb{R}^n and $\mathbb{R}^{n \times m}$ denote the spaces of real numbers, positive real numbers, real n -dimensional vectors, and $n \times m$ -dimensional matrixes, respectively, $|\cdot|$ and $\|\cdot\|$ denote the absolute value and Euclidean-norm, respectively, L_∞ denotes the space of bounded signals, $\Omega_c := \{\mathbf{x} \mid \|\mathbf{x}\| \leq c\}$ denotes the ball of radius c , $\min\{\cdot\}$ and $\max\{\cdot\}$ are the minimum and maximum functions, respectively, $\text{sgn}(\cdot)$ is the sign function, $\text{rank}(A)$ is the rank of A , $\text{diag}(\cdot)$ is a diagonal matrix, and \mathcal{C}^k represents the space of functions whose k -order derivatives all exist and are continuous, where $c \in \mathbb{R}^+$, $\mathbf{x} \in \mathbb{R}^n$, $A \in \mathbb{R}^{n \times m}$, and n , m and k are positive integers.

*This work was supported in part by the National Research Foundation of Singapore under Grant no. NRF2014NRF-POC001-027.

Y. Pan and H. Yu are with the Department of Biomedical Engineering, National University of Singapore, Singapore 117575, Singapore. biep-anu@nus.edu.sg; biehyh@nus.edu.sg

II. PROBLEM FORMULATION

This section discusses the formulation of learning from the classical MRAC. For clear illustration, consider a class of n th order single-input single-output (SISO) affine nonlinear systems as follows [15]:

$$\dot{\mathbf{x}} = \Lambda \mathbf{x} + \mathbf{b}(f(\mathbf{x}) + u) \quad (1)$$

where $\Lambda \in \mathbb{R}^{n \times n}$, $\mathbf{b} := [0, \dots, 0, 1]^T$, $\mathbf{x}(t) := [x_1(t), x_2(t), \dots, x_n(t)]^T \in \mathbb{R}^n$ is the vector of plant states, $u(t) \in \mathbb{R}$ is the control input, and $f(\mathbf{x}) : \mathbb{R}^n \mapsto \mathbb{R}$ is the \mathcal{C}^1 model uncertainty. A reference model that characterizes the desired response of the system (1) is given by

$$\dot{\mathbf{x}}_r = A_r \mathbf{x}_r + \mathbf{b}_r r \quad (2)$$

with $\mathbf{b}_r := [0, \dots, 0, b_r]^T \in \mathbb{R}^n$, where $A_r \in \mathbb{R}^{n \times n}$ is a strictly Hurwitz matrix, $\mathbf{x}_r(t) := [x_{r1}(t), \dots, x_{rn}(t)]^T \in \mathbb{R}^n$ is the vector of reference model states, and $r(t) \in \mathbb{R}$ is a bounded reference signal. This study is based on the facts that \mathbf{x} is measurable, (Λ, \mathbf{b}) is controllable, and $f(\mathbf{x})$ is linearly parameterizable such that [15]–[17]

$$f(\mathbf{x}) = W^* \Phi(\mathbf{x}) \quad (3)$$

in which $W^* \in \Omega_{c_w} \subset \mathbb{R}^N$ is a unknown constant parameter vector, $\Phi(\mathbf{x}) : \mathbb{R}^n \mapsto \mathbb{R}^N$ is a known regression function vector, and $c_w \in \mathbb{R}^+$ is a known constant. The following definitions are given for facilitating control synthesis.

Definition 1 [15]: A bounded signal $\Phi(t) \in \mathbb{R}^n$ is *exciting* over $t \in [T_e - \tau_d, T_e]$ with $\tau_d \in \mathbb{R}^+$ and $T_e \geq \tau_d$ if there is a constant $\sigma \in \mathbb{R}^+$ such that $\int_{T_e - \tau_d}^{T_e} \Phi(\tau) \Phi^T(\tau) d\tau \geq \sigma I$.

Definition 2 [15]: A bounded signal $\Phi(t) \in \mathbb{R}^n$ is *persistently exciting* if there exist constants $\sigma, \tau_d \in \mathbb{R}^+$ such that $\int_{t - \tau_d}^t \Phi(\tau) \Phi^T(\tau) d\tau \geq \sigma I, \forall t \geq 0$.

Let $\mathbf{x}_{re} := [\mathbf{x}_r^T, r]^T$ be an augmented reference signal, and $\hat{W} \in \mathbb{R}^N$ be an estimate of W^* . Define a tracking error $\mathbf{e}(t) := \mathbf{x}(t) - \mathbf{x}_r(t)$, and an estimation error $\tilde{W}(t) := W^* - \hat{W}(t)$. Our objective is to design a proper control law u such that both \mathbf{e} and \tilde{W} exponentially converge to $\mathbf{0}$.

III. COMPOSITE LEARNING CONTROL STRATEGY

A. Review of Previous Results

From [5], the MRAC law can be designed as follows:

$$u = \underbrace{-\mathbf{k}_e^T \mathbf{e}}_{u_{pd}} + \underbrace{\mathbf{k}_r^T \mathbf{x}_{re}}_{u_{re}} - \underbrace{\hat{W}^T \Phi(\mathbf{x})}_{u_{ad}} \quad (4)$$

where u_{pd} denotes a proportional-derivative (PD) feedback part, u_{re} denotes a reference signal feedforward part, u_{ad} denotes an adaptive part, $\mathbf{k}_e \in \mathbb{R}^n$ and $\mathbf{k}_r \in \mathbb{R}^{n+1}$ are control gains, and the design of \mathbf{k}_r satisfies

$$\mathbf{b} \mathbf{k}_r^T \mathbf{x}_{re} = (A_r - \Lambda) \mathbf{x}_r + \mathbf{b}_r r. \quad (5)$$

Thus, one obtains the tracking error dynamics

$$\dot{\mathbf{e}} = A \mathbf{e} + \mathbf{b} \tilde{W}^T \Phi(\mathbf{x}) \quad (6)$$

where $A := \Lambda - \mathbf{b} \mathbf{k}_e^T$ is designed to be strictly Hurwitz. Thus, for any matrix $Q = Q^T > 0$, a unique solution $P = P^T > 0$ exists for the following Lyapunov equation:

$$A^T P + P A = -Q. \quad (7)$$

Let the adaptive law of \hat{W} be as follows:

$$\dot{\hat{W}} = \mathcal{P}(\hat{W}, \gamma \mathbf{e}^T P \mathbf{b} \Phi(\mathbf{x})) \quad (8)$$

where $\gamma \in \mathbb{R}^+$ is a learning rate, and $\mathcal{P}(\hat{W}, \bullet)$ is a projection operator given by [5]

$$\mathcal{P}(\hat{W}, \bullet) = \begin{cases} \bullet - \hat{W} \hat{W}^T \cdot \bullet / \|\hat{W}\|^2, \\ \text{if } \|\hat{W}\| \geq c_w \text{ \& } \hat{W}^T \cdot \bullet > 0. \\ \bullet, \text{ otherwise} \end{cases}$$

Choose a Lyapunov function candidate

$$V(\mathbf{z}) = \mathbf{e}^T P \mathbf{e} / 2 + \tilde{W}^T \tilde{W} / (2\gamma) \quad (9)$$

with $\mathbf{z} := [\mathbf{e}^T, \tilde{W}^T]^T \in \mathbb{R}^{n+N}$ for the closed-loop dynamics composed of (6) and (8). It follows from the result of [5] that if $\hat{W}(0) \in \Omega_{c_w}$ and $\Phi(\mathbf{x})$ is persistently exciting, then the closed-loop system (6) with (8) achieves *global exponential stability* in the sense that both the tracking error $\mathbf{e}(t)$ and the estimation error $\tilde{W}(t)$ converge to $\mathbf{0}$.

To remove the requirement of the PE condition on $\Phi(\mathbf{x})$ for parameter convergence in the result of [5], a concurrent learning law of \hat{W} is proposed in [15] as follows:

$$\dot{\hat{W}} = \gamma \text{proj}(\mathbf{e}^T P \mathbf{b} \Phi(\mathbf{x}) + \sum_{j=1}^p \epsilon_j \tilde{\Phi}^T(\mathbf{x}_j)) \quad (10)$$

where j is a certain epoch, $p \geq N$ is the number of stored data, and $\epsilon_j := \tilde{W}_j^T \Phi(\mathbf{x}_j)$ denotes a modelling error which is regarded as the prediction error calculated by

$$\epsilon_j = \mathbf{b}^T (\dot{\mathbf{x}}_j - \Lambda \mathbf{x}_j - \mathbf{b} u_j) - \hat{W}_j^T \Phi(\mathbf{x}_j). \quad (11)$$

where \mathbf{x}_j, u_j and \hat{W}_j are online recorded data of \mathbf{x}, u and \hat{W} at the epoch j , respectively. Let $Z := [\Phi(\mathbf{x}_1), \Phi(\mathbf{x}_2), \dots, \Phi(\mathbf{x}_p)] \in \mathbb{R}^{p \times N}$ be a dynamic data stack. It is shown in the concurrent learning MRAC approach of [15] that if $\hat{W}(0) \in \Omega_{c_w}$ and $\text{rank}(Z) = N$ after $t \geq T_e$, then the closed-loop system (6) with (10) achieves *global exponential-like stability* in the sense that both the tracking error \mathbf{e} and the estimation error \tilde{W} converge to $\mathbf{0}$ on $t \geq T_e$. Yet in [15], fixed-point smoothing must be applied to estimate $\dot{\mathbf{x}}_j$ in (11) such that the prediction error ϵ_j is calculable, and singular value maximization should be applied to exhaustively search the data stack Z to maximize its singular value.

B. Composite Learning Control Design

Define a modified modelling error $\epsilon(t) := \Theta_e \tilde{W}(t)$ as the prediction error, in which

$$\Theta_e := \begin{cases} \Theta(t) & \text{for } t < T_e \text{ if } \Theta(t) < \sigma I \\ \Theta(T_e) & \text{for } t \geq T_e \text{ if } \Theta(T_e) \geq \sigma I \end{cases} \quad (12)$$

with $\sigma = \max_{t \geq 0} \{\sigma_r(t)\}$ and

$$\Theta(t) := \int_{t - \tau_d}^t \Phi(\mathbf{x}(\tau)) \Phi^T(\mathbf{x}(\tau)) d\tau \quad (13)$$

where $\tau_d \in \mathbb{R}^+$ is an integral duration, $\sigma_r(t) \in \mathbb{R}^+$ is the minimal singular value of $\Theta(t)$, and $T_e \geq \tau_d$ is the time when $\sigma_r(t)$ reaches its maximum¹. Then, design a composite learning law of \hat{W} as follows:

$$\dot{\hat{W}} = \gamma \text{proj}(\mathbf{e}^T P \mathbf{b} \Phi(\mathbf{x}) + k_w \epsilon) \quad (14)$$

in which $k_w \in \mathbb{R}^+$ is a weight factor.

From $\epsilon = \Theta_e \tilde{W}$ and (12), the calculation of ϵ can follow the calculation of $\Theta \tilde{W}$ as follows:

$$\Theta(t) \tilde{W}(t) = \Theta(t) W^* - \Theta(t) \hat{W}(t) \quad (15)$$

where $\Theta \hat{W}$ is directly obtainable by (13) and (14), and ΘW^* is not directly obtainable. Multiplying $\Phi(\mathbf{x}(t))$ at the both sides of (6), integrating the resulting equality over $[t - \tau_d, t]$ and making some transformations, one gets

$$\Theta(t) W^* = \int_{t-\tau_d}^t \Phi(\mathbf{x})(\dot{e}_n + \hat{W}^T \Phi(\mathbf{x}) - \mathbf{b} A \mathbf{e}) d\tau \quad (16)$$

in which the time variable τ is omitted in the above integral part. Since \dot{e}_n is unavailable, a second-order command filter with unit gain is implemented as follows [19]:

$$\begin{cases} \dot{\hat{e}}_n = \hat{e}_{n+1} \\ \dot{\hat{e}}_{n+1} = -2\zeta\omega\hat{e}_{n+1} + \omega^2(e_n - \hat{e}_n) \end{cases} \quad (17)$$

with $\hat{e}_n(0) = e_n(0)$ and $\hat{e}_{n+1}(0) = 0$, where $\omega \in \mathbb{R}^+$ is the natural frequency, $\zeta \in \mathbb{R}^+$ is the damping factor, and \hat{e}_n and \hat{e}_{n+1} are estimates of e_n and \dot{e}_n , respectively. The integral in (16) is effective in reducing the influence of measurement noise on the calculation of ΘW^* . Thus, ω in (17) can be made sufficiently small such that $\hat{e}_{n+1} \approx \dot{e}_n$. For simplifying analysis, assume that $\hat{e}_{n+1} = \dot{e}_n$ as in [19]. The reasonability of this assumption will also be verified in the subsequent simulations. The following theorem establishes the stability results of the closed-loop system comprised of (6) and (14) under the proposed control law (4) with (14).

Theorem 1: Consider the system (1) driven by the control law (4) with (14), where the control gain k_r is designed to satisfy (5), and the control gain k_e is selected to make A in (6) strictly Hurwitz. If $\hat{W}(0) \in \Omega_{c_w}$ and $\Theta(T_e) \geq \sigma I$ are satisfied with certain constants $c_w, \sigma \in \mathbb{R}^+$ and a finite time $T_e \geq \tau_d$, then the closed-loop system composed of (6) and (14) achieves *global exponential-like stability* in the sense that all closed-loop signals are bounded for all $t \geq 0$ and both the tracking error $\mathbf{e}(t)$ and the estimation error $\tilde{W}(t)$ exponentially converge to $\mathbf{0}$ on $t \geq T_e$.

proof: Firstly, consider the control problem at $t \in [0, \infty)$. Choose the Lyapunov function candidate V in (9) for the closed-loop system comprised of (6) and (14). The time derivative of V along (6) is as follows:

$$\dot{V} = -\mathbf{e}^T Q \mathbf{e} / 2 + \tilde{W}^T (\mathbf{e}^T P \mathbf{b} \Phi(\mathbf{x}) - \dot{\hat{W}}) \quad (18)$$

where (7) is utilized to obtain (18). Applying (14) to (18), noting $\hat{W}(0) \in \Omega_{c_w}$ and $\epsilon = \Theta_e \tilde{W}$, and using the projection

¹The presence of T_e and σ here is only used in the subsequent performance analysis and their values can only be gotten at the control process.

operator results in [5], one obtains

$$\dot{V} \leq -\mathbf{e}^T Q \mathbf{e} / 2 - k_w \tilde{W}^T \Theta_e \tilde{W}, \forall t \geq 0. \quad (19)$$

Noting $Q > 0$ and $\Theta_e \geq 0$, one gets $\dot{V}(t) \leq 0, \forall t \geq 0$, which implies that the closed-loop system is stable in the sense that $\mathbf{e}, \tilde{W} \in L_\infty$. Since $\dot{V}(t) \leq 0$ is satisfied $\forall \mathbf{x}(0) \in \mathbb{R}^n$ and V in (9) is radially unbounded (i.e. $V(\mathbf{z}) \rightarrow \infty$ as $\mathbf{z} \rightarrow \infty$), the stability is global. Using $\mathbf{e}, \tilde{W} \in L_\infty$, one also obtains $\mathbf{x}, \hat{W}, \Phi, \epsilon, u \in L_\infty$ from their definitions. Thus, all closed-loop signals are bounded for all $t \geq 0$.

Secondly, consider the control problem at $t \in [T_e, \infty)$, since there exist $\sigma \in \mathbb{R}^+$ and $T_e \geq \tau_d$ such that $\Theta(T_e) \geq \sigma I$, i.e. the bounded signal $\Phi(\mathbf{x}(t))$ is exciting over $t \in [T_e - \tau_d, T_e]$, it is obtained from (19) that

$$\dot{V} \leq -\mathbf{e}^T Q \mathbf{e} / 2 - k_w \sigma \tilde{W}^T \tilde{W}, \forall t \geq T_e. \quad (20)$$

It follows from (9) and (20) that

$$\dot{V}(t) \leq -k_s V(t), \forall t \geq T_e \quad (21)$$

where $k_s := \min\{\lambda_{\min}(Q) / \lambda_{\max}(P), 2\gamma k_w \sigma\} \in \mathbb{R}^+$, which implies that the closed-loop system achieves global exponential stability in the sense that both \mathbf{e} and \tilde{W} exponentially converge to $\mathbf{0}$ on $t \geq T_e$. \square

IV. APPLICATION TO INVERTED PENDULUM

Consider the following inverted pendulum model [15]:

$$\dot{\mathbf{x}} = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \mathbf{x} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} (W^{*T} \Phi(\mathbf{x}) + u)$$

in which $W^* = [1, -1, 0.5]^T$ and $\Phi(\mathbf{x}) = [\sin x_1, |x_2| x_2, e^{x_1 x_2}]^T$. The reference model is given as follows:

$$\dot{\mathbf{x}}_r = \begin{bmatrix} 0 & 1 \\ -1 & -2 \end{bmatrix} \mathbf{x}_r + \begin{bmatrix} 0 \\ 1 \end{bmatrix} r.$$

For simulation, set $\mathbf{x}(0) = \mathbf{x}_r(0) = [1, 1]^T$, $r(t) = 1$ while $t \in [20, 25)$, and $r(t) = 0$ while $t \in [0, 20) \cup [25, \infty)$.

The parameters selection of the proposed control law (4) with (14) is based on that of [15], where the details are given as follows: firstly, solve (5) to obtain $k_r = [-1, -2, 1]^T$; secondly, select $k_e = [1.5, 1.3]^T$ so that A is strictly Hurwitz; thirdly, solve (7) with $Q = 10I$ to obtain P ; fourthly, set $\tau_d = 5$ s in (13); fifthly, set $\gamma = 3.5$, $k_w = 6$ and $c_w = 5$ in (14); finally, set $\omega = 100$ and $\zeta = 0.7$ in (17).

Simulations are carried out in MATLAB software running on Windows 7, where the solver is set to be fixed-step ode 5 with the step size being 0.001 s and other settings being default values. The conventional MRAC in [5] and the model reference CAC (MRCAC) with Q -modification in [20] are selected as baseline controllers, where the reference models and shared parameters of all controllers are set to be the same for fair comparisons. Simulation trajectories by all controllers are depicted Fig. 1. For the control performance, it is shown that the plant state \mathbf{x} follows its desired signal \mathbf{x}_r closely with a smooth control input u for all controllers, the MRCAC achieves the worst tracking accuracy [see Fig. 1(c)], and the proposed MRCLC achieves the best tracking accuracy [see Fig. 1(e)]. For the learning performance, it is observed that

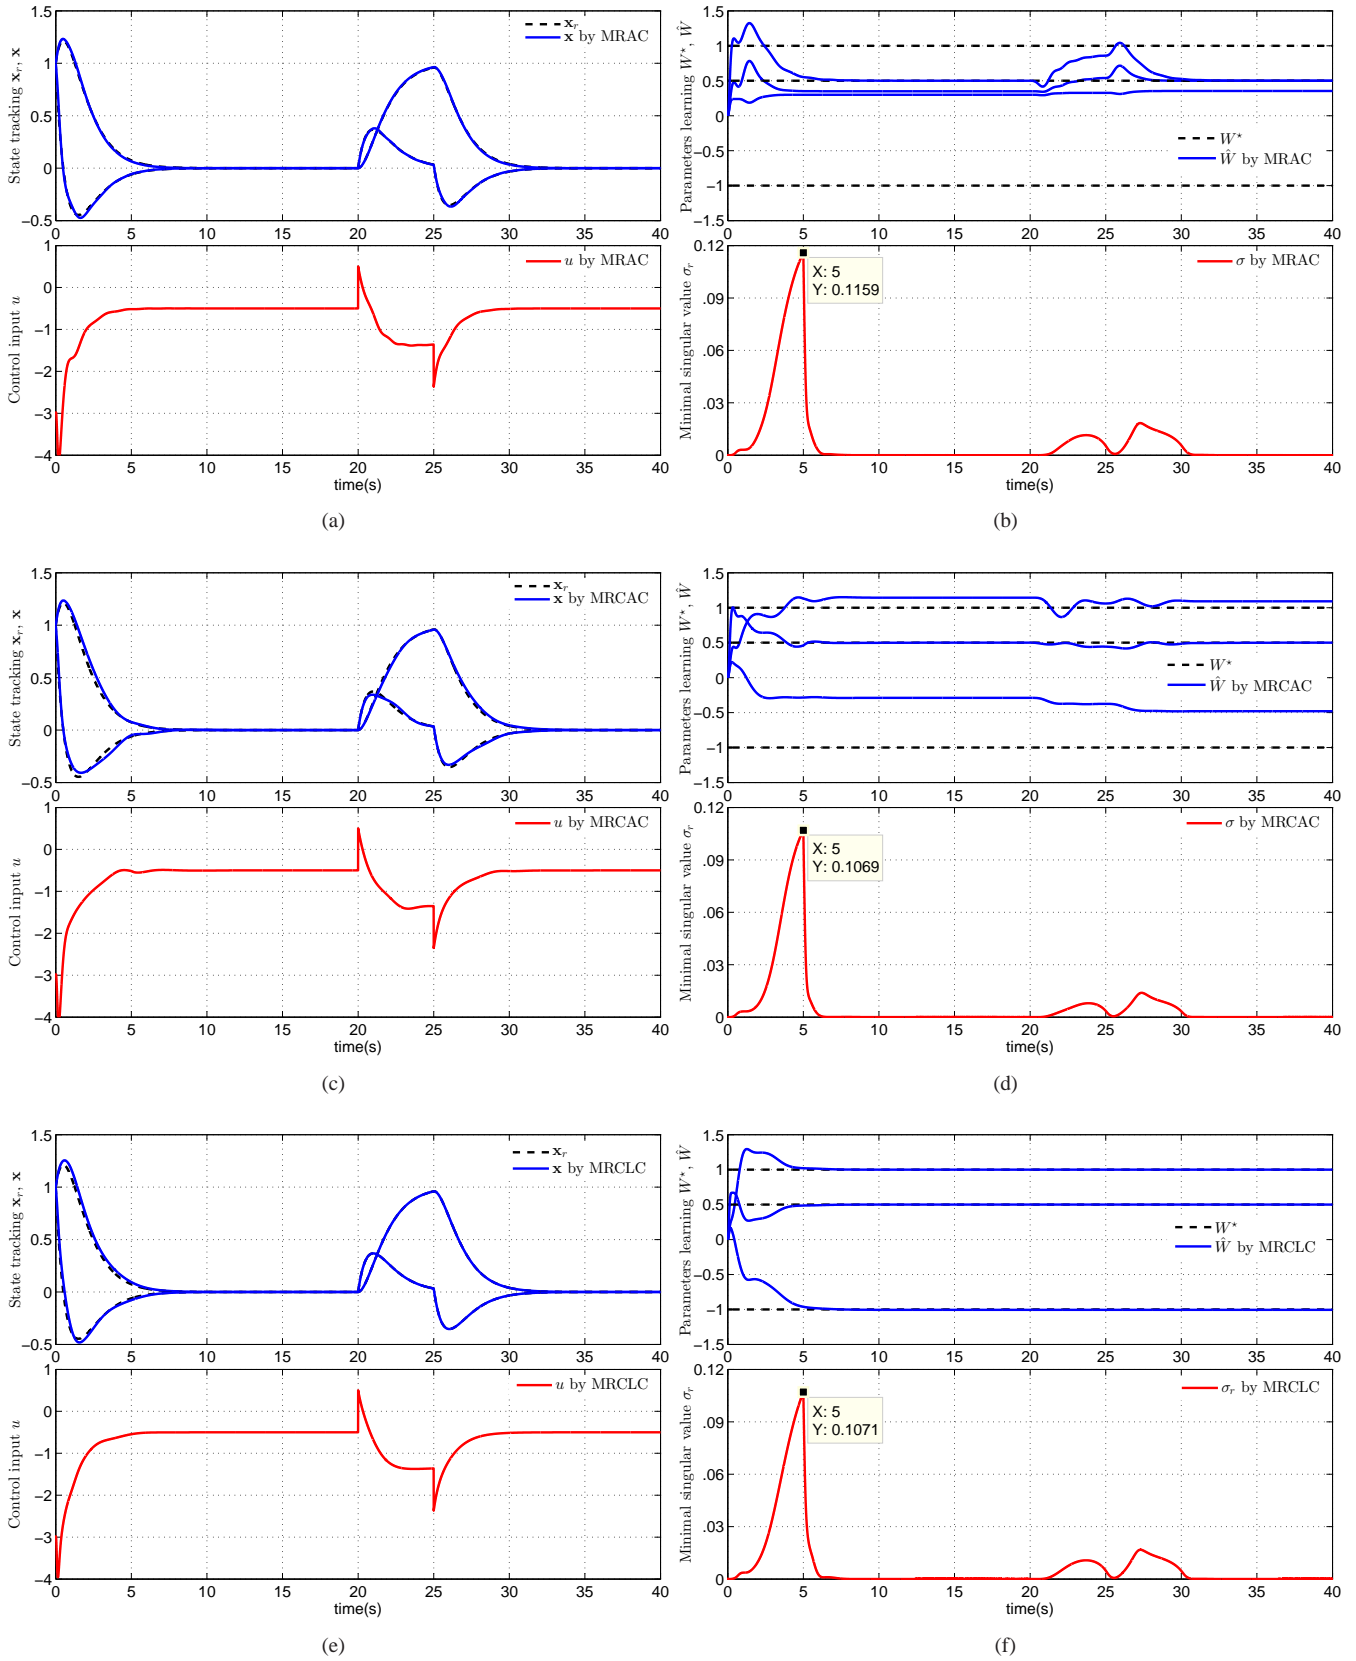


Fig. 1. Simulation trajectories by all controllers. (a) Control performance by the MRAC. (b) Learning performance by the MRAC. (c) Control performance by the MRCAC. (d) Learning performance by the MRCAC. (e) Control performance by the MRCLC. (f) Learning performance by the MRCLC.

interval excitation occurs with σ rising at $t = 5$ s in this case, the MRAC does not show any parameter convergence [see Fig. 1(b)], the MRCLC shows better parameter estimation than the MRAC but still does not achieve parameter convergence [see Fig. 1(d)], and the proposed MRCLC achieves fast and accurate parameter estimation even the excitation is short and weak [see Fig. 1(f)].

V. CONCLUSIONS

In this paper, a MRCLC strategy has been successfully developed for a class of parametric uncertain affine nonlinear systems such that parameter convergence can be guaranteed by time-interval excitation, rather than PE, of regression functions. The proposed approach has also been applied to the control of an inverted pendulum, where superior control and learning performances are demonstrated compared with the conventional MRAC and the MRCAC. Further work would focus on the extension of the proposed approach to wider classes of nonlinear systems such as multi-input multi-output affine nonlinear systems [22] and strict-feedback nonlinear systems [23] under certain conditions.

REFERENCES

- [1] K. J. Astrom and B. Wittenmark, *Adaptive Control*, 2 ed. Mineola, NY, USA: Dover, 2008.
- [2] A. Astolfi, D. Karagiannis, and R. Ortega, *Nonlinear and Adaptive Control with Applications*. London, UK: Springer, 2008.
- [3] I. D. Landau, R. Lozano, M. M'Saad, and A. Karimi, *Adaptive Control: Algorithms, Analysis and Applications*, 2 ed. London, UK: Springer, 2011.
- [4] E. Lavretsky E, and K. A. Wise, *Robust and Adaptive Control: With Aerospace Applications*. London, UK: Springer, 2013.
- [5] P. A. Ioannou and J. Sun, *Robust Adaptive Control*. Englewood Cliffs, NJ: Prentice Hall, 1996.
- [6] J.-J. E. Slotine and W. Li, "Composite adaptive control of robot manipulators," *Automatica*, vol. 25, no. 4, pp. 509-519, Jul. 1989.
- [7] D. Naso, F. Cupertino, and B. Turchiano, "Precise position control of tubular linear motors with neural networks and composite learning," *Control Eng. Practice*, vol. 18, no. 5, pp. 515-522, May 2010.
- [8] A. Mohanty and B. Yao, "Integrated direct/indirect adaptive robust control of hydraulic manipulators with valve deadband," *IEEE-ASME Trans. Mechatron.*, vol. 16, no. 4, pp. 707-715, Aug. 2011.
- [9] P. M. Patre, S. Bhasin, Z. D. Wilcox, and W. E. Dixon, "Composite adaptation for neural network-based controllers," *IEEE Trans. Autom. Control*, vol. 55, no. 4, pp. 944-950, Apr. 2010.
- [10] C. Hu, B. Yao, and Q. Wang, "Integrated direct/indirect adaptive robust contouring control of a biaxial gantry with accurate parameter estimations," *Automatica*, vol. 46, no. 4, pp. 701-707, Apr. 2010.
- [11] Y. P. Pan, M. J. Er, and T. R. Sun, "Composite adaptive fuzzy control for synchronizing generalized Lorenz systems," *Chaos*, vol. 22, no. 2, Article ID 023144, Jun. 2012.
- [12] Y. P. Pan, Y. Zhou, T. R. Sun, and M. J. Er, "Composite adaptive fuzzy H^∞ tracking control of uncertain nonlinear systems," *Neurocomputing*, vol. 99, pp. 15-24, Jan. 2013.
- [13] X. J. Wei, N. Chen, and W. Q. Li, "Composite adaptive disturbance observer-based control for a class of nonlinear systems with multi-source disturbance," *Int. J. Adapt. Control Signal Process.*, vol. 27, no. 3, pp. 199-208, Mar. 2013.
- [14] Z. T. Dydek, A. M. Annaswamy, J. J. E. Slotine, and E. Lavretsky, "Composite adaptive posicast control for a class of LTI plants with known delay," *Automatica*, vol. 49, pp. 1914-1924, Jun. 2013.
- [15] G. V. Chowdhary and E. N. Johnson, "Concurrent learning for convergence in adaptive control without persistency of excitation," in Proc. *IEEE Conf. Decision Control*, Atlanta, GA, 2010, pp. 3674-3679.
- [16] G. V. Chowdhary, M. Muhlegg, and E. N. Johnson, "Exponential parameter and tracking error convergence guarantees for adaptive controllers without persistency of excitation," *Int. J. Control*, vol. 87, no. 8, pp. 1583-1603, May 2014.
- [17] G. V. Chowdhary and E. N. Johnson, "Theory and flight-test validation of a concurrent-learning adaptive controller," *J. Guid. Control Dyn.*, vol. 34, no. 2, pp. 592-607, 2011.
- [18] P. J. Antsaklis, "Intelligent learning control," *IEEE Control Syst. Mag.*, vol. 15, no. 3, pp. 5-7, Jun. 1995.
- [19] J. C. Hu and H. H. Zhang, "Immersion and invariance based command-filtered adaptive backstepping control of VTOL vehicles," *Automatica*, vol. 49, no. 7, pp. 2160-2167, Jul. 2013.
- [20] K. Y. Volyanskyy, W. M. Haddad, and A. J. Calise, "A new neuroadaptive control architecture for nonlinear uncertain dynamical systems: beyond σ - and e-modifications," *IEEE Trans. Neural Netw.*, vol. 20, no. 11, pp. 1707-1723, Nov. 2009.
- [21] S. V. Joshi, A. Sreenatha, and J. Chandrasekhar, "Suppression of wing rock of slender delta wings using a single neuron controller," *IEEE Trans. Autom. Control Syst. Tech.*, vol. 6, pp. 671-677, Sep. 1998.
- [22] Y. P. Pan and M. J. Er, "Enhanced adaptive fuzzy control with optimal approximation error convergence," *IEEE Trans. Fuzzy Syst.*, vol. 21, no. 6, pp. 1123-1132, Dec. 2013.
- [23] Y. P. Pan and H. Y. Yu, "Dynamic surface control via singular perturbation analysis," *Automatica*, vol. 51, pp. 29-33, Jul. 2015.