

# Fundamental Limits of Repeaterless Quantum Communications

Stefano Pirandola,<sup>1</sup> Riccardo Laurenza,<sup>1</sup> Carlo Ottaviani,<sup>1</sup> and Leonardo Banchi<sup>2</sup>

<sup>1</sup>*Computer Science and York Centre for Quantum Technologies,  
University of York, York YO10 5GH, United Kingdom*

<sup>2</sup>*Department of Physics and Astronomy, University College London,  
Gower Street, London WC1E 6BT, United Kingdom*

Quantum communications promises reliable transmission of quantum information, efficient distribution of entanglement and generation of completely secure keys. For all these tasks, we need to determine the optimal point-to-point rates that are achievable by two remote parties at the ends of a quantum channel, without restrictions on their local operations and classical communication, which can be unlimited and two-way. These two-way assisted capacities represent the ultimate rates that are reachable without quantum repeaters. By constructing an upperbound based on the relative entropy of entanglement and devising a dimension-independent technique dubbed “teleportation stretching”, we establish these capacities for many fundamental channels, namely bosonic lossy channels, quantum-limited amplifiers, dephasing and erasure channels in arbitrary dimension. In particular, we determine the fundamental rate-loss trade-off affecting any protocol of quantum key distribution. Our findings set the ultimate limits of point-to-point quantum communications and provide the most precise and general benchmarks for quantum repeaters.

Quantum information [1–3] is moving towards practical implementations, gradually evolving into next-generation quantum technologies. The development of completely secure quantum communications [4–6] is an appealing alternative to the present and insecure classical infrastructure. The idea of a quantum Internet [7] is attracting huge efforts from different fields, with hybrid solutions being considered very promising [8–10]. But quantum information is more fragile than its classical counterpart. Due to inevitable interactions with the environment, the ideal performances of quantum protocols may rapidly degrade. Unfortunately, this limitation affects any point-to-point quantum communication and requires the use of quantum repeaters [11]. An open problem is therefore to determine the ultimate point-to-point limits that we can reach without these devices, so that we fully understand when they are actually needed and what benchmarks they need to surpass.

Our work investigates this basic problem and establishes the optimal rates that are achievable by point-to-point (i.e., repeaterless) quantum communications in the most relevant settings. In fact, we consider two remote parties connected by a quantum channel, who may exploit unlimited two-way classical communication (CC) and adaptive local operations (LOs), briefly called adaptive LOCCs. In this general scenario, we determine the maximum achievable rates for transmitting quantum information (two-way quantum capacity  $Q_2$ ), distributing entanglement (two-way entanglement distribution capacity  $D_2$ ) and generating secret keys (secret key capacity  $K$ ), through the most fundamental quantum channels.

The two-way assisted capacities are benchmarks for quantum repeaters because they are derived by removing any restriction from the point-to-point protocols between the remote parties, who may perform the most general strategies allowed by quantum mechanics in the absence of pre-shared entanglement. Clearly these ultimate limits cannot be achieved by imposing restrictions on the num-

ber of channel uses or enforcing energy constraints. Furthermore, we note that current protocols of quantum key distribution (QKD) already exploit relatively large data blocks and high-energy Gaussian modulations [12, 13].

To achieve our results we suitably combine the relative entropy of entanglement (REE) [14–16] with teleportation [9, 17, 18] in a novel reduction method which completely simplifies quantum protocols based on adaptive LOCCs. The first step is to show that two-way capacities cannot exceed a bound based on the REE. The second step is the application of a technique, dubbed “teleportation stretching”, which is valid at any dimension. This allows us to reduce any adaptive protocol to a block form, so that the REE bound becomes a single-letter quantity. In this way, we upperbound the two-way capacities of bosonic Gaussian channels [2], Pauli channels, erasure channels and amplitude damping channels [1].

Most importantly, by showing coincidence with suitable lower bounds, we can prove strikingly simple formulas for the two-way quantum capacity  $Q_2$  ( $= D_2$ ) and the secret-key capacity  $K$  of several fundamental channels. In fact, for the erasure channel we show that  $K = 1 - p$  where  $p$  is the erasure probability; for the dephasing channel we show that  $Q_2 = K = 1 - H_2(p)$ , where  $H_2$  is the binary Shannon entropy and  $p$  is the dephasing probability (we also extend these results to any finite dimension). Then, for a quantum-limited amplifier, we show that  $Q_2 = K = -\log_2(1 - g^{-1})$  where  $g$  is the gain. Finally, for the lossy channel, we show that  $Q_2 = K = -\log_2(1 - \eta)$  where  $\eta$  is the transmissivity.

Note that only the  $Q_2$  of the erasure channel was previously known [20]. It took about 20 years to find the other two-way capacities, which should give an idea of the novelty of our reduction method. Furthermore, the secret-key capacity of the lossy channel determines the maximum rate achievable in QKD. At high loss  $\eta \simeq 0$  we find the optimal rate-loss scaling of  $K \simeq 1.44\eta$  secret bits per channel use. This result completely characterizes the

fundamental rate-loss law which restricts secure quantum optical communications, closing a long-standing investigation with a series of preliminary results achieved in the last years, such as the lower bound of ref. [21] based on the reverse coherent information [22] and the non-tight upper bound [23] based on the squashed entanglement [24] (see also other results [12, 25–27]). Finally, our approach using the REE and teleportation stretching closes the investigation, setting the ultimate and precise limit that only quantum repeaters can surpass.

## Results

Our machinery builds on several tools but the key features are the REE bound for the two-way capacities, and teleportation stretching, that reduces this bound to a single-letter quantity. The dimension of the Hilbert space is arbitrary and may be infinite, i.e., we consider both discrete variable (DV) and continuous variable (CV) systems [2]. Here we first formulate our reduction method. Then we derive the results for CV and DV channels.

### Adaptive protocols and two-way capacities.

Suppose that Alice and Bob are separated by a quantum channel  $\mathcal{E}$  and want to implement the most general quantum protocol assisted by adaptive LOCCs. This protocol may be stated for an arbitrary quantum task and then specified for the transmission of quantum information, distribution of entanglement or secret correlations. Assume that Alice and Bob have countable sets of systems,  $\mathbf{a}$  and  $\mathbf{b}$ , respectively. These are local registers which are updated before and after each transmission. The steps of an arbitrary adaptive protocol are described in Fig. 1.

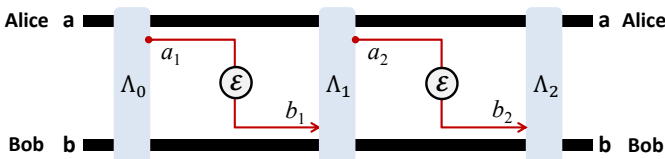


FIG. 1: Adaptive quantum protocol. The first step is the preparation of the initial separable state  $\rho_{\mathbf{ab}}^0$  of  $\mathbf{a}$  and  $\mathbf{b}$  by some adaptive LOCC  $\Lambda_0$ . After the preparation of the local registers, there is the first transmission: Alice picks a system from her local register  $a_1 \in \mathbf{a}$ , so that the register is updated as  $\mathbf{a} \rightarrow \mathbf{a}a_1$ ; system  $a_1$  is sent through the channel  $\mathcal{E}$ , with Bob getting the output  $b_1$ ; Bob includes the output in his local register, which is updated as  $b_1\mathbf{b} \rightarrow \mathbf{b}$ ; finally, Alice and Bob apply another adaptive LOCC  $\Lambda_1$  to their registers  $\mathbf{a}$  and  $\mathbf{b}$ . In the second transmission, Alice picks and sends another system  $a_2 \in \mathbf{a}$  through channel  $\mathcal{E}$  with output  $b_2$  for Bob. The parties apply a further adaptive LOCC  $\Lambda_2$  to their registers and so on. This procedure is repeated  $n$  times, with output state  $\rho_{\mathbf{ab}}^n$  for the Alice's and Bob's local registers.

After  $n$  transmissions, Alice and Bob share an output state  $\rho_{\mathbf{ab}}^n := \rho_{\mathbf{ab}}(\mathcal{E}^{\otimes n})$  depending on the sequence of adaptive LOCCs  $\mathcal{L} = \{\Lambda_0, \dots, \Lambda_n\}$ . By definition, this adaptive protocol has a rate equal to  $R_n$  if the output  $\rho_{\mathbf{ab}}^n$

is sufficiently close to a target state  $\phi_n$  with  $nR_n$  bits, i.e., we may write  $\|\rho_{\mathbf{ab}}^n - \phi_n\| \leq \varepsilon$  in trace norm. The rate of the protocol is an average quantity, which means that the sequence  $\mathcal{L}$  is assumed to be averaged over local measurements, so that it becomes trace-preserving. Thus, by taking the asymptotic limit in  $n$  and optimizing over  $\mathcal{L}$ , we define the generic two-way capacity of the channel as

$$\mathcal{C}(\mathcal{E}) := \sup_{\mathcal{L}} \lim_n R_n. \quad (1)$$

In particular, if the aim of the protocol is entanglement distribution, then the target state  $\phi_n$  is a maximally entangled state and  $\mathcal{C}(\mathcal{E}) = D_2(\mathcal{E})$ . Because an ebit can teleport a qubit and a qubit can distribute an ebit,  $D_2(\mathcal{E})$  coincides with the two-way quantum capacity  $Q_2(\mathcal{E})$ . If the goal is to implement QKD, then the target state  $\phi_n$  is a private state [28] and  $\mathcal{C}(\mathcal{E}) = K(\mathcal{E})$ . Here the secret-key capacity satisfies  $K(\mathcal{E}) \geq D_2(\mathcal{E})$ , because ebits are specific types of secret bits and LOCCs are equivalent to LOs and public communication [28]. Thus, the generic two-way capacity  $\mathcal{C}$  can be any of  $D_2$ ,  $Q_2$ , or  $K$ , and these capacities must satisfy  $D_2 = Q_2 \leq K$ . Also note that we may consider the two-way private capacity  $P_2(\mathcal{E})$ , which is the maximum rate at which classical messages can be securely transmitted [26]. Because of the unlimited two-way CCs and the one-time pad, we have  $P_2(\mathcal{E}) = K(\mathcal{E})$ , so that this equivalence is implicitly assumed hereafter.

**General bounds for two-way capacities.** Let us design suitable bounds for  $\mathcal{C}(\mathcal{E})$ . From below we know that we may use the coherent [29, 30] or reverse coherent [21, 22] information. Take a maximally entangled state of two systems  $A$  and  $B$ , i.e., an Einstein-Podolsky-Rosen (EPR) state  $\Phi_{AB}$ . Propagating the  $B$ -part through the channel defines its Choi matrix  $\rho_{\mathcal{E}} := \mathcal{I} \otimes \mathcal{E}(\Phi_{AB})$ . This allows us to introduce the coherent information of the channel  $I_C(\mathcal{E})$  and its reverse counterpart  $I_{RC}(\mathcal{E})$ , defined as  $I_C(\mathcal{E}) := S[\text{Tr}_{A(B)}(\rho_{\mathcal{E}})] - S(\rho_{\mathcal{E}})$ , where  $S(\cdot)$  is the von Neumann entropy. These quantities represent lower bounds for the entanglement that is distillable from the Choi matrix  $\rho_{\mathcal{E}}$  via one-way CCs, denoted as  $D_1(\rho_{\mathcal{E}})$ . In other words, we can write the hashing inequality [25]

$$\max\{I_C(\mathcal{E}), I_{RC}(\mathcal{E})\} \leq D_1(\rho_{\mathcal{E}}) \leq \mathcal{C}(\mathcal{E}). \quad (2)$$

For bosonic systems, the ideal EPR state has infinite energy, so that the Choi matrix of a bosonic channel is energy-unbounded (see Methods for notions on bosonic systems). In this case we consider a sequence of two-mode squeezed vacuum (TMSV) states [2]  $\Phi^\mu$  with variance  $\mu = \bar{n} + 1/2$ , where  $\bar{n}$  is the mean number of thermal photons in each mode. This sequence defines the bosonic EPR state as  $\Phi := \lim_{\mu} \Phi^\mu$ . At the output of the channel, we have the sequence of quasi-Choi matrices

$$\rho_{\mathcal{E}}^\mu := \mathcal{I} \otimes \mathcal{E}(\Phi^\mu), \quad (3)$$

defining the asymptotic Choi matrix  $\rho_{\mathcal{E}} := \lim_{\mu} \rho_{\mathcal{E}}^\mu$ . As a result, the coherent information quantities must be computed as limits on  $\rho_{\mathcal{E}}^\mu$  and the hashing inequality needs to

be suitably extended (see Supplementary Note 2, which exploits the truncation tools of Supplementary Note 1).

In this work the crucial tool is the upper bound. Recall that, for any bipartite state  $\rho$ , the REE is defined as  $E_R(\rho) = \inf_{\sigma_s} S(\rho||\sigma_s)$ , where  $\sigma_s$  is an arbitrary separable state and  $S(\rho||\sigma_s) := \text{Tr}[\rho(\log_2 \rho - \log_2 \sigma_s)]$  is the relative entropy [16]. Hereafter we extend this definition to include asymptotic (energy-unbounded) states. For an asymptotic state  $\sigma := \lim_{\mu} \sigma^\mu$  defined by a sequence of states  $\sigma^\mu$ , we define its REE as

$$E_R(\sigma) := \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S(\sigma^\mu||\sigma_s^\mu), \quad (4)$$

where  $\sigma_s^\mu$  is an arbitrary sequence of separable states such that  $\|\sigma_s^\mu - \sigma_s\| \rightarrow 0$  for some separable  $\sigma_s$ . In general, we also consider the regularized REE

$$E_R^\infty(\sigma) := \lim_n n^{-1} E_R(\sigma^{\otimes n}) \leq E_R(\sigma), \quad (5)$$

where  $\sigma^{\otimes n} := \lim_{\mu} \sigma^{\mu \otimes n}$  for an asymptotic state  $\sigma$ .

Thus, the REE of a Choi matrix  $E_R(\rho_{\mathcal{E}})$  is correctly defined for channels of any dimension, both finite and infinite. We may also define the channel's REE as

$$E_R(\mathcal{E}) := \sup_{\rho} E_R[\mathcal{I} \otimes \mathcal{E}(\rho)] \geq E_R(\rho_{\mathcal{E}}), \quad (6)$$

where the supremum includes asymptotic states for bosonic channels. In the following, we prove that these single-letter quantities,  $E_R(\mathcal{E})$  and  $E_R(\rho_{\mathcal{E}})$ , bound the two-way capacity  $\mathcal{C}(\mathcal{E})$  of basic channels. The first step is the following general result.

*Theorem 1 (general weak converse):* At any dimension, finite or infinite, the generic two-way capacity of a quantum channel  $\mathcal{E}$  is upper bounded by the REE bound

$$\mathcal{C}(\mathcal{E}) \leq E_R^\star(\mathcal{E}) := \sup_{\mathcal{L}} \lim_n \frac{E_R(\rho_{\mathbf{ab}}^n)}{n}. \quad (7)$$

In Supplementary Note 3 we provide various equivalent proofs. The simplest one assumes an exponential growth of the shield system in the target private state [28] as proven by ref. [31] and trivially adapted to CVs. Another proof is completely independent from the shield system. Once established the bound  $E_R^\star(\mathcal{E})$ , our next step is to simplify it by applying the technique of teleportation stretching, which is in turn based on a suitable simulation of quantum channels.

**Simulation of quantum channels.** The idea of simulating channels by teleportation was first developed [32, 33] for Pauli channels [34], and further studied in finite dimension [35–37] after the introduction of generalized teleportation protocols [38]. Then, ref. [39] moved the first steps in the simulation of Gaussian channels via the CV teleportation protocol [18, 19]. Another type of simulation is a deterministic version [40] of a programmable quantum gate array [41]. Developed for

DV systems, this is based on joint quantum operations, therefore failing to catch the LOCC structure of quantum communication. Here, not only we fully extend the teleportation-simulation to CV systems but we also design the most general channel simulation in a communication scenario; this is based on arbitrary LOCCs and may involve systems of any dimension, finite or infinite (see Supplementary Note 8 for comparisons and advances).

As explained in Fig. 2a, performing a teleportation LOCC (i.e., Bell detection and unitary corrections) over a mixed state  $\sigma$  is a way to simulate a (certain type of) quantum channel  $\mathcal{E}$  from Alice to Bob. However, more generally, the channel simulation can be realized using an arbitrary trace-preserving LOCC  $\mathcal{T}$  and an arbitrary resource state  $\sigma$  (see Fig. 2b). Thus, at any dimension, we say that a channel  $\mathcal{E}$  is “ $\sigma$ -stretchable” or “stretchable into  $\sigma$ ” if there is a trace-preserving LOCC  $\mathcal{T}$  such that

$$\mathcal{E}(\rho) = \mathcal{T}(\rho \otimes \sigma). \quad (8)$$

In general, we can simulate the same channel  $\mathcal{E}$  with different choices of  $\mathcal{T}$  and  $\sigma$ . In fact, any channel is stretchable into some state  $\sigma$ : A trivial choice is decomposing  $\mathcal{E} = \mathcal{I} \circ \mathcal{E}$ , inserting  $\mathcal{E}$  in Alice's LO and simulating  $\mathcal{I}$  with teleportation over the ideal EPR state  $\sigma = \Phi$ . Therefore, among all simulations, one needs to identify the best resource state that optimizes the functional under study. In our work, the best results are achieved when the state  $\sigma$  can be chosen as the Choi matrix of the channel. This is not a property of any channel but defines a class. Thus, we define “Choi-stretchable” a channel that can be LOCC-simulated over its Choi matrix, so that we may write Eq. (8) with  $\sigma = \rho_{\mathcal{E}}$  (see also Fig. 2c).

In infinite dimension, the LOCC simulation may involve limits  $\mathcal{T} := \lim_{\mu} \mathcal{T}^\mu$  and  $\sigma := \lim_{\mu} \sigma^\mu$  of sequences  $\mathcal{T}^\mu$  and  $\sigma^\mu$ . For any finite  $\mu$ , the simulation  $(\mathcal{T}^\mu, \sigma^\mu)$  provides some teleportation channel  $\mathcal{E}^\mu$ . Now, suppose that an asymptotic channel  $\mathcal{E}$  is defined as a pointwise limit of the sequence  $\mathcal{E}^\mu$ , i.e., we have  $\|\mathcal{I} \otimes \mathcal{E}(\rho) - \mathcal{I} \otimes \mathcal{E}^\mu(\rho)\| \xrightarrow{\mu} 0$  for any bipartite state  $\rho$ . Then, we say that  $\mathcal{E}$  is stretchable with asymptotic simulation  $(\mathcal{T}, \sigma)$ . This is important for bosonic channels, for which Choi-based simulations can only be asymptotic and based on sequences  $\rho_{\mathcal{E}}^\mu$ .

**Teleportation covariance.** We now discuss a property which easily identifies Choi-stretchable channels. Call  $\mathbb{U}_d$  the random unitaries which are generated by the Bell detection in a teleportation process. For a qudit,  $\mathbb{U}_d$  is composed of generalized Pauli operators, i.e., the generators of the Weyl-Heisenberg group. For a CV system, the set  $\mathbb{U}_\infty$  is composed of displacement operators [9], spanning the infinite dimensional version of the previous group. In arbitrary dimension (finite or infinite), we say that a quantum channel is “teleportation-covariant” if, for any teleportation unitary  $U \in \mathbb{U}_d$ , we may write

$$\mathcal{E}(U\rho U^\dagger) = V\mathcal{E}(\rho)V^\dagger, \quad (9)$$

for some another unitary  $V$  (not necessarily in  $\mathbb{U}_d$ ).

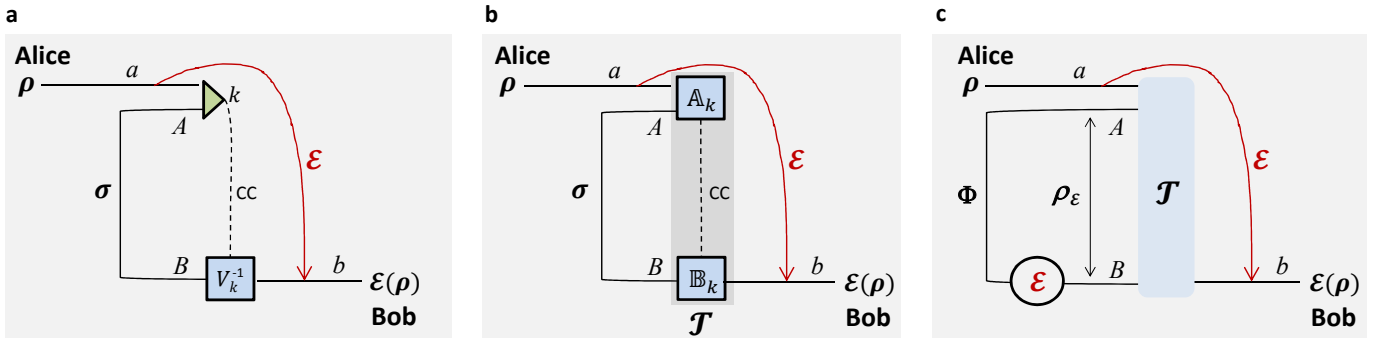


FIG. 2: From teleportation- to LOCC-simulation of quantum channels. (a) Consider the generalized teleportation of an input state  $\rho$  of a  $d$ -dimensional system  $a$  by using a resource state  $\sigma$  of two systems,  $A$  and  $B$ , with corresponding dimensions  $d$  and  $d'$  (finite or infinite). Systems  $a$  and  $A$  are subject to a Bell detection (triangle) with random outcome  $k$ . This outcome is associated with a projection onto a maximally entangled state up to an associated teleportation unitary  $U_k$  which is a Pauli operator for  $d < +\infty$  and a phase-displacement for  $d = +\infty$  (see Methods for the basics of quantum teleportation and the characterization of the teleportation unitaries). The classical outcome  $k$  is communicated to Bob, who applies a correction unitary  $V_k^{-1}$  to his system  $B$  with output  $b$ . In general,  $V_k$  does not necessarily belong to the set  $\{U_k\}$ . On average, this teleportation LOCC defines a teleportation channel  $\mathcal{E}$  from  $a$  to  $b$ . It is clear that this construction also teleports part  $a$  of an input state involving ancillary systems. (b) In general we may replace the teleportation LOCC (Bell detection and unitary corrections) with an arbitrary LOCC  $\mathcal{T}$ : Alice performs a quantum operation  $\mathbb{A}_k$  on her systems  $a$  and  $A$ , communicates the classical variable  $k$  to Bob, who then applies another quantum operation  $\mathbb{B}_k$  on his system  $B$ . By averaging over the variable  $k$ , so that  $\mathcal{T}$  is certainly trace-preserving, we achieve the simulation  $\mathcal{E}(\rho) = \mathcal{T}(\rho \otimes \sigma)$  for any input state  $\rho$ . We say that a channel  $\mathcal{E}$  is “ $\sigma$ -stretchable” if it can be simulated by a resource state  $\sigma$  for some LOCC  $\mathcal{T}$ . Note that Alice’s and Bob’s LOs  $\mathbb{A}_k$  and  $\mathbb{B}_k$  are arbitrary quantum operations; they may involve other local ancillas and also have extra labels (due to additional local measurements), in which case  $\mathcal{T}$  is assumed to be averaged over all these labels. (c) The most important case is when channel  $\mathcal{E}$  can be simulated by a trace-preserving LOCC  $\mathcal{T}$  applied to its Choi matrix  $\rho_{\mathcal{E}} := \mathcal{I} \otimes \mathcal{E}(\Phi)$ , with  $\Phi$  being an EPR state. In this case, we say that the channel is “Choi-stretchable”. These definitions are suitably extended to bosonic channels.

The key property of a teleportation-covariant channel is that the input teleportation unitaries can be pushed out of the channel, where they become other correctable unitaries. Because of this property, the transmission of a system through the channel can be simulated by a generalized teleportation protocol over its Choi matrix. This is the content of the following proposition.

*Proposition 2 (tele-covariance):* At any dimension, a teleportation-covariant channel  $\mathcal{E}$  is Choi-stretchable. The simulation is a teleportation LOCC over its Choi matrix  $\rho_{\mathcal{E}}$ , which is asymptotic for a bosonic channel.

The simple proof is explained in Fig. 3. The class of teleportation-covariant channels is wide and includes bosonic Gaussian channels, Pauli and erasure channels at any dimension (see Methods for a more detailed classification). All these fundamental channels are therefore Choi-stretchable. There are channels which are not (or not known to be) Choi-stretchable but still have decompositions  $\mathcal{E} = \mathcal{E}'' \circ \tilde{\mathcal{E}} \circ \mathcal{E}'$  where the middle part  $\tilde{\mathcal{E}}$  is Choi-stretchable. In this case,  $\mathcal{E}'$  and  $\mathcal{E}''$  can be made part of Alice’s and Bob’s LOs, so that channel  $\mathcal{E}$  can be stretched into the state  $\sigma = \rho_{\tilde{\mathcal{E}}}$ . An example is the amplitude damping channel as we will see afterwards.

### Teleportation stretching of adaptive protocols.

We are now ready to describe the reduction of arbitrary adaptive protocols. The procedure is schematically

shown in Fig. 4. We start by considering the  $i$ th transmission through the channel  $\mathcal{E}$ , so that Alice and Bob’s register state is updated from  $\rho_{\text{ab}}^{i-1}$  to  $\rho_{\text{ab}}^i$ . By using a simulation  $(\mathcal{T}, \sigma)$ , we show the input-output formula

$$\rho_{\text{ab}}^i = \Delta_i(\rho_{\text{ab}}^{i-1} \otimes \sigma), \quad (10)$$

for some “extended” LOCC  $\Delta_i$  (see Fig. 4c). By iterating the previous formula  $n$  times, we may write the output state  $\rho_{\text{ab}}^n = \Lambda(\rho_{\text{ab}}^0 \otimes \sigma^{\otimes n})$  for  $\Lambda := \Delta_n \circ \dots \circ \Delta_1$  (as in Fig. 4d). Because the initial state  $\rho_{\text{ab}}^0$  is separable, its preparation can be included in  $\Lambda$  and we may directly write  $\rho_{\text{ab}}^n = \Lambda(\sigma^{\otimes n})$ . Finally, we average over all local measurements present in  $\Lambda$ , so that  $\rho_{\text{ab}}^n = \bar{\Lambda}(\sigma^{\otimes n})$  for a trace-preserving LOCC  $\bar{\Lambda}$  (see Fig. 4e). More precisely, for any sequence of outcomes  $\mathbf{u}$  with probability  $p(\mathbf{u})$ , there is conditional LOCC  $\Lambda_{\mathbf{u}}$  with output  $\rho_{\text{ab}}^n(\mathbf{u}) = p(\mathbf{u})^{-1} \Lambda_{\mathbf{u}}(\sigma^{\otimes n})$ . Thus, the mean output state  $\rho_{\text{ab}}^n$  is generated by  $\bar{\Lambda} = \sum_{\mathbf{u}} \Lambda_{\mathbf{u}}$  (see Methods for more technical details on this LOCC averaging).

Note that the simulation of a bosonic channel  $\mathcal{E}$  is typically asymptotic, with infinite-energy limits  $\mathcal{T} := \lim_{\mu} \mathcal{T}^{\mu}$  and  $\sigma := \lim_{\mu} \sigma^{\mu}$ . In this case, we repeat the procedure for some  $\mu$ , with output  $\rho_{\text{ab}}^{n,\mu} := \bar{\Lambda}_{\mu}(\sigma^{\mu \otimes n})$ , where  $\bar{\Lambda}_{\mu}$  is derived assuming the finite-energy LOCCs  $\mathcal{T}^{\mu}$ . Then, we take the limit for large  $\mu$ , so that  $\rho_{\text{ab}}^{n,\mu}$  converges to  $\rho_{\text{ab}}^n$  in trace norm (see Methods for details on teleportation stretching with bosonic channels). Thus, at any dimension, we have proven the following result.

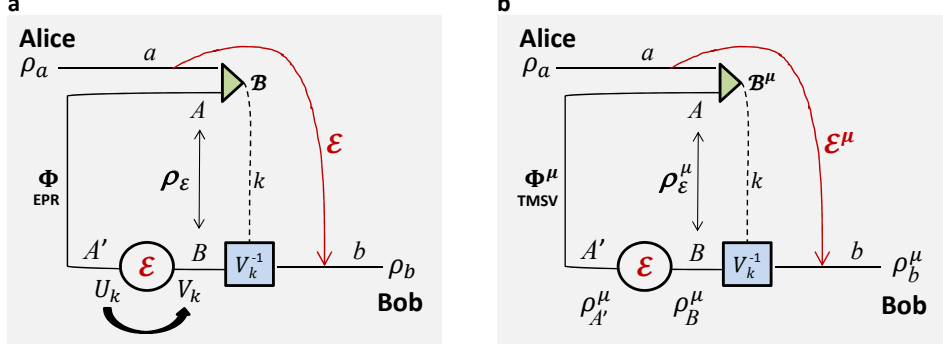


FIG. 3: Teleportation-covariant channels are Choi-stretchable. (a) Consider the teleportation of an input state  $\rho_a$  by using an EPR state  $\Phi_{AA'}$  of systems  $A$  and  $A'$ . The Bell detection  $\mathcal{B}$  on systems  $a$  and  $A$  teleports the input state onto  $A'$ , up to a random teleportation unitary, i.e.,  $\rho_{A'} = U_k \rho_a U_k^\dagger$ . Because  $\mathcal{E}$  is teleportation-covariant,  $U_k$  is mapped into an output unitary  $V_k$  and we may write  $\rho_B = \mathcal{E}(\rho_{A'}) = \mathcal{E}(U_k \rho_a U_k^\dagger) = V_k \mathcal{E}(\rho_a) V_k^\dagger$ . Therefore, Bob just needs to receive the outcome  $k$  and apply  $V_k^{-1}$ , so that  $\rho_b = V_k^{-1} \rho_B (V_k^{-1})^\dagger = \mathcal{E}(\rho_a)$ . Globally, the process describes the simulation of channel  $\mathcal{E}$  by means of a generalized teleportation protocol over the Choi matrix  $\rho_\mathcal{E}$ . (b) The procedure is also valid for CV systems. If the input  $a$  is a bosonic mode, we need to consider finite-energy versions for the EPR state  $\Phi$  and the Bell detection  $\mathcal{B}$ , i.e., we use a TMSV state  $\Phi^\mu$  and a corresponding quasi-projection  $\mathcal{B}^\mu$  onto displaced TMSV states. At finite energy  $\mu$ , the teleportation process from  $a$  to  $A'$  is imperfect with some output  $\rho_{A'}^\mu \neq \rho_{A'} = U_k \rho_a U_k^\dagger$ . However, for any  $\varepsilon > 0$  and input state  $\rho_a$ , there is a sufficiently large value of  $\mu$  such that  $\|\rho_{A'}^\mu - \rho_{A'}\| \leq \varepsilon$  [18, 19]. Consider the transmitted state  $\rho_B^\mu = \mathcal{E}(\rho_{A'}^\mu)$ . Because the trace distance decreases under channels, we have  $\|\rho_B^\mu - \rho_B\| \leq \|\rho_{A'}^\mu - \rho_{A'}\| \leq \varepsilon$ . After the application of the correction unitary  $V_k^{-1}$ , we have the output state  $\rho_b^\mu$  which satisfies  $\|\rho_b^\mu - \mathcal{E}(\rho_a)\| \leq \varepsilon$ . Taking the asymptotic limit of large  $\mu$ , we achieve  $\|\rho_b^\mu - \mathcal{E}(\rho_a)\| \rightarrow 0$  for any input  $\rho_a$ , therefore achieving the perfect asymptotic simulation of the channel. The asymptotic teleportation-LOCC is therefore  $(\mathcal{B}, \rho_\mathcal{E}) := \lim_\mu (\mathcal{B}^\mu, \rho_\mathcal{E}^\mu)$  where  $\rho_\mathcal{E}^\mu := \mathcal{I} \otimes \mathcal{E}(\Phi^\mu)$ . The result is trivially extended to the presence of ancillas.

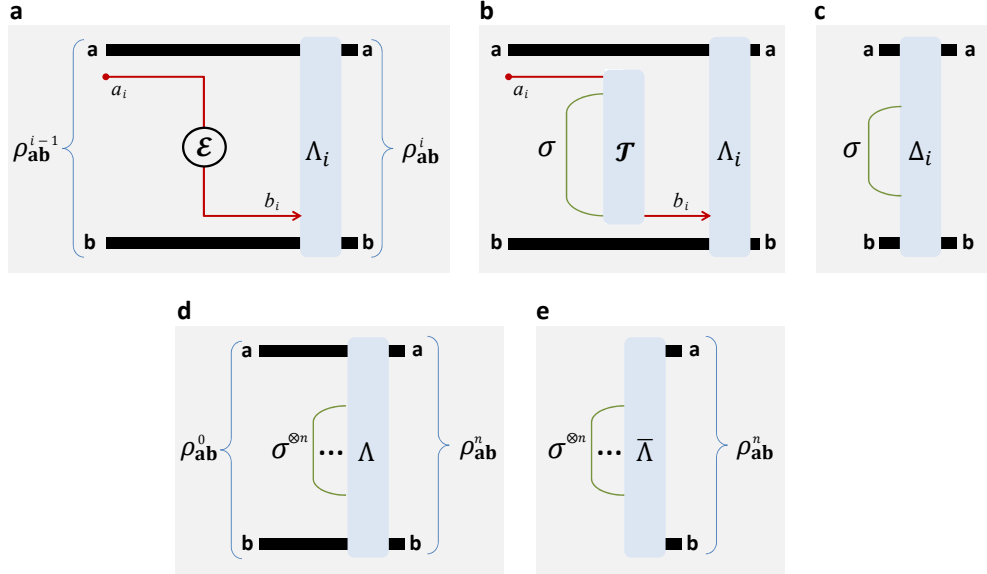


FIG. 4: Teleportation stretching of an adaptive quantum protocol. (a) Consider the  $i$ th transmission through channel  $\mathcal{E}$ , where the input  $(i-1)$ th register state is given by  $\rho_{\text{ab}}^{i-1} := \rho_{\text{aa}_i \text{b}}$ . After transmission through  $\mathcal{E}$  and the adaptive LOCC  $\Lambda_i$ , the register state is updated to  $\rho_{\text{ab}}^i = \Lambda_i \circ (\mathcal{I}_a \otimes \mathcal{E} \otimes \mathcal{I}_b)(\rho_{\text{aa}_i \text{b}})$ . (b) Let us simulate the channel  $\mathcal{E}$  by a LOCC  $\mathcal{T}$  and a resource state  $\sigma$ . (c) The simulation LOCC  $\mathcal{T}$  can be combined with the adaptive LOCC  $\Lambda_i$  into a single “extended” LOCC  $\Delta_i$  while the resource state  $\sigma$  can be stretched back in time and out of the adaptive operations. We may therefore write  $\rho_{\text{ab}}^i = \Delta_i(\rho_{\text{ab}}^{i-1} \otimes \sigma)$ . (d) We iterate the previous steps for all transmissions, so as to stretch  $n$  copies  $\sigma^{\otimes n}$  and collapse all the extended LOCCs  $\Delta_n \circ \dots \circ \Delta_1$  into a single LOCC  $\Lambda$ . In other words, we may write  $\rho_{\text{ab}}^n = \Lambda(\rho_{\text{ab}}^0 \otimes \sigma^{\otimes n})$ . (e) Finally, we include the preparation of the separable state  $\rho_{\text{ab}}^0$  into  $\Lambda$  and we also average over all local measurements present in  $\Lambda$ , so that we may write the output state as  $\rho_{\text{ab}}^n = \bar{\Lambda}(\sigma^{\otimes n})$  for a trace-preserving LOCC  $\bar{\Lambda}$ . The procedure is asymptotic in the presence of asymptotic channel simulations (bosonic channels).

*Lemma 3 (Stretching)*: Consider arbitrary  $n$  transmissions through a channel  $\mathcal{E}$  which is stretchable into a resource state  $\sigma$ . The output of an adaptive protocol can be decomposed into the block form

$$\rho_{\mathbf{ab}}^n = \bar{\Lambda}(\sigma^{\otimes n}), \quad (11)$$

for some trace-preserving LOCC  $\bar{\Lambda}$ . If the channel  $\mathcal{E}$  is Choi-stretchable, then we may write

$$\rho_{\mathbf{ab}}^n = \bar{\Lambda}(\rho_{\mathcal{E}}^{\otimes n}). \quad (12)$$

In particular,  $\bar{\Lambda}(\sigma^{\otimes n}) := \lim_{\mu} \bar{\Lambda}_{\mu}(\sigma^{\mu \otimes n})$  for an asymptotic channel simulation  $(\mathcal{T}, \sigma) := \lim_{\mu} (\mathcal{T}^{\mu}, \sigma^{\mu})$ .

According to this Lemma, teleportation stretching reduces an adaptive protocol performing an arbitrary task (quantum communication, entanglement distribution or key generation) into an equivalent block protocol, whose output state  $\rho_{\mathbf{ab}}^n$  is the same but suitably decomposed as in Eq. (11) for any number  $n$  of channel uses. In particular, for Choi-stretchable channels, the output is decomposed into a tensor-product of Choi matrices. An essential feature which makes the technique applicable to many contexts is the fact that the adaptive-to-block reduction maintains task and output of the original protocol so that, e.g., adaptive key generation is reduced to block key generation and not entanglement distillation.

*Remark 4*: Some aspects of our method might be traced back to a precursory but very specific argument discussed in Section V of ref. [32], where protocols of quantum communication (through Pauli channels) were transformed into protocols of entanglement distillation (the idea was developed for 1-way CCs, with an implicit extension to 2-way CCs). However, while this argument may be seen as precursory, it is certainly not developed at the level of generality of the present work where the adaptive-to-block reduction is explicitly proven for any type of protocol and any channel at any dimension (see Supplementary Notes 9 and 10 for remarks on previous literature).

**REE as a single-letter converse bound.** The combination of Theorem 1 and Lemma 3 provides the insight of our entire reduction method. In fact, let us compute the REE of the output state  $\rho_{\mathbf{ab}}^n$ , decomposed as in Eq. (11). Using the monotonicity of the REE under trace-preserving LOCCs, we derive

$$E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) \leq E_{\mathbf{R}}(\sigma^{\otimes n}), \quad (13)$$

where the complicated  $\bar{\Lambda}$  is fully discarded. Then, by replacing Eq. (13) into Eq. (7), we can ignore the supremum in the definition of  $E_{\mathbf{R}}^{\star}(\mathcal{E})$  and get the simple bound

$$E_{\mathbf{R}}^{\star}(\mathcal{E}) \leq E_{\mathbf{R}}^{\infty}(\sigma) \leq E_{\mathbf{R}}(\sigma). \quad (14)$$

Thus, we can state the following main result.

*Theorem 5 (one-shot REE bound)*: Let us stretch an arbitrary quantum channel  $\mathcal{E}$  into some resource state  $\sigma$ , according to Eq. (8). Then, we may write

$$\mathcal{C}(\mathcal{E}) \leq E_{\mathbf{R}}^{\infty}(\sigma) \leq E_{\mathbf{R}}(\sigma). \quad (15)$$

In particular, if  $\mathcal{E}$  is Choi-stretchable, we have

$$\mathcal{C}(\mathcal{E}) \leq E_{\mathbf{R}}^{\infty}(\rho_{\mathcal{E}}) \leq E_{\mathbf{R}}(\rho_{\mathcal{E}}) = E_{\mathbf{R}}(\mathcal{E}). \quad (16)$$

See Methods for a detailed proof, with explicit derivations for bosonic channels. We have therefore reached our goal and found single-letter bounds. In particular, note that  $E_{\mathbf{R}}(\rho_{\mathcal{E}})$  measures the entanglement distributed by a single EPR state, so that we may call it the “entanglement flux” of the channel  $\Phi(\mathcal{E}) := E_{\mathbf{R}}(\rho_{\mathcal{E}})$ . Remarkably, there is a sub-class of Choi-stretchable channels for which  $E_{\mathbf{R}}(\rho_{\mathcal{E}})$  coincides with the lower bound  $D_1(\rho_{\mathcal{E}})$  in Eq. (2). We call these “distillable channels”. We establish all their two-way capacities as  $\mathcal{C}(\mathcal{E}) = E_{\mathbf{R}}(\rho_{\mathcal{E}})$ . They include lossy channels, quantum-limited amplifiers, dephasing and erasure channels. See also Fig. 5.

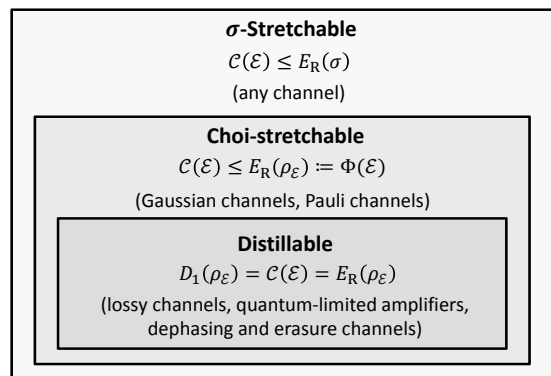


FIG. 5: Classification of channels in DVs and CVs.

**Immediate generalizations.** Consider a fading channel, described by an ensemble  $\{p_i, \mathcal{E}_i\}$ , where channel  $\mathcal{E}_i$  occurs with probability  $p_i$ . Let us stretch  $\mathcal{E}_i$  into a resource state  $\sigma_i$ . For large  $n$ , we may decompose the output of an adaptive protocol as  $\rho_{\mathbf{ab}}^n = \bar{\Lambda}(\otimes_i \sigma_i^{\otimes np_i})$ , so that the two-way capacity of this channel is bounded by

$$\mathcal{C}(\{p_i, \mathcal{E}_i\}) \leq \sum_i p_i E_{\mathbf{R}}(\sigma_i). \quad (17)$$

Then consider adaptive protocols of two-way quantum communication, where the parties have forward ( $\mathcal{E}$ ) and backward ( $\mathcal{E}'$ ) channels. The capacity  $\mathcal{C}(\mathcal{E}, \mathcal{E}')$  maximizes the number of target bits per channel use. Stretching  $(\mathcal{E}, \mathcal{E}')$  into a pair of states  $(\sigma, \sigma')$ , we find  $\mathcal{C}(\mathcal{E}, \mathcal{E}') \leq \max\{E_{\mathbf{R}}(\sigma), E_{\mathbf{R}}(\sigma')\}$ . For Choi-stretchable channels, this means  $\mathcal{C}(\mathcal{E}, \mathcal{E}') \leq \max\{\Phi(\mathcal{E}), \Phi(\mathcal{E}')\}$ , which reduces to  $\mathcal{C}(\mathcal{E}, \mathcal{E}') = \max\{\mathcal{C}(\mathcal{E}), \mathcal{C}(\mathcal{E}')\}$  if they are distillable. In

the latter case, the optimal strategy is using the channel with the maximum capacity (see Methods).

Yet another scenario is the multiband channel  $\mathcal{E}_{\text{mb}}$ , where Alice exploits  $m$  independent channels or “bands”  $\{\mathcal{E}_i\}$ , so that the capacity  $\mathcal{C}(\mathcal{E}_{\text{mb}})$  maximizes the number of target bits per multiband transmission. By stretching the bands  $\{\mathcal{E}_i\}$  into resource states  $\{\sigma_i\}$ , we find  $\mathcal{C}(\mathcal{E}_{\text{mb}}) \leq \sum_i E_{\text{R}}(\sigma_i)$ . For Choi-stretchable bands, this means  $\mathcal{C}(\mathcal{E}_{\text{mb}}) \leq \sum_i \Phi(\mathcal{E}_i)$ , giving the additive capacity  $\mathcal{C}(\mathcal{E}_{\text{mb}}) = \sum_i \mathcal{C}(\mathcal{E}_i)$  if they are distillable (see Methods).

**Ultimate limits of bosonic communications.** We now apply our method to derive the ultimate rates for quantum and secure communication through bosonic Gaussian channels. These channels are Choi-stretchable with an asymptotic simulation involving  $\rho_{\mathcal{E}} := \lim_{\mu} \rho_{\mathcal{E}}^{\mu}$ . From Eqs. (4) and (16), we may write

$$\mathcal{C}(\mathcal{E}) \leq \Phi(\mathcal{E}) \leq \liminf_{\mu \rightarrow +\infty} S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu}), \quad (18)$$

for a suitable converging sequence of separable states  $\tilde{\sigma}_s^{\mu}$ .

For Gaussian channels, the sequences in Eq. (18) involve Gaussian states, for which we easily compute the relative entropy. In fact, for any two Gaussian states,  $\rho_1$  and  $\rho_2$ , we prove the general formula  $S(\rho_1 || \rho_2) = \Sigma(V_1, V_2) - S(\rho_1)$ , where  $\Sigma$  is a simple functional of their statistical moments (see Methods). After technical derivations (see Supplementary Note 4), we then bound the two-way capacities of all Gaussian channels, starting from the most important, the lossy channel.

**Fundamental rate-loss scaling in quantum optical communications.** Optical communications through free-space links or telecom fibres are inevitably lossy and the standard model to describe this scenario is the lossy channel. This is a bosonic Gaussian channel characterized by a transmissivity parameter  $\eta$ , which quantifies the fraction of input photons surviving the channel. It can be represented as a beam splitter mixing the signals with zero-temperature environment (background thermal noise is negligible at optical and telecom frequencies).

For a lossy channel  $\mathcal{E}_{\eta}$  with arbitrary transmissivity  $\eta$  we apply our reduction method and compute the entanglement flux  $\Phi(\eta) \leq -\log_2(1 - \eta)$ . This coincides with the reverse coherent information of this channel  $I_{\text{RC}}(\eta)$ , first derived in ref. [21]. Thus, we find that this channel is distillable and all its two-way capacities are given by

$$\mathcal{C}(\eta) = D_2(\eta) = Q_2(\eta) = K(\eta) = -\log_2(1 - \eta). \quad (19)$$

Interestingly, this capacity coincides with the maximum discord [42] that can be distributed, since we may write [43]  $I_{\text{RC}}(\eta) = D(B|A)$ , where the latter is the discord of the (asymptotic) Gaussian Choi matrix  $\rho_{\mathcal{E}_{\eta}}$  [44]. We also prove the strict separation  $Q_2(\eta) > Q(\eta)$ , where  $Q$  is the unassisted quantum capacity [29, 30].

Expanding Eq. (19) at high loss  $\eta \simeq 0$ , we find

$$\mathcal{C}(\eta) \simeq \eta / \ln 2 \simeq 1.44\eta \text{ (bits per channel use)}, \quad (20)$$

or about  $\eta$  nats per channel use. This completely characterizes the fundamental rate-loss scaling which rules long-distance quantum optical communications in the absence of quantum repeaters. It is important to remark that our work also proves the achievability of this scaling. This is a major advance with respect to existing literature, where previous studies with the squashed entanglement [23] only identified a non-achievable upper bound. In Fig. 6, we compare the scaling of Eq. (20) with the maximum rates achievable by current QKD protocols.

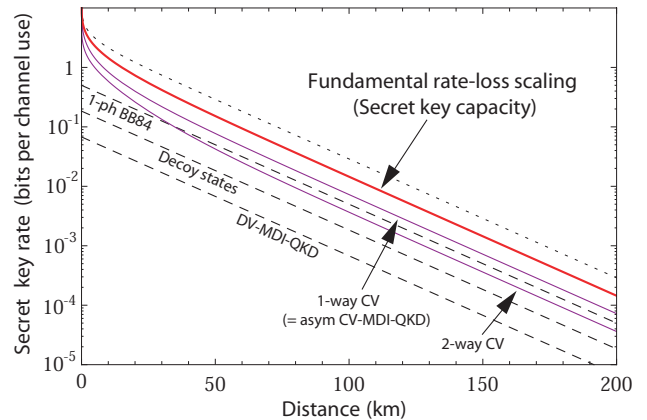


FIG. 6: Ideal performances in QKD. We plot the secret key rate (bits per channel use) versus Alice-Bob’s distance (km) at the loss rate of 0.2 dB per km. The secret key capacity of the channel (red line) sets the fundamental rate limit for point-to-point QKD in the presence of loss. Compare this capacity with a previous non-achievable upperbound [23] (dotted line). We then show the maximum rates that are potentially achievable by current protocols, assuming infinitely long keys and ideal conditions, such as unit detector efficiencies, zero dark count rates, zero intrinsic error, unit error correction efficiency, zero excess noise (for CVs), and large modulation (for CVs). In the figure, we see that ideal implementations of CV protocols (purple lines) are not so far from the ultimate limit. In particular, we consider: (i) One-way no-switching protocol [45], coinciding with CV-MDI-QKD [13, 46] in the most asymmetric configuration (relay approaching Alice [47]). For high loss ( $\eta \simeq 0$ ), the rate scales as  $\eta / \ln 4$ , which is just 1/2 of the capacity. Same scaling for the one-way switching protocol of ref. [12]; (ii) Two-way protocol with coherent states and homodyne detection [48, 49] which scales as  $\simeq \eta / (4 \ln 2)$  for high loss (thermal noise is needed for two-way to beat one-way QKD [48]). For the DV protocols (dashed lines), we consider: BB84 with single-photon sources [4] with rate  $\eta/2$ ; BB84 with weak coherent pulses and decoy states [6] with rate  $\eta/(2e)$ ; and DV-MDI-QKD [50, 51] with rate  $\eta/(2e^2)$ . See Supplementary Note 6 for details on these ideal rates.

The capacity in Eq. (19) is also valid for two-way quantum communication with lossy channels, assuming that  $\eta$  is the maximum transmissivity between the forward and feedback channels. It can also be extended to a multiband lossy channel, for which we write  $\mathcal{C} = -\sum_i \log_2(1 - \eta_i)$ , where  $\eta_i$  are the transmissivities of the various bands or frequency components. For instance, for a multimode telecom fibre with constant transmissivity

$\eta$  and bandwidth  $W$ , we have

$$\mathcal{C} = -W \log_2(1 - \eta). \quad (21)$$

Finally, note that free-space satellite communications may be modeled as a fading lossy channel, i.e., an ensemble of lossy channels  $\mathcal{E}_{\eta_i}$  with associated probabilities  $p_i$  [52]. In particular, slow fading can be associated with variations of satellite-Earth radial distance [53, 54]. For a fading lossy channel  $\{\mathcal{E}_{\eta_i}, p_i\}$ , we may write

$$\mathcal{C} \leq -\sum_i p_i \log_2(1 - \eta_i). \quad (22)$$

### Quantum communications with Gaussian noise.

The fundamental limit of the lossy channel bounds the two-way capacities of all channels decomposable as  $\mathcal{E} = \mathcal{E}'' \circ \mathcal{E}_\eta \circ \mathcal{E}'$  where  $\mathcal{E}_\eta$  is a lossy component while  $\mathcal{E}'$  and  $\mathcal{E}''$  are extra channels. A channel  $\mathcal{E}$  of this type is stretchable with resource state  $\sigma = \rho_{\mathcal{E}_\eta} \neq \rho_{\mathcal{E}}$  and we may write  $\mathcal{C}(\mathcal{E}) \leq -\log_2(1 - \eta)$ . For Gaussian channels, such decompositions are known but we achieve tighter bounds if we directly stretch them using their own Choi matrix.

Let us start from the thermal-loss channel, which can be modeled as a beamsplitter with transmissivity  $\eta$  in a thermal background with  $\bar{n}$  mean photons. Its action on input quadratures  $\hat{\mathbf{x}} = (\hat{q}, \hat{p})$  is given by  $\hat{\mathbf{x}} \rightarrow \sqrt{\eta}\hat{\mathbf{x}} + \sqrt{1-\eta}\hat{\mathbf{x}}_E$  with  $E$  being a thermal mode. This channel is central for microwave communications [55–58] but also important for CV QKD at optical and telecom frequencies, where Gaussian eavesdropping via entangling cloners results into a thermal-loss channel [2].

For an arbitrary thermal-loss channel  $\mathcal{E}_{\eta, \bar{n}}$  we apply our reduction method and compute the entanglement flux

$$\Phi(\eta, \bar{n}) \leq -\log_2 [(1 - \eta)\eta^{\bar{n}}] - h(\bar{n}), \quad (23)$$

for  $\bar{n} < \eta/(1 - \eta)$ , while zero otherwise. Here we set

$$h(x) := (x + 1) \log_2(x + 1) - x \log_2 x. \quad (24)$$

Combining this result with the lower bound given by the reverse coherent information [21], we write the following inequalities for the two-way capacity of this channel

$$-\log_2(1 - \eta) - h(\bar{n}) \leq \mathcal{C}(\eta, \bar{n}) \leq \Phi(\eta, \bar{n}). \quad (25)$$

As shown in Fig. 7a, the two bounds tend to coincide at sufficiently high transmissivity. We clearly retrieve the previous result of the lossy channel for  $\bar{n} = 0$ .

Another important Gaussian channel is the quantum amplifier. This channel  $\mathcal{E}_{g, \bar{n}}$  is described by  $\hat{\mathbf{x}} \rightarrow \sqrt{g}\hat{\mathbf{x}} + \sqrt{g-1}\hat{\mathbf{x}}_E$ , where  $g > 1$  is the gain and  $E$  is the thermal environment with  $\bar{n}$  mean photons. We compute

$$\Phi(g, \bar{n}) \leq \log_2 \left( \frac{g^{\bar{n}+1}}{g-1} \right) - h(\bar{n}), \quad (26)$$

for  $\bar{n} < (g - 1)^{-1}$ , while zero otherwise. Combining this result with the coherent information [60], we get

$$\log_2 \left( \frac{g}{g-1} \right) - h(\bar{n}) \leq \mathcal{C}(g, \bar{n}) \leq \Phi(g, \bar{n}), \quad (27)$$

whose behavior is plotted in Fig. 7b.

In the absence of thermal noise ( $\bar{n} = 0$ ), the previous channel describes a quantum-limited amplifier  $\mathcal{E}_g$ , for which the bounds in Eq. (27) coincide. This channel is therefore distillable and its two-way capacities are

$$\mathcal{C}(g) = D_2(g) = Q_2(g) = K(g) = -\log_2(1 - g^{-1}). \quad (28)$$

In particular, this proves that  $Q_2(g)$  coincides with the unassisted quantum capacity  $Q(g)$  [60, 61]. Note that a gain-2 amplifier can transmit at most 1 qubit per use.

Finally, one of the simplest models of bosonic decoherence is the additive-noise Gaussian channel [2]. This is the direct extension of the classical model of a Gaussian channel to the quantum regime. It can be seen as the action of a random Gaussian displacement over incoming states. In terms of input-output transformations, it is described by  $\hat{\mathbf{x}} \rightarrow \hat{\mathbf{x}} + (z, z)^T$  where  $z$  is a classical Gaussian variable with zero mean and variance  $\xi \geq 0$ . For this channel  $\mathcal{E}_\xi$  we find the entanglement flux

$$\Phi(\xi) \leq \frac{\xi - 1}{\ln 2} - \log_2 \xi, \quad (29)$$

for  $\xi < 1$ , while zero otherwise. Including the lower bound given by the coherent information [60], we get

$$-\frac{1}{\ln 2} - \log_2 \xi \leq \mathcal{C}(\xi) \leq \Phi(\xi). \quad (30)$$

In Fig. 7c, see its behavior and how the two bounds tend to rapidly coincide for small added noise.

**Ultimate limits in qubit communications.** We now study the ultimate rates for quantum communication, entanglement distribution and secret key generation through qubit channels, with generalizations to any finite dimension. For any DV channel  $\mathcal{E}$  from dimension  $d_A$  to dimension  $d_B$ , we may write the dimensionality bound  $\mathcal{C}(\mathcal{E}) \leq \min\{\log_2 d_A, \log_2 d_B\}$ . This is because we may always decompose the channel into  $\mathcal{I} \circ \mathcal{E}$  (or  $\mathcal{E} \circ \mathcal{I}$ ), include  $\mathcal{E}$  in Alice's (or Bob's) LOs and stretch the identity map into a Bell state with dimension  $d_B$  (or  $d_A$ ). For DV channels, we may also write the following simplified version of our Theorem 5 (see Methods for proof).

*Proposition 6:* For a Choi-stretchable channel  $\mathcal{E}$  in finite dimension, we may write the chain

$$K(\mathcal{E}) = K(\rho_{\mathcal{E}}) \leq E_R^\infty(\rho_{\mathcal{E}}) \leq E_R(\rho_{\mathcal{E}}) = E_R(\mathcal{E}), \quad (31)$$

where  $K(\rho_{\mathcal{E}})$  is the distillable key of  $\rho_{\mathcal{E}}$ .

In the following we provide our results for DV channels, with technical details available in Supplementary Note 5.

**Pauli channels.** A general error model for the transmission of qubits is the Pauli channel

$$\mathcal{P}(\rho) = p_0\rho + p_1X\rho X + p_2Y\rho Y + p_3Z\rho Z, \quad (32)$$



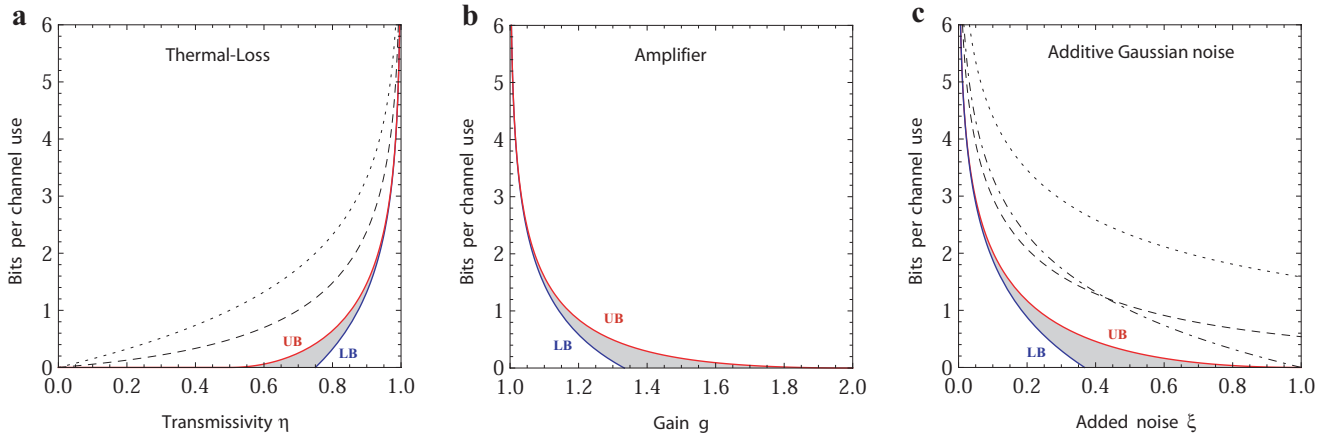


FIG. 7: Two-way capacities for Gaussian channels in terms of the relevant channel parameters. (a) Two-way capacity  $\mathcal{C}(\eta, \bar{n})$  of the thermal-loss channel as a function of transmissivity  $\eta$  for  $\bar{n} = 1$  thermal photon. It is contained in the shadowed area identified by the lower bound (LB) and upper bound (UB) of Eq. (25). Our upper bound is clearly tighter than those based on the squashed entanglement, computed in ref. [23] (dotted) and ref. [59] (dashed). Note that  $\mathcal{C}(\eta, \bar{n}) \simeq -\log_2(1 - \eta) - h(\bar{n})$  at high transmissivities. For  $\bar{n} = 0$  (lossy channel) the shadowed region shrinks into a single line. (b) Two-way capacity  $\mathcal{C}(g, \bar{n})$  of the amplifier channel as a function of the gain  $g$  for  $\bar{n} = 1$  thermal photon. It is contained in the shadowed region specified by the bounds in Eq. (27). For small gains, we have  $\mathcal{C}(g, \bar{n}) \simeq \log_2[g/(g - 1)] - h(\bar{n})$ . For  $\bar{n} = 0$  (quantum-limited amplifier) the shadowed region shrinks into a single line. (c) Two-way capacity  $\mathcal{C}(\xi)$  of the additive-noise Gaussian channel with added noise  $\xi$ . It is contained in the shadowed region specified by the bounds in Eq. (30). For small noise, we have  $\mathcal{C}(\xi) \simeq -1/\ln 2 - \log_2 \xi$ . Our upper bound is much tighter than those of ref. [23] (dotted), ref. [59] (dashed), and ref. [60] (dot-dashed).

where  $X, Y$ , and  $Z$  are Pauli operators [1] and  $\mathbf{p} := \{p_k\}$  is a probability distribution. It is easy to check that this channel is Choi-stretchable and its Choi matrix is Bell-diagonal. We compute its entanglement flux as

$$\Phi(\mathcal{P}) = 1 - H_2(p_{\max}), \quad (33)$$

if  $p_{\max} := \max\{p_k\} \geq 1/2$ , while zero otherwise. Since the channel is unital, we have that  $I_C(\mathcal{P}) = I_{RC}(\mathcal{P}) = 1 - H(\mathbf{p})$ , where  $H$  is the Shannon entropy. Thus, the two-way capacity of a Pauli channel satisfies

$$1 - H(\mathbf{p}) \leq \mathcal{C}(\mathcal{P}) \leq \Phi(\mathcal{P}). \quad (34)$$

This can be easily generalized to arbitrary finite dimension (see Supplementary Note 5).

Consider the depolarising channel, which is a Pauli channel shrinking the Bloch sphere. With probability  $p$ , an input state becomes the maximally-mixed state

$$\mathcal{P}_{\text{depol}}(\rho) = (1 - p)\rho + pI/2. \quad (35)$$

Setting  $\kappa(p) := 1 - H_2(3p/4)$ , we may then write

$$\kappa(p) - \frac{3p}{4} \log_2 3 \leq \mathcal{C}(\mathcal{P}_{\text{depol}}) \leq \kappa(p), \quad (36)$$

for  $p \leq 2/3$ , while 0 otherwise (see Fig. 8a). The result can be extended to any dimension  $d \geq 2$ . A qudit depolarising channel is defined as in Eq. (35) up to using the mixed state  $I/d$ . Setting  $f := p(d^2 - 1)/d^2$  and  $\kappa(d, p) := \log_2 d - H_2(f) - f \log_2(d - 1)$ , we find

$$\kappa(d, p) - f \log_2(d + 1) \leq \mathcal{C}(\mathcal{P}_{\text{depol}}) \leq \kappa(d, p), \quad (37)$$

for  $p \leq d/(d + 1)$ , while zero otherwise.

Consider now the dephasing channel. This is a Pauli channel which deteriorates quantum information without energy decay, as it occurs in spin-spin relaxation or photonic scattering through waveguides. It is defined as

$$\mathcal{P}_{\text{deph}}(\rho) = (1 - p)\rho + pZ\rho Z, \quad (38)$$

where  $p$  is the probability of a phase flip. We can easily check that the two bounds of Eq. (34) coincide, so that this channel is distillable and its two-way capacities are

$$\begin{aligned} \mathcal{C}(\mathcal{P}_{\text{deph}}) &= D_2(\mathcal{P}_{\text{deph}}) = Q_2(\mathcal{P}_{\text{deph}}) \\ &= K(\mathcal{P}_{\text{deph}}) = 1 - H_2(p). \end{aligned} \quad (39)$$

Note that this also proves  $Q_2(\mathcal{P}_{\text{deph}}) = Q(\mathcal{P}_{\text{deph}})$ , where the latter was derived in ref. [62].

For an arbitrary qudit with computational basis  $\{|j\rangle\}$ , the generalized dephasing channel is defined as

$$\mathcal{P}_{\text{deph}}(\rho) = \sum_{i=0}^{d-1} P_i Z^i \rho (Z^\dagger)^i, \quad (40)$$

where  $P_i$  is the probability of  $i$  phase flips, with a single flip being  $Z|j\rangle = e^{ij2\pi/d}|j\rangle$ . This channel is distillable and its two-way capacities are functionals of  $\mathbf{P} = \{P_i\}$

$$\mathcal{C}(\mathcal{P}_{\text{deph}}) = \log_2 d - H(\mathbf{P}). \quad (41)$$

**Quantum erasure channel.** A simple decoherence model is the erasure channel. This is described by

$$\mathcal{E}_{\text{erasure}}(\rho) = (1 - p)\rho + p|e\rangle\langle e|, \quad (42)$$

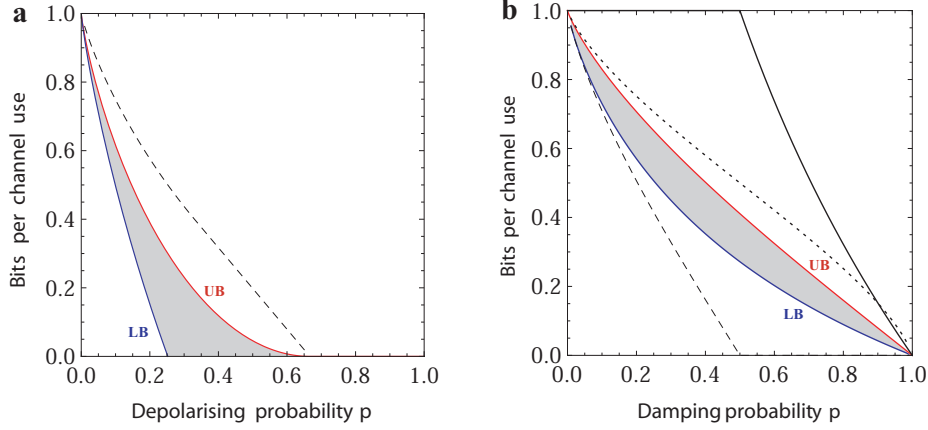


FIG. 8: Two-way capacities of basic qubit channels. (a) Two-way capacity of the depolarising channel  $\mathcal{P}_{\text{depol}}$  with arbitrary probability  $p$ . It is contained in the shadowed region specified by the bounds in Eq. (36). We also depict the best known bound based on the squashed entanglement [59] (dashed). (b) Two-way capacity of the amplitude damping channel  $\mathcal{E}_{\text{damp}}$  for arbitrary damping probability  $p$ . It is contained in the shadowed area identified by the lower bound (LB) of Eq. (48) and the upper bound (UB) of Eq. (49). We also depict the bound of Eq. (47) (upper solid line), which is good only at high dampings; and the bound  $C_A(\mathcal{E}_{\text{damp}})/2$  of ref. [59] (dotted line), which is computed from the entanglement-assisted classical capacity  $C_A$ . Finally, note the separation of the two-way capacity  $\mathcal{C}(\mathcal{E}_{\text{damp}})$  from the unassisted quantum capacity  $Q(\mathcal{E}_{\text{damp}})$  (dashed line).

where  $p$  is the probability of getting an orthogonal erasure state  $|e\rangle$ . We already know that  $Q_2(\mathcal{E}_{\text{erase}}) = 1 - p$  [20]. Therefore we compute the secret key capacity.

Following ref. [20], one shows that  $D_1(\rho_{\mathcal{E}_{\text{erase}}}) \geq 1 - p$ . In fact, suppose that Alice sends halves of EPR states to Bob. A fraction  $1 - p$  will be perfectly distributed. These good cases can be identified by Bob applying the measurement  $\{|e\rangle\langle e|, I - |e\rangle\langle e|\}$  on each output system, and communicating the results back to Alice in a single and final CC. Therefore, they distill at least  $1 - p$  ebits per copy. It is then easy to check that this channel is Choi-stretchable and we compute  $\Phi(\rho_{\mathcal{E}_{\text{erase}}}) \leq 1 - p$ . Thus, the erasure channel is distillable and we may write

$$\mathcal{C}(\mathcal{E}_{\text{erase}}) = K(\mathcal{E}_{\text{erase}}) = 1 - p. \quad (43)$$

In arbitrary dimension  $d$ , the generalized erasure channel is defined as in Eq. (42), where  $\rho$  is now the state of a qudit and the erasure state  $|e\rangle$  lives in the extra  $d + 1$  dimension. We can easily generalize the previous derivations to find that this channel is distillable and

$$K(\mathcal{E}_{\text{erase}}) = (1 - p) \log_2 d. \quad (44)$$

Note that the latter result can also be obtained by computing the squashed entanglement of the erasure channel, as shown by the independent derivation of ref. [59].

**Amplitude damping channel.** Finally, an important model of decoherence in spins or optical cavities is energy dissipation or amplitude damping [63, 64]. The action of this channel on a qubit is

$$\mathcal{E}_{\text{damp}}(\rho) = \sum_{i=0,1} A_i \rho A_i^\dagger, \quad (45)$$

where  $A_0 := |0\rangle\langle 0| + \sqrt{1-p}|1\rangle\langle 1|$ ,  $A_1 := \sqrt{p}|0\rangle\langle 1|$ , and  $p$  is the damping probability. Note that  $\mathcal{E}_{\text{damp}}$  is not teleportation-covariant. However, it is decomposable as

$$\mathcal{E}_{\text{damp}} = \mathcal{E}_{\text{CV} \rightarrow \text{DV}} \circ \mathcal{E}_{\eta(p)} \circ \mathcal{E}_{\text{DV} \rightarrow \text{CV}}, \quad (46)$$

where  $\mathcal{E}_{\text{DV} \rightarrow \text{CV}}$  teleports the original qubit into a single-rail bosonic qubit [9]; then,  $\mathcal{E}_{\eta(p)}$  is a lossy channel with transmissivity  $\eta(p) := 1 - p$ ; and  $\mathcal{E}_{\text{CV} \rightarrow \text{DV}}$  teleports the single-rail qubit back to the original qubit. Thus,  $\mathcal{E}_{\text{damp}}$  is stretchable into the asymptotic Choi matrix of the lossy channel  $\mathcal{E}_{\eta(p)}$ . This shows that we need a dimension-independent theory even for stretching DV channels.

From Theorem 5 we get  $\mathcal{C}(\mathcal{E}_{\text{damp}}) \leq \Phi(\mathcal{E}_{\eta(p)})$ , implying

$$\mathcal{C}(\mathcal{E}_{\text{damp}}) \leq \min\{1, -\log_2 p\}, \quad (47)$$

while the reverse coherent information implies [22]

$$\max_u \{H_2(u) - H_2(up)\} \leq \mathcal{C}(\mathcal{E}_{\text{damp}}). \quad (48)$$

The bound in Eq. (47) is simple but only good for strong damping ( $p > 0.9$ ). As shown in Fig. 8b, we find a tighter bound using the squashed entanglement, i.e.,

$$\mathcal{C}(\mathcal{E}_{\text{damp}}) \leq H_2\left(\frac{1-p}{2}\right) - H_2\left(1 - \frac{p}{4}\right). \quad (49)$$

## Discussion

In this work we have established the ultimate rates for point-to-point quantum communication, entanglement distribution and secret key generation at any dimension, from qubits to bosonic systems. These limits provide the

fundamental benchmarks that only quantum repeaters may surpass. To achieve our results we have designed a general reduction method for adaptive protocols, based on teleportation stretching and the relative entropy of entanglement, suitably extended to quantum channels. This method has allowed us to bound the two-way capacities ( $Q_2$ ,  $D_2$  and  $K$ ) with single-letter quantities, establishing exact formulas for bosonic lossy channels, quantum-limited amplifiers, dephasing and erasure channels, after about 20 years since the first studies [20, 32].

In particular, we have characterized the fundamental rate-loss scaling which affects any quantum optical communication, setting the ultimate achievable rate for repeaterless QKD at  $-\log_2(1 - \eta)$  bits per channel use, i.e., about  $1.44\eta$  bits per use at high loss. There are two remarkable aspects to stress about this bound. First, it remains sufficiently tight even when we consider input energy constraints (down to  $\simeq 1$  mean photon). Second, it can be reached by using 1-way CCs with a maximum cost of just  $\log_2(3\pi e) \approx 4.68$  classical bits per channel use; this means that our bound directly provides the throughput in terms of bits per second, once a clock is specified (see Supplementary Note 7 for more details).

Our reduction method is very general and goes well beyond the scope of this work. It has been already used to extend the results to quantum repeaters. Ref. [65] has showed how to simplify the most general adaptive protocols of quantum and private communication between two end-points of a repeater chain and, more generally, of an arbitrary multi-hop quantum network, where systems may be routed through single or multiple paths. Depending on the type of routing, the end-to-end capacities are determined by quantum versions of the widest path problem and the max-flow min-cut theorem. More recently, teleportation stretching has been also used to completely simplify adaptive protocols of quantum parameter estimation and quantum channel discrimination [66]. See Supplementary Discussion for a summary of our findings, other follow-up works and further remarks.

## Methods

### Basics of bosonic systems and Gaussian states.

Consider  $n$  bosonic modes with quadrature operators  $\hat{x} = (\hat{q}_1, \dots, \hat{q}_n, \hat{p}_1, \dots, \hat{p}_n)^T$ . The latter satisfy the canonical commutation relations [67]

$$[\hat{x}, \hat{x}^T] = i\Omega, \quad \Omega := \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \otimes I_n, \quad (50)$$

with  $I_n$  being the  $n \times n$  identity matrix. An arbitrary multimode Gaussian state  $\rho(u, V)$ , with mean value  $u$  and covariance matrix (CM)  $V$ , can be written as [68]

$$\rho = \frac{\exp[-\frac{1}{2}(\hat{x} - u)^T G (\hat{x} - u)]}{\det(V + i\Omega/2)^{1/2}}, \quad (51)$$

where the Gibbs matrix  $G$  is specified by

$$G = 2i\Omega \coth^{-1}(2Vi\Omega). \quad (52)$$

Using symplectic transformations [2], the CM  $V$  can be decomposed into the Williamson's form  $\bigoplus_{k=1}^n \nu_k I_2$  where the generic symplectic eigenvalue  $\nu_k$  satisfies the uncertainty principle  $\nu_k \geq 1/2$ . Similarly, we may write  $\nu_k = \bar{n}_k + 1/2$  where  $\bar{n}_k$  are thermal numbers, i.e., mean number of photons in each mode. The von Neumann entropy of a Gaussian state can be easily computed as

$$S(\rho) = \sum_{k=1}^n h(\bar{n}_k), \quad (53)$$

where  $h(x)$  is given in Eq. (24).

A two-mode squeezed vacuum (TMSV) state  $\Phi^\mu$  is a zero-mean pure Gaussian state with CM

$$V^\mu = \begin{pmatrix} \mu & c \\ c & \mu \end{pmatrix} \oplus \begin{pmatrix} \mu & -c \\ -c & \mu \end{pmatrix}, \quad (54)$$

where  $c := \sqrt{\mu^2 - 1/4}$  and  $\mu = \bar{n} + 1/2$ . Here  $\bar{n}$  is the mean photon number of the reduced thermal state associated with each mode  $A$  and  $B$ . The Wigner function of a TMSV state  $\Phi^\mu$  is the Gaussian

$$W[\Phi^\mu](x) = \pi^{-2} \exp\left[-\frac{x^T (V^\mu)^{-1} x}{2}\right], \quad (55)$$

where  $x := (q_A, q_B, p_A, p_B)^T$ . For large  $\mu$ , this function assumes the delta-like expression [18]

$$W[\Phi^\mu](x) \rightarrow N \delta(q_A - q_B) \delta(p_A + p_B), \quad (56)$$

where  $N$  is a normalization factor, function of the anti-squeezed quadratures  $q_+ := q_A + q_B$  and  $p_- := p_A - p_B$ , such that  $\int N(q_+, p_-) dq_+ dp_- = 1$ . Thus, the infinite-energy limit of TMSV states  $\lim_{\mu} \Phi^\mu$  defines the asymptotic CV EPR state  $\Phi$ , realizing the ideal EPR conditions  $\hat{q}_A = \hat{q}_B$  for position and  $\hat{p}_A = -\hat{p}_B$  for momentum.

Finally, recall that single-mode Gaussian channels can be put in canonical form [2], so that their action on input quadratures  $\hat{x} = (\hat{q}, \hat{p})^T$  is

$$\hat{x} \rightarrow T\hat{x} + N\hat{x}_E + z, \quad (57)$$

where  $T$  and  $N$  are diagonal matrices,  $E$  is an environmental mode with  $\bar{n}_E$  mean photons, and  $z$  is a classical Gaussian variable, with zero mean and CM  $\xi I \geq 0$ .

**Relative entropy between Gaussian states.** We now provide a simple formula for the relative entropy between two arbitrary Gaussian states  $\rho_1(u_1, V_1)$  and  $\rho_2(u_2, V_2)$  directly in terms of their statistical moments. Because of this feature, our formula supersedes previous expressions [69, 70]. We have the following.

*Theorem 7:* For two arbitrary multimode Gaussian states,  $\rho_1(u_1, V_1)$  and  $\rho_2(u_2, V_2)$ , the entropic functional

$$\Sigma := -\text{Tr}(\rho_1 \log_2 \rho_2) \quad (58)$$

is given by

$$\Sigma(V_1, V_2, \delta) = \frac{\ln \det(V_2 + \frac{i\Omega}{2}) + \text{Tr}(V_1 G_2) + \delta^T G_2 \delta}{2 \ln 2}, \quad (59)$$

where  $\delta := u_1 - u_2$  and  $G := g(V)$  as given in Eq. (52). As a consequence, the von Neumann entropy of a Gaussian state  $\rho(u, V)$  is equal to

$$S(\rho) := -\text{Tr}(\rho \log_2 \rho) = \Sigma(V, V, 0), \quad (60)$$

and the relative entropy of two Gaussian states  $\rho_1(u_1, V_1)$  and  $\rho_2(u_2, V_2)$  is given by

$$\begin{aligned} S(\rho_1 || \rho_2) &:= \text{Tr}[\rho_1(\log_2 \rho_1 - \log_2 \rho_2)] \\ &= -S(\rho_1) - \text{Tr}(\rho_1 \log_2 \rho_2) \\ &= -\Sigma(V_1, V_1, 0) + \Sigma(V_1, V_2, \delta). \end{aligned} \quad (61)$$

*Proof:* The starting point is the use of the Gibbs-exponential form for Gaussian states [68] given in Eq. (51). Start with zero-mean Gaussian states, which can be written as  $\rho_i = Z_i^{-1} \exp[-\hat{x}^T G_i \hat{x}/2]$ , where  $G_i = g(V_i)$  is the Gibbs-matrix and  $Z_i = \det(V_i + i\Omega/2)^{1/2}$  is the normalization factor (with  $i = 1, 2$ ). Then, replacing into the definition of  $\Sigma$  given in Eq. (58), we find

$$\begin{aligned} (2 \ln 2)\Sigma &= 2 \ln Z_2 + \text{Tr}(\rho_1 \hat{x}^T G_2 \hat{x}) \\ &= \ln \det(V_2 + i\Omega/2) \\ &\quad + \sum_{jk} \text{Tr}(\rho_1 \hat{x}_j \hat{x}_k) G_{2jk}. \end{aligned} \quad (62)$$

Using the commutator  $\langle[\hat{x}_j, \hat{x}_k]\rangle = i\Omega_{jk}$  and the anticommutator  $\langle\{\hat{x}_j, \hat{x}_k\}\rangle = 2V_{jk}$ , we derive

$$\begin{aligned} \sum_{jk} \text{Tr}(\rho_1 \hat{x}_j \hat{x}_k) G_{2jk} &= \text{Tr} \left[ \left( V_1 + \frac{i\Omega}{2} \right)^T G_2 \right] \\ &= \text{Tr}(V_1 G_2), \end{aligned} \quad (63)$$

where we also exploit the fact that  $\text{Tr}(\Omega G) = 0$ , because  $\Omega$  is antisymmetric and  $G$  is symmetric (as  $V$ ).

Let us now extend the formula to non-zero mean values (with difference  $\delta = u_1 - u_2$ ). This means to perform the replacement  $\hat{x} \rightarrow \hat{x} - u_2$ , so that

$$\begin{aligned} \text{Tr}(\rho_1 \hat{x}_j \hat{x}_k) &\rightarrow \text{Tr}[\rho_1(\hat{x}_j - u_{2j})(\hat{x}_k - u_{2k})] \\ &= \text{Tr}[\rho_1(\hat{x}_j - u_{1j} + \delta_j)(\hat{x}_k - u_{1k} + \delta_k)] \\ &= \text{Tr}[\rho_1(\hat{x}_j - u_{1j})(\hat{x}_k - u_{1k})] + \delta_j \delta_k. \end{aligned} \quad (64)$$

By replacing this expression in Eq. (63), we get

$$\sum_{jk} \text{Tr}(\rho_1 \hat{x}_j \hat{x}_k) G_{2jk} \rightarrow \text{Tr}(V_1 G_2) + \delta^T G_2 \delta. \quad (65)$$

Thus, by combining Eqs. (62) and (65), we achieve Eq. (59). The other Eqs. (60) and (61) are immediate consequences. This completes the proof of Theorem 7.

As discussed in ref. [68], the Gibbs-matrix  $G$  becomes singular for a pure state or, more generally, for a mixed state containing vacuum contributions (i.e., with some of the symplectic eigenvalues equal to  $1/2$ ). In this case the Gibbs-exponential form must be used carefully by making a suitable limit. Since  $\Sigma$  is basis independent, we can perform the calculations in the basis in which  $V_2$ , and therefore  $G_2$ , is diagonal. In this basis

$$\Sigma = \frac{1}{2} \sum_{k=1}^n \sum_{\pm} \alpha_k^{\pm} \log_2(v_{2k} \pm 1/2), \quad (66)$$

where  $\{v_{2k}\}$  is the symplectic spectrum of  $V_2$ , and

$$\alpha_k^{\pm} = 1 \pm [(V_1)_{k,k} + (V_1)_{k+n,k+n}]. \quad (67)$$

Now, if  $v_{2k} = 1/2$  for some  $k$ , then its contribution to the sum in Eq. (66) is either zero or infinity.

**Basics of quantum teleportation.** Ideal teleportation exploits an ideal EPR state  $\Phi_{AB} = |\Phi\rangle_{AB} \langle\Phi|$  of systems  $A$  (for Alice) and  $B$  (for Bob). In finite dimension  $d$ , this is the maximally-entangled Bell state

$$|\Phi\rangle_{AB} := d^{-1/2} \sum_{i=0}^{d-1} |i\rangle_A |i\rangle_B. \quad (68)$$

In particular, it is the usual Bell state  $(|00\rangle + |11\rangle)/\sqrt{2}$  for a qubit. To teleport, we need to apply a Bell detection  $\mathcal{B}$  on the input system  $a$  and the EPR system  $A$  (i.e., Alice's part of the EPR state). This detection corresponds to projecting onto a basis of Bell states  $|\Phi^k\rangle_{aA}$  where the outcome  $k$  takes  $d^2$  values with probabilities  $p_k = d^{-2}$ .

More precisely, the Bell detection is a positive-operator valued measure (POVM) with operators

$$M_k = (U_k \otimes I)^\dagger \Phi_{aA} (U_k \otimes I), \quad (69)$$

where  $\Phi_{aA} := |\Phi\rangle_{aA} \langle\Phi|$  is the Bell state as in Eq. (68) and  $U_k$  is one of  $d^2$  teleportation unitaries, corresponding

to generalized Pauli operators (described below). For any state  $\rho$  of the input system  $a$ , and outcome  $k$  of the Bell detection, the other EPR system  $B$  (Bob's part) is projected onto  $U_k \rho U_k^\dagger$ . Once Alice has communicated  $k$  to Bob (feed-forward), he applies the correction unitary  $U_k^{-1}$  to retrieve the original state  $\rho$  on its system  $B$ . Note that this process also teleports all correlations that the input system  $a$  may have with ancillary systems.

For CV systems ( $d \rightarrow +\infty$ ), the ideal EPR source  $\Phi_{AB}$  can be expressed as a TMSV state  $\Phi^\mu$  in the limit of infinite energy  $\mu \rightarrow +\infty$ . The unitaries  $U_k$  are phase-space displacements  $D(k)$  with complex amplitude  $k$  [9]. The CV Bell detection is also energy-unbounded, corresponding to a projection onto the asymptotic EPR state up to phase-space displacements  $D(k)$ . To deal with this, we need to consider a finite-energy version of the measurement, defined as a quasi-projection onto displaced versions of the TMSV state  $\Phi^\mu$  with finite parameter  $\mu$ . This defines a POVM  $\mathcal{B}^\mu$  with operators

$$M_k^\mu := \pi^{-1}[D(-k) \otimes I] \Phi_{aA}^\mu [D(k) \otimes I]. \quad (70)$$

Optically, this can be interpreted as applying a balanced beam-splitter followed by two projections, one onto a position-squeezed state and the other onto a momentum-squeezed state (both with finite squeezing). The ideal CV Bell detection  $\mathcal{B}$  is reproduced by taking the limit of  $\mu \rightarrow +\infty$  in Eq. (70). Thus, CV teleportation must always be interpreted *a la* Braunstein and Kimble [18], so that we first consider finite resources ( $\Phi^\mu, \mathcal{B}^\mu$ ) to compute the  $\mu$ -dependent output and then we take the limit of large  $\mu$ .

**Teleportation unitaries.** Let us characterize the set of teleportation unitaries  $\mathbb{U}_d = \{U_k\}$  for a qudit of dimension  $d$ . First, let us write  $k$  as a multi-index  $k = (a, b)$  with  $a, b \in \mathbb{Z}_d := \{0, \dots, d-1\}$ . The teleportation set is therefore composed of  $d^2$  generalized Pauli operators  $\mathbb{U}_d = \{U_{ab}\}$ , where  $U_{ab} := X^a Z^b$ . These are defined by introducing unitary (non-Hermitian) operators

$$X|j\rangle = |j \oplus 1\rangle, \quad Z|j\rangle = \omega^j |j\rangle, \quad (71)$$

where  $\oplus$  is the modulo  $d$  addition and

$$\omega := \exp(i2\pi/d), \quad (72)$$

so that they satisfy the generalized commutation relation

$$Z^b X^a = \omega^{ab} X^a Z^b. \quad (73)$$

Note that any qudit unitary can be expanded in terms of these generalized Pauli operators. We may construct the set of finite-dimensional displacement operators  $D(j, a, b) := \omega^j X^a Z^b$  with  $j, a, b \in \mathbb{Z}_d$  which form the finite-dimensional Weyl-Heisenberg group (or Pauli group). For instance, for a qubit ( $d = 2$ ), we have  $\mathbb{U}_2 = \{I, X, XZ, Z\}$  and the group  $\pm 1 \times \{I, X, XZ, Z\}$ . For a CV system ( $d = +\infty$ ), the teleportation set is composed of infinite displacement operators, i.e., we have

$\mathbb{U}_\infty = \{D(k)\}$ , where  $D(k)$  is a phase-space displacement operator [2] with complex amplitude  $k$ . This set is the infinite-dimensional Weyl-Heisenberg group.

It is important to note that, at any dimension (finite or infinite), the teleportation unitaries satisfy

$$U_k U_\ell = e^{i\phi(k, \ell)} U_f, \quad (74)$$

where  $U_f$  is another teleportation unitary and  $\phi(k, \ell)$  is a phase. In fact, for finite  $d$ , let us write  $k$  and  $\ell$  as multi-indices, i.e.,  $k = (a, b)$  and  $\ell = (s, t)$ . From  $U_{ab} = X^a Z^b = \sum_n \omega^{nb} |n \oplus a\rangle \langle n|$ , we see that  $U_{ab} U_{st} = \omega^{sb} U_{a \oplus s, b \oplus t}$ . Then, for infinite  $d$ , we know that the displacement operators satisfy  $D(u)D(v) = e^{uv^* - u^*v} D(u + v)$ , for any two complex amplitudes  $u$  and  $v$ .

Now, let us represent a teleportation unitary as

$$\mathcal{U}_g(\rho) := U_g \rho U_g^\dagger. \quad (75)$$

It is clear that we have  $\mathcal{U}_{a,b} \circ \mathcal{U}_{s,t} = \mathcal{U}_{a \oplus s, b \oplus t}$  for DV systems, and  $\mathcal{U}_u \circ \mathcal{U}_v = \mathcal{U}_{u+v}$  for CV systems. Therefore  $\mathcal{U}_g$  satisfies the group structure

$$\mathcal{U}_g \circ \mathcal{U}_h = \mathcal{U}_{g \cdot h} \quad (g, h \in G), \quad (76)$$

where  $G$  is a product of two groups of addition modulo  $d$  for DVs, while  $G$  is the translation group for CVs. Thus, the (multi-)index of the teleportation unitaries can be taken from the abelian group  $G$ .

**Teleportation-covariant channels.** Let us give a group representation to the property of teleportation covariance specified by Eq. (9). Following Eq. (75), we may express an arbitrary teleportation unitary as  $\mathcal{U}_g(\rho) := U_g \rho U_g^\dagger$  where  $g \in G$ . Calling  $\mathcal{V}_g(\rho) := V_g \rho V_g^\dagger$ , we see that Eq. (9) implies

$$\mathcal{V}_g \circ \mathcal{V}_h \circ \mathcal{E} = \mathcal{E} \circ \mathcal{U}_g \circ \mathcal{U}_h = \mathcal{E} \circ \mathcal{U}_{g \cdot h} = \mathcal{V}_{g \cdot h} \circ \mathcal{E}, \quad (77)$$

so that  $\mathcal{U}$  and  $\mathcal{V}$  are generally-different unitary representations of the same abelian group  $G$ . Thus, Eq. (9) can also be written as

$$\mathcal{V}_h^\dagger \circ \mathcal{E} \circ \mathcal{U}_h = \mathcal{E}, \quad (78)$$

for all  $h \in G$ , where  $\mathcal{V}_h^\dagger(\rho) := V_h^\dagger \rho V_h = \mathcal{V}_{h^{-1}}(\rho)$ .

The property of Eq. (9) is certainly satisfied if the channel is covariant with respect to the Weyl-Heisenberg group, describing the teleportation unitaries in both finite- and infinite-dimensional Hilbert spaces. This happens when the channel is dimension-preserving and we may set  $V_k = U_{k'}$  for some  $k'$  in Eq. (9). Equivalently, this also means that  $\mathcal{U}$  and  $\mathcal{V}$  are exactly the same unitary representation in Eq. (78). We call ‘‘Weyl-covariant’’ these specific types of tele-covariant channels.

In finite-dimension, a Weyl-covariant channel must necessarily be a Pauli channel. In infinite-dimension, a Weyl-covariant channel commutes with displacements which is certainly a property of the bosonic Gaussian channels. A simple channel which is tele-covariant but

not Weyl-covariant is the erasure channel. This is in fact dimension-altering (since it adds an orthogonal state to the input Hilbert space) and the output correction unitaries to be used in Eq. (9) have the augmented form  $V_k = U_k \oplus I$ . Hybrid channels, mapping DVs to CVs and viceversa, cannot be Weyl-covariant but they may be tele-covariant. Finally, the amplitude damping channel is an example of a channel which is not tele-covariant. See below for a schematic classification.

	Tele-covariant	Weyl-covariant
Pauli channels	Yes	Yes
Gaussian channels	Yes	Yes
Erasure channels	Yes	No
Hybrid channels	Yes/No	No
Amplitude damping	No	No

Note that, for a quantum channel in finite dimension, we may easily re-write Eq. (9) in terms of an equivalent condition for the Choi matrix. In fact, by evaluating the equality in Eq. (9) on the EPR state  $\Phi = |\Phi\rangle\langle\Phi|$  and using the property that  $I \otimes U |\Phi\rangle = U^T \otimes I |\Phi\rangle$ , one finds

$$\rho_{\mathcal{E}} = (U_k^* \otimes V_k) \rho_{\mathcal{E}} (U_k^T \otimes V_k^\dagger). \quad (79)$$

Thus, a finite-dimensional  $\mathcal{E}$  is tele-covariant if and only if, for any teleportation unitary  $U_k$ , we may write

$$[\rho_{\mathcal{E}}, U_k^* \otimes V_k] = 0, \quad (80)$$

for another generally-different unitary  $V_k$ . There are finite-dimensional channels satisfying conditions stronger than Eq. (80). For Pauli channels, we may write  $[\rho_{\mathcal{E}}, U_k^* \otimes U_k] = 0$  for any  $k$ , i.e., the Choi matrix is invariant under twirling operations restricted to the generators of the Pauli group  $\{U_k\}$ . For depolarising channels, we may even write  $[\rho_{\mathcal{E}}, U^* \otimes U] = 0$  for an arbitrary unitary  $U$ . This means that the Choi matrix of a depolarising channel is an isotropic state.

### LOCC-averaging in teleportation stretching.

Consider an arbitrary adaptive protocol described by some fundamental preparation of the local registers  $\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0$  and a sequence of adaptive LOCCs  $\mathcal{L} := \{\Lambda_0, \dots, \Lambda_n\}$ . In general, these LOs may involve measurements. Call  $u_i$  the (vectorial) outcome of Alice's and Bob's local measurements performed within the  $i$ th adaptive LOCC, so that  $\Lambda_i = \Lambda_i^{u_i}$ . It is clear that  $\Lambda_i^{u_i}$  will be conditioned by measurements and outcomes of all the previous LOCCs, so that a more precise notation will be  $\Lambda_{i|i-1, i-2, \dots}^{u_i}$  where the output  $u_i$  is achieved with a conditional probability  $p(u_i|u_{i-1}, u_{i-2}, \dots)$ . After  $n$  transmissions, we have a sequence of outcomes  $\mathbf{u} = u_0 \dots u_n$  with joint probability

$$p(\mathbf{u}) = p(u_0)p(u_1|u_0) \dots p(u_n|u_{n-1} \dots), \quad (81)$$

and a sequence of LOCCs

$$\mathcal{L}(\mathbf{u}) := \{\Lambda_0^{u_0}, \Lambda_{1|0}^{u_1}, \dots, \Lambda_{n|n-1}^{u_n}\}. \quad (82)$$

The mean rate of the protocol is achieved by averaging the output state over all possible outcomes  $\mathbf{u}$ , which is equivalent to considering the output state generated by the trace-preserving LOCC-sequence  $\mathcal{L} := \sum_{\mathbf{u}} \mathcal{L}(\mathbf{u})$ .

In fact, suppose that the (normalized) output state  $\rho_{\mathbf{ab}}^n(\mathbf{u})$  generated by the conditional  $\mathcal{L}(\mathbf{u})$  is epsilon-close to a corresponding target state  $\phi_n(\mathbf{u})$  with rate  $R_n(\mathbf{u})$ . This means that we have  $D[\rho_{\mathbf{ab}}^n(\mathbf{u}), \phi_n(\mathbf{u})] \leq \varepsilon$  in trace distance. The mean rate of the protocol  $R_n = \langle R_n(\mathbf{u}) \rangle := \sum_{\mathbf{u}} p(\mathbf{u}) R_n(\mathbf{u})$  is associated with the average target state  $\phi_n = \langle \phi_n(\mathbf{u}) \rangle$ . It is easy to show that  $\phi_n$  is approximated by the mean output state  $\rho_{\mathbf{ab}}^n = \langle \rho_{\mathbf{ab}}^n(\mathbf{u}) \rangle$  generated by  $\mathcal{L}$ . In fact, by using the joint convexity of the trace distance [1], we may write

$$D(\rho_{\mathbf{ab}}^n, \phi_n) \leq \sum_{\mathbf{u}} p(\mathbf{u}) D[\rho_{\mathbf{ab}}^n(\mathbf{u}), \phi_n(\mathbf{u})] \leq \varepsilon. \quad (83)$$

Now we show that the LOCC-simulation of a channel  $\mathcal{E}$  does not change the average output state  $\rho_{\mathbf{ab}}^n$  and this state can be re-organized in a block form. The  $i$ th (normalized) conditional output  $\rho_{\mathbf{ab}}^i$  can be expressed in terms of the  $i-1$ th output  $\rho_{\mathbf{ab}}^{i-1} = \rho_{\mathbf{aa}, \mathbf{b}}$  as follows

$$\rho_{\mathbf{ab}}^i(u_i|u_{i-1} \dots) = \frac{\Lambda_{i|i-1 \dots}^{u_i} \circ \mathcal{E}(\rho_{\mathbf{aa}, \mathbf{b}})}{p(u_i|u_{i-1} \dots)}, \quad (84)$$

where  $\mathcal{E}$  is meant as  $\mathcal{I}_{\mathbf{a}} \otimes \mathcal{E}_{a_i} \otimes \mathcal{I}_{\mathbf{b}}$  with  $a_i$  being the system transmitted. Thus, after  $n$  transmissions, the conditional output state is  $\rho_{\mathbf{ab}}^n(\mathbf{u}) = p(\mathbf{u})^{-1} \Lambda_{\mathbf{u}}^{\mathcal{E}}(\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0)$ , where

$$\Lambda_{\mathbf{u}}^{\mathcal{E}} := \Lambda_{n|n-1}^{u_n} \circ \mathcal{E} \circ \Lambda_{n-1|n-2}^{u_{n-1}} \circ \dots \circ \Lambda_{1|0}^{u_1} \circ \mathcal{E} \circ \Lambda_0^{u_0}, \quad (85)$$

and the average output state is given by

$$\rho_{\mathbf{ab}}^n = \sum_{\mathbf{u}} p(\mathbf{u}) \rho_{\mathbf{ab}}^n(\mathbf{u}) = \bar{\Lambda}^{\mathcal{E}}(\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0), \quad (86)$$

where  $\bar{\Lambda}^{\mathcal{E}} := \sum_{\mathbf{u}} \Lambda_{\mathbf{u}}^{\mathcal{E}}$ .

For some LOCC  $\mathcal{T}$  and resource state  $\sigma$ , let us write the simulation

$$\mathcal{E}(\rho_{\mathbf{aa}, \mathbf{b}}) = \mathcal{T}(\rho_{\mathbf{aa}, \mathbf{b}} \otimes \sigma) = \sum_k \mathcal{T}^k(\rho_{\mathbf{aa}, \mathbf{b}} \otimes \sigma), \quad (87)$$

where  $\mathcal{T}^k(\rho) := (\mathbb{A}_k \otimes \mathbb{B}_k) \rho (\mathbb{A}_k \otimes \mathbb{B}_k)^\dagger$  is Alice and Bob's conditional LOCC with probability  $p(k)$ . For simplicity we omit other technical labels that may describe independent local measurements or classical channels, because they will also be averaged at the end of the procedure. Let us introduce the vector  $\mathbf{k} = k_1 \dots k_n$  where  $k_i$  identifies a conditional LOCC  $\mathcal{T}^{k_i}$  associated with the  $i$ th transmission. Because the LOCC-simulation of the channel is fixed, we have the factorized probability  $p(\mathbf{k}) = p(k_1) \dots p(k_n)$ .

By replacing the simulation in Eq. (84), we obtain

$$\rho_{\mathbf{ab}}^i(u_i|u_{i-1} \dots) = \frac{\Lambda_{i|i-1 \dots}^{u_i} \circ \mathcal{T}(\rho_{\mathbf{aa}, \mathbf{b}} \otimes \sigma)}{p(u_i|u_{i-1} \dots)}. \quad (88)$$

By iteration, the latter equation yields

$$\rho_{\mathbf{ab}}^n(\mathbf{u}) = p(\mathbf{u})^{-1} \Lambda_{\mathbf{u}}^{\mathcal{T}}(\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0 \otimes \sigma^{\otimes n}), \quad (89)$$

where

$$\begin{aligned} \Lambda_{\mathbf{u}}^{\mathcal{T}} &:= \Lambda_{n|n-1\dots}^{u_n} \circ \mathcal{T} \circ \dots \circ \mathcal{T} \circ \Lambda_0^{u_0} \\ &= \sum_{\mathbf{k}} p(\mathbf{k}) \Lambda_{n|n-1\dots}^{u_n} \circ \mathcal{T}^{k_n} \circ \dots \circ \mathcal{T}^{k_1} \circ \Lambda_0^{u_0}. \end{aligned} \quad (90)$$

Therefore, the average output state of the original protocol may be equivalently expressed in the form

$$\rho_{\mathbf{ab}}^n = \bar{\Lambda}^{\mathcal{T}}(\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0 \otimes \sigma^{\otimes n}), \quad \bar{\Lambda}^{\mathcal{T}} := \sum_{\mathbf{u}} \Lambda_{\mathbf{u}}^{\mathcal{T}}. \quad (91)$$

Finally, we may include the preparation  $\rho_{\mathbf{a}}^0 \otimes \rho_{\mathbf{b}}^0$  in the LOCC, so that we may write

$$\rho_{\mathbf{ab}}^n = \bar{\Lambda}(\sigma^{\otimes n}). \quad (92)$$

To extend this technical proof to CV systems, we perform the replacement  $\sum_{\mathbf{u}} \rightarrow \int d\mathbf{u}$  with the probabilities becoming probability densities. Then,  $\mathcal{T}$  and  $\sigma$  may be both asymptotic, i.e., defined as infinite-energy limits  $\mathcal{T} := \lim_{\mu} \mathcal{T}^{\mu}$  and  $\sigma := \lim_{\mu} \sigma^{\mu}$  from corresponding finite-versions  $\mathcal{T}^{\mu}$  and  $\sigma^{\mu}$ . In this case, we repeat the previous procedure for some  $\mu$  and then we take the limit on the output state  $\rho_{\mathbf{ab}}^{n,\mu}$ .

**Teleportation stretching with bosonic channels (more details on Lemma 3).** For a bosonic channel, the Choi matrix and the ideal Bell detection are both energy-unbounded. Therefore, any Choi-based LOCC simulation of these channels must necessarily be asymptotic. Here we discuss in more detail how an asymptotic channel simulation  $(\mathcal{T}, \sigma) := \lim_{\mu}(\mathcal{T}^{\mu}, \sigma^{\mu})$  leads to an asymptotic form of stretching as described in Lemma 3. Any operation or functional applied to  $(\mathcal{T}, \sigma)$  is implicitly meant to be applied to the finite-energy simulation  $(\mathcal{T}^{\mu}, \sigma^{\mu})$ , whose output then undergoes the  $\mu$ -limit.

Consider a bosonic channel  $\mathcal{E}$  with asymptotic simulation  $(\mathcal{T}, \sigma) := \lim_{\mu}(\mathcal{T}^{\mu}, \sigma^{\mu})$ . As depicted in Fig. 9, this means that there is a channel  $\mathcal{E}^{\mu}$  generated by  $(\mathcal{T}^{\mu}, \sigma^{\mu})$  such that  $\mathcal{E} := \lim_{\mu} \mathcal{E}^{\mu}$  in the sense that

$$\|\mathcal{I} \otimes \mathcal{E}(\rho_{aa'}) - \mathcal{I} \otimes \mathcal{E}^{\mu}(\rho_{aa'})\| \xrightarrow{\mu} 0 \text{ for any } \rho_{aa'}. \quad (93)$$

In other words, for any (energy-bounded) bipartite state  $\rho_{aa'}$ , whose  $a'$ -part is propagated, the original channel output  $\rho_{ab} := \mathcal{I} \otimes \mathcal{E}(\rho_{aa'})$  and the simulated channel output  $\rho_{ab}^{\mu} := \mathcal{I} \otimes \mathcal{E}^{\mu}(\rho_{aa'})$  satisfy the limit

$$\|\rho_{ab}^{\mu} - \rho_{ab}\| \xrightarrow{\mu} 0. \quad (94)$$

By teleportation stretching, we may equivalently decompose the output state  $\rho_{ab}^{\mu}$  into the form

$$\rho_{ab}^{\mu} = \bar{\Lambda}_{\mu}(\sigma^{\mu}), \quad (95)$$

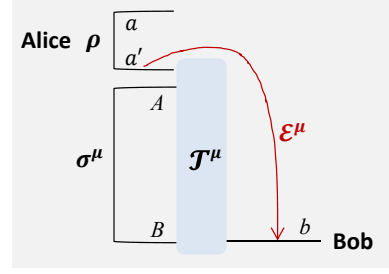


FIG. 9: Asymptotic LOCC simulation of bosonic channels. The finite-energy LOCC simulation  $(\mathcal{T}^{\mu}, \sigma^{\mu})$  generates a teleportation channel  $\mathcal{E}^{\mu}$ . Assume that  $\mathcal{E}^{\mu}$  defines a target bosonic channel  $\mathcal{E}$  according to the pointwise limit in Eq. (93). Then, we say that the bosonic channel  $\mathcal{E}$  has asymptotic simulation  $(\mathcal{T}, \sigma) := \lim_{\mu}(\mathcal{T}^{\mu}, \sigma^{\mu})$ .

where  $\bar{\Lambda}_{\mu}$  is a trace-preserving LOCC, which includes both  $\mathcal{T}^{\mu}$  and the preparation of  $\rho_{aa'}$  (it is trace-preserving because we implicitly assume that we average over all possible measurements present in the simulation LOCC  $\mathcal{T}^{\mu}$ ). By taking the limit of  $\mu \rightarrow +\infty$  in Eq. (95), the state  $\rho_{ab}^{\mu}$  becomes the channel output state  $\rho_{ab}$  according to Eq. (94). Therefore, we have the limit

$$\|\rho_{ab} - \bar{\Lambda}_{\mu}(\sigma^{\mu})\| \xrightarrow{\mu} 0, \quad (96)$$

that we may compactly write as

$$\rho_{ab} = \lim_{\mu} \bar{\Lambda}_{\mu}(\sigma^{\mu}). \quad (97)$$

Note that we may express Eq. (93) in a different form. In fact, consider the set of energy-constrained bipartite states  $\mathcal{D}_N := \{\rho_{aa'} \mid \text{Tr}(\hat{N}\rho_{aa'}) \leq N\}$ , where  $\hat{N}$  is the total number operator. Then, for two bosonic channels,  $\mathcal{E}_1$  and  $\mathcal{E}_2$ , we may define the bounded diamond norm

$$\|\mathcal{E}_1 - \mathcal{E}_2\|_{\diamond N} := \sup_{\rho_{aa'} \in \mathcal{D}_N} \|\mathcal{I} \otimes \mathcal{E}_1(\rho_{aa'}) - \mathcal{I} \otimes \mathcal{E}_2(\rho_{aa'})\|. \quad (98)$$

Using the latter definition and the fact that  $\mathcal{D}_N$  is a compact set, we have that the pointwise limit in Eq. (93) implies the following uniform limit

$$\|\mathcal{E} - \mathcal{E}^{\mu}\|_{\diamond N} \xrightarrow{\mu} 0 \text{ for any } N. \quad (99)$$

The latter expression is useful to generalize the reasoning to the adaptive protocol, with LOCCs applied before and after transmission. Consider the output  $\rho_{\mathbf{ab}}^n$  after  $n$  adaptive uses of the channel  $\mathcal{E}$ , and the simulated output  $\rho_{\mathbf{ab}}^{n,\mu}$ , which is generated by replacing  $\mathcal{E}$  with the imperfect channel  $\mathcal{E}^{\mu}$ . Explicitly, we may write

$$\rho_{\mathbf{ab}}^n = \Lambda_n \circ \mathcal{E} \circ \Lambda_{n-1} \cdots \circ \Lambda_1 \circ \mathcal{E}(\rho_{\mathbf{ab}}^0), \quad (100)$$

with its approximate version

$$\rho_{\mathbf{ab}}^{n,\mu} = \Lambda_n \circ \mathcal{E}^{\mu} \circ \Lambda_{n-1} \cdots \circ \Lambda_1 \circ \mathcal{E}(\rho_{\mathbf{ab}}^0), \quad (101)$$

where it is understood that  $\mathcal{E}$  and  $\mathcal{E}^\mu$  are applied to system  $a_i$  in the  $i$ -th transmission, i.e.,  $\mathcal{E} = \mathcal{I}_a \otimes \mathcal{E}_{a_i} \otimes \mathcal{I}_b$ .

Assume that the mean photon number of the total register states  $\rho_{\mathbf{ab}}^n$  and  $\rho_{\mathbf{ab}}^{n,\mu}$  is bounded by some large but yet finite value  $N(n)$ . For instance, we may consider a sequence  $N(n) = N(0) + nt$ , where  $N(0)$  is the initial photon contribution and  $t$  is the channel contribution, which may be negative for energy-decreasing channels (like the thermal-loss channel) or positive for energy-increasing channels (like the quantum amplifier). We then prove

$$\|\rho_{\mathbf{ab}}^n - \rho_{\mathbf{ab}}^{n,\mu}\| \leq \sum_{i=0}^{n-1} \|\mathcal{E} - \mathcal{E}^\mu\|_{\diamond N(i)}. \quad (102)$$

In fact, for  $n = 2$ , we may write

$$\begin{aligned} & \|\rho_{\mathbf{ab}}^2 - \rho_{\mathbf{ab}}^{2,\mu}\| \\ &= \|\Lambda_2 \circ \mathcal{E} \circ \Lambda_1 \circ \mathcal{E}(\rho_{\mathbf{ab}}^0) - \Lambda_2 \circ \mathcal{E}^\mu \circ \Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)\| \\ &\stackrel{(1)}{\leq} \|\mathcal{E} \circ \Lambda_1 \circ \mathcal{E}(\rho_{\mathbf{ab}}^0) - \mathcal{E}^\mu \circ \Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)\| \\ &\stackrel{(2)}{\leq} \|\mathcal{E} \circ \Lambda_1 \circ \mathcal{E}(\rho_{\mathbf{ab}}^0) - \mathcal{E} \circ \Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)\| \\ &\quad + \|\mathcal{E} \circ \Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0) - \mathcal{E}^\mu \circ \Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)\| \\ &\stackrel{(3)}{\leq} \|\mathcal{E}(\rho_{\mathbf{ab}}^0) - \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)\| \\ &\quad + \|\mathcal{E}[\Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)] - \mathcal{E}^\mu[\Lambda_1 \circ \mathcal{E}^\mu(\rho_{\mathbf{ab}}^0)]\| \\ &\stackrel{(4)}{\leq} \|\mathcal{E} - \mathcal{E}^\mu\|_{\diamond N(0)} + \|\mathcal{E} - \mathcal{E}^\mu\|_{\diamond N(1)}, \end{aligned} \quad (103)$$

where: (1) we use monotonicity under  $\Lambda_2$ ; (2) we use the triangle inequality; (3) we use monotonicity with respect to  $\mathcal{E} \circ \Lambda_1$ ; and (4) we use the definition of Eq. (98) assuming  $a' = a_i$  and the energy bound  $N(n)$ . Generalization to arbitrary  $n$  is just a technicality.

By using Eq. (99) we may write that, for any bound  $N(n)$  and  $\varepsilon \geq 0$ , there is a sufficiently large  $\mu$  such that  $\|\mathcal{E} - \mathcal{E}^\mu\|_{\diamond N(n)} \leq \varepsilon$ , so that Eq. (102) becomes

$$\|\rho_{\mathbf{ab}}^n - \rho_{\mathbf{ab}}^{n,\mu}\| \leq n\varepsilon. \quad (104)$$

By applying teleportation stretching we derive  $\rho_{\mathbf{ab}}^{n,\mu} = \bar{\Lambda}_\mu(\sigma^{\mu \otimes n})$ , where  $\bar{\Lambda}_\mu$  includes the original LOCCs  $\Lambda_i$  and the teleportation LOCCs  $\mathcal{T}^\mu$ . Thus, Eq. (104) implies

$$\|\rho_{\mathbf{ab}}^n - \bar{\Lambda}_\mu(\sigma^{\mu \otimes n})\| \leq n\varepsilon, \quad (105)$$

or, equivalently,  $\|\rho_{\mathbf{ab}}^n - \bar{\Lambda}_\mu(\sigma^{\mu \otimes n})\| \xrightarrow{\mu} 0$ .

Therefore, given an adaptive protocol with arbitrary register energy, and performed  $n$  times through a bosonic channel  $\mathcal{E}$  with asymptotic simulation, we may write its output state as the (trace-norm) limit

$$\rho_{\mathbf{ab}}^n = \lim_{\mu} \bar{\Lambda}_\mu(\sigma^{\mu \otimes n}). \quad (106)$$

This means that we may formally write the asymptotic stretching  $\bar{\Lambda}(\sigma^{\otimes n}) := \lim_{\mu} \bar{\Lambda}_\mu(\sigma^{\mu \otimes n})$  for an asymptotic channel simulation  $(\mathcal{T}, \sigma) := \lim_{\mu} (\mathcal{T}^\mu, \sigma^\mu)$ .

**One-shot REE bound (Theorem 5).** The main steps for proving Eq. (15) are already given in the main text. Here we provide more details of the formalism for the specific case of bosonic channels, involving asymptotic simulations  $(\mathcal{T}, \sigma) := \lim_{\mu} (\mathcal{T}^\mu, \sigma^\mu)$ . Given the asymptotic stretching of the output state  $\rho_{\mathbf{ab}}^n$  as in Eq. (106), the simplification of the REE bound  $E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n)$  explicitly goes as follows

$$\begin{aligned} E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) &= \inf_{\sigma_s} S(\rho_{\mathbf{ab}}^n \| \sigma_s) \\ &\stackrel{(1)}{\leq} \inf_{\sigma_s^\mu} S \left[ \lim_{\mu} \bar{\Lambda}_\mu(\sigma^{\mu \otimes n}) \| \lim_{\mu} \sigma_s^\mu \right] \\ &\stackrel{(2)}{\leq} \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S[\bar{\Lambda}_\mu(\sigma^{\mu \otimes n}) \| \sigma_s^\mu] \\ &\stackrel{(3)}{\leq} \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S[\bar{\Lambda}_\mu(\sigma^{\mu \otimes n}) \| \bar{\Lambda}_\mu(\sigma_s^\mu)] \\ &\stackrel{(4)}{\leq} \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S(\sigma^{\mu \otimes n} \| \sigma_s^\mu) \\ &\stackrel{(5)}{=} E_{\mathbf{R}}(\sigma^{\otimes n}), \end{aligned} \quad (107)$$

where: (1)  $\sigma_s^\mu$  is a generic sequence of separable states that converges in trace norm, i.e., such that there is a separable state  $\sigma_s := \lim_{\mu} \sigma_s^\mu$  so that  $\|\sigma_s - \sigma_s^\mu\| \xrightarrow{\mu} 0$ ; (2) we use the lower semi-continuity of the relative entropy [3]; (3) we use that  $\bar{\Lambda}_\mu(\sigma_s^\mu)$  are specific types of converging separable sequences within the set of all such sequences; (4) we use the monotonicity of the relative entropy under trace-preserving LOCCs; and (5) we use the definition of REE for asymptotic states given in Eq. (4).

Thus, from Theorem 1, we may write the following upper bound for the two-way capacity of a bosonic channel

$$\mathcal{C}(\mathcal{E}) \leq E_{\mathbf{R}}^{\star}(\mathcal{E}) \leq \lim_n n^{-1} E_{\mathbf{R}}(\sigma^{\otimes n}) = E_{\mathbf{R}}^{\infty}(\sigma). \quad (108)$$

The supremum over all adaptive protocols which defines  $E_{\mathbf{R}}^{\star}(\mathcal{E})$  disappears in the right hand side of Eq. (108). The resulting bound applies to both energy-constrained protocols and the limit of energy-unconstrained protocols. The proof of the further condition  $E_{\mathbf{R}}^{\infty}(\sigma) \leq E_{\mathbf{R}}(\sigma)$  in Eq. (15) comes from the subadditivity of the REE over tensor product states. This subadditivity also holds for a tensor product of asymptotic states; it is proven by restricting the minimization on tensor-product sequences  $\sigma_s^{\mu \otimes n}$  in the corresponding definition of the REE.

Let us now prove Eq. (16). The two inequalities in Eq. (16) are simply obtained by using  $\sigma = \rho_{\mathcal{E}}$  for a Choi-stretchable channel (where the Choi matrix is intended to be asymptotic for a bosonic channel). Then we show the equality  $E_{\mathbf{R}}(\rho_{\mathcal{E}}) = E_{\mathbf{R}}(\mathcal{E})$ . By restricting the optimization in  $E_{\mathbf{R}}(\mathcal{E})$  to an input EPR state  $\Phi$ , we get the direct part  $E_{\mathbf{R}}(\mathcal{E}) \geq E_{\mathbf{R}}(\rho_{\mathcal{E}})$  as already noticed in Eq. (6). For CVs, this means to choose an asymptotic EPR state  $\Phi := \lim_{\mu} \Phi^\mu$ , so that

$$\mathcal{I} \otimes \mathcal{E}(\Phi) := \lim_{\mu} \mathcal{I} \otimes \mathcal{E}(\Phi^\mu) = \lim_{\mu} \rho_{\mathcal{E}}^\mu := \rho_{\mathcal{E}}, \quad (109)$$



and therefore

$$E_{\text{R}}(\mathcal{E}) \geq E_{\text{R}}(\rho_{\mathcal{E}}) := \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S(\rho_{\mathcal{E}}^\mu \| \sigma_s^\mu). \quad (110)$$

For the converse part, consider first DVs. By applying teleportation stretching to a single use of the channel  $\mathcal{E}$ , we may write  $\mathcal{I} \otimes \mathcal{E}(\rho) = \bar{\Lambda}(\rho_{\mathcal{E}})$  for a trace-preserving LOCC  $\bar{\Lambda}$ . Then, the monotonicity of the REE leads to

$$E_{\text{R}}(\mathcal{E}) = \sup_{\rho} E_{\text{R}}[\mathcal{I} \otimes \mathcal{E}(\rho)] = \sup_{\rho} E_{\text{R}}[\bar{\Lambda}(\rho_{\mathcal{E}})] \leq E_{\text{R}}(\rho_{\mathcal{E}}). \quad (111)$$

For CVs, we have an asymptotic stretching  $\mathcal{I} \otimes \mathcal{E}(\rho) = \lim_{\mu} \sigma^\mu$  where  $\sigma^\mu := \bar{\Lambda}_\mu(\rho_{\mathcal{E}}^\mu)$ . Therefore, we may write

$$\begin{aligned} E_{\text{R}}[\mathcal{I} \otimes \mathcal{E}(\rho)] &= \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S(\sigma^\mu \| \sigma_s^\mu) \\ &\leq \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S[\bar{\Lambda}_\mu(\rho_{\mathcal{E}}^\mu) \| \bar{\Lambda}_\mu(\sigma_s^\mu)] \\ &\leq \inf_{\sigma_s^\mu} \liminf_{\mu \rightarrow +\infty} S(\rho_{\mathcal{E}}^\mu \| \sigma_s^\mu) = E_{\text{R}}(\rho_{\mathcal{E}}). \end{aligned} \quad (112)$$

Since this is true for any  $\rho$ , it also applies to the supremum and, therefore, to the channel's REE  $E_{\text{R}}(\mathcal{E})$ .

**One-shot REE bound for DV channels (Proposition 6).** At finite dimension, we may first use teleportation stretching to derive  $K(\mathcal{E}) \leq K(\rho_{\mathcal{E}})$  and then apply any upper bound to the distillable key  $K(\rho_{\mathcal{E}})$ , among which the REE bound has the best performance. Consider a key-generation protocol described by a sequence  $\mathcal{L}$  of adaptive LOCCs (implicitly assumed to be averaged). If the protocol is implemented over a Choi-stretchable channel  $\mathcal{E}$  in finite dimension  $d$ , its stretching allows us to write the output as  $\rho_{\text{ab}}^n = \bar{\Lambda}(\rho_{\mathcal{E}}^{\otimes n})$  for a trace-preserving LOCC  $\bar{\Lambda}$ . Since any LOCC-sequence  $\mathcal{L}$  is transformed into  $\bar{\Lambda}$ , any key-generation protocol through  $\mathcal{E}$  becomes a key distillation protocol over copies of the Choi matrix  $\rho_{\mathcal{E}}$ . For large  $n$ , this means  $K(\mathcal{E}) \leq K(\rho_{\mathcal{E}})$ .

To derive the opposite inequality, consider Alice sending EPR states through the channel, so that the shared output will be  $\rho_{\mathcal{E}}^{\otimes n}$ . There exists an optimal LOCC on these states which reaches the distillable key  $K(\rho_{\mathcal{E}})$  for large  $n$ . This is a specific key-generation protocol over  $\mathcal{E}$ , so that we may write  $K(\rho_{\mathcal{E}}) \leq K(\mathcal{E})$ . Thus, for a  $d$ -dimensional Choi-stretchable channel, we find

$$K(\mathcal{E}) = K(\rho_{\mathcal{E}}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}}), \quad (113)$$

where we also exploit the fact that the distillable key of a DV state is bounded by its regularized REE [28]. It is also clear that  $E_{\text{R}}^{\infty}(\rho_{\mathcal{E}}) \leq E_{\text{R}}(\rho_{\mathcal{E}}) = E_{\text{R}}(\mathcal{E})$ , where the latter equality is demonstrated in the proof of Theorem 5.

Note that  $K(\mathcal{E}) = K(\rho_{\mathcal{E}})$  cannot be directly written for a bosonic channel, because its Choi matrix  $\rho_{\mathcal{E}}$  is energy-unbounded, so that its distillable key  $K(\rho_{\mathcal{E}})$  is not well-defined. By contrast, we know how to extend  $E_{\text{R}}^{\infty}(\rho_{\mathcal{E}})$  to bosonic channels and show  $K(\mathcal{E}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}})$  at any dimension: This is the more general procedure of Theorem 5 which first exploits the general REE bound

$K(\mathcal{E}) \leq E_{\text{R}}^{\star}(\mathcal{E})$  and then simplifies  $E_{\text{R}}^{\star}(\mathcal{E}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}})$  by means of teleportation stretching at any dimension.

**Two-way quantum communication.** Our method can be extended to more complex forms of quantum communication. In fact, our weak converse theorem can be applied to any scenario where two parties produce an output state by means of an adaptive protocol. All the details of the protocol are contained in the LOCCs  $\mathcal{L}$  which are collapsed into  $\bar{\Lambda}$  by teleportation stretching and then discarded using the REE.

Consider the scenario where Alice and Bob send systems to each other by choosing between two possible channels,  $\mathcal{E}$  (forward) or  $\mathcal{E}'$  (backward), and performing adaptive LOCC after each single transmission (see also Fig. 10). The capacity  $\mathcal{C}(\mathcal{E}, \mathcal{E}')$  is defined as the maximum number of target bits distributed per individual transmission, by using one of the two channels  $\mathcal{E}$  and  $\mathcal{E}'$ , and assuming LOs assisted by unlimited two-way CCs.

In general, the feedback transmission may occur a fraction  $p$  of the rounds, with associated capacity

$$\mathcal{C}(p, \mathcal{E}, \mathcal{E}') \geq (1-p)\mathcal{C}(\mathcal{E}) + p\mathcal{C}(\mathcal{E}'). \quad (114)$$

The lower bound is a convex combination of the individual capacities of the two channels, which is achievable by using independent LOCC-sequences for the two channels.

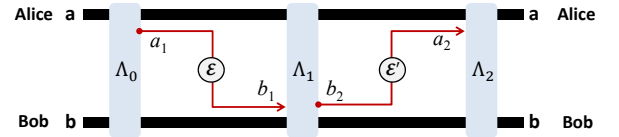


FIG. 10: Adaptive protocol for two-way quantum or private communication. The protocol employs a forward channel  $\mathcal{E}$  and backward channel  $\mathcal{E}'$ . Transmissions are alternated with adaptive LOCCs  $\mathcal{L} = \{\Lambda_0, \Lambda_1, \Lambda_2, \dots\}$ .

Assume that  $(\mathcal{E}, \mathcal{E}')$  are stretchable into the pair of resource states  $(\sigma, \sigma')$ . Then, we can stretch the protocol and decompose the output state as

$$\rho_{\text{ab}}^n = \bar{\Lambda} \left[ \sigma^{\otimes n(1-p)} \otimes \sigma'^{\otimes np} \right], \quad (115)$$

where the tensor exponents  $n(1-p)$  and  $np$  are integers for suitably large  $n$  (it is implicitly understood that we consider suitable limits in the bosonic case). Using the monotonicity of the REE under trace-preserving LOCCs and its subadditivity over tensor products, we write

$$\begin{aligned} E_{\text{R}}(\rho_{\text{ab}}^n) &\leq E_{\text{R}}[\sigma^{\otimes n(1-p)} \otimes \sigma'^{\otimes np}] \\ &\leq n(1-p)E_{\text{R}}(\sigma) + npE_{\text{R}}(\sigma'). \end{aligned} \quad (116)$$

As previously said, our weak converse theorem can be applied to any adaptive protocol where two parties finally share a bipartite state  $\rho_{\text{ab}}^n$ . Thus, we may write

$$\begin{aligned} \mathcal{C}(p, \mathcal{E}, \mathcal{E}') &\leq \sup_{\mathcal{L}} \lim_{n \rightarrow +\infty} \frac{E_{\text{R}}(\rho_{\text{ab}}^n)}{n} \\ &\leq (1-p)E_{\text{R}}(\sigma) + pE_{\text{R}}(\sigma'). \end{aligned} \quad (117)$$

From Eqs. (114) and (117), we find that  $\mathcal{C}(\mathcal{E}, \mathcal{E}') = \max_p \mathcal{C}(p, \mathcal{E}, \mathcal{E}')$  must satisfy

$$\max\{\mathcal{C}(\mathcal{E}), \mathcal{C}(\mathcal{E}')\} \leq \mathcal{C}(\mathcal{E}, \mathcal{E}') \leq \max\{E_R(\sigma), E_R(\sigma')\}. \quad (118)$$

For Choi-stretchable channels, this means

$$\max\{\mathcal{C}(\mathcal{E}), \mathcal{C}(\mathcal{E}')\} \leq \mathcal{C}(\mathcal{E}, \mathcal{E}') \leq \max\{\Phi(\mathcal{E}), \Phi(\mathcal{E}')\}. \quad (119)$$

In particular, if the two channels are distillable, i.e.,  $\mathcal{C}(\mathcal{E}) = \Phi(\mathcal{E})$  and  $\mathcal{C}(\mathcal{E}') = \Phi(\mathcal{E}')$ , then we may write

$$\mathcal{C}(\mathcal{E}, \mathcal{E}') = \max\{\mathcal{C}(\mathcal{E}), \mathcal{C}(\mathcal{E}')\}, \quad (120)$$

and the optimal strategy (value of  $p$ ) corresponds to using the channel with maximum capacity.

Note that we may also consider a two-way quantum communication protocol where the forward and backward transmissions occur simultaneously, and correspondingly define a capacity that quantifies the maximum number of target bits which are distributed in each double communication, forward *and* backward (instead of each single transmission, forward *or* backward). However, this case can be considered as a double-band quantum channel.

**Multiband quantum channel.** Consider the communication scenario where Alice and Bob can exploit a multiband quantum channel, i.e., a quantum channel whose single use involves the simultaneous transmission of  $m$  distinct systems. In practice, this channel  $\mathcal{E}_{\text{mb}}$  is represented by a set of  $m$  independent channels or bands  $\{\mathcal{E}_1, \dots, \mathcal{E}_m\}$ , i.e., it can be written as

$$\mathcal{E}_{\text{mb}} = \bigotimes_{i=1}^m \mathcal{E}_i. \quad (121)$$

For instance, the bands may be bosonic Gaussian channels associated with difference frequencies.

In this case, the adaptive protocol is modified in such a way that each (multiband) transmission involves Alice simultaneously sending  $m$  quantum systems to Bob. These  $m$  input systems may be in a generally-entangled state, which may also involve correlations with the remaining systems in Alice's register. Before and after each multiband transmission, the parties perform adaptive LOCCs on their local registers  $\mathbf{a}$  and  $\mathbf{b}$ . The multiband protocol is therefore characterized by a LOCC sequence  $\mathcal{L} = \{\Lambda_0, \dots, \Lambda_n\}$  after  $n$  transmissions.

The definition of the generic two-way capacity is immediately extended to a multiband channel. This capacity quantifies the maximum number of target bits that are distributed (in parallel) for each multiband transmission by means of adaptive protocols. It must satisfy

$$\mathcal{C}(\mathcal{E}_{\text{mb}}) \geq \sum_{i=1}^m \mathcal{C}(\mathcal{E}_i), \quad (122)$$

where the lower bound is the sum of the two-way capacities of the single bands  $\mathcal{E}_i$ . This lower bound is obtained by using adaptive LOCCs which are independent between

different  $\mathcal{E}_i$ , and considering an output state of the form  $\otimes_i \rho_{\mathbf{ab}}^{n,i}$  where  $\rho_{\mathbf{ab}}^{n,i}$  is the output associated with  $\mathcal{E}_i$ .

Now consider an adaptive protocol performed over a multiband channel, whose  $m$  bands  $\{\mathcal{E}_i\}$  are stretchable into  $m$  resources states  $\{\sigma_i\}$ . By teleportation stretching, we find that Alice and Bob's output state can be decomposed in the form

$$\rho_{\mathbf{ab}}^n = \bar{\Lambda} \left( \bigotimes_{i=1}^m \sigma_i^{\otimes n} \right). \quad (123)$$

(It is understood that the formulation is asymptotic for bosonic channels.) This previous decomposition leads to

$$E_R(\rho_{\mathbf{ab}}^n) \leq \sum_{i=1}^m E_R(\sigma_i^{\otimes n}). \quad (124)$$

Using our weak converse theorem, we can then write

$$\begin{aligned} \mathcal{C}(\mathcal{E}_{\text{mb}}) &\leq \sup_{\mathcal{L}} \lim_{n \rightarrow +\infty} \frac{E_R(\rho_{\mathbf{ab}}^n)}{n} \\ &\leq \sum_{i=1}^m E_R^\infty(\sigma_i) \leq \sum_{i=1}^m E_R(\sigma_i). \end{aligned} \quad (125)$$

Combining Eqs. (122) and (125) we may then write

$$\sum_{i=1}^m \mathcal{C}(\mathcal{E}_i) \leq \mathcal{C}(\mathcal{E}_{\text{mb}}) \leq \sum_{i=1}^m E_R(\sigma_i). \quad (126)$$

For Choi-stretchable bands, this means

$$\sum_{i=1}^m \mathcal{C}(\mathcal{E}_i) \leq \mathcal{C}(\mathcal{E}_{\text{mb}}) \leq \sum_{i=1}^m \Phi(\mathcal{E}_i). \quad (127)$$

Finally, if the bands are distillable, i.e.,  $\mathcal{C}(\mathcal{E}_i) = \Phi(\mathcal{E}_i)$ , then we find the additive result

$$\mathcal{C}(\mathcal{E}_{\text{mb}}) = \sum_{i=1}^m \mathcal{C}(\mathcal{E}_i). \quad (128)$$

**Acknowledgments.** We acknowledge support from the EPSRC via the 'UK Quantum Communications Hub' (EP/M013472/1) and 'qDATA' (EP/L011298/1), and from the ERC (Starting Grant 308253 PACOMANEDIA). In alphabetic order we would like to thank G. Adesso, S. Bose, S. L. Braunstein, M. Christandl, T. P. W. Cope, R. Demkowicz-Dobrzanski, K. Goodenough, F. Grosshans, S. Guha, M. Horodecki, L. Jiang, J. Koldynski, S. Lloyd, C. Lupo, L. Maccone, S. Mancini, A. Müller-Hermes, B. Schumacher, G. Spedalieri, G. Vallone, M. Westmoreland, M. M. Wilde and A. Winter.

- 
- [1] Nielsen, M. A. & Chuang, I. L. Quantum computation and quantum information (Cambridge University Press, Cambridge, 2000).
- [2] Weedbrook, C. *et al.* Gaussian quantum information. *Rev. Mod. Phys.* **84**, 621–669 (2012).
- [3] Holevo, A. Quantum Systems, Channels, Information: A Mathematical Introduction (De Gruyter, Berlin-Boston, 2012).
- [4] Bennett, C. H. & Brassard, G. Quantum cryptography: Public key distribution and coin tossing. *Proc. IEEE International Conf. on Computers, Systems, and Signal Processing, Bangalore*, pp. 175–179 (1984).
- [5] Gisin, N., Ribordy, G., Tittel, W. & Zbinden, H. Quantum cryptography. *Rev. Mod. Phys.* **74**, 145–196 (2002).
- [6] Scarani, V. *et al.* The security of practical quantum key distribution. *Rev. Mod. Phys.* **81**, 1301–1350 (2009).
- [7] Kimble, H. J. The quantum internet. *Nature* **453**, 1023–1030 (2008).
- [8] Pirandola, S. & Braunstein, S. L. Unite to build a quantum internet. *Nature* **532**, 169–171 (2016).
- [9] Pirandola, S. *et al.* Advances in quantum teleportation. *Nature Photon.* **9**, 641–652 (2015).
- [10] Andersen, U. L., Neergaard-Nielsen, J. S., van Loock, P. & Furusawa, A. Hybrid discrete- and continuous-variable quantum information. *Nature Phys.* **11**, 713–719 (2015).
- [11] Briegel, H.-J., Dür, W., Cirac, J. I. & Zoller, P. Quantum repeaters: The role of imperfect local operations in quantum communication. *Phys. Rev. Lett.* **81**, 5932–5935 (1998).
- [12] Grosshans, F. *et al.* Quantum key distribution using gaussian-modulated coherent states. *Nature* **421**, 238–241 (2003).
- [13] Pirandola, S. *et al.* High-rate measurement-device-independent quantum cryptography. *Nature Photon.* **9**, 397–402 (2015).
- [14] Vedral, V., Plenio, M. B., Rippin, M. A. & Knight, P. L. Quantifying Entanglement. *Phys. Rev. Lett.* **78**, 2275–2279 (1997).
- [15] Vedral, V. & Plenio, M. B. Entanglement measures and purification procedures. *Phys. Rev. A* **57**, 1619–1633 (1998).
- [16] Vedral, V. The role of relative entropy in quantum information theory. *Rev. Mod. Phys.* **74**, 197–234 (2002).
- [17] Bennett, C. H., Brassard, G., Crépeau, C., Jozsa, R., Peres, A. & Wootters, W. K. Teleporting an unknown quantum state via dual classical and Einstein-Podolsky-Rosen channels. *Phys. Rev. Lett.* **70**, 1895–1899 (1993).
- [18] Braunstein, S. L. & Kimble, H. J. Teleportation of Continuous Quantum Variables. *Phys. Rev. Lett.* **80**, 869–872 (1998).
- [19] Braunstein, S. L., D’Ariano, G. M., Milburn, G. J. & Sacchi, M. F. Universal teleportation with a twist. *Phys. Rev. Lett.* **84**, 3486–3489 (2000).
- [20] Bennett, C. H., DiVincenzo, D. P., & Smolin, J. A. Capacities of Quantum Erasure Channels. *Phys. Rev. Lett.* **78**, 3217–3220 (1997).
- [21] Pirandola, S., García-Patrón, R., Braunstein, S. L. & Lloyd, S. Direct and reverse secret-key capacities of a quantum channel. *Phys. Rev. Lett.* **102**, 050503 (2009).
- [22] García-Patrón, R., Pirandola, S., Lloyd, S. & Shapiro, J. H. Reverse coherent information. *Phys. Rev. Lett.* **102**, 210501 (2009).
- [23] Takeoka, M., Guha, S. & Wilde, M.M. Fundamental rate-loss tradeoff for optical quantum key distribution. *Nat. Commun.* **5**, 5235 (2014).
- [24] Christandl, M. The Structure of Bipartite Quantum States: Insights from Group Theory and Cryptography. *PhD thesis, University of Cambridge, 2006*.
- [25] Devetak, I. & Winter, A. Distillation of secret key and entanglement from quantum states. *Proc. R. Soc. A* **461**, 207–235 (2005).
- [26] Devetak, I. The private classical capacity and quantum capacity of a quantum channel. *IEEE Trans. Info. Theory* **51**, 44–55 (2005).
- [27] Curty, M., Lewenstein, M. & Lütkenhaus, N. Entanglement as a Precondition for Secure Quantum Key Distribution. *Phys. Rev. Lett.* **92**, 217903 (2004).
- [28] Horodecki, K., Horodecki, M., Horodecki, P. & Oppenheim, J. Secure key from bound entanglement. *Phys. Rev. Lett.* **94**, 160502 (2005).
- [29] Schumacher, B. & Nielsen, M. A. Quantum data processing and error correction. *Phys. Rev. A* **54**, 2629–2635 (1996).
- [30] Lloyd, S. Capacity of the noisy quantum channel. *Phys. Rev. A* **55**, 1613–1622 (1997).
- [31] Christandl, M., Schuch, N. & Winter, A. Entanglement of the antisymmetric state. *Comm. Math. Phys.* **311**, 397–422 (2012).
- [32] Bennett, C. H., DiVincenzo, D. P., Smolin, J. A. & Wootters, W. K. Mixed-state entanglement and quantum error correction. *Phys. Rev. A* **54**, 3824–3851 (1996).
- [33] Horodecki, M., Horodecki, P. & Horodecki, R. General teleportation channel, singlet fraction, and quasidistillation. *Phys. Rev. A* **99**, 1888–1898 (1999).
- [34] Bowen, G. & Bose, S. Teleportation as a Depolarizing Quantum Channel, Relative Entropy and Classical Capacity. *Phys. Rev. Lett.* **87**, 267901 (2001).
- [35] Albeverio, S., Fei, S.-M. & Yang, W.-L. Optimal teleportation based on Bell measurements. *Phys. Rev. A* **66**, 012301 (2002).
- [36] Müller-Hermes, A. Transposition in Quantum Information Theory. *Master Thesis, Technische Universität München* (2012).
- [37] Leung, D. & Matthews, W. On the power of ppt-preserving and nonsignalling codes. *IEEE Transactions on Information Theory* **61**, 4486–4499 (2015).
- [38] Werner, R. F. All teleportation and dense coding schemes. *J. Phys. A* **34**, 7081–7094 (2001).
- [39] J. Niset, J., Fiurasek, J. & Cerf, N. J. No-go theorem for Gaussian quantum error correction. *Phys. Rev. Lett.* **102**, 120501 (2009).
- [40] Ji, Z., Wang, G., Duan, R., Feng, Y. & Ying, M. Parameter estimation of quantum channels. *IEEE Trans. Inform. Theory* **54**, 5172–5185 (2008).
- [41] Nielsen, M. A. & Chuang, I. L. Programmable Quantum Gate Arrays. *Phys. Rev. Lett.* **79**, 321–324 (1997).
- [42] Modi, K. *et al.* The classical-quantum boundary for correlations: Discord and related measures. *Rev. Mod. Phys.* **84**, 1655–1707 (2012).
- [43] Pirandola, S. Quantum discord as a resource for quantum cryptography. *Sci. Rep.* **4**, 6956 (2014).
- [44] Pirandola, S., Spedalieri, G., Braunstein, S.L., Cerf, N.

- J. & Lloyd, S. Optimality of Gaussian discord. *Phys. Rev. Lett.* **113**, 140405 (2014).
- [45] Weedbrook, C. *et al.* Quantum cryptography without switching. *Phys. Rev. Lett.* **93**, 170504 (2004).
- [46] Ottaviani, C., Spedalieri, G., Braunstein, S.L. & Pirandola, S. Continuous-variable quantum cryptography with an untrusted relay: Detailed security analysis of the symmetric configuration. *Phys. Rev. A* **91**, 022320 (2015).
- [47] Spedalieri, G. *et al.* Quantum cryptography with an ideal local relay. *Proceedings of the SPIE Security + Defence 2015 conference on Quantum Information Science and Technology*, Toulouse, France (21-24 September 2015). Paper 9648-47. See also Preprint at <https://arxiv.org/abs/1509.01113> (2015).
- [48] Pirandola, S., Mancini, S., Lloyd, S. & Braunstein, S. L. Continuous-variable quantum cryptography using two-way quantum communication. *Nature Phys.* **4**, 726–730 (2008).
- [49] Ottaviani, C. & Pirandola S. General immunity and superadditivity of two-way Gaussian quantum cryptography. *Sci. Rep.* **6**, 22225 (2016).
- [50] Braunstein, S. L. & Pirandola, S. Side-channel-free quantum key distribution. *Phys. Rev. Lett.* **108**, 130502 (2012).
- [51] Lo, H.-K., Curty, M. & Qi, B. Measurement-Device-Independent Quantum Key Distribution. *Phys. Rev. Lett.* **108**, 130503 (2012).
- [52] Hosseinidehaj, N. & Malaney, R. Gaussian entanglement distribution via satellite. *Phys. Rev. A* **91**, 022304 (2015).
- [53] Vallone, G. *et al.* Experimental Satellite Quantum Communications. *Phys. Rev. Lett.* **115**, 040502 (2015).
- [54] Dequal, D. *et al.* Experimental single-photon exchange along a space link of 7000 km. *Phys. Rev. A* **93**, 010301(R) (2016).
- [55] Usenko, V. C. & Filip, R. Feasibility of continuous-variable quantum key distribution with noisy coherent states. *Phys. Rev. A* **81**, 022318 (2010).
- [56] Weedbrook, C. *et al.* Quantum cryptography approaching the classical limit. *Phys. Rev. Lett.* **105**, 110501 (2010).
- [57] Weedbrook, C. *et al.* Continuous-variable quantum key distribution using thermal states. *Phys. Rev. A* **86**, 022318 (2012).
- [58] Weedbrook, C., Ottaviani, C. & Pirandola, S. Two-way quantum cryptography at different wavelengths. *Phys. Rev. A* **89**, 012309 (2014).
- [59] Goodenough, K., Elkouss, D. & Wehner, S. Assessing the performance of quantum repeaters for all phase-insensitive Gaussian bosonic channels. Preprint at <https://arxiv.org/abs/1511.08710v1> (2015).
- [60] Holevo, A. S. & Werner, R. F. Evaluating capacities of bosonic Gaussian channels. *Phys. Rev. A* **63**, 032312 (2001).
- [61] Wolf, M. M., Pérez-García, D. & Giedke, G. Quantum Capacities of Bosonic Channels. *Phys. Rev. Lett.* **98**, 130501 (2007).
- [62] Devetak, I. & Shor, P.W. The Capacity of a Quantum Channel for Simultaneous Transmission of Classical and Quantum Information, *Commun. Math. Phys.* **256**, 287–303 (2005).
- [63] Bose, S. Quantum Communication through an Unmodulated Spin Chain. *Phys. Rev. Lett.* **20**, 207901 (2003).
- [64] Bose, S., Bayat, A., Sodano, P., Banchi, L. & Verrucchi, P. Spin Chains as Data Buses, Logic Buses and Entan-  
glers in “Quantum State Transfer and Network Engineering” (Springer Berlin Heidelberg, 2014), pp 1-37.
- [65] Pirandola, S. Capacities of repeater-assisted quantum communications. Preprint at <https://arxiv.org/abs/1601.00966> (2016).
- [66] Pirandola, S. & Lupo, C. Ultimate precision of adaptive noise estimation. Preprint at <https://arxiv.org/abs/1609.02160> (2016).
- [67] Arvind, B. Dutta, N. Mukunda, & R. Simon. The real symplectic groups in quantum mechanics and optics. *Pramana* **45**, 471–497 (1995).
- [68] Banchi, L., Braunstein, S.L. & Pirandola, S. Quantum fidelity for arbitrary Gaussian states. *Phys. Rev. Lett.* **115**, 260501 (2015).
- [69] Chen, X.-y. Gaussian relative entropy of entanglement. *Phys. Rev. A* **71**, 062320 (2005).
- [70] Scheel, S., & Welsch D.-G. Entanglement generation and degradation by passive optical devices. *Phys. Rev. A* **64**, 063811 (2001).

# Supplementary Notes

## Supplementary Note 1. PRELIMINARY TECHNICAL TOOLS

### Truncation of infinite-dimensional Hilbert spaces

In the following it will be useful to use truncation tools which enables us to connect continuous-variable (CV) and discrete-variable (DV) states. Consider  $m$  bosonic modes with Hilbert space  $\mathcal{H}^{\otimes m}$  and space of density operators  $\mathcal{D}(\mathcal{H}^{\otimes m})$ . Then, consider the energy operator  $\hat{H} = \sum_{i=1}^m \hat{N}_i$  (with  $\hat{N}_i$  being the number operator of mode  $i$ ) and the following compact set of energy-constrained states [S1]

$$\mathcal{D}_E(\mathcal{H}^{\otimes m}) := \{\rho \in \mathcal{D}(\mathcal{H}^{\otimes m}) \mid \text{Tr}(\rho \hat{H}) \leq E\}. \quad (\text{S1})$$

It is easy to show that every such state is essentially supported on a finite-dimensional Hilbert space.

*Lemma 8:* Consider an energy-constrained  $m$ -mode bosonic state  $\rho \in \mathcal{D}_E(\mathcal{H}^{\otimes m})$ . There exists a finite-dimensional projector  $P_d$  which projects this state onto a  $d$ -dimensional support of the  $m$ -mode Hilbert space with probability

$$\text{Tr}(\rho P_d) \geq 1 - \gamma, \quad \gamma := \frac{E}{\sqrt[m]{d} - 1}. \quad (\text{S2})$$

Correspondingly, the trace distance between the original state  $\rho$  and the  $d$ -dimensional truncated state

$$\delta := \frac{P_d \rho P_d}{\text{Tr}(\rho P_d)} \quad (\text{S3})$$

satisfies the inequality

$$D(\rho, \delta) := \frac{1}{2} \|\rho - \delta\| \leq \sqrt{\gamma}. \quad (\text{S4})$$

*Proof:* Let us arrange the degenerate eigenvalues of  $\hat{H}$  in increasing order as  $h_0 \leq h_1 \leq \dots \leq h_n \leq \dots$ . Each eigenvalue is computed as  $\sum_{i=1}^m N_i$  where  $N_i$  is the photon number of mode  $i$ . The corresponding eigenstates are of the type  $|\tilde{h}_n\rangle = |N_1\rangle \otimes \dots \otimes |N_m\rangle$ . For instance

$$\begin{aligned} |\tilde{h}_0\rangle &= |0\rangle \otimes |0\rangle \otimes \dots \otimes |0\rangle, & (h_0 = 0), \\ |\tilde{h}_1\rangle &= |1\rangle \otimes |0\rangle \otimes \dots \otimes |0\rangle, & (h_1 = 1), \\ |\tilde{h}_2\rangle &= |0\rangle \otimes |1\rangle \otimes \dots \otimes |0\rangle, & (h_2 = 1), \\ &\vdots & \vdots \end{aligned} \quad (\text{S5})$$

Note that  $n + 1$  counts the dimension of the truncated Hilbert space and we have  $h_n \leq n$ , because of the degeneracy of the eigenvalues. Since  $h_n$  is the total number of photons in all  $m$  modes, we have that each mode can have at most dimension  $(h_n + 1)$ , so that we may write the upper bound  $n \leq n + 1 \leq (h_n + 1)^m$  or, equivalently,

$$h_n \geq \sqrt[m]{n} - 1 \quad (\text{S6})$$

Then, we proceed as in Refs. [S1, S2]. Denote by  $P_n := |\tilde{h}_n\rangle\langle\tilde{h}_n|$  the eigenprojector associated with  $|\tilde{h}_n\rangle$ . For dimension  $d$ , we consider the truncation projector

$$P_d := \sum_{n=0}^{d-1} P_n. \quad (\text{S7})$$

Therefore, for all  $|\psi\rangle \in \mathcal{H}$ , we may write

$$\langle\psi|h_d(I - P_d)|\psi\rangle = \langle\psi|\left[h_d \sum_{n=d}^{\infty} P_n\right]|\psi\rangle \leq \langle\psi|\left[\sum_{n=d}^{\infty} h_n P_n\right]|\psi\rangle \leq \langle\psi|\hat{H}|\psi\rangle. \quad (\text{S8})$$

This implies that, for all  $\rho \in \mathcal{D}_E(\mathcal{H})$ , we have

$$\mathrm{Tr}[\rho(I - P_d)] \leq \frac{1}{h_d} \mathrm{Tr}(\rho \hat{H}) \leq \frac{E}{h_d}. \quad (\text{S9})$$

According to Eq. (S6), we may write  $h_d \geq \sqrt[m]{d} - 1$ , so that

$$\frac{E}{h_d} \leq \gamma := \frac{E}{\sqrt[m]{d} - 1}, \quad (\text{S10})$$

which proves Eq. (S2). The proof of Eq. (S4) is a simple modification of the one given by ref. [S2].  $\square$

Note that we may derive a similar result in terms of a truncation channel, i.e., by means of a completely positive trace-preserving (CPTP) map.

*Lemma 9:* Consider an energy-constrained  $m$ -mode bosonic state  $\rho \in \mathcal{D}_E(\mathcal{H}^{\otimes m})$ . There exists a truncation channel  $\mathbb{T}_d$  which maps the state  $\rho$  into a truncated state  $\tilde{\rho}$  defined over a  $d$ -dimensional support of the  $m$ -mode Hilbert space, such that

$$D(\rho, \tilde{\rho}) \leq \sqrt{\gamma} + \gamma, \quad (\text{S11})$$

where  $\gamma$  is defined in Eq. (S2).

*Proof:* For any multimode energy-constrained bosonic state  $\rho \in \mathcal{D}_E(\mathcal{H}^{\otimes m})$ , we may define the following (non-local) truncation map

$$\tilde{\rho} := \mathbb{T}_d(\rho) = \sum_{i=0,1} \mathcal{E}_i \left( \Pi_i \rho \Pi_i^\dagger \right), \quad (\text{S12})$$

where  $\Pi_0 := P_d$  and  $\Pi_1 := I - P_d$ , while for any projected state  $\sigma$  we have either the identity channel  $\mathcal{E}_0(\sigma) = \sigma$  or the collapsing map  $\mathcal{E}_1(\sigma) = \rho_0$ , where  $\rho_0$  is an arbitrary fixed state within the  $d$ -dimensional support. Setting  $p := \mathrm{Tr}(\rho P_d)$ , we may write

$$\tilde{\rho} = p\delta + (1-p)\rho_0, \quad (\text{S13})$$

where  $\delta$  is defined in Eq. (S3). Note that  $S_0 := \|\rho - \rho_0\| \leq 2$ . Then, by exploiting the convexity of the trace norm, we may write

$$D(\rho, \tilde{\rho}) = \frac{1}{2} \|\rho - \tilde{\rho}\| \leq \frac{p}{2} \|\rho - \delta\| + \frac{1-p}{2} S_0 \leq p\sqrt{\gamma} + 1-p \leq \sqrt{\gamma} + \gamma, \quad (\text{S14})$$

where we have also used  $p \leq 1$  and Lemma 8.  $\square$

### Local CV-DV mappings

It is easy to modify the previous truncation tools to make them bipartite and local, i.e., based on LOs assisted by (generally two-way) CCs. Suppose that Alice and Bob share a CV bipartite state  $\rho_{\mathbf{ab}}$ , where Alice's local system  $\mathbf{a}$  contains  $m_{\mathbf{a}}$  modes and Bob's local system  $\mathbf{b}$  contains  $m_{\mathbf{b}}$  modes. Then, we may analyze how this state is transformed by a truncation channel which is based on LOCC. In fact, we may state the following.

*Lemma 10:* Consider an energy-constrained bosonic state  $\rho_{\mathbf{ab}} \in \mathcal{D}_E(\mathcal{H}^{\otimes m_{\mathbf{a}}} \otimes \mathcal{H}^{\otimes m_{\mathbf{b}}})$  where Alice (Bob) has  $m_{\mathbf{a}}$  ( $m_{\mathbf{b}}$ ) modes. There is an LOCC truncation channel  $\mathbb{T}_d^{\otimes}$  (local with respect to the bipartition  $m_{\mathbf{a}} + m_{\mathbf{b}}$ ) which maps  $\rho_{\mathbf{ab}}$  into a truncated state  $\tilde{\rho}_{\mathbf{ab}}$  defined over a  $d \times d$ -dimensional support and such that

$$D(\rho_{\mathbf{ab}}, \tilde{\rho}_{\mathbf{ab}}) \leq \sqrt{\gamma} + \gamma, \quad \gamma := \frac{E}{\sqrt{d} - 1}. \quad (\text{S15})$$

The implementation of such truncation channel needs two bits of CC between Alice and Bob.

*Proof:* Assuming the bipartition of modes  $m = m_A + m_B$ , let us write the energy operator as  $\hat{H} = \hat{H}_A + \hat{H}_B$ , where

$$\hat{H}_A = \sum_{i=1}^{m_A} \hat{N}_i, \quad \hat{H}_B = \sum_{i=1+m_A}^{m_A+m_B} \hat{N}_i, \quad (\text{S16})$$

with  $\hat{N}_i$  being the number operator of the  $i$ -th mode, with eigenstates  $|N_i\rangle$ . Let us arrange the eigenvalues  $h_n$  of  $\hat{H}$  in increasing order  $h_0 \leq h_1 \leq \dots$ . The corresponding eigenstates are of the type  $|\tilde{h}_n\rangle = |N_1\rangle \otimes \dots \otimes |N_m\rangle$ . Call  $h_k^A$  ( $h_l^B$ ) the eigenvalues of  $\hat{H}_A$  ( $\hat{H}_B$ ). Correspondingly, we have eigenstates of the type

$$|\tilde{h}_k^A\rangle = |N_1\rangle \otimes \dots \otimes |N_{m_A}\rangle, \quad (\text{S17})$$

$$|\tilde{h}_l^B\rangle = |N_{1+m_A}\rangle \otimes \dots \otimes |N_{m_A+m_B}\rangle. \quad (\text{S18})$$

It is clear that, given an arbitrary  $|\tilde{h}_n\rangle$ , we may always decompose it as  $|\tilde{h}_n\rangle = |\tilde{h}_k^A\rangle \otimes |\tilde{h}_l^B\rangle$  for some pair of labels  $k$  and  $l$ . For this reason, any set of  $d$  states  $\{|\tilde{h}_n\rangle\}$  for the  $m$  modes can certainly be represented by a tensor product of  $d \times d$  states suitably chosen within the local sets  $\{|\tilde{h}_k^A\rangle\}$  and  $\{|\tilde{h}_l^B\rangle\}$ . As a consequence, the support of a  $d$ -dimensional projector as in Eq. (S7) is always contained in the support of a local  $d \times d$  projector  $P_d^\otimes = P_d^A \otimes P_d^B$ , where

$$P_d^A := \sum_{k=0}^{d-1} |\tilde{h}_k^A\rangle \langle \tilde{h}_k^A|, \quad P_d^B := \sum_{l=0}^{d-1} |\tilde{h}_l^B\rangle \langle \tilde{h}_l^B|, \quad (\text{S19})$$

for some suitable choice of  $\{|\tilde{h}_k^A\rangle\}$  and  $\{|\tilde{h}_l^B\rangle\}$ .

This implies that there always exists a local projector  $P_d^\otimes$  for which we may write

$$\text{Tr}(\rho_{\mathbf{ab}} P_d^\otimes) \geq \text{Tr}(\rho_{\mathbf{ab}} P_d) \geq 1 - \gamma, \quad \gamma = \frac{E}{\sqrt[d]{d-1}}, \quad (\text{S20})$$

where we have also used Lemma 8. Set  $p := \text{Tr}(\rho_{\mathbf{ab}} P_d)$  and  $p' := \text{Tr}(\rho_{\mathbf{ab}} P_d^\otimes)$ , so that we have truncated states

$$\delta_{\mathbf{ab}} = p^{-1} P_d \rho_{\mathbf{ab}} P_d, \quad \delta'_{\mathbf{ab}} = p'^{-1} P_d^\otimes \rho_{\mathbf{ab}} P_d^\otimes. \quad (\text{S21})$$

Because of the wider support of  $P_d^\otimes$ , it is easy to check that

$$\|\rho_{\mathbf{ab}} - \delta'_{\mathbf{ab}}\| \leq \|\rho_{\mathbf{ab}} - \delta_{\mathbf{ab}}\| \leq 2\sqrt{\gamma}, \quad (\text{S22})$$

where we have used Lemma 8 in the last inequality.

In order to construct the LOCC truncation channel, let us consider the local POVM  $\Pi_{ij} := \Pi_i^{\mathbf{a}} \otimes \Pi_j^{\mathbf{b}}$  where

$$\Pi_0^{\mathbf{a}(\mathbf{b})} = P_d^{\mathbf{a}(\mathbf{b})}, \quad \Pi_1^{\mathbf{a}(\mathbf{b})} = I^{\mathbf{a}(\mathbf{b})} - P_d^{\mathbf{a}(\mathbf{b})}. \quad (\text{S23})$$

The parties apply these projections and then they communicate their outcomes to each other, employing one bit of classical information for each one-way CC. If both parties project onto the local  $d$ -dimensional support then they apply an identity channel; if one of them projects outside this local support, they both apply a damping channel which maps any input into a fixed state within the support (which can always be chosen as the vacuum state).

More precisely, we define the LOCC truncation channel

$$\mathbb{T}_d^\otimes(\rho_{\mathbf{ab}}) = \sum_{i,j=0,1} \mathcal{E}_{ij} \left( \Pi_{ij} \rho_{\mathbf{ab}} \Pi_{ij}^\dagger \right), \quad (\text{S24})$$

where  $\Pi_{ij}$  is the local POVM defined above and

$$\mathcal{E}_{ij} = \begin{cases} \mathcal{I}_{\mathbf{a}} \otimes \mathcal{I}_{\mathbf{b}} & \text{for } i = j = 0 \\ \mathcal{E}_{\mathbf{a}}^* \otimes \mathcal{E}_{\mathbf{b}}^* & \text{otherwise,} \end{cases} \quad (\text{S25})$$

where channel  $\mathcal{E}_{\mathbf{a}(\mathbf{b})}^*$  provides an  $m_{\mathbf{a}}$ - ( $m_{\mathbf{b}}$ -) mode vacuum state for any input.

It is clear that the result is a truncated state  $\tilde{\rho}_{\mathbf{ab}} := \mathbb{T}_d^{\otimes}(\rho_{\mathbf{ab}})$  where each set of modes  $\mathbf{a}$  and  $\mathbf{b}$  is supported in a  $d$ -dimensional Hilbert space. In particular, we have

$$\tilde{\rho}_{\mathbf{ab}} = p' \delta'_{\mathbf{ab}} + (1 - p') |0\rangle_{\mathbf{ab}} \langle 0|. \quad (\text{S26})$$

Using the convexity of the trace norm, we get

$$D(\rho_{\mathbf{ab}}, \tilde{\rho}_{\mathbf{ab}}) = \frac{1}{2} \|\rho_{\mathbf{ab}} - \tilde{\rho}_{\mathbf{ab}}\| \leq \frac{p'}{2} \|\rho_{\mathbf{ab}} - \delta'_{\mathbf{ab}}\| + \frac{1-p'}{2} \|\rho_{\mathbf{ab}} - |0\rangle_{\mathbf{ab}} \langle 0|\| \leq p' \sqrt{\gamma} + 1 - p' \leq \sqrt{\gamma} + \gamma, \quad (\text{S27})$$

which concludes the proof.  $\square$

Finally, note that LOCC channels from DVs to CVs can be constructed by using hybrid quantum teleportation [S3]. For instance, a polarisation qubit  $\alpha |\uparrow\rangle_a + \beta |\downarrow\rangle_a$  can be teleported onto a single-rail qubit, which is the bosonic subspace spanned by the vacuum  $|0\rangle_b$  and the single-photon state  $|1\rangle_b$ . It is sufficient to build a hyper-entangled Bell state  $|\uparrow\rangle_{a'} |1\rangle_b + |\downarrow\rangle_{a'} |0\rangle_b$  and apply a discrete variable Bell detection on qubits  $a$  and  $a'$ . This teleports  $a$  onto the bosonic mode  $b$ , up to Pauli operators (suitably re-written in terms of the ladder operators) that can be undone from the output state. Such procedure can be readily extended to teleport qudits into bosonic modes in a LOCC fashion.

## Supplementary Note 2. LOWER BOUND AT ANY DIMENSION

### Coherent and reverse coherent information of a quantum channel

Consider a quantum channel  $\mathcal{E}$  applied to some input state  $\rho_A$  of system  $A$ . Let us introduce the purification  $|\psi\rangle_{RA}$  of  $\rho_A$  by means of an auxiliary system  $R$ . We can therefore consider the output  $\rho_{RB} = \mathcal{I} \otimes \mathcal{E}(|\psi\rangle_{RA} \langle \psi|)$ . By definition, the coherent information is [S4, S5]

$$I_C(\mathcal{E}, \rho_A) = I(A)B_{\rho_{RB}} = S(\rho_B) - S(\rho_{RB}), \quad (\text{S28})$$

where  $\rho_B := \text{Tr}_R(\rho_{RB})$  and  $S(\rho) := -\text{Tr}(\rho \log_2 \rho)$  is the von Neumann entropy. Similarly, the reverse coherent information is given by [S6, S7]

$$I_{RC}(\mathcal{E}, \rho_A) = I(A)B_{\rho_{RB}} = S(\rho_R) - S(\rho_{RB}), \quad (\text{S29})$$

where  $\rho_R := \text{Tr}_B(\rho_{RB})$ .

When the input state  $\rho_A$  is a maximally-mixed state, its purification is a maximally-entangled state  $\Phi_{RA}$ , so that  $\rho_{RB}$  is the Choi matrix of the channel, i.e.,  $\rho_{\mathcal{E}}$ . We then define the coherent information of the channel as

$$I_C(\mathcal{E}) = I(A)B_{\rho_{\mathcal{E}}}. \quad (\text{S30})$$

Similarly, its reverse coherent information is

$$I_{RC}(\mathcal{E}) = I(A)B_{\rho_{\mathcal{E}}}. \quad (\text{S31})$$

Note that for unital channels, i.e., channels preserving the identity  $\mathcal{E}(I) = I$ , we have  $I_C(\mathcal{E}) = I_{RC}(\mathcal{E})$ . This is just a consequence of the fact that, the reduced states  $\rho_A$  and  $\rho_R$  of a maximally entangled state  $\Phi_{RA}$  is a maximally-mixed state  $I/d$ , where  $d$  is the dimension of the Hilbert space (including the limit for  $d \rightarrow +\infty$ ). If the channel is unital, also the reduced state  $\rho_B = \mathcal{E}(\rho_A)$  is maximally-mixed. As a result,  $S(\rho_B) = S(\rho_A) = S(\rho_R)$  and we may write  $I_C(\mathcal{E}) = I_{RC}(\mathcal{E}) := I_{(R)C}(\mathcal{E})$ .

In the specific case of discrete-variable systems ( $d < +\infty$ ), we have  $S(\rho_R) = \log_2 d$  and therefore

$$I_{(R)C}(\mathcal{E}) = \log_2 d - S(\rho_{\mathcal{E}}). \quad (\text{S32})$$

In particular, for unital qubit channels ( $d = 2$ ), one has

$$I_{(R)C}(\mathcal{E}) = 1 - S(\rho_{\mathcal{E}}). \quad (\text{S33})$$

The latter two formulas will be exploited to compute the coherent information of discrete-variable channels.

The coherent information is an achievable rate for *forward* one-way entanglement distillation. Similarly, the reverse coherent information is an achievable rate for *backward* one-way entanglement distillation (i.e., assisted by a single and final CC from Bob to Alice). In fact, thanks to the hashing inequality [S8], we may write

$$\max\{I_C(\mathcal{E}), I_{RC}(\mathcal{E})\} = \max\{I(A)B_{\rho_{\mathcal{E}}}, I(A)B_{\rho_{\mathcal{E}}}\} \leq D_1(\rho_{\mathcal{E}}). \quad (\text{S34})$$



### Hashing inequality in infinite dimension

The hashing inequality is known to be valid for finite-dimensional quantum systems. It is easy to extend this inequality to energy-constrained bosonic states by exploiting the continuity of the (reverse) coherent information in the limit of infinite dimension. Consider the state  $\rho_{AB}$  of two bosonic modes, each mode having  $\leq \bar{n}$  mean photons. Then, we may apply a projector  $P_d$  generating a  $d$ -dimensional truncated state  $\delta_{AB}$  such that (see Lemma 8)

$$D(\rho_{AB}, \delta_{AB}) \leq \sqrt{\gamma}, \quad \gamma = \frac{2\bar{n}}{\sqrt{d}-1}. \quad (\text{S35})$$

According to ref. [S9, Lemma 17], the trace-distance condition  $D(\rho, \delta) \leq \sqrt{\gamma} < 1/6$  implies that the coherent information  $I(A)B = -S(A|B)$  satisfies

$$|I(A)B)_\rho - I(A)B)_\delta| \leq 16\sqrt{\gamma} \log_2 \left[ \frac{2e(\bar{n}+1)}{1-\sqrt{\gamma}} \right] + 32H_2(3\sqrt{\gamma}), \quad (\text{S36})$$

where  $H_2$  the binary Shannon entropy

$$H_2(p) := -p \log_2 p - (1-p) \log_2 (1-p). \quad (\text{S37})$$

For any  $\bar{n}$ , the limit  $d \rightarrow +\infty$  implies that  $\gamma \rightarrow 0$  and therefore

$$|I(A)B)_\rho - I(A)B)_\delta| \rightarrow 0. \quad (\text{S38})$$

An equivalent result holds for the reverse coherent information  $I(A)B) = -S(B|A)$ .

Thus for any  $\bar{n}$ , the coherent and reverse coherent information are continuous in the limit of infinite dimension. This means that the hashing inequality [S8] is extended to bosonic systems with constrained energy. In other words,  $I(A)B)_\rho$  ( $I(A)B)_\rho$ ) represents an achievable rate for the distillable entanglement of the energy-bounded bosonic state  $\rho$  via forward (backward) CCs.

### Extension to energy-unbounded Choi matrices of bosonic Gaussian channels

For bosonic systems, the ideal EPR state  $\Phi$  is defined as the limit of two-mode squeezed vacuum (TMSV) states  $\Phi^\mu$ , where  $\mu = \bar{n} + 1/2$  is sent to infinity (here  $\bar{n}$  is the mean photon number in each mode) [S10]. Thus, the Choi matrix of a Gaussian channel is defined as the asymptotic operator  $\rho_{\mathcal{E}} := \lim_{\mu} \rho_{\mathcal{E}}^\mu$  where  $\rho_{\mathcal{E}}^\mu := \mathcal{I} \otimes \mathcal{E}(\Phi^\mu)$ . Correspondingly, the computation of the (reverse) coherent information of the channel is performed as a limit, i.e., we have

$$I_{\text{C}}(\mathcal{E}) = I(A)B)_{\rho_{\mathcal{E}}} := \lim_{\mu} I(A)B)_{\rho_{\mathcal{E}}^\mu}, \quad (\text{S39})$$

$$I_{\text{RC}}(\mathcal{E}) = I(A)B)_{\rho_{\mathcal{E}}} := \lim_{\mu} I(A)B)_{\rho_{\mathcal{E}}^\mu}. \quad (\text{S40})$$

As we will see afterwards in the technical derivations of Supplementary Note 4, for bosonic Gaussian channels the functionals  $I(A)B)_{\rho_{\mathcal{E}}^\mu}$  and  $I(A)B)_{\rho_{\mathcal{E}}^\mu}$  are continuous, monotonic and bounded in  $\mu$ . Therefore, the previous limits are finite and we can continuously extend the hashing inequality of Eq. (S34) to the asymptotic Choi matrix  $\rho_{\mathcal{E}}$  of a Gaussian channel, for which we may set  $D_1(\rho_{\mathcal{E}}) := \lim_{\mu} D_1(\rho_{\mathcal{E}}^\mu)$ .

### Supplementary Note 3. UPPER BOUND AT ANY DIMENSION

We provide alternate proofs of the weak converse theorem (Theorem 1 in the main paper). The first proof relies on an exponential growth for the total dimension of the private state [S11–S13] (which is justified by well-known arguments [S14, S15]). The second proof relies on an exponential growth for the total energy. Finally, the third proof does not have any of the previous assumptions; in particular, it only depends on the “key part” of the private state. The first and third proofs are first given for DV channels and then extended to CV channels by means of truncation arguments (see Supplementary Note 1 for full details). The second proof simultaneously applies to both DV and CV channels, by means of embedding arguments. Besides truncation and embedding, the other main ingredients are basic properties of the trace norm and the relative entropy of entanglement (REE) [S16], the “asymptotic continuity” of the REE [S17, S18], and the REE upper bound for the distillable key of a quantum state [S11, S12].

### First proof of the weak converse theorem

Let us start by assuming that the output state  $\rho_{\mathbf{ab}}^n$  in Alice and Bob's registers has total finite dimension  $d_{\mathbf{ab}}$ . Given  $\rho_{\mathbf{ab}}^n$  and  $\phi_n$  such that  $\|\rho_{\mathbf{ab}}^n - \phi_n\| \leq \varepsilon \leq 1/3$ , we may write the Fannes-type inequality [S17]

$$E_{\mathbf{R}}(\phi_n) \leq E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) + 2\varepsilon \log_2 d_{\mathbf{ab}} + f(\varepsilon) , \quad (\text{S41})$$

where  $f(\varepsilon) := 4\varepsilon - 2\varepsilon \log_2 \varepsilon$ . This result is also known as asymptotic continuity of the REE. An alternate version states that  $\|\rho_{\mathbf{ab}}^n - \phi_n\| \leq \varepsilon \leq 1/2$  implies [S18]

$$E_{\mathbf{R}}(\phi_n) \leq E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) + 4\varepsilon \log_2 d_{\mathbf{ab}} + 2H_2(\varepsilon) , \quad (\text{S42})$$

where  $H_2$  is the binary Shannon entropy. Note that the total dimension  $d_{\mathbf{ab}}$  of the output state may always be considered to be greater than or equal to the dimension  $d_{\mathbf{P}}$  of the private state. The latter involves two key systems (with total dimension  $d_{\mathbf{K}}^2$ ) and a shield system (with total dimension  $d_{\mathbf{S}}$ ), so that  $d_{\mathbf{P}} = d_{\mathbf{K}}^2 d_{\mathbf{S}}$ . The logarithm of the dimension  $d_{\mathbf{K}}$  determines the key rate, while the extra dimension  $d_{\mathbf{S}}$  is needed to shield the key and can be assumed to grow exponentially in  $n$  (see the next subsection ‘‘Private states and size of the shield system’’ for full details on this secondary technical issue).

According to ref. [S11], we may write

$$E_{\mathbf{R}}(\phi_n) \geq K(\phi_n) = \log_2 d_{\mathbf{K}} := nR_n^\varepsilon , \quad (\text{S43})$$

where  $K(\phi_n)$  is the distillable key of  $\phi_n$ . Therefore, from Eq. (S42), we find

$$R_n^\varepsilon \leq \frac{E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) + 4\varepsilon \log_2 d_{\mathbf{ab}} + 2H_2(\varepsilon)}{n} . \quad (\text{S44})$$

For some sufficiently high  $\alpha \geq 2$ , let us set

$$\log_2 d_{\mathbf{ab}} \leq \alpha n R_n^\varepsilon . \quad (\text{S45})$$

Then the previous inequality becomes

$$R_n^\varepsilon \leq \frac{E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) + 2H_2(\varepsilon)}{n(1 - 4\varepsilon\alpha)} . \quad (\text{S46})$$

Asymptotically in  $n$ , we therefore get

$$\lim_n R_n^\varepsilon \leq \frac{1}{1 - 4\varepsilon\alpha} \lim_n n^{-1} E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) . \quad (\text{S47})$$

For  $\varepsilon \rightarrow 0$ , we derive

$$\lim_n R_n \leq \lim_n n^{-1} E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) , \quad (\text{S48})$$

whose optimization over adaptive protocols leads to the following weak converse bound for the key generation capacity

$$K(\mathcal{E}) := \sup_{\mathcal{L}} \lim_n R_n \leq E_{\mathbf{R}}^\star(\mathcal{E}) := \sup_{\mathcal{L}} \lim_n n^{-1} E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) . \quad (\text{S49})$$

When  $\rho_{\mathbf{ab}}^n$  is a CV bosonic state, we may consider an LOCC truncation channel  $T^\otimes$  which maps the state into a DV state  $\tilde{\rho}_{\mathbf{ab}}^n = T^\otimes(\rho_{\mathbf{ab}}^n)$  supported in a subspace with cut-off  $\alpha$ , so that the effective dimension is  $2^{\alpha n R_n^\varepsilon}$  as in Eq. (S45). This CV-to-DV mapping is large enough to leave the private state  $\phi_n$  invariant, i.e.,  $\phi_n = T^\otimes(\phi_n)$ . Because  $\|\tilde{\rho}_{\mathbf{ab}}^n - \phi_n\| \leq \|\rho_{\mathbf{ab}}^n - \phi_n\| \leq \varepsilon$ , we can then repeat the previous derivation and write Eq. (S49) for  $\tilde{\rho}_{\mathbf{ab}}^n$ . Then, we introduce the upper-bound  $E_{\mathbf{R}}(\tilde{\rho}_{\mathbf{ab}}^n) \leq E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n)$ , which derives from the monotonicity of the REE under trace-preserving LOCCs (such as  $T^\otimes$ ). For clarity, this derivation can be broken down into the following steps

$$E_{\mathbf{R}}(\tilde{\rho}_{\mathbf{ab}}^n) \stackrel{(1)}{=} S(\tilde{\rho}_{\mathbf{ab}}^n || \tilde{\sigma}_s^{\text{opt}}) \stackrel{(2)}{\leq} S(\tilde{\rho}_{\mathbf{ab}}^n || \sigma'_s) \stackrel{(3)}{\leq} S(\rho_{\mathbf{ab}}^n || \sigma_s^{\text{opt}}) = E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n) , \quad (\text{S50})$$

where (1) we use the optimal separable state  $\tilde{\sigma}_s^{\text{opt}}$  which is the closest to  $\tilde{\rho}_{\mathbf{ab}}^n$  in terms of relative entropy; (2) we introduce the non-optimal separable state  $\sigma'_s = T^\otimes(\sigma_s^{\text{opt}})$ , where  $\sigma_s^{\text{opt}}$  is the separable state closest to  $\rho_{\mathbf{ab}}^n$  (because  $T^\otimes$  is a LOCC, it preserves the separability of input states); and (3) we exploit the fact that the relative entropy cannot increase under trace-preserving LOCCs, which holds in arbitrary dimension [S16, S19]. Thus, we may write Eq. (S49) where  $E_{\mathbf{R}}(\rho_{\mathbf{ab}}^n)$  is directly computed on the bosonic state  $\rho_{\mathbf{ab}}^n$ .

### Private states and size of the shield system

Let us discuss here the secondary technical detail related with the size of the shield system which appears in the definition of a private state. Consider a finite dimensional system of dimension  $d_K$  and basis  $\{|i\rangle\}_{i=0}^{d_K-1}$ . A private state between Alice and Bob can be written in the form [S11, S12]

$$\phi_{ABA'B'} = U(\Phi_{AB} \otimes \chi_{A'B'})U^\dagger, \quad (\text{S51})$$

where  $AB$  is the total key system in the maximally entangled state

$$\Phi_{AB} = |\Phi\rangle_{AB} \langle \Phi|, \quad |\Phi\rangle_{AB} := d_K^{-1/2} \sum_{i=0}^{d_K-1} |i\rangle_A |i\rangle_B, \quad (\text{S52})$$

while  $A'B'$  is the shield system in a state  $\chi_{A'B'}$  protecting the key from eavesdropping. In Eq. (S51), the unitary  $U$  is a controlled-unitary known as ‘‘twisting unitary’’ which takes the form [S12]

$$U = \sum_{i,j=0}^{d_K-1} |i\rangle_A \langle i| \otimes |j\rangle_B \langle j| \otimes U_{A'B'}^{ij}, \quad (\text{S53})$$

with  $U_{A'B'}^{ij}$  being arbitrary unitary operators.

One can prove that a dilation of a private state into an environment  $E$  (owned by Eve) must take the form [S12]

$$\phi_{ABA'B'E} = (U \otimes I_E)(\Phi_{AB} \otimes \chi_{A'B'E})(U \otimes I_E)^\dagger, \quad (\text{S54})$$

with  $\chi_{A'B'E} = \text{Tr}_E(\chi_{A'B'})$ . Note that one can also equivalently write

$$\phi_{ABA'B'E} = d_K^{-1} \sum_{i,j=0}^{d_K-1} |ii\rangle_{AB} \langle jj| \otimes U_{A'B'}^{ii} \chi_{A'B'E} (U_{A'B'}^{jj})^\dagger. \quad (\text{S55})$$

By making local measurements on the key system  $AB$  and tracing out the shield system  $A'B'$ , Alice and Bob retrieve the ideal classical-classical-quantum (ccq) state [S12]

$$\tau_{ABE} = d_K^{-1} \sum_{i=0}^{d_K-1} |i\rangle_A \langle i| \otimes |i\rangle_B \langle i| \otimes \tau_E, \quad (\text{S56})$$

with  $\tau_E$  arbitrary. More precisely, one shows [S12] that  $\tau_E^i = \tau_E$  for any  $i$  in Eq. (S56). The shared randomness in the final classical  $AB$  system provides  $\log_2 d_K$  secret-key bits. Thus, the dimension  $d_K$  of each key system defines the number of secret-key bits (i.e., the rate of the protocol), while the dimension  $d_S$  of the shield system can in principle be arbitrary. The total dimension of the private state is  $d_P = d_K^2 d_S$ .

In a key distillation protocol, where Alice and Bob start from  $n$  shared copies  $\rho_{AB}^{\otimes n}$  and apply LOCCs to approximate a private state, the size of the shield  $d_S$  grows with the number of classical bits exchanged in their CCs. In fact, Eve may store all these bits in her local register and a private state can be approximated by the parties only if the dimension of Eve’s register is smaller than the dimension of the shield system. This is implied by Eq. (S56) as explained in ref. [S12, Section III].

Now we may ask: *Is the shield size  $d_S$  super-exponential in  $n$ ?* The answer is *no* for DV systems.

This was originally proven in ref. [S14] and also discussed in ref. [S15]. This result also holds for key distribution through memoryless channels at any dimension (finite or infinite). Let us remark that, despite the proof may appear involved, it is actually a trivial modification of the one in ref. [S14, Appendix A (arXiv v3 version)]. It is based on the fact that one can always design an approximate protocol where key distribution through  $n$  uses of a finite- or infinite-dimensional channel is broken down into  $m$  identical and independent  $n_0$ -long sub-protocols. These sub-protocols provide  $m$  copies, which are truncated, measured and whose shields may be discarded. The effective increase of the shield size will then come from one-way key distillation of these output copies, which has an exponential contribution in  $m < n$ . In the following, we report this adaptation (with all details) only for the sake of completeness.

*Lemma 11* (Shield size. Trivially adapted from ref. [S14]): Consider  $n$  uses of an adaptive key generation protocol through a quantum channel at any dimension (finite or infinite). Without loss of generality, we can assume that the effective dimension of the shield system  $d_S$  grows in such a way that  $\liminf_n (d_S/c^n)$  is a constant for some  $c \geq 1$ .

*Proof:* Let us represent Alice's and Bob's local registers as  $\mathbf{a} = AA'$  and  $\mathbf{b} = BB'$ , where  $A$  and  $B$  are the local key systems, while  $A'$  and  $B'$  are the local shield systems. Denote Eve's register by  $E$ . Even if all these systems are infinite-dimensional for bosonic channels, the key systems  $A$  and  $B$  of the private state  $\phi_{AA'BB'E}^{n_0}$  have finite-dimensional support, as we can see from Eq. (S54). Then consider an arbitrary adaptive key generation protocol  $\mathcal{P}_{\text{key}}^n$ , with key rate  $R$  and communication cost that is not necessarily linear in the number  $n$  of channel uses (this cost may even be singular, i.e., involving an infinite number of classical bits per channel use). For any  $\varepsilon > 0$ , there is a sufficiently large integer  $n_0$  such that its output  $\rho_{AA'BB'E}^{n_0}$  satisfies

$$\|\rho_{AA'BB'E}^{n_0} - \phi_{AA'BB'E}^{n_0}\| \leq \varepsilon, \quad (\text{S57})$$

where  $\phi_{AA'BB'E}^{n_0}$  is a (dilated) private state with  $l_{n_0}$  secret bits such that

$$R_{n_0} := \frac{l_{n_0}}{n_0} \geq R - \varepsilon. \quad (\text{S58})$$

Assume that the restricted  $n_0$ -adaptive protocol is repeated  $m$  times, so that the total number of channel uses can be written as  $n = n_0 m$ . Correspondingly, Alice and Bob's output state will be equal to the tensor product  $(\rho_{AA'BB'E}^{n_0})^{\otimes m}$  with  $\rho_{AA'BB'E}^{n_0} = \text{Tr}_E(\rho_{AA'BB'E}^{n_0})$ . Now, assume that the parties measure their key systems in the computational basis  $|i\rangle_A \otimes |j\rangle_B$  while truncating any outcome outside the finite-dimensional  $2^{l_{n_0}} \times 2^{l_{n_0}}$  support  $\mathcal{S}_{\text{key}}$  of the private state's key system. They then discard their shield systems. This means that they apply the LOCC channel

$$\mathbb{L}^{\otimes}(\rho_{AA'BB'E}^{n_0}) = \text{Tr}_{A'B'} \left[ \sum_{i,j} \mathcal{E}_{ij} \left( \Pi_{ij} \rho_{AA'BB'E}^{n_0} \Pi_{ij}^\dagger \right) \right], \quad (\text{S59})$$

where  $\Pi_{ij} := \Pi_i^A \otimes \Pi_j^B$  projects onto the local computational bases, while the conditional channel  $\mathcal{E}_{ij}$  is

$$\mathcal{E}_{ij} = \begin{cases} \mathcal{I}_{AB} & \text{for } i, j \in [0, 2^{l_{n_0}} - 1] \\ \mathcal{E}_e^A \otimes \mathcal{E}_e^B & \text{otherwise,} \end{cases} \quad (\text{S60})$$

where  $\mathcal{E}_e$  is a map replacing any input with an erasure state  $|e\rangle$  orthogonal to the support  $\mathcal{S}_{\text{key}}$ . (Note that the contribution of the extra dimension of  $|e\rangle$  to the output state is completely negligible since  $2^{l_{n_0}}$  is very large).

The action of  $\mathbb{L}^{\otimes}$  on the (dilated) output state  $\rho_{AA'BB'E}^{n_0}$  is such that we achieve a truncated ccq state  $\tilde{\rho}_{ABE}^{n_0} := (\mathbb{L}^{\otimes} \otimes \mathcal{I}_E)(\rho_{AA'BB'E}^{n_0})$ , where the key systems  $A$  and  $B$  are classical and finite-dimensional. Similarly, the action on the (dilated) private state provides the ideal ccq target state  $\tau_{ABE}^{n_0} := (\mathbb{L}^{\otimes} \otimes I_E)(\phi_{AA'BB'E}^{n_0})$  which corresponds to Eq. (S56) with  $\log_2 d_K = l_{n_0}$ . Also note that this classicalization and truncation step just needs two bits of CC to be implemented: These bits are needed to identify those instances where the measurement of the other party falls outside the support (this classical overhead is clearly linear in the number  $m$  of blocks).

All the procedure is a trivial modification of the one in ref. [S14, Appendix A (arXiv v3 version)]. Here we implement it in a coherent way and we include CV systems, for which  $\mathbb{L}^{\otimes}$  measures the key systems within the finite-dimensional support of the private state, while collapsing any contribution from the remaining part of the infinite-dimensional Hilbert space. It is easy to check that  $\mathbb{L}^{\otimes}$  can also be implemented in two subsequent steps: First a truncation channel into a  $(2^{l_{n_0}} + 1) \times (2^{l_{n_0}} + 1)$  subspace and then a measurement channel in the computational bases.

Using the monotonicity of the trace distance under channels (at any dimension), from Eq. (S57) we may write

$$\|\tilde{\rho}_{ABE}^{n_0} - \tau_{ABE}^{n_0}\| \leq \varepsilon. \quad (\text{S61})$$

Let us consider the reduced state  $\tilde{\rho}_{AB}^{n_0} = \text{Tr}_E(\tilde{\rho}_{ABE}^{n_0})$ . Given many copies  $(\tilde{\rho}_{AB}^{n_0})^{\otimes m}$ , Alice and Bob may apply one-way key distillation at an achievable rate (secret bits per block) given by the Devetak-Winter (DW) rate [S8]

$$R_{\tilde{\rho}}^{\text{DW}} := I(A : B) - I(A : E) = S(A|E) - S(A|B), \quad (\text{S62})$$

where  $I(\cdot)$  is the quantum mutual information (equal to the classical mutual information on classical systems  $A$  and  $B$ ), and  $S(\cdot)$  is the conditional von Neumann entropy, with all quantities being computed on the extended output  $\tilde{\rho} := \tilde{\rho}_{ABE}^{n_0}$ . Note that the DW rates are achievable rates at any dimension (finite or infinite).

Let us set  $\tau := \tau_{ABE}^{n_0}$ . We then compute the difference

$$R_\tau^{\text{DW}} - R_{\tilde{\rho}}^{\text{DW}} \leq |S(A|E)_\tau - S(A|E)_{\tilde{\rho}}| + |S(A|B)_{\tilde{\rho}} - S(A|B)_\tau| \leq 8\varepsilon \log_2 \dim \mathcal{H}_A + 4H_2(\varepsilon), \quad (\text{S63})$$

where  $H_2$  is the binary Shannon entropy. In Eq. (S63), we have used the Alicki-Fannes' inequality for the conditional quantum entropy [S20] which is valid for any  $\|\tilde{\rho} - \tau\| \leq \varepsilon < 1$  as in Eq. (S61).

Note that Eq. (S63) only contains the dimension of Alice's Hilbert space  $\mathcal{H}_A$  (truncated in each sub-protocol), while the Hilbert spaces of Bob and Eve do not have any restriction of their dimensionality. Because  $R_\tau^{\text{DW}} = l_{n_0}$  and  $\dim \mathcal{H}_A = 2^{l_{n_0}}$ , we may then write

$$R_{\tilde{\rho}}^{\text{DW}} \geq (1 - 8\varepsilon)l_{n_0} - 4H_2(\varepsilon), \quad (\text{S64})$$

exactly as in ref. [S14, Appendix A (arXiv v3 version)]. Therefore, by dividing the latter equation by  $n_0$ , one gets the average rate (per channel use)

$$\tilde{R} := \frac{1}{n_0} R_{\tilde{\rho}}^{\text{DW}} \geq (1 - 8\varepsilon)(R - \varepsilon) - \frac{4H_2(\varepsilon)}{n_0}. \quad (\text{S65})$$

It is now important to note that Alice and Bob can achieve the average DW rate  $\tilde{R}$  using an amount of one-way CC which is linear in the block number  $m < n$ . In fact, the communication cost (bits per block) associated with the one-way key distillation of Alice and Bob's copies  $(\tilde{\rho}_{AB}^{n_0})^{\otimes m}$  is equal to the conditional (Shannon) entropy  $S(A|B)$  between the two classical finite-dimensional systems  $A$  and  $B$  [S8]. This overhead is bounded by  $\log_2 \dim \mathcal{H}_{A,B} = l_{n_0}$  classical bits per block, so that it scales at most linearly as  $ml_{n_0}$ . Therefore, by decreasing  $\varepsilon$ , we get a sequence of protocols whose classical communication scales linearly in  $m$  while their rates approach  $R$  according to Eq. (S65). Correspondingly, the size of the shield grows at most exponentially in  $m$ .

Let us take a closer look at the dynamics of the shield. Within each block, the shield size may increase super-exponentially (even to infinite) but then this size collapses to zero at the end of each block (after  $n_0$  uses) once the parties have generated their finite-dimensional cc-state  $\tilde{\rho}_{AB}^{n_0}$ . For this reason, there is no surviving contribution to shield coming from the  $m$  sub-protocols. The only contribution to the shield size is that (exponential) coming from the protocol of one-way key distillation on the output finite-dimensional copies. Thus, at values of  $n = n_0 m$  for integer  $m$ , the dimension  $d_S$  scales as an exponential function, i.e., it is bounded by  $c^n$  for some  $c \geq 1$ . If we look at the shield dynamics for every  $n$ , then we may always replace the limit by an inferior limit, i.e., we may always say that  $\liminf_n (d_S/c^n)$  is a constant (with the infimum reached by the sequence of points  $n = n_0 m$ ).  $\square$

### Second proof of the weak converse theorem

This second proof simultaneously applies to DV and CV systems, and relies on the physical assumption that the energy of the output state grows at most exponentially in the number of channel uses. Consider bosonic modes, since any DV system can be unitarily embedded into a CV system (operation which does not change the trace distance). In general, we assume  $m_{\mathbf{a}}$  modes at Alice's side and  $m_{\mathbf{b}}$  modes at Bob's side (recall that the parties' local registers may be composed of a countable set of quantum systems). Assume that the output state  $\rho_{\mathbf{ab}}^n$  and the target state  $\phi_{\mathbf{ab}}^n$  have mean photon numbers bounded by  $E_n$ , where we may set  $E_n \leq 2^{cn}$  for some constant  $c$ .

Let us apply a LOCC truncation channel  $\mathbb{T}_d^{\otimes}$ , local with respect to Alice and Bob's bipartition of modes  $m_{\mathbf{a}} + m_{\mathbf{b}}$ , which truncates Alice's and Bob's local Hilbert spaces to finite dimension  $d = E_n^4$  (other choices are possible). This means that the truncated states  $\rho_{\mathbf{ab}}^{n,d} := \mathbb{T}_d^{\otimes}(\rho_{\mathbf{ab}}^n)$  and  $\phi_{\mathbf{ab}}^{n,d} := \mathbb{T}_d^{\otimes}(\phi_{\mathbf{ab}}^n)$  satisfies (see Lemma 10)

$$\|\rho_{\mathbf{ab}}^{n,d} - \rho_{\mathbf{ab}}^n\|, \|\phi_{\mathbf{ab}}^{n,d} - \phi_{\mathbf{ab}}^n\| \leq 2(\sqrt{\gamma} + \gamma), \quad \gamma = \frac{E_n}{E_n^2 - 1}. \quad (\text{S66})$$

Because  $\|\rho_{\mathbf{ab}}^n - \phi_{\mathbf{ab}}^n\| \leq \varepsilon$ , we can apply the triangle inequality and find

$$\|\rho_{\mathbf{ab}}^{n,d} - \phi_{\mathbf{ab}}^{n,d}\| \leq \varepsilon + \varepsilon', \quad \varepsilon' := 4(\sqrt{\gamma} + \gamma) = O(E_n^{-1/2}). \quad (\text{S67})$$

Now the asymptotic continuity of the REE [S18] leads to

$$E_R(\phi_{\mathbf{ab}}^{n,d}) \leq E_R(\rho_{\mathbf{ab}}^{n,d}) + 32(\varepsilon + \varepsilon') \log_2 E_n + 2H_2(\varepsilon + \varepsilon'), \quad (\text{S68})$$

where we use the fact that the total dimension of the truncated states is  $d_{\mathbf{ab}} = d^2 = E_n^8$ .

In Eq. (S68) we may replace  $E_{\text{R}}(\rho_{\mathbf{ab}}^{n,d}) \leq E_{\text{R}}(\rho_{\mathbf{ab}}^n)$  due to the fact that the REE is monotonic under  $\mathbb{T}_d^{\otimes}$  and invariant under embedding local unitaries. We may also replace  $\log_2 E_n \leq cn$  and  $E_{\text{R}}(\phi_{\mathbf{ab}}^{n,d}) \geq K(\phi_{\mathbf{ab}}^{n,d}) = nR_n^\varepsilon(E_n)$ , where the energy-constrained key rate must satisfy  $\lim_n R_n^\varepsilon(E_n) = \lim_n R_n^\varepsilon$ , with  $R_n^\varepsilon$  being the (finite) key rate associated with  $\phi_{\mathbf{ab}}^n$ . Therefore, we may write

$$nR_n^\varepsilon(E_n) \leq E_{\text{R}}(\rho_{\mathbf{ab}}^n) + 32(\varepsilon + \varepsilon')cn + 2H_2(\varepsilon + \varepsilon'). \quad (\text{S69})$$

Dividing by  $n$  and taking the limit for  $n \rightarrow +\infty$ , we get

$$\lim_n R_n^\varepsilon \leq \lim_n n^{-1} E_{\text{R}}(\rho_{\mathbf{ab}}^n) + 32\varepsilon c. \quad (\text{S70})$$

Finally, by taking the limit of  $\varepsilon \rightarrow 0$ , we find

$$\lim_n R_n \leq \lim_n n^{-1} E_{\text{R}}(\rho_{\mathbf{ab}}^n), \quad (\text{S71})$$

which gives the final result  $K(\mathcal{E}) \leq E_{\text{R}}^\star(\mathcal{E})$  by optimizing over all adaptive protocols.

### Third proof of the weak converse theorem

Let us now give a final proof which is completely independent from the dimensionality of the shield system in the private state. We start from the DV case and then we prove the CV case by resorting to truncation arguments. After  $n$  uses of a DV quantum channel  $\mathcal{E}$ , an adaptive key-generation protocol has an output  $\rho_{\mathbf{ab}}^n = \rho_{\mathbf{ab}}(\mathcal{E}^{\otimes n})$  such that

$$\|\rho_{\mathbf{ab}}^n - \phi_{\mathbf{ab}}^n\| \leq \varepsilon, \quad (\text{S72})$$

where  $\phi_{\mathbf{ab}}^n$  is a private state. Let us write the local registers as  $\mathbf{a} = AA'$  and  $\mathbf{b} = BB'$ , with  $AB$  being the key part (with dimension  $d_K \times d_K$ ) and  $A'B'$  being the shield. By definition of private state, we have

$$\phi_{\mathbf{ab}}^n = \phi_{ABA'B'}^n = U(\Phi_{AB}^n \otimes \chi_{A'B'})U^\dagger, \quad (\text{S73})$$

where  $U$  is a twisting unitary,  $\chi_{A'B'}$  is a state of the shield, and  $\Phi_{AB}^n$  is a Bell state with  $\log d_K = nR_n^\varepsilon$  secret bits.

Let us “untwist” the output state  $\rho_{\mathbf{ab}}^n = \rho_{ABA'B'}^n$  and then take the partial trace over the shield system  $A'B'$ . This means to consider

$$\rho_{AB}^n = \text{Tr}_{A'B'}(U^\dagger \rho_{ABA'B'}^n U) := \mathcal{W}(\rho_{ABA'B'}^n). \quad (\text{S74})$$

Trace norm is non-decreasing under partial trace and invariant under unitaries, so that Eq. (S72) implies

$$\|\rho_{AB}^n - \Phi_{AB}^n\| \leq \varepsilon. \quad (\text{S75})$$

Following ref. [S12], let us consider the set  $T$  of bipartite states  $\sigma_{AB}$  which are defined by  $\sigma_{AB} = \mathcal{W}(\sigma_{ABA'B'})$  where  $\sigma_{ABA'B'}$  is an arbitrary separable state (with respect to Alice and Bob’s bipartition  $AA'$  and  $BB'$ ). One may define the relative entropy distance from this set as

$$E_{\text{R}}^T(\rho) = \inf_{\sigma \in T} S(\rho||\sigma). \quad (\text{S76})$$

Because the set  $T$  is compact, convex and contains the maximally mixed state [S12], this distance is asymptotically continuous, i.e., the condition  $\|\rho_1 - \rho_2\| \leq \varepsilon < 1/2$  implies [S18]

$$|E_{\text{R}}^T(\rho_1) - E_{\text{R}}^T(\rho_2)| \leq 4\varepsilon \log_2 d + 2H_2(\varepsilon), \quad (\text{S77})$$

where  $d$  is the total dimension of the Hilbert space and  $H_2$  is the binary Shannon entropy.

By applying this property to Eq. (S75) with  $d_{AB} = d_K^2$ , we then get

$$E_{\text{R}}^T(\Phi_{AB}^n) \leq E_{\text{R}}^T(\rho_{AB}^n) + 8\varepsilon \log_2 d_K + 2H_2(\varepsilon). \quad (\text{S78})$$

Now we exploit two observations. The first is that

$$E_{\text{R}}^T(\Phi_{AB}^n) \geq \log d_K = nR_n^\varepsilon, \quad (\text{S79})$$

as shown in ref. [S12, Lemma 7]. Then, we also have

$$E_{\text{R}}^T(\rho_{AB}^n) \leq E_{\text{R}}(\rho_{ABA'B'}^n) := E_{\text{R}}(\rho_{\text{ab}}^n). \quad (\text{S80})$$

In fact, this is proven by the following chain of (in)equalities

$$E_{\text{R}}^T(\rho_{AB}^n) \stackrel{(1)}{\leq} S[\rho_{AB}^n || \mathcal{W}(\sigma_{ABA'B'})] \stackrel{(2)}{=} S[\mathcal{W}(\rho_{ABA'B'}^n) || \mathcal{W}(\sigma_{ABA'B'})] \stackrel{(3)}{\leq} S(\rho_{ABA'B'}^n | \sigma_{ABA'B'}) \stackrel{(4)}{=} E_{\text{R}}(\rho_{ABA'B'}^n), \quad (\text{S81})$$

where (1) we use some arbitrary state  $\sigma_{AB} \in T$ , (2) we use Eq. (S74), (3) we use the fact that the relative entropy is monotonic under partial trace and invariant under unitaries, and finally (4) we may always choose the separable state  $\sigma_{ABA'B'}$  to be the one which is the closest to  $\rho_{ABA'B'}^n$  in relative entropy (so that it defines its REE).

Using Eqs. (S79) and (S80) into Eq. (S78), we find

$$nR_n^\varepsilon \leq E_{\text{R}}(\rho_{\text{ab}}^n) + 8\varepsilon \log_2 d_{\text{K}} + 2H_2(\varepsilon). \quad (\text{S82})$$

Because  $\log_2 d_{\text{K}} = nR_n^\varepsilon$ , this leads to

$$R_n^\varepsilon \leq \frac{E_{\text{R}}(\rho_{\text{ab}}^n) + 2H_2(\varepsilon)}{n(1 - 8\varepsilon)}, \quad (\text{S83})$$

so that, for large  $n$ , we may write

$$\lim_n R_n^\varepsilon \leq \frac{1}{1 - 8\varepsilon} \lim_n n^{-1} E_{\text{R}}(\rho_{\text{ab}}^n). \quad (\text{S84})$$

By taking the limit of  $\varepsilon \rightarrow 0$ , we then find

$$\lim_n R_n \leq \lim_n n^{-1} E_{\text{R}}(\rho_{\text{ab}}^n). \quad (\text{S85})$$

Finally, by optimizing over all adaptive protocols  $\mathcal{L}$ , we establish the weak converse bound for the two-way key-generation capacity of the channel

$$K(\mathcal{E}) := \sup_{\mathcal{L}} \lim_n R_n \leq \sup_{\mathcal{L}} \lim_n n^{-1} E_{\text{R}}(\rho_{\text{ab}}^n). \quad (\text{S86})$$

We now consider the CV case, i.e., a bosonic channel  $\mathcal{E}$ . In this case, the private state  $\phi_{\text{ab}}^n = \phi_{ABA'B'}^n$  of Eq. (S73) is still built on a finite-dimensional  $d_{\text{K}} \times d_{\text{K}}$  Bell state  $\Phi_{AB}^n$  containing  $\log d_{\text{K}} = nR_n^\varepsilon$  secret bits. This Bell state may equivalently be thought to be embedded into a CV system where it is supported within a  $d_{\text{K}} \times d_{\text{K}}$  subspace of the infinite-dimensional Hilbert space. The shield state  $\chi_{A'B'}$  can be an arbitrary CV state and the twisting  $U$  is an arbitrary control-unitary as in Eq. (S53) but where the target unitaries  $U_{A'B'}^{ij}$  are defined on a CV state.

Let us apply a LOCC truncation channel  $\mathbb{T}_{d_{\text{K}}}^\otimes$  to the key systems  $A$  and  $B$ , so that their Hilbert spaces are truncated to finite dimension  $d_{\text{K}} \times d_{\text{K}}$ . Clearly, we have the invariance  $\phi_{ABA'B'}^n = \mathbb{T}_{d_{\text{K}}}^\otimes \otimes \mathcal{I}_{A'B'}(\phi_{ABA'B'}^n)$ , while we set  $\rho_{ABA'B'}^{n,d_{\text{K}}} := \mathbb{T}_{d_{\text{K}}}^\otimes \otimes \mathcal{I}_{A'B'}(\rho_{ABA'B'}^n)$ , where  $\mathcal{I}_{A'B'}$  is an identity channel acting on the shield systems. By using the monotonicity of the trace norm under channels, we may write

$$\|\rho_{ABA'B'}^{n,d_{\text{K}}} - \phi_{ABA'B'}^n\| \leq \varepsilon. \quad (\text{S87})$$

As before, let us define a channel  $\mathcal{W}$  which untwists and partial-traces the states as in Eq. (S74). This channel provides the  $d_{\text{K}} \times d_{\text{K}}$  states  $\tilde{\rho}_{AB}^n = \mathcal{W}(\rho_{ABA'B'}^{n,d_{\text{K}}})$  and  $\Phi_{AB}^n = \mathcal{W}(\phi_{ABA'B'}^n)$ , for which we may write (using monotonicity)

$$\|\tilde{\rho}_{AB}^n - \Phi_{AB}^n\| \leq \varepsilon. \quad (\text{S88})$$

Consider now the set  $T$  of states defined by  $\sigma_{AB} = \mathcal{W}(\sigma_{ABA'B'})$ , where  $\sigma_{ABA'B'}$  is an arbitrary separable state (with respect to the bipartition  $AA'$  and  $BB'$ ) where the key-part  $AB$  has dimension  $d_{\text{K}} \times d_{\text{K}}$  while the shield-part  $A'B'$  is infinite-dimensional. The set  $T$  is compact, convex and contains the maximally mixed state. Thus, the relative entropy distance  $E_{\text{R}}^T(\rho) = \inf_{\sigma \in T} S(\rho || \sigma)$  is asymptotically continuous. This means that we may write

$$E_{\text{R}}^T(\Phi_{AB}^n) \leq E_{\text{R}}^T(\tilde{\rho}_{AB}^n) + 8\varepsilon \log_2 d_{\text{K}} + 2H_2(\varepsilon). \quad (\text{S89})$$

Now we derive

$$E_{\text{R}}^T(\tilde{\rho}_{AB}^n) \stackrel{(1)}{\leq} E_{\text{R}}(\rho_{ABA'B'}^{n,d_{\text{K}}}) \stackrel{(2)}{\leq} E_{\text{R}}(\rho_{ABA'B'}^n) := E_{\text{R}}(\rho_{\text{ab}}^n), \quad (\text{S90})$$

where (1) follows the derivation given in Eq. (S81), and (2) comes from the monotonicity of the REE under  $\mathbb{T}_{d_{\text{K}}}^\otimes \otimes \mathcal{I}_{A'B'}$ . By replacing Eqs. (S79) and (S90) into Eq. (S89), we find Eq. (S82) where  $\rho_{\text{ab}}^n$  is a now a CV state. The remainder of the proof is the same as before.

Supplementary Note 4. TECHNICAL DERIVATIONS FOR BOSONIC GAUSSIAN CHANNELS

Basic tools for continuous variables

Let us consider  $n$  bosonic modes with quadrature operators  $\hat{x} = (\hat{q}_1, \dots, \hat{q}_n, \hat{p}_1, \dots, \hat{p}_n)^T$  and canonical commutation relations [S21]

$$[\hat{x}, \hat{x}^T] = i\Omega, \quad \Omega := \begin{pmatrix} 0 & 1 \\ -1 & 0 \end{pmatrix} \otimes I, \quad (\text{S91})$$

with  $I$  being the  $n \times n$  identity matrix. An arbitrary multimode Gaussian state  $\rho(u, V)$ , with mean value  $u$  and covariance matrix (CM)  $V$ , can be written as [S22]

$$\rho = \frac{\exp[-\frac{1}{2}(\hat{x} - u)^T G (\hat{x} - u)]}{\det(V + i\Omega/2)^{1/2}}, \quad (\text{S92})$$

where the Gibbs matrix  $G$  is specified by

$$G = 2i\Omega \coth^{-1}(2Vi\Omega). \quad (\text{S93})$$

The CM of a Gaussian state can be decomposed by using Williamson's theorem [S10]. This provides the symplectic spectrum  $\{\nu_1, \dots, \nu_n\}$  which must satisfy the uncertainty principle  $\nu_k \geq 1/2$ . Similarly, we may write  $\nu_k = \bar{n}_k + 1/2$  where  $\bar{n}_k$  are thermal numbers, i.e., mean number of photons in each mode. The von Neumann entropy of a Gaussian state can be easily computed as

$$S(\rho) = \sum_k s(\nu_k) = \sum_k h(\bar{n}_k), \quad (\text{S94})$$

where

$$\begin{cases} s(\nu) := (\nu + \frac{1}{2}) \log_2(\nu + \frac{1}{2}) - (\nu - \frac{1}{2}) \log_2(\nu - \frac{1}{2}), \\ h(\bar{n}) := (\bar{n} + 1) \log_2(\bar{n} + 1) - \bar{n} \log_2 \bar{n}. \end{cases} \quad (\text{S95})$$

The most typical Gaussian state of two modes  $A$  and  $B$  is a two-mode squeezed thermal state. This has zero-mean and CM of the form

$$V = \begin{pmatrix} a & c \\ c & b \end{pmatrix} \oplus \begin{pmatrix} a & -c \\ -c & b \end{pmatrix}, \quad (\text{S96})$$

with arbitrary  $a, b \geq 1/2$  and  $c$  satisfying the condition

$$c \leq c_{\max} := \min \left\{ \sqrt{(a - \frac{1}{2})(b + \frac{1}{2})}, \sqrt{(a + \frac{1}{2})(b - \frac{1}{2})} \right\}. \quad (\text{S97})$$

These bona-fide conditions can be checked using the tools in Refs. [S23, S24] adapted to our different notation. For a CM as in Eq. (S96), separability corresponds to

$$c \leq c_{\text{sep}} := \sqrt{(a - \frac{1}{2})(b - \frac{1}{2})}. \quad (\text{S98})$$

Thus, at any fixed  $a$  and  $b$ , the maximally-correlated but still separable Gaussian state is given by imposing the boundary condition  $c = c_{\text{sep}}$ . It is easy to check that this state contains the maximum correlations among the separable states, e.g., as quantified by its (unrestricted, generally non-Gaussian) quantum discord [S25].

For  $c_{\text{sep}} < c \leq c_{\max}$  in Eq. (S96), the Gaussian state is entangled. A specific case is the TMSV state  $\Phi^\mu$  with CM of the form

$$V^\mu = \begin{pmatrix} \mu & c \\ c & \mu \end{pmatrix} \oplus \begin{pmatrix} \mu & -c \\ -c & \mu \end{pmatrix}, \quad c := \sqrt{\mu^2 - 1/4}, \quad \mu \geq 1/2. \quad (\text{S99})$$



As already discussed, for  $\mu \rightarrow \infty$ , this state describes the asymptotic CV EPR state  $\Phi$ , realizing the ideal EPR conditions  $\hat{q}_A = \hat{q}_B$  and  $\hat{p}_A = -\hat{p}_B$ .

A Gaussian channel is a CPTP map which transforms Gaussian states into Gaussian states. Single-mode Gaussian channels can be greatly simplified by means of input-output unitaries. In fact, these can always be put in canonical form [S10] whose general action on input quadratures  $\hat{x} = (\hat{q}, \hat{p})^T$  is given by

$$\hat{x} \rightarrow T\hat{x} + N\hat{x}_E + z, \quad (\text{S100})$$

where  $T$  and  $N$  are diagonal matrices,  $E$  is an environmental mode with  $\bar{n}$  mean photons, and  $z$  is a classical Gaussian variable, with zero mean and CM  $\xi I$  where  $\xi \geq 0$ . All Gaussian channels are teleportation-covariant and, therefore, Choi-stretchable (with an asymptotic Choi matrix). Teleportation-covariance is given by the fact that any displacement of the input  $\hat{x} \rightarrow \hat{x} + d_k$  is mapped into a displacement  $Td_k$  on the output.

Depending on the specific canonical form we have different expressions in Eq. (S100). We have:

- The thermal-loss channel  $\mathcal{E}_{\text{loss}}(\eta, \bar{n})$  with transmissivity  $0 \leq \eta \leq 1$  and  $\bar{n}$  thermal photons. This is described by

$$\hat{x} \rightarrow \sqrt{\eta}\hat{x} + \sqrt{1-\eta}\hat{x}_E. \quad (\text{S101})$$

For  $\bar{n} = 0$ , the channel  $\mathcal{E}_{\text{loss}}(\eta) := \mathcal{E}_{\text{loss}}(\eta, 0)$  is called pure-loss channel or just “lossy channel”.

- The amplifier channel  $\mathcal{E}_{\text{amp}}(\eta, \bar{n})$  with gain  $\eta > 1$  and  $\bar{n}$  thermal photons (in the main text we use the letter  $g$  for the gain). This corresponds to the transformation

$$\hat{x} \rightarrow \sqrt{\eta}\hat{x} + \sqrt{\eta-1}\hat{x}_E. \quad (\text{S102})$$

For  $\bar{n} = 0$ , the channel  $\mathcal{E}_{\text{amp}}(\eta) := \mathcal{E}_{\text{amp}}(\eta, 0)$  is called “quantum-limited amplifier”.

- The additive-noise Gaussian channel  $\mathcal{E}_{\text{add}}(\xi)$ , which simply corresponds to

$$\hat{x} \rightarrow \hat{x} + z. \quad (\text{S103})$$

- Finally, there are other secondary forms. One is the conjugate of the amplifier, which is described by  $\hat{x} \rightarrow \sqrt{-\eta}Z\hat{x} + \sqrt{1-\eta}\hat{x}_E$ , where  $\eta < 0$  and  $Z = \text{diag}(1, -1)$  is the reflection matrix. Then, other pathological forms [S10]: The  $A_2$ -form, which is a ‘half’ depolarising channel and corresponds to  $\hat{x} \rightarrow (\hat{q}, 0)^T + \hat{x}_E$ ; and the  $B_1$ -form, which is described by  $\hat{x} \rightarrow \hat{x} + (0, \hat{p}_v)^T$  where  $v$  is the vacuum.

### Coherent and reverse coherent information of a Gaussian channel

Here we discuss the computation of the (reverse) coherent information for the most important single-mode Gaussian channels, i.e., the thermal-loss channel, the amplifier channel and the additive-noise Gaussian channel. Compactly, their action on input quadratures is given by

$$\hat{x} \rightarrow \sqrt{\eta}\hat{x} + \sqrt{|1-\eta|}\hat{x}_E + z, \quad (\text{S104})$$

where  $\eta \geq 0$  is the transmission (or gain),  $E$  is the environmental mode in a thermal state with  $\bar{n}$  mean photons, and  $z$  is a classical Gaussian variable with CM  $\xi I \geq 0$ . The Choi matrix  $\rho_{\mathcal{E}}$  of this Gaussian channel  $\mathcal{E} = \mathcal{E}(\eta, \bar{n}, \xi)$  is defined as an asymptotic limit. At the input we consider a sequence of TMSV states  $\Phi^\mu$  with CM as in Eq. (S99). Then, at the output, we get a sequence of finite-energy Gaussian states

$$\rho_{\mathcal{E}}^\mu := \mathcal{I} \otimes \mathcal{E}(\Phi^\mu), \quad (\text{S105})$$

whose limit defines  $\rho_{\mathcal{E}} := \lim_{\mu} \rho_{\mathcal{E}}^\mu$ . The quasi-Choi matrices  $\rho_{\mathcal{E}}^\mu$  are zero-mean Gaussian states with CM

$$V^\mu(\eta, \bar{n}, \xi) = \begin{pmatrix} \mu & \gamma \\ \gamma & \beta \end{pmatrix} \oplus \begin{pmatrix} \mu & -\gamma \\ -\gamma & \beta \end{pmatrix}, \quad \beta := \eta\mu + |1-\eta| \left( \bar{n} + \frac{1}{2} \right) + \xi, \quad \gamma := \sqrt{\eta(\mu^2 - 1/4)}. \quad (\text{S106})$$

Let us consider the symplectic eigenvalues of the output CM in Eq. (S106), which are given by [S10]

$$\nu_{\pm} = \sqrt{\frac{\Delta \pm \sqrt{\Delta^2 - 4 \det V^\mu}}{2}}, \quad \Delta := \mu^2 + \beta^2 - 2\gamma^2. \quad (\text{S107})$$

Using the formula of the von Neumann entropy for Gaussian states and the definitions of the coherent information  $I_C$  and reverse coherent information  $I_{RC}$ , we may write

$$I_C(\mathcal{E}, \Phi^\mu) = I(A)B_{\rho_\mathcal{E}^\mu} = s(\beta) - s(\nu_-) - s(\nu_+), \quad I_{RC}(\mathcal{E}, \Phi^\mu) = I(A\langle B)_{\rho_\mathcal{E}^\mu} = s(\mu) - s(\nu_-) - s(\nu_+), \quad (\text{S108})$$

where function  $s(\cdot)$  is given in Eq. (S95).

It is easy to see that these quantities are continuous and increasing in  $\mu$ , for any fixed values of  $\eta$ ,  $\bar{n}$  and  $\xi$ . For instance, for the lossy channel ( $0 \leq \eta \leq 1$ ,  $\bar{n} = \xi = 0$ ), we simply have

$$I(A)B_{\rho_\mathcal{E}^\mu} = s\left[\frac{1-\eta}{2} + \eta\mu\right] - s\left[\frac{\eta}{2} + (1-\eta)\mu\right], \quad I(A\langle B)_{\rho_\mathcal{E}^\mu} = s(\mu) - s\left[\frac{\eta}{2} + (1-\eta)\mu\right]. \quad (\text{S109})$$

Thus, the limit for  $\mu \rightarrow +\infty$  in the expressions of Eq. (S108) is regular and finite. The asymptotic values represent the coherent and reverse coherent information of the considered Gaussian channels, i.e., we have

$$I_C(\mathcal{E}) = I(A)B_{\rho_\mathcal{E}} := \lim_{\mu} I(A)B_{\rho_\mathcal{E}^\mu}, \quad I_{RC}(\mathcal{E}) = I(A\langle B)_{\rho_\mathcal{E}} := \lim_{\mu} I(A\langle B)_{\rho_\mathcal{E}^\mu}, \quad (\text{S110})$$

as already defined in Eqs. (S39) and (S40). Correspondingly, the hashing inequality can be safely extended to the limit, i.e., from

$$\max\{I(A)B_{\rho_\mathcal{E}^\mu}, I(A\langle B)_{\rho_\mathcal{E}^\mu}\} \leq D_1(\rho_\mathcal{E}^\mu), \quad (\text{S111})$$

we may write

$$\max\{I_C(\mathcal{E}), I_{RC}(\mathcal{E})\} \leq D_1(\rho_\mathcal{E}) := \lim_{\mu} D_1(\rho_\mathcal{E}^\mu). \quad (\text{S112})$$

For the thermal-loss channel, the best lower bound is the reverse coherent information, given by [S7]

$$I_{RC}(\eta, \bar{n}) = -\log_2(1-\eta) - h(\bar{n}), \quad (\text{S113})$$

where  $h(\cdot)$  is the entropic function defined in Eq. (S95). In particular, for a lossy channel ( $\bar{n} = 0$ ), one has

$$I_{RC}(\eta) = -\log_2(1-\eta). \quad (\text{S114})$$

For the amplifier channel, the best lower bound is given by the coherent information, which is equal to [S7, S26]

$$I_C(\eta, \bar{n}) = \log_2\left(\frac{\eta}{\eta-1}\right) - h(\bar{n}), \quad (\text{S115})$$

and becomes

$$I_C(\eta) = \log_2\left(\frac{\eta}{\eta-1}\right), \quad (\text{S116})$$

for the quantum-limited amplifier ( $\bar{n} = 0$ ). The coherent information and reverse coherent information of the additive-noise Gaussian channel coincide. We have [S26]

$$I_C(\xi) = I_{RC}(\xi) = -\log_2 \xi - \frac{1}{\ln 2}. \quad (\text{S117})$$

Due to the hashing inequality, the quantities  $I_C(\mathcal{E})$  and  $I_{RC}(\mathcal{E})$  are achievable rates for one-way entanglement distillation. Therefore, they also represent achievable rates for key generation, just because an ebit is a particular type of secret bit. In particular, ref. [S7] proved that  $I_{RC}(\mathcal{E})$  is an achievable lower bound for quantum key distribution (QKD) through a Gaussian channel without the need of preliminary entanglement distillation. In fact,  $I_{RC}(\mathcal{E})$  can be computed as the asymptotic key rate of a coherent protocol where:

- (i) Alice prepares TMSV states  $\Phi_{AA'}^\mu$ , sending  $A'$  to Bob;
- (ii) Bob heterodynes each output mode  $B$  and sends final CCs back to Alice;
- (iii) Alice measures all her modes  $A$  by means of an optimal coherent detection that reaches the Holevo bound.

The achievable rate of this coherent protocol is given by a Devetak-Winter rate  $R_{DW}$  [S8]. Because Eve holds the entire purification of Alice and Bob's Gaussian output state  $\rho_\mathcal{E}^\mu$  and Bob's detections are rank-1 measurements, this rate is equal to the reverse coherent information [S7]  $R_{DW} = I(A\langle B)_{\rho_\mathcal{E}^\mu}$  computed on Alice and Bob's output. Then, by taking the limit of  $\mu \rightarrow +\infty$ , one obtains  $K(\mathcal{E}) \geq I_{RC}(\mathcal{E})$ .

### How to compute the entanglement flux of a Gaussian channel

Here we discuss how to compute the entanglement flux of a single-mode Gaussian channel (in canonical form). We provide the general recipe and then we go into details of the specific channels in the next subsections. The entanglement flux of a Gaussian channel  $\mathcal{E}$  satisfies

$$\Phi(\mathcal{E}) \leq \liminf_{\mu \rightarrow +\infty} S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu}), \quad (\text{S118})$$

where  $\rho_{\mathcal{E}}^{\mu}$  is a sequence of quasi-Choi matrices as defined in Eq. (S105) with CMs as in Eq. (S106), while  $\tilde{\sigma}_s^{\mu}$  is a suitable sequence of separable Gaussian states.

For any  $\mu$ , we choose a separable Gaussian state  $\tilde{\sigma}_s^{\mu}$  with CM  $\tilde{V}^{\mu}(\eta, \bar{n}, \xi)$  as in Eq. (S106) but with the replacement

$$\gamma \rightarrow \sqrt{(\mu - 1/2)(\beta - 1/2)}, \quad (\text{S119})$$

for the off-diagonal term. At fixed marginals  $\mu$  and  $\beta$ , this is the most-correlated separable Gaussian state that we can build according to Eqs. (S96) and (S98); it has maximum (non-Gaussian) discord [S25] and minimizes the relative entropy  $S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu})$  as long as  $\rho_{\mathcal{E}}^{\mu}$  is an entangled state. In the specific case where the channel  $\mathcal{E}$  is entanglement-breaking, then  $\rho_{\mathcal{E}}^{\mu}$  becomes separable and we can trivially pick  $\tilde{\sigma}_s^{\mu} = \rho_{\mathcal{E}}^{\mu}$ , which gives  $S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu}) = 0$ .

In general, we are left with the analytical calculation of the relative entropy  $S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu})$  between two Gaussian states. This can be done in terms of their statistical moments according to our formula for the REE between two arbitrary multimode Gaussian states, which is given in the ‘‘Methods’’ section of our paper. For  $S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu})$  we find regular expressions with a well-defined limit, so that we can put  $\liminf_{\mu} = \lim_{\mu}$  in Eq. (S118). We provide full algebraic details below for the various Gaussian channels.

#### Entanglement flux of a thermal-loss channel

Consider a thermal-loss channel  $\mathcal{E}_{\text{loss}}(\eta, \bar{n})$  with transmissivity  $0 \leq \eta \leq 1$  and thermal number  $\bar{n}$ , so that thermal noise has variance  $\omega = \bar{n} + 1/2$ . For  $\bar{n} \geq \eta(1 - \eta)^{-1}$ , this channel is entanglement-breaking and we have  $\Phi(\eta, \bar{n}) = 0$ . For  $\bar{n} < \eta(1 - \eta)^{-1}$  we compute the relative entropy  $S^{\mu} := S(\rho_{\mathcal{E}}^{\mu} || \tilde{\sigma}_s^{\mu})$  from the CMs  $V^{\mu}(\eta \leq 1, \bar{n}, 0)$  and  $\tilde{V}^{\mu}(\eta \leq 1, \bar{n}, 0)$  of the zero-mean Gaussian states  $\rho_{\mathcal{E}}^{\mu}$  and  $\tilde{\sigma}_s^{\mu}$ . Using our formula for the relative entropy between Gaussian states, we get

$$S^{\mu} = -S_1 + \frac{\Delta}{2 \ln 2} + \frac{1}{2} \log_2 \left\{ \frac{2\mu - 1}{4} [2\omega - 1 + 2\eta(\mu - \omega)] \right\}, \quad (\text{S120})$$

where  $S_1$  is the contribution of the von Neumann entropy, while the other two terms come from the entropic functional  $\Sigma(V^{\mu}, \tilde{V}^{\mu}, 0)$  (see Methods for its definition). Term  $\Delta$  is analytical but too cumbersome to be reported here.

By expanding for large  $\mu$ , we may write

$$\Delta \rightarrow 2 \left[ 1 - 2\omega \coth^{-1} \left( \frac{1 + \eta}{\eta - 1} \right) \right] + O(\mu^{-1}), \quad S_1 \rightarrow h(\bar{n}) + \log_2 [e(1 - \eta)\mu] + O(\mu^{-1}), \quad (\text{S121})$$

and

$$\frac{1}{2} \log_2 \left\{ \frac{2\mu - 1}{4} [2\omega - 1 + 2\eta(\mu - \omega)] \right\} \rightarrow \log_2 \mu \sqrt{\eta} + O(\mu^{-1}). \quad (\text{S122})$$

Taking the limit  $S^{\infty} = \liminf_{\mu} S^{\mu} = \lim_{\mu} S^{\mu}$ , we get

$$S^{\infty} = -\log_2 [(1 - \eta)\eta^{\bar{n}}] - h(\bar{n}). \quad (\text{S123})$$

As a result, by replacing in Eq. (S118), we find that the entanglement flux of a thermal-loss channel  $\mathcal{E}_{\text{loss}}(\eta, \bar{n})$  satisfies

$$\Phi(\eta, \bar{n}) \leq \Phi_{\text{loss}}(\eta, \bar{n}) := \begin{cases} -\log_2 [(1 - \eta)\eta^{\bar{n}}] - h(\bar{n}) & \text{for } \bar{n} < \frac{\eta}{1 - \eta}, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S124})$$

The thermal bound in Eq. (S124) is clearly tighter than previous bounds based on the squashed entanglement, such as the ‘‘Takeoka-Guha-Wilde’’ (TGW) thermal bound [S27]

$$K_{\text{TGW}} = \log_2 \left[ \frac{(1-\eta)\bar{n} + 1 + \eta}{(1-\eta)\bar{n} + 1 - \eta} \right], \quad (\text{S125})$$

and its improved version [S28]. However,  $\Phi_{\text{loss}}$  does not generally coincide with the achievable lower-bound [S7] given by the reverse coherent information of the channel [see Eq. (S113)]. Thus, the generic two-way capacity of the thermal-loss channel satisfies the sandwich relation

$$-\log_2(1-\eta) - h(\bar{n}) \leq \mathcal{C}_{\text{loss}}(\eta, \bar{n}) \leq \Phi_{\text{loss}}(\eta, \bar{n}). \quad (\text{S126})$$

It is easy to check that, for a lossy channel ( $\bar{n} = 0$ ), the bounds Eq. (S126) coincide, therefore establishing

$$\mathcal{C}_{\text{loss}}(\eta) = -\log_2(1-\eta). \quad (\text{S127})$$

### Relation with quantum discord

The result of Eq. (S127) sets the fundamental limit for secret-key generation, entanglement distribution and quantum communication in bosonic lossy channels. For high loss it provides the fundamental rate-loss scaling of  $1.44\eta$  bits per channel use. This also coincides with the maximum discord that can be distributed to the parties in a single use of the channel. In fact, we may write the reverse coherent information of a (bosonic) channel  $\mathcal{E}$  as [S29]  $I(A\langle B \rangle_{\rho_{\mathcal{E}}}) = D(B|A) - E_f(B, E)$ , where  $D(B|A)$  is the quantum discord [S30] of Alice and Bob’s (asymptotic) Choi matrix  $\rho_{\mathcal{E}}$ , while  $E_f(B, E)$  is the entanglement of formation between Bob and Eve. Because a lossy channel  $\mathcal{E}_{\text{loss}} := \mathcal{E}_{\text{loss}}(\eta, 0)$  is dilated into a beamsplitter with a vacuum environment, we have  $E_f(B, E) = 0$ . Thus, for a lossy channel, we simultaneously have  $I(A\langle B \rangle_{\rho_{\mathcal{E}_{\text{loss}}}}) = D(B|A)$  and  $\mathcal{C}_{\text{loss}}(\eta) = I(A\langle B \rangle_{\rho_{\mathcal{E}_{\text{loss}}}})$ . These relations lead to

$$\mathcal{C}_{\text{loss}}(\eta) = D(B|A), \quad (\text{S128})$$

where  $D(B|A)$  is the quantum discord of the (asymptotic) Gaussian Choi matrix  $\rho_{\mathcal{E}_{\text{loss}}}$  [S25]. In particular, this discord can be computed as Gaussian discord [S31, S32].

### Full calculation details for the lossy channel

For the sake of completeness, we provide the specific details of the computation of the relative entropy  $S^\mu$  for the specific case of a lossy channel. After some algebra, we achieve

$$S^\mu = \log_2 \left[ \left( \mu - \frac{1}{2} \right) \sqrt{\eta} \right] - s \left[ (1-\eta)\mu + \frac{\eta}{2} \right] + \frac{\Delta}{2 \ln 2}, \quad (\text{S129})$$

where

$$\Delta := \frac{c - (2\mu - 1)(1 - \eta)a}{b} \coth^{-1} \left[ \frac{(1 - \eta)(1 - 2\mu) - a}{2} \right] - \frac{c + (2\mu - 1)(1 - \eta)a}{b} \coth^{-1} \left[ \frac{(1 - \eta)(1 - 2\mu) + a}{2} \right], \quad (\text{S130})$$

and

$$a := \sqrt{1 - (6 - \eta)\eta + 4\mu[1 + (4 - \eta)\eta + (1 - \eta)^2\mu]}, \quad (\text{S131})$$

$$b := \sqrt{8\mu + (2\mu - 1)[4\eta + (2\mu - 1)(1 - \eta)^2]}, \quad (\text{S132})$$

$$c := 2\eta(2\mu - 1) \left( 2\sqrt{4\mu^2 - 1} - 1 - 2\mu \right) - \eta^2(2\mu - 1)^2 - (1 + 2\mu)^2. \quad (\text{S133})$$

We now insert the expression of  $\Delta$  in Eq. (S129) and we take the limit for  $\mu \rightarrow +\infty$ . This limit is defined (i.e.,  $\liminf_{\mu} = \lim_{\mu}$ ) and we get

$$S^\infty = \lim_{\mu \rightarrow +\infty} S^\mu = -\log_2(1 - \eta). \quad (\text{S134})$$

We can show this limit step-by-step. First note that, for large  $\nu$ , we have

$$s(\nu) \rightarrow \log_2 e\nu + O(\nu^{-1}). \quad (\text{S135})$$

Thus, in the limit of  $\mu \rightarrow +\infty$ , the first two terms in the RHS of Eq. (S129) become

$$\log_2 \left[ \left( \mu - \frac{1}{2} \right) \sqrt{\eta} \right] \rightarrow \log_2 (\mu\sqrt{\eta}) + O(\mu^{-1}), \quad (\text{S136})$$

$$-s \left[ (1 - \eta)\mu + \frac{\eta}{2} \right] \rightarrow -\log_2 [e(1 - \eta)\mu] + O(\mu^{-1}). \quad (\text{S137})$$

Then, it is easy to show that, for  $\mu \rightarrow +\infty$ , we have

$$\begin{aligned} \Delta &\rightarrow [-4(1 - \eta)\mu + O(\mu^0)] \coth^{-1} [-2(1 - \eta)\mu + O(\mu^0)] - [-2 + O(\mu^{-1})] \coth^{-1} \left[ \frac{1 + \eta}{1 - \eta} + O(\mu^{-1}) \right] \\ &\rightarrow 2 - \ln \eta + O(\mu^{-1}). \end{aligned} \quad (\text{S138})$$

In conclusion, by using Eqs. (S136), (S137) and (S138) into Eq. (S129), we obtain the final result in Eq. (S134).

### Entanglement flux of a quantum amplifier

Consider an amplifier channel  $\mathcal{E}_{\text{amp}}(\eta, \bar{n})$  with gain  $\eta > 1$  and thermal number  $\bar{n}$ , so that thermal noise has variance  $\omega = \bar{n} + 1/2$ . For  $\bar{n} \geq (\eta - 1)^{-1}$  this channel is entanglement breaking and therefore  $\Phi(\eta, \bar{n}) = 0$ . For  $\bar{n} < (\eta - 1)^{-1}$  we compute the relative entropy  $S^\mu := S(\rho_{\mathcal{E}}^\mu || \tilde{\sigma}_s^\mu)$  from the CMs  $V^\mu(\eta > 1, \bar{n}, 0)$  and  $\tilde{V}^\mu(\eta > 1, \bar{n}, 0)$  of the zero-mean Gaussian states  $\rho_{\mathcal{E}}^\mu$  and  $\tilde{\sigma}_s^\mu$ . Up to terms  $O(\mu^{-1})$ , we get

$$S(\rho_{\mathcal{E}}^\mu) \rightarrow h(\bar{n}) + \log_2 e(\eta - 1)\mu, \quad -\text{Tr}(\rho_{\mathcal{E}}^\mu \log_2 \tilde{\sigma}_s^\mu) \rightarrow \frac{\ln(\eta\mu^2) + 2 + 4\omega \coth^{-1} \left( \frac{\eta+1}{\eta-1} \right)}{2 \ln 2}. \quad (\text{S139})$$

For large  $\mu$  we therefore obtain

$$S^\infty = \log_2 \left( \frac{\eta^{\bar{n}+1}}{\eta - 1} \right) - h(\bar{n}). \quad (\text{S140})$$

Thus we find

$$\Phi(\eta, \bar{n}) \leq \Phi_{\text{amp}}(\eta, \bar{n}) := \begin{cases} \log_2 \left( \frac{\eta^{\bar{n}+1}}{\eta - 1} \right) - h(\bar{n}) & \text{for } \bar{n} < (\eta - 1)^{-1}, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S141})$$

In general,  $\Phi_{\text{amp}}(\eta, \bar{n})$  does not coincide with the best known lower bound which is given by the coherent information of the channel in Eq. (S115). Thus, the two-way capacity of a quantum amplifier channel satisfies

$$\log_2 \left( \frac{\eta}{\eta - 1} \right) - h(\bar{n}) \leq \mathcal{C}_{\text{amp}}(\eta, \bar{n}) \leq \Phi_{\text{amp}}(\eta, \bar{n}). \quad (\text{S142})$$

It is easy to check that, for the quantum-limited amplifier ( $\bar{n} = 0$ ), the previous upper and lower bounds coincide, thus determining its two-way capacity

$$\mathcal{C}_{\text{amp}}(\eta) = \log_2 \left( \frac{\eta}{\eta - 1} \right). \quad (\text{S143})$$

Thus,  $\mathcal{C}_{\text{amp}}(\eta)$  turns out to coincide with the unassisted quantum capacity  $Q_{\text{amp}}(\eta)$  [S26, S33]. The result of Eq. (S143) sets the fundamental limit for key generation, entanglement distribution and quantum communication with amplifiers. A trivial consequence is that infinite amplification is useless for communication since  $\mathcal{C}_{\text{amp}}(\infty) \rightarrow 0$ . For an amplifier with typical gain 2, the maximum achievable rate for quantum communication is just 1 qubit per use.

### Entanglement flux of an additive-noise Gaussian channel

Consider an additive-noise Gaussian channel  $\mathcal{E}_{\text{add}}(\xi)$  with noise variance  $\xi \geq 0$ . For  $\xi \geq 1$  this channel is entanglement breaking and therefore we have  $\Phi(\xi) = 0$ . For  $\xi < 1$  we compute the relative entropy  $S^\mu := S(\rho_{\mathcal{E}}^\mu || \tilde{\sigma}_s^\mu)$  from the CMs  $V^\mu(1, 0, \xi)$  and  $\tilde{V}^\mu(1, 0, \xi)$  of the zero-mean Gaussian states  $\rho_{\mathcal{E}}^\mu$  and  $\tilde{\sigma}_s^\mu$ . Discarding terms  $O(\mu^{-1})$ , we get

$$S(\rho_{\mathcal{E}}^\mu) \rightarrow \log_2(e^2 \xi \mu), \quad -\text{Tr}(\rho_{\mathcal{E}}^\mu \log_2 \tilde{\sigma}_s^\mu) \rightarrow \frac{\ln \left[ \frac{(2\mu-1)(2\xi+2\mu-1)}{4} \right] + 2(1+\xi)}{2 \ln 2}. \quad (\text{S144})$$

which leads to

$$S^\infty = \liminf_{\mu} S^\mu = \lim_{\mu} S^\mu = \frac{\xi - 1}{\ln 2} - \log_2 \xi. \quad (\text{S145})$$

Thus we find

$$\Phi(\xi) \leq \Phi_{\text{add}}(\xi) := \begin{cases} \frac{\xi-1}{\ln 2} - \log_2 \xi & \text{for } \xi < 1, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S146})$$

The best lower bound is its coherent information  $I_C(\xi)$  of Eq. (S117), so that the two-way capacity satisfies

$$-1/\ln 2 - \log_2 \xi \leq \mathcal{C}_{\text{add}}(\xi) \leq \Phi_{\text{add}}(\xi). \quad (\text{S147})$$

It is interesting to note how quantum communication rapidly degrades when we compose quantum channels. For instance, a quantum-limited amplifier with gain 2 can transmit  $Q_2 = 1$  qubit per use from Alice to Bob. This is the same amount which can be transmitted from Bob to Charlie, through a lossy channel with transmissivity  $1/2$ . By using Bob as a quantum repeater, Alice can therefore transmit at least 1 qubit per use to Charlie. If we remove Bob and we compose the two channels, we obtain an additive-noise Gaussian channel with variance  $\xi = 1/2$ , which is limited to  $Q_2 \lesssim 0.278$  qubits per use.

### Secondary canonical forms

For the conjugate of the amplifier it is easy to check that this channel is always entanglement-breaking, so that it has zero flux and, therefore, zero two-way capacity  $\mathcal{C} = 0$ . The  $A_2$ -form [S10], which is a ‘half’ depolarising channel, is also an entanglement-breaking channel, so that  $\Phi = \mathcal{C} = 0$ . Finally, for the ‘pathological’  $B_1$ -form [S10], we find the trivial bound  $\Phi = +\infty$ .

#### Supplementary Note 5. TECHNICAL DERIVATIONS FOR DISCRETE-VARIABLE CHANNELS

Given a discrete-variable channel  $\mathcal{E}$  in dimension  $d$ , we can easily derive its Choi matrix  $\rho_{\mathcal{E}} = I \otimes \mathcal{E}(\Phi)$  from the maximally-entangled state

$$\Phi = \frac{1}{\sqrt{d}} \sum_{i=0}^{d-1} |ii\rangle, \quad (\text{S148})$$

where  $\{|0\rangle, \dots, |i\rangle, \dots, |d-1\rangle\}$  is the computational basis of the qudit. We write the spectral decomposition

$$\rho_{\mathcal{E}} = \sum_k p_k |\varphi_k\rangle \langle \varphi_k|, \quad (\text{S149})$$

where  $\mathbf{p} = \{p_k\}$  are the eigenvalues of the Choi matrix. The von Neumann entropy is simply equal to the Shannon entropy of the previous eigenvalues, i.e.,

$$S(\rho_{\mathcal{E}}) = H(\mathbf{p}) := - \sum_k p_k \log_2 p_k. \quad (\text{S150})$$

From the Choi matrix we may compute the coherent and reverse coherent information of the channel. In particular, for unital channels, these quantities coincide and are given by the simple formula in Eq. (S32), i.e.,

$$I_C(\mathcal{E}) = I_{\text{RC}}(\mathcal{E}) = \log_2 d - S(\rho_{\mathcal{E}}) = \log_2 d - H(\mathbf{p}). \quad (\text{S151})$$

To compute the entanglement flux of the channel (upper bound), recall that we have

$$\Phi(\mathcal{E}) := E_{\text{R}}(\rho_{\mathcal{E}}) \leq S(\rho_{\mathcal{E}}|\tilde{\sigma}_s), \quad (\text{S152})$$

for some suitable separable state  $\tilde{\sigma}_s$ . Let us write its spectral decomposition

$$\tilde{\sigma}_s = \sum_k s_k |\lambda_k\rangle\langle\lambda_k|, \quad (\text{S153})$$

where  $|\lambda_k\rangle$  ( $s_k$ ) are the orthogonal eigenstates (eigenvalues) of  $\tilde{\sigma}_s$ . We may then write

$$S(\rho_{\mathcal{E}}|\tilde{\sigma}_s) = -S(\rho_{\mathcal{E}}) - \text{Tr}(\rho_{\mathcal{E}} \log_2 \tilde{\sigma}_s) = -H(\mathbf{p}) - \sum_k \langle\lambda_k|\rho_{\mathcal{E}}|\lambda_k\rangle \log_2 s_k. \quad (\text{S154})$$

The separable state  $\tilde{\sigma}_s$  may be constructed by applying the channel  $I \otimes \mathcal{E}$  to the input separable state

$$\sigma_s = \frac{1}{d} \sum_{i=0}^{d-1} |ii\rangle\langle ii|, \quad (\text{S155})$$

so that we have the output

$$\tilde{\sigma}_s = \frac{1}{d} \sum_{i=0}^{d-1} |i\rangle\langle i| \otimes \mathcal{E}(|i\rangle\langle i|). \quad (\text{S156})$$

This specific choice will be optimal in some cases and suboptimal in others.

### Erasure channel in arbitrary finite dimension

Consider a qudit in arbitrary dimension  $d$  with computational basis  $\{|i\rangle\}$  (results can be easily specified to the case of a qubit  $d = 2$ ). The erasure channel replaces an incoming qudit state  $\rho$  with an orthogonal erasure state  $|e\rangle$  with some probability  $p$ . In other words, we have the action

$$\mathcal{E}_{\text{erase}}(\rho) = (1-p)\rho + p|e\rangle\langle e|. \quad (\text{S157})$$

The simplicity of this channel relies in the fact that the input states either are perfectly transmitted or they are lost (while in other quantum channels, the input states are all transmitted into generally-different outputs). This feature allows one to apply simple reasonings such as those in ref. [S34] which determined the  $Q_2$  of this channel (more precisely, the  $Q_2$  of the qubit erasure channel, but the extension to arbitrary  $d$  is trivial).

It is easy to see that this channel is teleportation-covariant (and therefore Choi-stretchable). In fact, any input unitary  $U$  applied to the state  $\rho$  is mapped into an output augmented unitary  $U \oplus I$ , i.e., we may write

$$\mathcal{E}_{\text{erase}}(U\rho U^\dagger) = (U \oplus I)\mathcal{E}_{\text{erase}}(\rho)(U \oplus I)^\dagger. \quad (\text{S158})$$

Let us write the Kraus decomposition of this channel

$$\mathcal{E}_{\text{erase}}(\rho) = A\rho A^\dagger + \sum_{i=0}^{d-1} A_i\rho A_i^\dagger, \quad (\text{S159})$$

where  $A := \sqrt{1-p}I$  (with  $I$  being the  $d \times d$  identity) and  $A_i := \sqrt{p}|e\rangle\langle i|$ . We then compute its Choi matrix

$$\rho_{\mathcal{E}_{\text{erase}}} = (1-p)\Phi + \frac{p}{d}(I \otimes |e\rangle\langle e|). \quad (\text{S160})$$

Note that  $\text{Tr}[\Phi(I \otimes |e\rangle\langle e|)] = 0$ , so that Eq. (S160) is the spectral decomposition of  $\rho_{\mathcal{E}}$  over two orthogonal subspaces, where  $\Phi$  has eigenvalue  $1 - p$ , and  $I \otimes |e\rangle\langle e|$  is degenerate with  $d$  eigenvalues equal to  $p/d$ . Therefore, it is easy to compute the von Neumann entropy, which is

$$S(\rho_{\mathcal{E}_{\text{erase}}}) = -(1-p)\log_2(1-p) - p\log_2\left(\frac{p}{d}\right). \quad (\text{S161})$$

To compute the entanglement flux of the channel, we consider the separable state  $\tilde{\sigma}_s$  in Eq. (S156), which here becomes

$$\tilde{\sigma}_s = \frac{1}{d} \sum_{i=0}^{d-1} [(1-p)|ii\rangle\langle ii| + p|i, e\rangle\langle i, e|]. \quad (\text{S162})$$

We have now all the elements to be used in Eq. (S154), which provides

$$\Phi(\mathcal{E}_{\text{erase}}) \leq S(\rho_{\mathcal{E}_{\text{erase}}} || \tilde{\sigma}_s) = (1-p)\log_2 d. \quad (\text{S163})$$

For the lower bound, one can easily check that the coherent and reverse coherent information of this channel are not sufficient to reach the upper bound, since we get

$$I_C(\mathcal{E}_{\text{erase}}) = (1-2p)\log_2 d, \quad I_{\text{RC}}(\mathcal{E}_{\text{erase}}) = (1-p)\log_2 d - H_2(p), \quad (\text{S164})$$

where the extra term  $H_2(p)$  is the binary Shannon entropy. Note that these quantities are achievable rates for one-way entanglement distribution but not necessarily the optimal rates. Indeed it is easy to find a strategy based on one-way backward CCs which reaches  $(1-p)\log_2 d$ . This follows the same reasoning of ref. [S34].

Alice can send halves of EPR states to Bob in large  $n$  uses of the channel. A fraction  $1-p$  will be perfectly distributed. The identification of these good cases can be done by Bob performing a dichotomic POVM  $\{|e\rangle\langle e|, I - |e\rangle\langle e|\}$  on each received system and communicating to Alice which instances were perfectly transmitted. At that point Alice and Bob possess  $n(1-p)$  EPR states with  $\log_2 d$  ebits each. On average this gives a rate of  $(1-p)\log_2 d$  ebits per channel use. Thus, one may write

$$D_1(\rho_{\mathcal{E}_{\text{erase}}}) \geq (1-p)\log_2 d, \quad (\text{S165})$$

whose combination with Eq. (S163) provides

$$\mathcal{C}(\mathcal{E}_{\text{erase}}) = D_2(\mathcal{E}_{\text{erase}}) = Q_2(\mathcal{E}_{\text{erase}}) = K(\mathcal{E}_{\text{erase}}) = \Phi(\mathcal{E}_{\text{erase}}) = (1-p)\log_2 d. \quad (\text{S166})$$

Since the two-way quantum capacity of the erasure channel is already known [S34], our novel result regards the determination of its secret key capacity

$$K(\mathcal{E}_{\text{erase}}) = (1-p)\log_2 d. \quad (\text{S167})$$

It is clear that, for qubits, we have  $K(\mathcal{E}_{\text{erase}}) = 1 - p$ .

### Qubit Pauli channels

Consider a Pauli channel  $\mathcal{P}$  acting on a qubit state  $\rho$ . The Kraus representation of this channel is

$$\mathcal{P}(\rho) = \sum_{k=0}^3 p_k P_k \rho P_k^\dagger = p_0 \rho + p_1 X \rho X + p_2 Y \rho Y + p_3 Z \rho Z, \quad (\text{S168})$$

where  $\mathbf{p} := \{p_k\}$  is a probability distribution and  $P_k \in \{I, X, Y, Z\}$  are Pauli operators, with  $I$  the identity and

$$X := \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}, \quad Y := \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix}, \quad Z := \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}. \quad (\text{S169})$$

It is easy to check that a Pauli channel is teleportation-covariant and, therefore, Choi-stretchable. Teleportation covariance simply comes from the fact that the Pauli operators (qubit teleportation unitaries) either commute or



anticommute with the other Pauli operators (Kraus operators of the channel). For a Pauli channel we can also write the stronger condition

$$[\rho_{\mathcal{P}}, F_k^* \otimes P_k] = 0 \text{ for any } k, \quad (\text{S170})$$

i.e., its Choi matrix is invariant under twirling operations restricted to the generators of the Pauli group. In fact, the Choi matrix of a Pauli channel is Bell-diagonal, i.e., it has spectral decomposition

$$\rho_{\mathcal{P}} = \sum_{k=0}^3 p_k \Phi_k, \quad (\text{S171})$$

where the eigenvalues  $p_k$  are the channel probabilities, and the eigenvectors  $\Phi_k$  are the four Bell states

$$\left\{ \frac{|00\rangle \pm |11\rangle}{\sqrt{2}}, \frac{|10\rangle \pm |01\rangle}{\sqrt{2}} \right\}. \quad (\text{S172})$$

It is clear that  $S(\rho_{\mathcal{P}}) = H(\mathbf{p})$ . Then, using the separable state  $\tilde{\sigma}_s$  as in Eq. (S156), we derive the following upper bound for the entanglement flux of this channel

$$\Phi(\mathcal{P}) \leq 1 - H(\mathbf{p}) + H_2(p_1 + p_2). \quad (\text{S173})$$

Since a Pauli channel is unital, its (reverse) coherent information is just given by  $I_{(\text{R})\text{C}}(\mathcal{P}) = 1 - H(\mathbf{p})$ . Therefore, the two-way capacity of a Pauli channel with arbitrary distribution  $\mathbf{p} := \{p_k\}$  must satisfy

$$1 - H(\mathbf{p}) \leq \mathcal{C}(\mathcal{P}) \leq 1 - H(\mathbf{p}) + H_2(p_1 + p_2). \quad (\text{S174})$$

Latter result can be made stronger by exploiting the fact that  $\rho_{\mathcal{P}}$  is Bell-diagonal. For any such a state we can compute the REE by using the formula of ref. [S35]. In fact, let us set  $p_{\max} := \max\{p_k\}$ , then we may write

$$E_{\text{R}}(\rho_{\mathcal{P}}) = \begin{cases} 1 - H_2(p_{\max}) & \text{if } p_{\max} \geq \frac{1}{2} \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S175})$$

Thus, we have the tighter upper bound

$$1 - H(\mathbf{p}) \leq \mathcal{C}(\mathcal{P}) \leq \Phi(\mathcal{P}) = \begin{cases} 1 - H_2(p_{\max}) & \text{if } p_{\max} \geq \frac{1}{2} \\ 0 & \text{otherwise.} \end{cases}. \quad (\text{S176})$$

In the following subsections, we specialize this result to depolarising and dephasing channels.

### Qubit depolarising channel

This is a Pauli channel with probability distribution

$$\mathbf{p} = \left\{ 1 - \frac{3p}{4}, \frac{p}{4}, \frac{p}{4}, \frac{p}{4} \right\}, \quad (\text{S177})$$

so that we have

$$\mathcal{P}_{\text{depol}}(\rho) = \left( 1 - \frac{3p}{4} \right) \rho + \frac{p}{4} (X\rho X + Y\rho Y + Z\rho Z) = (1-p)\rho + p\frac{I}{2}. \quad (\text{S178})$$

Let us set

$$\kappa(p) := 1 - H_2\left(\frac{3p}{4}\right). \quad (\text{S179})$$

Then, from Eq. (S176), we derive the following bounds for the two-way capacity of the depolarising channel

$$\kappa(p) - \frac{3p}{4} \log_2 3 \leq \mathcal{C}(\mathcal{P}_{\text{depol}}) \leq \kappa(p), \quad (\text{S180})$$

for  $p \leq 2/3$ , while  $\mathcal{C}(\mathcal{P}_{\text{depol}}) = 0$  otherwise.

### Qubit dephasing channel

This is a Pauli channel with probability distribution  $\mathbf{p} = \{1 - p, 0, 0, p\}$ , so that we have

$$\mathcal{P}_{\text{deph}}(\rho) = (1 - p)\rho + pZ\rho Z. \quad (\text{S181})$$

It is easy to see that  $H(\mathbf{p}) = H_2(p_{\text{max}}) = H_2(p)$ , so that Eq. (S176) leads to

$$\mathcal{C}(\mathcal{P}_{\text{deph}}) = D_2(\mathcal{P}_{\text{deph}}) = Q_2(\mathcal{P}_{\text{deph}}) = K(\mathcal{P}_{\text{deph}}) = \Phi(\mathcal{P}_{\text{deph}}) = 1 - H_2(p), \quad (\text{S182})$$

which also coincides with the unassisted quantum capacity of this channel  $Q(\mathcal{P}_{\text{deph}})$  [S36].

### Pauli channels in arbitrary finite dimension

Let us now consider Pauli channels  $\mathcal{P}_d$  in arbitrary dimension  $d \geq 2$ . These qudit channels are also called ‘‘Weyl channels’’ and they have Kraus representation

$$\mathcal{P}_d(\rho) = \sum_{a,b=0}^{d-1} p_{ab}(X^a Z^b)\rho(X^a Z^b)^\dagger, \quad (\text{S183})$$

where  $p_{ab}$  is a probability distribution for  $a, b \in \mathbb{Z}_d := \{0, 1, \dots, d-1\}$ . Here  $X$  and  $Z$  are generalized Pauli operators whose action on the computational basis  $\{|j\rangle\}$  is given by

$$X|j\rangle = |j \oplus 1\rangle, \quad Z|j\rangle = \omega^j |j\rangle, \quad (\text{S184})$$

where  $\oplus$  is the modulo  $d$  addition and

$$\omega := \exp(i2\pi/d). \quad (\text{S185})$$

These operators satisfy the generalized commutation relation

$$Z^b X^a = \omega^{ab} X^a Z^b. \quad (\text{S186})$$

Not only for  $d = 2$  (qubits) but also at any  $d \geq 2$  a Pauli channel is teleportation-covariant.

The channel’s Choi matrix  $\rho_{\mathcal{P}_d}$  is Bell-diagonal with eigenvalues  $\{p_{ab}\}$ , so that we may write its von Neumann entropy in terms of the Shannon entropy as follows

$$S(\rho_{\mathcal{P}_d}) = H(\{p_{ab}\}). \quad (\text{S187})$$

Note that the Choi matrix can also be written as

$$\rho_{\mathcal{P}_d} = \frac{1}{d} \sum_{a,b,j,k} p_{ab}(I \otimes X^a Z^b)|jj\rangle\langle kk|(I \otimes X^a Z^b)^\dagger = \frac{1}{d} \sum_{a,b,j,k} p_{ab} \omega^{b(j-k)} |j, j \oplus a\rangle\langle k, k \oplus a|. \quad (\text{S188})$$

Then, let us consider a separable state  $\tilde{\sigma}_s$  which is constructed as in Eq. (S156). This state can be re-written as

$$\tilde{\sigma}_s = \frac{1}{d} \sum_{a,b,i=0}^{d-1} p_{ab} |i, i \oplus a\rangle\langle i, i \oplus a|. \quad (\text{S189})$$

By applying Eq. (S154), we find

$$\Phi(\mathcal{P}_d) \leq \log_2 d - H(\{p_{ab}\}) + H(\{p_a\}), \quad (\text{S190})$$

where  $p_a := \sum_{b=0}^{d-1} p_{ab}$ . Since the  $d$ -dimensional Pauli channel is unital, we may also write  $I_{(\text{R})\text{C}}(\mathcal{P}_d) = \log_2 d - H(\{p_{ab}\})$ , so that we derive the following bounds for its two-way capacity

$$\log_2 d - H(\{p_{ab}\}) \leq \mathcal{C}(\mathcal{P}_d) \leq \log_2 d - H(\{p_{ab}\}) + H(\{p_a\}), \quad (\text{S191})$$

which generalizes Eq. (S174) to arbitrary dimension  $d$ . In the following two subsections, we consider the specific cases of the depolarising and dephasing channels in arbitrary finite dimension  $d$ .

### Depolarising channel in arbitrary finite dimension

Consider a depolarising channel acting on a qudit with dimension  $d \geq 2$ . This channel can be written as

$$\mathcal{P}_{d\text{-depol}}(\rho) = (1-p)\rho + p\frac{I}{d} = A\rho A^\dagger + \sum_{i,j=0}^{d-1} A_{ij}\rho A_{ij}^\dagger, \quad (\text{S192})$$

where  $A = \sqrt{1-p}I$  and  $A_{ij} = \sqrt{p/d}|i\rangle\langle j|$ . Its Choi matrix is the isotropic state

$$\rho_{\mathcal{P}_{d\text{-depol}}} = (1-p)|\Phi\rangle\langle\Phi| + \frac{p}{d^2}I \otimes I, \quad (\text{S193})$$

satisfying the twirling condition

$$[\rho_{\mathcal{P}_{d\text{-depol}}}, U^* \otimes U] = 0, \quad (\text{S194})$$

for any qudit unitary  $U$ .

The REE of an isotropic state can be evaluated exactly by using the formula of ref. [S37]. Thus we can exactly compute the entanglement flux of the  $d$ -dimensional depolarising channel. Let us set

$$f := \frac{d^2 - 1}{d^2}p, \quad \kappa(d, p) := \log_2 d - H_2(f) - f \log_2(d-1). \quad (\text{S195})$$

Then, we may write the following expression

$$\Phi(\mathcal{P}_{d\text{-depol}}) = E_{\text{R}}(\rho_{\mathcal{P}_{d\text{-depol}}}) = \begin{cases} \kappa(d, p) & \text{if } p \leq \frac{d}{d+1}, \\ 0 & \text{otherwise.} \end{cases} \quad (\text{S196})$$

Because the depolarising channel is unital, we may use Eq. (S151) to compute its (reverse) coherent information. We specifically find

$$I_{(\text{R})\text{C}}(\mathcal{P}_{d\text{-depol}}) = \log_2 d - H_2(f) - f \log_2(d^2 - 1) = \kappa(d, p) - f \log_2(d+1). \quad (\text{S197})$$

Thus, the two-way capacity of this channel must satisfy the bounds

$$\kappa(d, p) - f \log_2(d+1) \leq \mathcal{C}(\mathcal{P}_{d\text{-depol}}) \leq \kappa(d, p), \quad (\text{S198})$$

for  $p \leq d/(d+1)$ , while zero otherwise.

### Dephasing channel in arbitrary finite dimension

Consider a generalized dephasing channel affecting a qudit in arbitrary dimension  $d \geq 2$ . This channel has Kraus representation [S38, S39]

$$\mathcal{P}_{d\text{-deph}}(\rho) = \sum_{i=0}^{d-1} P_i Z^i \rho (Z^\dagger)^i, \quad (\text{S199})$$

where  $Z$  is the generalized Pauli (phase-flip) operator defined in Eq. (S184), and  $P_i$  is the probability of  $i$  phase flips. The channel's Choi matrix is

$$\rho_{\mathcal{P}_{d\text{-deph}}} = \sum_{mjl} \frac{P_m}{d} \exp\left[\frac{2i\pi}{d}(j-l)m\right] |jj\rangle\langle ll|. \quad (\text{S200})$$

By diagonalizing, we find  $d$  non-zero eigenvalues  $\mathbf{P} := \{P_0, \dots, P_{d-1}\}$ , so that the Von Neumann entropy is given by

$$S(\rho_{\mathcal{P}_{d\text{-deph}}}) = H(\mathbf{P}). \quad (\text{S201})$$

The separable state  $\tilde{\sigma}_s$  in Eq. (S156) turns out to be diagonal in the computational basis and takes the form

$$\tilde{\sigma}_s = \sum_{i=0}^{d-1} \frac{1}{d} |ii\rangle\langle ii|. \quad (\text{S202})$$

Thus, using Eq. (S154), we find

$$\Phi(\mathcal{P}_{d\text{-deph}}) \leq S(\rho_{\mathcal{P}_{d\text{-deph}}} || \tilde{\sigma}_s) = \log_2 d - H(\mathbf{P}). \quad (\text{S203})$$

Since this channel is unital, from Eq. (S151) we have that its (reverse) coherent information is  $I_{(\text{R})\text{C}}(\mathcal{P}_{d\text{-deph}}) = \log_2 d - H(\mathbf{P})$ , so that lower and upper bounds coincide. This means that this channel is distillable and its two-way capacity is equal to

$$C(\mathcal{P}_{d\text{-deph}}) = D_2(\mathcal{P}_{d\text{-deph}}) = Q_2(\mathcal{P}_{d\text{-deph}}) = K(\mathcal{P}_{d\text{-deph}}) = \Phi(\mathcal{P}_{d\text{-deph}}) = \log_2 d - H(\mathbf{P}). \quad (\text{S204})$$

### Amplitude damping channel

The amplitude damping channel describes the process of energy dissipation through spontaneous emission in a two-level system. Its application to an input qubit state is defined by the Kraus representation

$$\mathcal{E}_{\text{damp}}(\rho) = \sum_{i=0,1} A_i \rho A_i^\dagger, \quad (\text{S205})$$

where

$$A_0 := |0\rangle\langle 0| + \sqrt{1-p}|1\rangle\langle 1|, \quad A_1 := \sqrt{p}|0\rangle\langle 1|, \quad (\text{S206})$$

and  $p$  is the probability of damping. This channel is not teleportation-covariant. In fact, because we have

$$|0\rangle\langle 0| \rightarrow |0\rangle\langle 0|, \quad |1\rangle\langle 1| \rightarrow p|0\rangle\langle 0| + (1-p)|1\rangle\langle 1|, \quad (\text{S207})$$

there is no unitary  $U$  able to realize  $U\mathcal{E}_{\text{damp}}(|0\rangle\langle 0|)U^\dagger = \mathcal{E}_{\text{damp}}(X|0\rangle\langle 0|X)$  for Pauli operator  $X$ .

The amplitude damping channel can be decomposed as

$$\mathcal{E}_{\text{damp}} = \mathcal{E}_{\text{CV} \rightarrow \text{DV}} \circ \mathcal{E}_{\eta(p)} \circ \mathcal{E}_{\text{DV} \rightarrow \text{CV}}, \quad (\text{S208})$$

where  $\mathcal{E}_{\text{DV} \rightarrow \text{CV}}$  is an identity mapping from the original qubit (e.g. a spin) to a single-rail qubit, which is the subspace of a bosonic mode spanned by the vacuum and the single photon states; then,  $\mathcal{E}_{\eta(p)}$  is a lossy channel with transmissivity  $\eta(p) := 1 - p$ ; finally,  $\mathcal{E}_{\text{CV} \rightarrow \text{DV}}$  is an identity mapping from the single-rail qubit to the original qubit. Note that the two mappings can be performed via perfect hybrid teleportation and the middle lossy channel preserves the 2-dimensional effective Hilbert space of the system.

Thanks to this decomposition, we can include  $\mathcal{E}_{\text{DV} \rightarrow \text{CV}}$  in Alice's LOs and  $\mathcal{E}_{\text{CV} \rightarrow \text{DV}}$  into Bob's LOs. The middle lossy channel  $\mathcal{E}_{\eta(p)}$  can therefore be stretched into its asymptotic Choi matrix  $\rho_{\mathcal{E}_{\eta(p)}}$ . Overall, this means that the amplitude damping channel can be stretched into the asymptotic resource state  $\sigma = \rho_{\mathcal{E}_{\eta(p)}}$  by means of an asymptotic simulation. By applying teleportation stretching, we therefore reduce the output of an adaptive protocol to the form

$$\rho_{\mathbf{ab}}^n := \rho_{\mathbf{ab}}(\mathcal{E}_{\text{damp}}^{\otimes n}) = \bar{\Lambda} \left( \rho_{\mathcal{E}_{\eta(p)}}^{\otimes n} \right), \quad (\text{S209})$$

where both  $\bar{\Lambda}$  and  $\rho_{\mathcal{E}_{\eta(p)}}$  are intended as asymptotic limits. Thus, our reduction method provides the upper bound

$$\mathcal{C}(\mathcal{E}_{\text{damp}}) \leq \Phi[\mathcal{E}_{\eta(p)}] = -\log_2 p. \quad (\text{S210})$$

We can combine the latter result with the fact that we cannot exceed the logarithm of the dimension of the input Hilbert space (see this simple ‘‘dimensionality bound’’ in the main text, in the discussion just before Proposition 5). This leads to

$$\mathcal{C}(\mathcal{E}_{\text{damp}}) \leq \min\{1, -\log_2 p\}. \quad (\text{S211})$$

The best lower bound is given by optimizing the reverse coherent information over the input states  $\rho_u = \text{diag}(1-u, u)$  for  $0 \leq u \leq 1$ . In fact, we have [S6]

$$I_{\text{RC}}(p) := \max_u I_{\text{RC}}(\mathcal{E}_{\text{damp}}, \rho_u) = \max_u \{H_2(u) - H_2(up)\}. \quad (\text{S212})$$


This is an achievable lower bound for entanglement distribution assisted by a final round of backward CCs. Note that this is strictly higher than the  $Q_1 = Q$  of the channel, which is given by [S6]

$$Q_1(\mathcal{E}_{\text{damp}}) = \max_u \{H_2[u(1-p)] - H_2(up)\}. \quad (\text{S213})$$

Thus, in total, we may write

$$I_{\text{RC}}(p) \leq \mathcal{C}(\mathcal{E}_{\text{damp}}) \leq \min\{1, -\log_2 p\}, \quad (\text{S214})$$

which is shown in Supplementary Fig. 1a. See the next section for the derivation of a tighter upper bound which is based on the squashed entanglement.

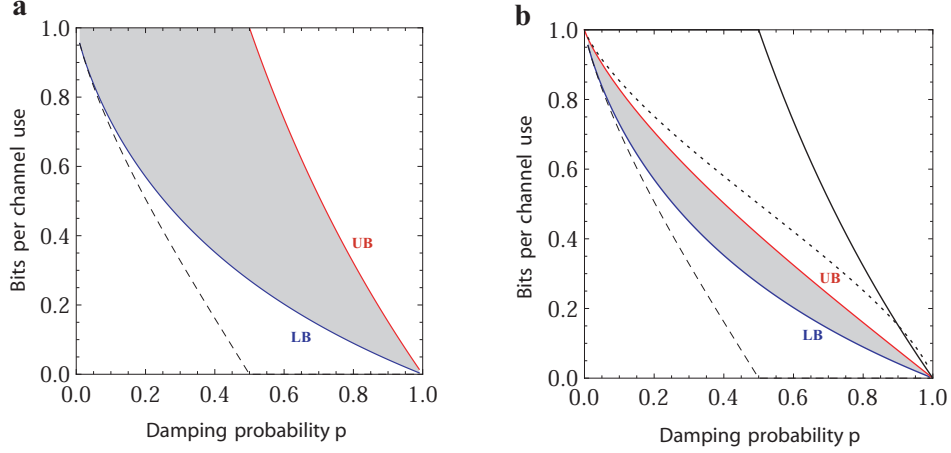

Supplementary Figure 1: Two-way capacity of the amplitude damping channel  $\mathcal{E}_{\text{damp}}$  with probability  $p$ . **(a)** The two-way capacity  $\mathcal{C}(\mathcal{E}_{\text{damp}})$  is contained in the shaded area identified by the lower bound (LB) and the upper bound (UB) of Eq. (S214). Note the separation from the unassisted quantum capacity  $Q$  of the channel (dashed). **(b)** More precisely,  $\mathcal{C}(\mathcal{E}_{\text{damp}})$  is contained in the shaded area identified by the lower bound (LB) and the upper bound (UB) of Eq. (S235). We also plot the unassisted quantum capacity  $Q$  of the channel (dashed), the REE upper bound of Eq. (S211) (solid), and the bound of ref. [S28] (dotted).

### Amplitude damping channel: Upper bound based on the squashed entanglement

An alternative upper bound for the two-way capacity of a quantum channel is its squashed entanglement, i.e., we may write [S40]

$$\mathcal{C}(\mathcal{E}) \leq E_{\text{sq}}(\mathcal{E}). \quad (\text{S215})$$

The squashed entanglement of an arbitrary channel  $\mathcal{E}$ , from system  $A$  to system  $B$ , is defined as [S40]

$$E_{\text{sq}}(\mathcal{E}) := \frac{1}{2} \max_{\rho_A} \inf_{V_{C \rightarrow EF}} [S(B|E)_\omega + S(B|F)_\omega], \quad (\text{S216})$$

where  $\rho_A$  is an arbitrary input state, and  $\omega$  is the global output state

$$\omega_{BEF} := V_{C \rightarrow EF}[U_{A \rightarrow BC}^\mathcal{E}(\rho_A)], \quad (\text{S217})$$

with  $U_{A \rightarrow BC}^\mathcal{E}$  being an isometric extension of  $\mathcal{E}$  and  $V_{C \rightarrow EF}$  being an arbitrary “squashing isometry”.

In Eq. (S216), the terms in the brackets are conditional von Neumann entropies computed over  $\omega_{BEF}$ , i.e.,

$$S(B|E)_\omega = S(BE)_\omega - S(E)_\omega, \quad S(B|F)_\omega = S(BF)_\omega - S(F)_\omega. \quad (\text{S218})$$

Then note that the most general input state reads

$$\rho_A = \begin{pmatrix} 1 - \gamma & c^* \\ c & \gamma \end{pmatrix}, \quad (\text{S219})$$

where  $\gamma \in [0, 1]$  is the population of the excited state  $|1\rangle$ , while the off-diagonal term  $|c| \leq \sqrt{(1-\gamma)\gamma}$  accounts for coherence. Thus, the maximization in Eq. (S216) is mapped into a maximization over parameters  $\gamma$  and  $c$ .

Let us compute the squashed entanglement of the amplitude damping channel  $\mathcal{E}_{\text{damp}}$ . Recall that its action is described by Eq. (S205) with Kraus operators as in Eq. (S206). In the computational basis  $\{|00\rangle, |01\rangle, |10\rangle, |11\rangle\}$ , the unitary dilation of  $\mathcal{E}_{\text{damp}}$  is therefore given by the following matrix

$$U_p = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & \sqrt{1-p} & \sqrt{p} & 0 \\ 0 & -\sqrt{p} & \sqrt{1-p} & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}, \quad (\text{S220})$$

so that we may write

$$\mathcal{E}_{\text{damp}}(\rho_A) = \text{Tr}_C[U_p(\rho_A \otimes |0\rangle\langle 0|_C)U_p^\dagger], \quad (\text{S221})$$

where  $C$  is an environmental qubit prepared in the fundamental state  $|0\rangle$ . It is clear that Eq. (S221) expresses the isometric extension of the channel, i.e., it corresponds to  $\mathcal{E}_{\text{damp}}(\rho_A) = \text{Tr}_C[U_{A \rightarrow BC}^{\text{damp}}(\rho_A)]$ .

As a squashing channel we consider another amplitude damping channel but with damping probability equal to  $1/2$ , so that its unitary dilation is  $V = U_{1/2}$ . In other words, we consider the squashing isometry  $V_{C \rightarrow EF} = [U_{C \rightarrow EF}^{\text{damp}}]_{p=1/2}$  (so that we are more precisely deriving an upper bound of the squashed entanglement of the channel). Let us derive the global output state  $\omega_{BEF}$  step-by-step.

The state of systems  $B$  and  $C$  at the output of the dilation  $U_p$  is given by

$$\rho_{BC} := U_p(\rho_A \otimes |0\rangle\langle 0|_C)U_p^\dagger = \begin{pmatrix} 1-\gamma & \sqrt{p}c^* & \sqrt{1-p}c^* & 0 \\ c\sqrt{p} & p\gamma & \sqrt{1-p}\sqrt{p}\gamma & 0 \\ c\sqrt{1-p} & \sqrt{1-p}\sqrt{p}\gamma & (1-p)\gamma & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}. \quad (\text{S222})$$

Now the system  $C$  is sent through the squashing amplitude damping channel with probability  $1/2$ . At the output of the dilation  $U_{1/2}$  we have the final output state

$$\omega_{BEF} = (I_B \otimes U_{1/2})\rho_{BC} \otimes |0\rangle\langle 0|_F (I_B \otimes U_{1/2})^\dagger = \begin{pmatrix} 1-\gamma & \frac{\sqrt{p}c^*}{\sqrt{2}} & \frac{\sqrt{p}c^*}{\sqrt{2}} & 0 & \sqrt{1-p}c^* & 0 & 0 & 0 \\ \frac{c\sqrt{p}}{\sqrt{2}} & \frac{p\gamma}{2} & \frac{p\gamma}{2} & 0 & \frac{\sqrt{(1-p)p}\gamma}{\sqrt{2}} & 0 & 0 & 0 \\ \frac{c\sqrt{p}}{\sqrt{2}} & \frac{p\gamma}{2} & \frac{p\gamma}{2} & 0 & \frac{\sqrt{(1-p)p}\gamma}{\sqrt{2}} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ c\sqrt{1-p} & \frac{\sqrt{(1-p)p}\gamma}{\sqrt{2}} & \frac{\sqrt{(1-p)p}\gamma}{\sqrt{2}} & 0 & \gamma - p\gamma & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}. \quad (\text{S223})$$

We now proceed with the calculation of the entropies in Eq. (S218), which are obtained from the eigenvalues of the reduced states  $\rho_{BE}$ ,  $\rho_{BF}$ ,  $\rho_E$  and  $\rho_F$ . We obtain

$$\rho_E = \rho_F = \begin{pmatrix} 1 - \frac{p\gamma}{2} & \frac{\sqrt{p}c^*}{\sqrt{2}} \\ \frac{c\sqrt{p}}{\sqrt{2}} & \frac{p\gamma}{2} \end{pmatrix}, \quad (\text{S224})$$

with eigenvalues

$$\lambda_{1,2} = \frac{1}{2} \left( 1 \pm \sqrt{2|c|^2 p + (p\gamma - 1)^2} \right). \quad (\text{S225})$$

The eigenvalues of  $\rho_{BE}$  and  $\rho_{BF}$  are too complicated to be reported here but it is easy to check that, exactly as for  $\lambda_{1,2}$  in previous Eq. (S225), their dependence on  $c$  is just through the modulus  $|c|$ , so that we can choose  $c$  to be real without losing generality.

Because  $c$  is real, we also have that the entropic functional  $F(\rho) = S(B|E)_\omega + S(B|F)_\omega$  computed over the input state  $\rho$  is exactly the same as that computed over the state  $Z\rho Z$ , with  $Z$  being the phase-flip Pauli operator. Using the latter observation, together with the concavity of the conditional quantum entropy, one simply has

$$F(\rho) = \frac{F(\rho) + F(Z\rho Z)}{2} \leq F\left(\frac{\rho + Z\rho Z}{2}\right) = F(\bar{\rho}), \quad (\text{S226})$$

where  $\bar{\rho}$  is diagonal. This means that we may reduce the maximization to diagonal input states ( $c = 0$ ).

As a result, we may just consider

$$\rho_E = \rho_F = \begin{pmatrix} 1 - \frac{p\gamma}{2} & 0 \\ 0 & \frac{p\gamma}{2} \end{pmatrix}, \quad (\text{S227})$$

with eigenvalues

$$\lambda_1 = \frac{p\gamma}{2}, \quad \lambda_2 = 1 - \frac{p\gamma}{2}, \quad (\text{S228})$$

and

$$\rho_{BE} = \rho_{BF} = \begin{pmatrix} \frac{1}{2}(p-2)\gamma + 1 & 0 & 0 & 0 \\ 0 & \frac{p\gamma}{2} & \frac{\sqrt{(1-p)p\gamma}}{\sqrt{2}} & 0 \\ 0 & \frac{\sqrt{(1-p)p\gamma}}{\sqrt{2}} & \gamma - p\gamma & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}, \quad (\text{S229})$$

with eigenvalues

$$\nu_1 = \frac{\gamma}{2}(2-p), \quad \nu_2 = 1 - \nu_1, \quad \nu_3 = \nu_4 = 0. \quad (\text{S230})$$

From the previous eigenvalues, we compute the conditional quantum entropies in Eq. (S218). Thus, we find that the squashed entanglement of the amplitude damping channel must satisfy the bound

$$E_{\text{sq}}(\mathcal{E}_{\text{damp}}) \leq \max_{\gamma} \{H_2(\nu_1) - H_2(\lambda_1)\}, \quad (\text{S231})$$

where  $H_2$  is the binary Shannon entropy of Eq. (S37). In particular, the function  $H_2(\nu_1) - H_2(\lambda_1)$  is concave and symmetric in  $\gamma$ , so that the maximum is reached for  $\gamma = 1/2$ , which corresponds to a maximally mixed state at the input. This reduces Eq. (S231) to the simple bound

$$E_{\text{sq}}(\mathcal{E}_{\text{damp}}) \leq H_2\left(\frac{1}{2} - \frac{p}{4}\right) - H_2\left(1 - \frac{p}{4}\right). \quad (\text{S232})$$

If we choose a squashing amplitude damping channel with generic probability of damping  $\eta$  and we repeat the calculation from the beginning we obtain the following bound for the squashed entanglement

$$E_{\text{sq}}(\mathcal{E}_{\text{damp}}) \leq \frac{1}{2} \max_{\gamma} \min_{\eta} \{H_2(\gamma - p\gamma\eta) + H_2[\gamma(1-p+p\eta)] - H_2[p\gamma(1-\eta)] - H_2(p\gamma\eta)\}. \quad (\text{S233})$$

The minimum of the function inside the curly bracket is for  $\eta = 1/2$ , so our choice of a balanced amplitude damping channel as a squashing channel is now justified. Note that the sub-optimal choice  $\eta = 0$  corresponds to use the identity as squashing channel; correspondingly, the right hand side of Eq. (S233) becomes half of the entanglement-assisted classical capacity  $C_A$  of the amplitude damping channel, i.e.,

$$E_{\text{sq}}(\mathcal{E}_{\text{damp}}) \leq \frac{1}{2} C_A(\mathcal{E}_{\text{damp}}) = \frac{1}{2} \max_{\gamma} \{H_2(\gamma) + H_2[\gamma(1-p)] - H_2(p\gamma)\}. \quad (\text{S234})$$

In conclusion, combining the lower bound of Eq. (S212) and the upper bound of Eq. (S232), we find that the two-way capacity of the amplitude damping channel is within the sandwich

$$\max_u \{H_2(u) - H_2(up)\} \leq \mathcal{C}(\mathcal{E}_{\text{damp}}) \leq H_2\left(\frac{1}{2} - \frac{p}{4}\right) - H_2\left(1 - \frac{p}{4}\right). \quad (\text{S235})$$

This is shown in Supplementary Fig. 1b, which also contains a comparison with the previous upper bound based on the REE. Note that, for high damping ( $p \simeq 1$ ), the upper bound in Eq. (S235) provides the scaling of  $\lesssim 0.793(1-p)$  bits per channel use, while Eq. (S211) provides the scaling of  $\lesssim 1.44(1-p)$  bits per channel use.

## Supplementary Note 6. MAXIMUM RATES ACHIEVABLE BY CURRENT QKD PROTOCOLS

We consider the state of the art in high-rate QKD, by analyzing the maximum rates which are achievable by current practical protocols in CVs and DVs. We assume the optimal asymptotic case of infinitely long keys, so that finite-size effects are negligible. We also assume ideal parameters. For CVs this means: Unit detector efficiency, zero excess noise, large modulation and unit reconciliation efficiency. For DVs this means: Unit detector efficiencies, zero dark count rates, zero intrinsic error, unit error correction efficiency, and no other internal loss in the devices. Note that all the following results are already present in the literature or are easily derivable from those in the literature. They are given to the reader for the sake of completeness.

### Continuous-variable protocols

- No-switching protocol [S41]. This is the practical CV protocol with the highest secret key rate. It is based on coherent states and heterodyne detection. In reverse reconciliation (RR), its maximum secret key rate over a lossy channel with transmissivity  $\eta$  is equal to

$$R_{\text{no-switch}} = \log_2 \left[ \frac{\eta}{e(1-\eta)} \right] + s \left( \frac{2-\eta}{2\eta} \right), \quad (\text{S236})$$

where  $s(\cdot)$  is the entropic function given in Eq. (S95). For high loss ( $\eta \simeq 0$ ), it scales as  $\simeq \eta/2 \ln 2$ , which is 1/2 of the secret key capacity.

- Switching protocol [S42, S43]. This was the first practical CV protocol. It is based on coherent states and homodyne detection (with switching between the two quadratures). In RR, it reaches the rate

$$R_{\text{switch}} = \frac{1}{2} \log_2 \left( \frac{1}{1-\eta} \right), \quad (\text{S237})$$

which is 1/2 of the secret key capacity. For high loss, it clearly scales as the previous protocol.

- CV measurement-device-independent (MDI) protocol [S44, S45]. This is based on coherent states sent to an untrusted relay implementing a CV Bell detection. Alice-relay channel has transmissivity  $\eta_A$  and Bob-relay channel has transmissivity  $\eta_B$ , so that the total Alice-Bob channel transmissivity is  $\eta = \eta_A \eta_B$ . In the symmetric configuration with the relay perfectly in the middle ( $\eta_A = \eta_B$ ) [S44, S46], it has maximum rate

$$R_{\text{CVMDI-sym}} = \log_2 \left[ \frac{\eta}{e^2(1-\sqrt{\eta})} \right] + s \left( \frac{1}{\sqrt{\eta}} - \frac{1}{2} \right). \quad (\text{S238})$$

In the asymmetric configuration ( $\eta_A \neq \eta_B$ ), it has maximum rate

$$R_{\text{CVMDI-asym}} = s \left( \frac{1}{\eta_B} - \frac{1}{2} \right) - s \left( \frac{2-\eta_A-\eta_B}{2|\eta_A-\eta_B|} \right) + \log_2 \left( \frac{\eta_A \eta_B}{e|\eta_A-\eta_B|} \right). \quad (\text{S239})$$

In particular, in the most asymmetric configuration, where the relay coincides with Alice ( $\eta_A = 1$ ) [S44, S47], we recover the one-way rate of Eq. (S236).

- CV two-way protocols [S48]. In the first main variant, Bob sends coherent states to Alice, who randomly displaces their amplitudes before sending them back to Bob for heterodyne detection. In RR (Bob as encoder), this protocol has maximum rate

$$R_{\text{2way-het}} = \frac{1}{2} \left\{ s \left[ \frac{2-\eta+\eta^2}{2\eta(1+\eta)} \right] + \log_2 \left[ \frac{\eta(1+\eta)}{e(1-\eta)} \right] \right\}. \quad (\text{S240})$$

In the second main variant, the protocol runs as before except that Bob's measurement is homodyne detection (with switching between the quadratures). In RR, it has maximum rate [S49]

$$R_{\text{2way-hom}} = \frac{1}{4} \log_2 \left( \frac{1+\eta^2}{1-\eta} \right). \quad (\text{S241})$$

It is easy to check that both the variants scale as  $\simeq \eta/4 \ln 2$  for high loss. Despite the fact that two-way protocols have lower key rates than one-way protocols in a lossy channel, they are more robust when excess noise is present. In this case, one considers the “security threshold” of the protocol which is defined as the maximum tolerable excess noise above which the rate becomes negative. Two-way protocols have higher security thresholds than one-way protocols [S48, S49].



### Discrete-variable protocols

Here we consider various DV protocols. As said before, we assume the optimal asymptotic case of infinitely long keys and also ideal parameters, which here means: Unit detector efficiencies, zero dark count rates, zero intrinsic error, unit error correction efficiency, and no other internal loss in the devices. Under these assumptions, we consider the ideal BB84 protocol with single photon sources [S50], the BB84 with weak coherent pulses and decoy states [S51, S52], and DV-MDI-QKD [S53, S54].

Let us consider the BB84 protocol [S50] assuming that Alice's source generates perfect single-photon pulses. The general formula of the key rate can be found in ref. [S51]. It reduces to the following expression

$$R = \bar{R} \{ [1 - H_2(Q)] - \delta(Q) \}, \quad (\text{S242})$$

where  $H_2$  is the binary Shannon entropy. In Eq. (S242),  $\delta(Q) = f H_2(Q)$  is a function accounting for the leak of information from imperfect error correction,  $f \geq 1$  is the efficiency of the classical error correction codes,  $Q$  is the total error rate (QBER), and  $\bar{R}$  is the total detection rate after quantum communication (the raw key). Under ideal conditions of zero dark-count rates, unit efficiency detectors, perfect visibility, and perfect classical error correction ( $f = 1$ ), one has  $Q = 0$  and obtains the following maximum rate  $R_{\text{BB84-1ph}} = \eta/2$ , setting the maximum rate for the current DV protocols.

A realistic photon source is a device emitting attenuated coherent pulses. In this case, the performance of the protocol depends on an additional parameter which is the intensity of the source. In the BB84 protocol, with weak coherent pulses and decoy states [S52], Alice randomly changes the intensity  $\mu$  of the pulses, and reveals publicly their values during the final classical communication. In this way Eve cannot adapt her attacks during the quantum communication. The  $\mu$ -dependent key rate of the protocol is given by [S51]

$$R^\mu = \bar{R} \left\{ Y_0^\mu + Y_1^\mu \left[ 1 - H_2 \left( \frac{Q^\mu}{Y_1^\mu} \right) \right] - \delta(Q^\mu) \right\}, \quad (\text{S243})$$

where  $Q^\mu$  is the  $\mu$ -dependent QBER, and  $Y_n^\mu = R_n^\mu/\bar{R}$  is the ratio between the  $\mu$ -dependent detection rate  $R_n^\mu$ , associated to Alice sending  $n$  photons, and the total detection rate  $\bar{R}$ . Assuming ideal conditions, one finds  $R^\mu = e^{-\mu}\eta\mu/2$ . The optimal key rate is obtained by maximizing over the intensities, i.e.,  $R = \max_\mu R^\mu$ . It is easy to check that the optimum is given by  $\mu = 1$  and the maximum key rate becomes  $R_{\text{BB84-decoy}} = \eta/(2e)$ .

Finally consider DV-MDI-QKD. The general expression of the key rate is given by the following expression [S54]

$$R = P_Z^{11} Y_Z^{11} [1 - H_2(e_Z^{11})] - G_Z \delta(Q_Z), \quad (\text{S244})$$

where  $P_Z^{11} = \mu_A \mu_B \exp[-(\mu_A + \mu_B)]$  is the joint probability that both emitters (with intensities  $\mu_A$  and  $\mu_B$ ) generate a single-photon pulse. The quantity  $Y_Z^{11}$  gives the gain in the  $Z$ -basis (one assumes  $Y_X^{11} = Y_Z^{11}$  for the  $X$ -basis), and  $e_Z^{11}$  is the error rate in the  $Z$ -basis. Finally, the quantity  $G_Z$  describes the gain and  $Q_Z$  the QBER, both in the  $Z$ -basis. Under ideal conditions, the  $\mu$ -dependent key rate becomes

$$R^{\mu_A \mu_B} = \frac{1}{2} e^{-(\mu_A + \mu_B)} \eta_A \eta_B \mu_A \mu_B, \quad (\text{S245})$$

where  $\eta_A$  and  $\eta_B$  are the transmissivities of Alice's and Bob's channels. It is easy to check that the maximum is taken for  $\mu_A = \mu_B = 1$ , providing  $R_{\text{DV-MDI}} = \eta/(2e^2)$ .

## Supplementary Note 7. OTHER ASPECTS: ENERGY CONSTRAINTS AND COST OF THE CC

### Input energy constraints

It is important to remark that the two-way capacities that we computed for Gaussian channels are bounded quantities, which do not diverge even if the maximum is achieved in the limit of infinite input energy (excluding the case of a pathological canonical form). In fact, one may consider an alphabet of input states whose mean number of photons is capped at some finite value  $\bar{N}$ . This assumption automatically defines a hard-constrained two-way capacity  $\mathcal{C}(\mathcal{E}, \bar{N})$ . For a bosonic Gaussian channel,  $\mathcal{C}(\mathcal{E}, \bar{N})$  is increasing in  $\bar{N}$  but also upper-bounded by the entanglement flux of the channel  $\Phi(\mathcal{E})$ . (In fact, note that all the procedure of teleportation stretching still applies if we enforce an input energy constraint for the adaptive protocols. For instance the constraint can be realized by a pinching map which is then absorbed in Alice's LOs). As a result, the asymptotic limit of the unconstrained capacity  $\mathcal{C}(\mathcal{E}) := \lim_{\bar{N}} \mathcal{C}(\mathcal{E}, \bar{N})$

is finite. This is clearly true for  $Q_2(\mathcal{E})$ ,  $D_2(\mathcal{E})$  and  $K(\mathcal{E})$ , but the situation would be different for the two-way classical capacity of the channel.

Another possibility is imposing a “soft constraint” on the input energy. This means to fix the average number of photons at the input to some finite value  $\bar{m}$ . In this case, it is interesting to see that our “unconstrained” upper bounds remain sufficiently tight even in the presence of such an energy constraint. The best way to show this is considering our main result for the lossy channel with arbitrary transmissivity  $\eta$ , for which we have proven that

$$Q_2(\eta) = D_2(\eta) = K(\eta) = \Phi(\eta) = -\log_2(1 - \eta). \quad (\text{S246})$$


Even if we constrain the input to  $\bar{m}$  mean photons, it is easy to show that:

- (1) The unconstrained bound  $\Phi(\eta)$  is still very tight, since it is rapidly approached from below by the reverse coherent information computed at finite energy;
- (2) The unconstrained bound  $\Phi(\eta)$  remains tighter than other constrained bounds based on the squashed entanglement, even when  $\bar{m}$  is of the order of a few photons.

Let us start with point (1). From Eq. (S109), we see that the reverse coherent information associated with a lossy channel and a TMSV state is

$$I_{\text{RC}}(\bar{m}, \eta) = h(\bar{m}) - h[(1 - \eta)\bar{m}], \quad (\text{S247})$$

which is obtained by setting  $\mu = \bar{m} + 1/2$  in Eq. (S109) and using the  $h$ -function of Eq. (S95). In Supplementary Fig. 2, we see that  $I_{\text{RC}}(\bar{m}, \eta)$  rapidly approaches the unconstrained upper bound  $\Phi(\eta)$  already for  $\bar{m} \simeq 1 - 5$  photons.

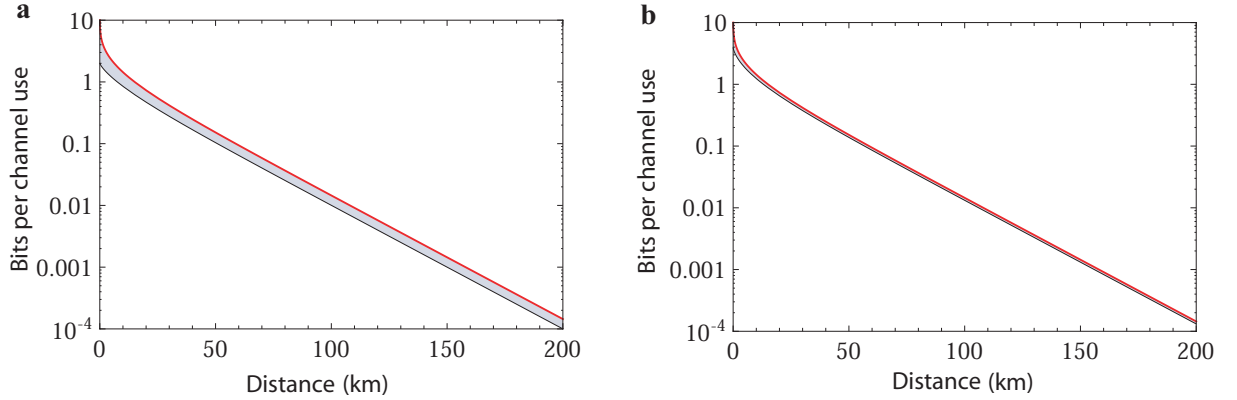

Supplementary Figure 2: Study of the tightness of our unconstrained upper bound for the lossy channel under the assumption of energy-constrained inputs. (a) We plot the unconstrained upper bound  $\Phi(\eta) = -\log_2(1 - \eta)$  (upper red line) and the constrained lower bound  $I_{\text{RC}}(\bar{m}, \eta)$  (lower black line) given by the reverse coherent information in Eq. (S247) assuming  $\bar{m} = 1$  mean photons at the input. Both are plotted in terms of the distance (km) assuming the standard loss rate of 0.2dB/km. The constrained two-way capacity of the lossy channel is in the middle dark area. (b) Same as in (a) but now with  $\bar{m} = 5$  mean photons. We see how the unconstrained upper bound is rapidly reached already with a few photons.

Let us now discuss point (2). We compare the unconstrained upper bound  $\Phi(\eta)$  with the unconstrained TGW upper bound for the lossy channel [S27]

$$K_{\text{TGW}}(\eta) = \log_2 \left( \frac{1 + \eta}{1 - \eta} \right), \quad (\text{S248})$$


and its energy-constrained version

$$K_{\text{TGW}}(\eta, \bar{m}) = h \left[ \frac{(1 + \eta)\bar{m}}{2} \right] - h \left[ \frac{(1 - \eta)\bar{m}}{2} \right]. \quad (\text{S249})$$

(Note that the latter was just a partial result [S27] used to derive the bound in Eq. (S248) for  $\bar{m} \rightarrow +\infty$ ).

In Supplementary Fig. 3 we clearly see that  $\Phi(\eta)$  not only is tighter than  $K_{\text{TGW}}(\eta)$  but also outperforms the constrained version  $K_{\text{TGW}}(\eta, \bar{m})$  for all input energies down to one mean photon. This is certainly true in the regime

of intermediate-long distances ( $> 25$  km), where DV-QKD protocols have ideal performances at one mean photon per channel use. At short distances ( $< 25$  km), energy constraints do not really have so much practical value since we can efficiently use highly-modulated CV-QKD whose number of photons is high enough to approach the asymptotic infinite-energy behavior. In general, note that CV-QKD protocols with highly-modulated Gaussian states can be used at any distance. Their performance is not limited by the input energy, but critically depends on the efficiency of the output detection scheme and the quality of the data-processing (reconciliation efficiency).

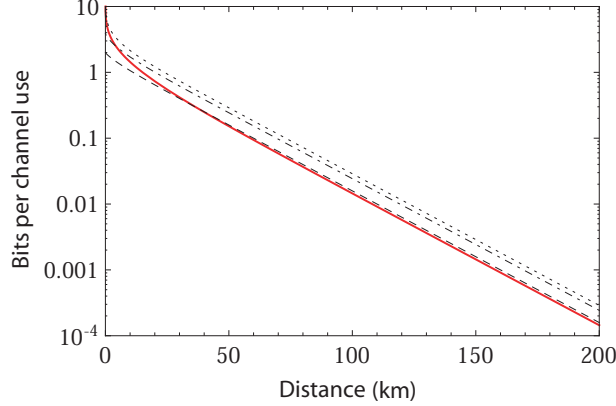

Supplementary Figure 3: Comparison with previous bounds based on the squashed entanglement. We compare the unconstrained upper bound  $\Phi(\eta) = -\log_2(1 - \eta)$  (solid red line) with the unconstrained TGW bound (dotted), and the constrained TGW bound for  $\bar{m} = 5$  mean photons (dashed-dotted) and  $\bar{m} = 1$  mean photons (dashed line). Bounds are plotted in terms of distance (km) assuming the standard loss rate of 0.2dB/km. Note that  $\Phi(\eta)$  remains the tighter upper bound even if we constrain the input energy down to one mean photon. This is true everywhere, except for short distances (where the energy constraint is not so interesting since we can efficiently use highly-modulated CV-QKD).

### Cost of classical communication

It is important to discuss the cost associated with the CCs. In fact, in order to achieve its performance, an optimal protocol will need a certain number of classical bits per channel use. Furthermore, the physical transmission of these bits is ultimately restricted by the speed of light. It is therefore essential to consider these aspects in order to translate a capacity, which is expressed in terms of target-bits (e.g. secret bits) per channel use, into a practical throughput, which is expressed in terms of target-bits per second. Consider the case of a bosonic lossy channel which is the most important for quantum optical communications.

By definition, an adaptive protocol is assisted by unlimited and two-way CCs. This is a very general formulation but it has an issue for practical applications: An adaptive protocol, which may be optimal in terms of target-bits per channel use, may have zero throughput in terms of target-bits per second, just due the fact that its implementation may require infinite rounds of feed-forward and feedback CCs in each channel use. The existence of such protocol is not excluded by the TGW bounds [S27] of Eqs. (S248) and (S249), which are non-tight and do not have control on the CCs. By contrast, this problem is completely solved by our bound.

In fact, for any distillable channel  $\mathcal{E}$  (e.g., bosonic lossy channel, quantum-limited amplifier, dephasing or erasure channel), the generic two-way capacity  $\mathcal{C}(\mathcal{E})$  is equal to  $D_1(\rho_{\mathcal{E}})$ , which is the entanglement distillable from the Choi matrix of the channel by means of one-way CCs (forward, from Alice to Bob, or backward, from Bob to Alice). This means that an optimal protocol achieving the capacity is non-adaptive and it does not involve infinite rounds of CCs, but just a single round of forward or backward CCs.

For the specific case of a bosonic lossy channel, with transmissivity  $\eta$ , we find that an optimal key-generation protocol, achieving the repeaterless bound  $K(\eta) = -\log_2(1 - \eta)$ , can be implemented by using backward CCs. In fact, as already discussed in Supplementary Note 4, an optimal key-generation protocol is the following: Alice prepares TMSV states  $\Phi_{AA'}^\mu$  sending  $A'$  to Bob; Bob heterodynes each output mode, with outcome  $Y$ , and sends final CCs back to Alice; Alice measures all her modes  $A$  by means of an optimal coherent detection. Taking the limit for large  $\mu$ , the key rate of the parties achieves the bound  $K(\eta)$ .

Because this is a Devetak-Winter rate (in reverse reconciliation), the amount of CCs required by the protocol (bits per channel use) is equal to the following conditional entropy [S8]

$$\gamma_{\text{CC}} := S(Y|A) = S(Y) - [S(A) - S(A|Y)], \quad (\text{S250})$$

where  $S(Y) = H(Y)$  is the Shannon entropy of Bob's outcomes  $Y$ , while  $S(A)$  and  $S(A|Y)$  are the von Neumann entropies of Alice's reduced state  $\rho_A$  and conditional state  $\rho_{A|Y}$ . These quantities are all easily computable for any finite value of  $\mu$ . By taking the limit for large  $\mu$ , we derive the asymptotic cost

$$\gamma_{CC}(\eta) = \frac{2\eta \log_2 \pi + (2\eta - 3) \log_2(3 - 2\eta) + 3 \log_2 3}{2\eta} \leq \log_2(3\pi e) \approx 4.68 \text{ classical bits/use}, \quad (\text{S251})$$

where the latter bound is achieved for low transmissivities (long-distances), i.e.,  $\gamma_{CC}(\eta \simeq 0) \simeq \log_2(3\pi e)$ . According to Eq. (S251), at any transmissivity  $\eta$ , Bob needs to send Alice no more than  $\log_2(3\pi e)$  classical bits per channel use.

Consider a practical scenario where the rounds of the protocol are not infinite but yet a very large number, e.g.,  $n = 10^9$ , so that the performance of such a large block of data is close to the asymptotic one. The amount of classical bits to be transmitted is linear in  $n$ , and the total cost is no larger than  $4.68 \times 10^9$  bits, i.e., less than 1 gigabyte per block. Assuming the existence of a broadband classical channel between Alice and Bob, the extra time associated with the transmission of this classical overhead can be made negligible (for instance, it may happen at the beginning of the second large block of quantum communication). Assuming that the procedures of error correction and privacy amplification are also sufficiently fast within the block, then the final achievable throughput (secret-bits per second) will only depend on the capacity  $K(\eta)$  (secret-bits per use) multiplied by the clock of the system (uses per second). Clearly, this is a simplified reasoning which does not consider other technical issues.

### Supplementary Note 8. ADVANCES IN CHANNEL SIMULATION

The idea of channel simulation was originally introduced by Bennett-DiVincenzo-Smolín-Wootters (BDSW) [S55] as a simple modification of the original teleportation protocol. Instead of performing standard teleportation by using a Bell state, one may consider an arbitrary mixed state as a resource. As a result, the effect of teleportation is not an identity map (transfer operator) but a noisy channel from the input to the output. BDSW introduced this teleportation-simulation argument to simulate DV channels that preserve the finite dimension  $d$  of the input Hilbert space  $\mathcal{H}^d$ , also known as the ‘‘tight’’ case [S56]. Let us discuss the BDSW simulation in more detail.

Consider a mixed state  $\sigma$  of two qudits,  $A$  and  $B$ , both having dimension  $d$ , i.e., their joint Hilbert space is  $\mathcal{H}_A^d \otimes \mathcal{H}_B^d$ . The ‘‘teleportation channel’’ associated with the density operator  $\sigma \in \mathcal{D}(\mathcal{H}_A^d \otimes \mathcal{H}_B^d)$  is the dimension-preserving quantum channel  $\mathcal{T}_\sigma : \mathcal{D}(\mathcal{H}^d) \rightarrow \mathcal{D}(\mathcal{H}^d)$ , which is given by teleporting an input  $d$ -dimensional qudit by using the resource state  $\sigma$ . The procedure goes as follows. Alice measures qudit  $A$  and input qudit  $a$  in a Bell detection, whose outcome  $k \in \{0, \dots, d^2 - 1\}$  is associated with a qudit Pauli unitary  $U_k$ . This detection projects Bob's qudit  $B$  onto a  $k$ -dependent state. Once the outcome  $k$  is communicated to Bob, he applies the Pauli correction  $U_k^{-1}$  to qudit  $B$  thus retrieving the final state on the output qudit  $b$ . The average over all outcomes  $k$  defines the teleportation channel  $\mathcal{T}_\sigma$  from the states of  $a$  to those of  $b$ .

BDSW [S55, Section V] also recognized that a Pauli channel  $\mathcal{E}$  (there called ‘‘generalized depolarizing channel’’) can be simulated by teleporting over its Choi matrix  $\rho_\mathcal{E}$ , so that  $\mathcal{E} = \mathcal{T}_{\rho_\mathcal{E}}$ . This particular case was later re-considered in ref. [S57] as a property of mutual reproducibility between mixed states and quantum channels. In a few words, we may store a channel  $\mathcal{E}$  into its Choi matrix  $\rho_\mathcal{E}$  (by sending half of an EPR state), and then recover the channel back by performing teleportation over  $\rho_\mathcal{E}$ . At this point, a natural question to ask is the following:

*Can we generate other DV channels (beyond Pauli) using the teleportation-simulation of BDSW [S55, Section V]?*

The answer is *no*. In fact, ref. [S58] showed that the standard teleportation protocol (based on Bell detection and Pauli corrections) performed over an arbitrary  $d \times d$  state  $\sigma$  can only simulate a quantum channel of the form

$$\mathcal{T}_\sigma(\rho) = \sum_{ab} \text{Tr}(\sigma M_{ab}) U_{(-a)b}^\dagger \rho U_{(-a)b}, \quad (\text{S252})$$

where  $M_{ab} := (U_{ab} \otimes I)^\dagger |\Phi\rangle \langle \Phi| (U_{ab} \otimes I)$  are the POVM elements of the Bell detection (with  $|\Phi\rangle$  being a  $d$ -dimensional Bell state), and  $U_{ab}$  are Pauli operators. This is clearly a  $d$ -dimensional Pauli channel. The possibility to generate other DV channels relies on a stronger modification of the original teleportation protocol, where we allow for more general quantum operations [S56, S59] and also for the possibility of varying the dimension of the Hilbert space. Recently, ref. [S60] considered a generalization of the teleportation-simulation argument for DV channels, using tools from ref. [S56] and moving the first steps into the study of teleportation covariance. Similarly, ref. [S62] moved the first steps in the simulation of single-mode Gaussian channels by employing Gaussian resources and the standard CV teleportation protocol [S63].

In our paper we provide the most general and rigorous formulation. In fact, we remove all the assumptions regarding the dimension of the quantum systems which may also vary through the channel. Thus we may tele-simulate, DV channels, CV channels and even hybrid channels, i.e., mappings between DVs and CVs. More generally, our simulation is not limited to teleportation-LOCCs (i.e., Bell detection and unitary corrections), but considers completely general LOCCs which may also be asymptotic, i.e., defined as suitable sequences. Furthermore, the simulating LOCCs may also include portions of the channels (i.e., we may decompose a channel  $\mathcal{E}$  as  $\mathcal{E}_2 \circ \tilde{\mathcal{E}} \circ \mathcal{E}_1$  and include  $\mathcal{E}_1$  and  $\mathcal{E}_2$  in the LOCCs). For all these reasons, we may simulate *any* quantum channel at any dimension. As discussed in the main text, the best case is when the simulation can be done directly on the channel’s Choi matrix. To identify this case we introduce the criterion of teleportation-covariance at any dimension, finite or infinite.

Note that ours is the most general simulation to be used in quantum/private communication, which is a setting where two remote parties can only apply LOCCs. In this regard, it is different and more precise than the channel simulation realized by using a deterministic version [S64] of a programmable quantum gate array (PQGA) [S65, S66]. This is also known as “quantum simulation” [S67] and considers the simulation of “programmable channels” by means of *joint* operations. A programmable channel is defined as a (finite-dimensional) channel  $\mathcal{E}$  that can be simulated as

$$\mathcal{E}(\rho) = \Omega(\rho \otimes \sigma_{\mathcal{E}}), \quad (\text{S253})$$

for a universal joint quantum operation  $\Omega$  and some programme state  $\sigma_{\mathcal{E}}$ . This clearly fails to catch the LOCC structure which is essential for protocols of quantum/private communication. Furthermore, this type of simulation has not been developed into an asymptotic version (via CV teleportation), which is clearly needed for the representation of bosonic channels. Finally, the universal character of the operation  $\Omega$  restricts the class of channels that can be simulated (universality implies that we cannot include portions of the channel in the operation, missing a procedure that allows one to simulate all channels). Our LOCC-simulation of channels solves all these issues.

To conclude, we give the timeline of the previous main contributions before our formulation of channel simulation:

- 1996** BDSW introduces the teleportation-simulation of Pauli channels [S55, Section V]
- 1997** Nielsen and Chuang introduce the PQGA [S65]
- 1998** Braunstein and Kimble design a realistic protocol for CV teleportation [S63]
- 1999** Horodeckis consider the BDSW simulation for channel reproducibility [S57]
- 2001** Bowen and Bose show that the BDSW simulation can only simulate Pauli channels [S58]
- 2001** Werner discusses generalized teleportation protocols [S56]
- 2008** Ji et al. use a deterministic PQGA to simulate certain DV channels in the context of quantum metrology [S64]
- 2009** Niset et al. simulate Gaussian channels in the context of one-way Gaussian entanglement distillation [S62]
- 2015** Leung and Matthews first discuss teleportation covariance in connection with the simulation of DV channels [S60]
- 2015-6** The present paper rigorously generalizes the idea of teleportation-simulation to CV systems (bosonic channels). More generally, it introduces the LOCC-simulation of any channel at any dimension (including asymptotic simulations), and identifies the criterion of teleportation-covariance at any dimension (finite or infinite).

### Supplementary Note 9. ADVANCES IN PROTOCOL REDUCTION

Teleportation stretching is a general method to reduce adaptive protocols into corresponding block protocols achieving exactly the same original task. Furthermore, it may be applied to any channel at any dimension, finite or infinite, thanks to our development of the tool of channel simulation (see Supplementary Note 8). In terms of reduction of protocols, a precursory but very restricted argument was given in BDSW [S55, Section V]. Here we discuss this preliminary argument and we point out the main and non-trivial advances brought by our general formulation.


BDSW showed how to transform a quantum communication (QC) protocol, through a finite-dimensional Pauli channel  $\mathcal{E}$ , into an entanglement distillation (ED) protocol, implemented over mixed states  $\sigma$ . The connection was established by interpreting  $\mathcal{E}$  as the teleportation channel generated by  $\sigma$  (which can be taken to be a Choi-matrix for a Pauli channel). This allowed them to prove

$$Q_1(\mathcal{E}) \leq D_1(\sigma), \quad (\text{S254})$$

for protocols based on 1-way CCs. They also realized that the argument could be applied to transform QC protocols based on 2-way CCs, so that they implicitly extended the previous result to the following inequality

$$Q_2(\mathcal{E}) \leq D_2(\sigma). \quad (\text{S255})$$

An explicit proof for Eq. (S255) is reported in Supplementary Fig. 4.

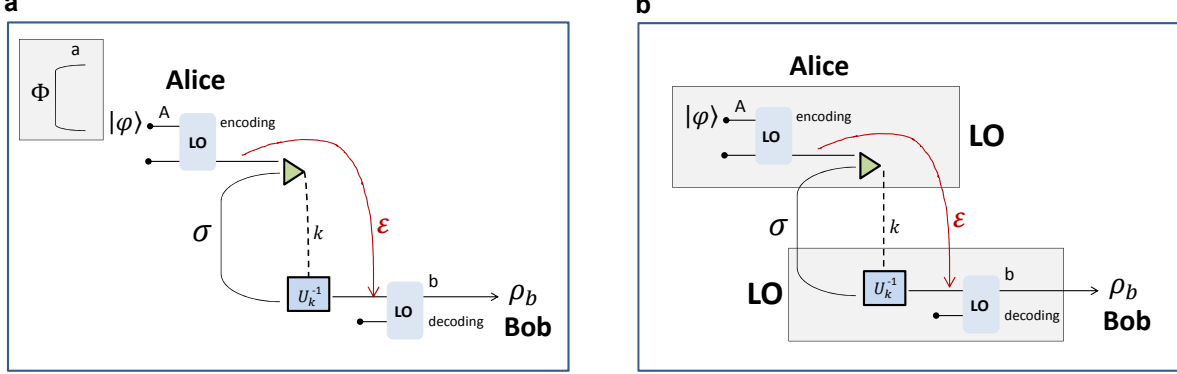

Supplementary Figure 4: Different approaches to reduce quantum communication. (a) Precursory BDSW reduction argument [S55, Section V], explicitly considered for 2-way CCs. This may be described in 3 steps. (1) Suppose that Alice and Bob implement a QC protocol for transmitting qubits from system  $A$  to system  $b$  by means of channel  $\mathcal{E}$  (red curvy line). In the upper LO, Alice applies a suitable quantum error correcting code (QECC)  $\Lambda_{\text{enc}}^{m \rightarrow n}$  to encode an  $m$ -qubit logical state  $|\varphi^{(m)}\rangle$  into an  $n$ -qubit codeword which is sent through  $\mathcal{E}^{\otimes n}$ . In the lower LO, Bob applies a decoding operation  $\Lambda_{\text{dec}}^{n \rightarrow m}$ , so that  $\Lambda_{\text{dec}}^{n \rightarrow m} \circ \mathcal{E}^{\otimes n} \circ \Lambda_{\text{enc}}^{m \rightarrow n}$  tends to the identity, and the  $n$ -use output state  $\rho_b^n$  approximates  $|\varphi^{(m)}\rangle\langle\varphi^{(m)}|$ . In the general case, we assume that the previous LOs are assisted by unlimited two-way CCs between Alice and Bob. By optimizing over all QECCs and in the limit of infinite channel uses, one defines the two-way quantum capacity  $Q_2(\mathcal{E})$ . (2) Notice that Alice can use the QECC to send part of  $m$  ebits (see the Bell state  $\Phi$  in the grey box), so that Alice and Bob share an output state  $\rho_{ab}^n$  which approximates  $\Phi^{\otimes m}$ . Assuming an asymptotic and optimal QECC, each ebit is reliably shared at the quantum capacity rate  $Q_2(\mathcal{E})$ . (3) Finally, assume that the channel  $\mathcal{E}$  can therefore be seen as a specific protocol of entanglement distillation applied to the copies of  $\sigma$ . This observation leads to  $Q_2(\mathcal{E}) \leq D_2(\sigma)$ . (b) Different re-organization of the quantum operations in teleportation stretching. When we apply teleportation stretching to a QC protocol, we directly reduce the output state as follows  $\rho_b(\mathcal{E}^{\otimes n}) = \bar{\Lambda}(\sigma^{\otimes n})$ , for a trace-preserving LOCC  $\bar{\Lambda}$  which is not connected with ED, but collapses the preparation  $|\varphi^{(m)}\rangle\langle\varphi^{(m)}|$ , the encoding/decoding maps, and all the teleportation operations. This is not asymptotic but done for any  $n$ .

Let us now compare teleportation stretching with the precursory BDSW argument. We identify a number of non-trivial differences and advances.

1. **Finite-size decomposition and connection with REE.** The BDSW reduction argument was formulated in an asymptotic fashion, i.e., for large  $n$ , which is sufficient to prove Eqs. (S254) and (S255). Teleportation stretching regards any  $n$ , and gives the finite-size decomposition of the output  $\bar{\Lambda}(\sigma^{\otimes n})$  for a trace-preserving LOCC  $\bar{\Lambda}$  collapsing all the adaptive LOCCs. The finite-size decomposition  $\bar{\Lambda}(\sigma^{\otimes n})$  could have not been exploited by BDSW, due to missing tools for the simplification of  $\bar{\Lambda}$ . This simplification is today achieved by combining teleportation stretching with the REE, which is the key insight giving applicability to the technique.
2. **Task preserving.** The BDSW reduction argument was specifically formulated to transform a QC protocol into an ED protocol, therefore changing the task of the original protocol. In teleportation stretching, we maintain the task. In the example of Supplementary Fig. 4b, we show the different re-organization of the quantum operations of the QC protocol. Teleportation stretching would directly reduce the output of the QC protocol as follows  $\rho_b(\mathcal{E}^{\otimes n}) = \bar{\Lambda}(\sigma^{\otimes n})$ , for a trace-preserving LOCC  $\bar{\Lambda}$  which is not connected with ED but collapses the preparation  $|\varphi^{(m)}\rangle\langle\varphi^{(m)}|$ , the encoding/decoding maps, and the teleportation operations.
3. **Any task.** Maintaining the task and output of the original protocol is crucial, because the reduction can now be applied to any kind of adaptive protocol, not just quantum communication, but any other task, including key generation (considered in this paper) and parameter estimation/channel discrimination (considered in ref. [S68]). This aspect is also important in order to extend the procedure to more complex scenarios, from two-way quantum communication to the presence of quantum repeaters in arbitrary network topologies [S69].

4. **Any channel and dimension.** The BDSW reduction argument was given for the restricted class of Pauli channel. Teleportation stretching is formulated for any channel at any dimension (finite or infinite). This is non-trivial because it involves the use of asymptotic simulations for fundamental channels such as the bosonic Gaussian channels and the amplitude damping channel. In general, we may write an output decomposition of the type  $\lim_{\mu} \bar{\Lambda}_{\mu}(\sigma^{\mu^{\otimes n}})$  for sequences of trace-preserving LOCCs  $\bar{\Lambda}_{\mu}$  and resource states  $\sigma^{\mu}$ .

In the literature, we can also find another type of adaptive-to-block reduction, which is based on the use of a deterministic PQGA. It is known that a PQGA can simulate an arbitrary unitary or channel in a probabilistic way [S65]. However, as discussed in Supplementary Note 8, one may also define a class of programmable channels for which the PQGA works deterministically: These are (finite-dimensional) channels  $\mathcal{E}$  that can be simulated as in Eq. (S253) for a universal generally-joint quantum operation  $\Omega$  and a programme state  $\sigma_{\mathcal{E}}$ . It is easy to check that, in a protocol, this “quantum simulation” [S67] leads to an output decomposition of the type  $Q(\sigma_{\mathcal{E}}^{\otimes n})$ , where  $Q$  is a joint quantum operation for Alice and Bob. Clearly this is not suitable for quantum/private communication, where the parties are restricted to LOCCs and, therefore, both the channel simulation and the adaptive-to-block reduction must maintain the LOCC structure of the original protocol. Furthermore, it lacks an asymptotic formulation which is needed for bosonic channels and also the flexibility to include portions of the channels in the simulating operations (these are elements introduced by our approach). It is worth to mention that the quantum simulation plays a role for the simplification of adaptive protocols in quantum metrology and channel discrimination, where the parties are close (they are indeed the same entity) and may therefore apply joint unitaries and joint measurements. See refs. [S68, S70].

#### Supplementary Note 10. ADVANCES IN BOUNDING TWO-WAY CAPACITIES

By simulating Pauli channels, BDSW showed how to reduce a quantum communication protocol into an entanglement distillation protocol. By combining this argument with an opposite implication, they were able to show that, for a Pauli channel  $\mathcal{E}$ , one may write  $Q_1(\mathcal{E}) = D_1(\rho_{\mathcal{E}})$ , which was implicitly extended to

$$Q_2(\mathcal{E}) = D_2(\rho_{\mathcal{E}}). \quad (\text{S256})$$

The latter result is not exploitable for computing the two-way quantum capacity  $Q_2$  unless one identifies simple (and tight) upper bounds for  $D_2$ . Such elements were missing in 1996 but today we can exploit powerful tools.

Using today’s knowledge, the simplest approach is to combine Eq. (S256) with the fact that  $D_2(\rho_{\mathcal{E}}) \leq K(\rho_{\mathcal{E}})$  (since an ebit is a particular type of secret-bit) and the REE upper bound on the distillable key of quantum states [S11], so that  $K(\rho_{\mathcal{E}}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}})$ . All this leads us to write

$$Q_2(\mathcal{E}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}}) \leq E_{\text{R}}(\rho_{\mathcal{E}}). \quad (\text{S257})$$

Our work shows the bound of Eq. (S257) for any finite-dimensional Choi-stretchable channel. In particular, we show that the single-letter REE bound of Eq. (S257) is tight for dephasing and erasure channels.

The next non-trivial generalization is moving from quantum to *private* communication. In this regard, the notions of private capacities [S71] and private states [S11, S12] were available well after 1996. Note that we may consider the secret-key capacity  $K$ , which is the number of secret bits which are distributed between the parties (via adaptive protocols), and the two-way private capacity  $P_2$ , which is the maximum rate at which classical messages can be securely encoded and transmitted [S71]. Because of the unlimited two-way CCs and the one-time pad, we have  $P_2 = K$ . For a finite-dimensional Choi-stretchable channel  $\mathcal{E}$ , it is easy to write the equivalence

$$P_2(\mathcal{E}) = K(\mathcal{E}) = K(\rho_{\mathcal{E}}). \quad (\text{S258})$$

The simplest way to show this is to apply teleportation stretching to reduce adaptive key-generation protocols, which leads to  $K(\mathcal{E}) = K(\rho_{\mathcal{E}})$  as in Proposition 6 of our main text. An alternate way is to show  $P_2(\mathcal{E}) = K(\rho_{\mathcal{E}})$  by means of a suitable extension of the BDSW reduction argument. In fact, for a finite-dimensional Choi-stretchable channel, we may transform a protocol of private communication [S71] through  $\mathcal{E}$  into a protocol of key-distillation [S11, S12] over the Choi matrix  $\rho_{\mathcal{E}}$ , so that  $P_2(\mathcal{E}) \leq K(\rho_{\mathcal{E}})$ . The latter bound is achievable by a protocol where Alice transmits part of Bell states, so that the parties distill a key from the output Choi matrices, which is then used to send the message via the one-time pad. Note that these extensions from quantum to private communication, and from entanglement to key distillation were not available in 1996, which is why Eq. (S258) can only be written today. At the same time, it is surprising that Eq. (S258) was never written before our work, with many of the tools being available since 2005.

Now it is very important to observe that both Eqs. (S257) and (S258) cannot be used to investigate the most important setting for quantum/private communication, which is the bosonic one. Furthermore, they miss to provide

single-letter bounds for other DV channels which involve asymptotic simulations (e.g., amplitude damping). For these important reasons, it is necessary to develop a general theory which is dimension-independent and applicable to channels of any dimension, finite or infinite. This is the main content of our Theorem 5 in the main text. This states that, for any channel  $\mathcal{E}$  stretchable into a resource state  $\sigma$  (even asymptotically), we may write

$$\mathcal{C}(\mathcal{E}) \leq E_{\text{R}}^{\infty}(\sigma) \leq E_{\text{R}}(\sigma), \quad (\text{S259})$$

where  $\mathcal{C}(\mathcal{E})$  is any among the two-way capacities  $Q_2(\mathcal{E}) = D_2(\mathcal{E}) \leq P_2(\mathcal{E}) = K(\mathcal{E})$ . In particular, for a Choi stretchable channel ( $\sigma = \rho_{\mathcal{E}}$ ), we have

$$\mathcal{C}(\mathcal{E}) \leq E_{\text{R}}^{\infty}(\rho_{\mathcal{E}}) \leq E_{\text{R}}(\rho_{\mathcal{E}}). \quad (\text{S260})$$

Recall that the proof of Eq. (S259) relies on the following steps:

- First the derivation of the REE bound  $\mathcal{C}(\mathcal{E}) \leq E_{\text{R}}^{\star}(\mathcal{E})$  for any channel  $\mathcal{E}$  at any dimension (weak converse theorem)
- Second, the adaptive-to-block reduction by teleportation stretching at any dimension, which decomposes the output of an arbitrary adaptive protocol into  $\bar{\Lambda}(\sigma^{\otimes n})$  or a suitable asymptotic form.

Because the REE is a functional which is monotonic under trace-preserving LOCCs and subadditive over tensor products, we may then derive Eq. (S259). It is clear that this procedure can be adapted to simplify any functional which is monotonic under LOCCs, which includes the Rains bound [S72, S73] and entanglement monotones.

## SUPPLEMENTARY DISCUSSION

### Schematic summary of our key findings

(1) We have designed an **adaptive-to-block reduction** method which reduces any adaptive protocol for quantum communication, entanglement distribution and key generation to the computation of a single-letter quantity. This is possible by combining the following two main ingredients:

- (1.1) **Channel's REE.** We have extended the notion of relative entropy of entanglement (REE) from states to channels. In particular, we have shown that the two-way capacity  $\mathcal{C}(\mathcal{E})$  of any channel  $\mathcal{E}$  is upperbounded by a suitably-defined REE bound  $E_{\text{R}}^{\star}(\mathcal{E})$ .
- (1.2) **LOCC simulation and teleportation stretching.** We have introduced the most general form of simulation of a quantum channel within a quantum/private communication scenario. This is based on arbitrary LOCCs (even asymptotic) and can be used to stretch an arbitrary channel  $\mathcal{E}$  into a resource state  $\sigma$ . By exploiting this simulation, we have shown how to reduce an adaptive protocol (achieving an arbitrary task) into a block form, so that its output can be decomposed as  $\bar{\Lambda}(\sigma^{\otimes n})$  for a trace-preserving LOCC  $\bar{\Lambda}$ . This is valid at any dimension (finite or infinite) and can be extended to more complex communication scenarios.

Thus, the insight of our entire reduction method is the combination of (1.1) and (1.2). ‘REE+teleportation stretching’ allows us to exploit the properties of the REE (monotonicity, subadditivity) and simplify  $E_{\text{R}}^{\star}(\mathcal{E})$  into a single-letter quantity so that we may write  $\mathcal{C}(\mathcal{E}) \leq E_{\text{R}}(\sigma)$  for any  $\sigma$ -stretchable channel. This is valid at any dimension.

(2) **Teleportation covariance.** At any dimension (finite or infinite), we have identified a simple criterion (teleportation covariance) which allows us to find those channels which are stretchable into their Choi matrices (Choi-stretchable channels). For these channels, we may write  $\mathcal{C}(\mathcal{E}) \leq E_{\text{R}}(\rho_{\mathcal{E}})$ , with the latter being the entanglement flux of the channel.

(3) **Tight bounds and two-way capacities.** We have shown that the entanglement flux is the tightest upper bound for the two-way capacities of many quantum channels at any dimension, including Pauli, erasure and bosonic Gaussian channels. In particular, we have established the two-way capacities ( $Q_2$ ,  $D_2$  and  $K$ ) of the bosonic lossy channel, the quantum-limited amplifier, and the dephasing channel in arbitrary finite dimension, plus the secret key capacity  $K$  of the erasure channel in arbitrary finite dimension. All these capacities have extremely simple formulas. For our calculations we have derived a simple formula for the relative entropy between two arbitrary Gaussian states.

(4) **Fundamental rate-loss tradeoff.** We have finally characterized the rate-loss tradeoff affecting quantum optical communications, so that the rate of repeaterless QKD is restricted to  $1.44\eta$  bits per channel use at long distances. This rate is achievable with one-way CCs and provides the maximum throughput of a point-to-point QKD protocol.



## Recent developments in quantum and private communications

### *Repeater-assisted capacities and multi-hop networks*

As also mentioned in the discussion of the main text, an important generalization of the results has been achieved in ref. [S69] with the study and determination of repeater-assisted capacities in the presence of unlimited two-way CCs. Ref. [S69] establishes the ultimate rates for transmitting quantum information, distributing entanglement and secret keys in repeater-assisted quantum communications, under the most fundamental decoherence models for both discrete and continuous variable systems, including lossy channels, quantum-limited amplifiers, dephasing and erasure channels. These capacities are derived considering the most general adaptive protocols of quantum and private communication between the two end-points of a repeater chain and, more generally, of an arbitrarily-complex quantum network or internet, where systems may be routed through single or multiple paths. Methodology combines tools from quantum information and classical network theory. Converse results are derived by introducing a tensor-product representation for a quantum communication network, where quantum channels are replaced by their Choi matrices. Exploiting this representation and suitable entanglement cuts of the network, one can upperbound the end-to-end capacities by means of the relative entropy of entanglement. Achievability of the bounds is proven by combining point-to-point quantum communications with classical network algorithms, so that optimal routing strategies are found by determining the widest path and the maximum flow in the network. In this way, ref. [S69] extends both the widest path problem and the max-flow min-cut theorem from classical to quantum communications.

### *Single-hop networks (broadcast, multiple-access and interference channels)*

Ref. [S74] investigates the maximum rates for transmitting quantum information, distributing entanglement and secret keys in a single-hop multipoint network, with the assistance of unlimited two-way classical communication among all the parties. Ref. [S74] first considers a sender directly communicating with an arbitrary number of receivers, so called quantum broadcast channel. In this case, it provides a simple analysis in the bosonic setting considering quantum broadcasting through a sequence of beamsplitters. This specific case has been also investigated in ref. [S75] where the use of our method (REE+teleportation stretching) has led to the determination of the capacity region of the lossy broadcast channel. Then, ref. [S74] also considers the multipoint setting where an arbitrary number of senders directly communicate with a single receiver, so called quantum multiple-access channel. Finally, ref. [S74] studies the general case of a quantum interference channel where an arbitrary number of senders directly communicate with an arbitrary number of receivers. Upper bounds are formulated for quantum systems of arbitrary dimension, so that they can be applied to many different physical scenarios involving multipoint quantum and private communication.

### *Improving the lower bound for the thermal-loss channel*

It remains an open problem to determine the two-way capacities of several channels, most notably that of the thermal-loss channel  $\mathcal{E}_{\text{loss}}(\eta, \bar{n})$ . Here we have shown lower- and upper-bounds in Eq. (S126). Recently, ref. [S76] has studied the specific case of the secret-key capacity  $K(\eta, \bar{n})$  of this channel investigating a region where the lower-bound given by the reverse coherent information can be beaten. This is possible by resorting to a Gaussian QKD protocol based on trusted-noise detection. However, the improved lower bound is still far from closing the gap.

### *Strong converse rates for private communication*

Let us start by recalling that the first version of our paper appeared on the arXiv in October 2015 [S77]. It originally contained the main result for the bosonic lossy channels. The other results for DV and CV channels were given in a second paper, uploaded on the arXiv in December 2015 [S78]. These two papers were later merged into a single contribution, which is the present manuscript. In late February 2016, about 4 months after our first arXiv submission, other authors (Wilde, Tomamichel and Berta) uploaded an interesting follow-up paper [S79] exploiting our methodology and showing that our weak converse bounds for Choi-stretchable channels are also strong converse bounds. In private communication, a weak converse bound means that *perfect* secret keys cannot be established at rates above the bound. A strong converse bound is a refinement according to which even *imperfect* secret keys ( $\varepsilon$ -secure with  $\varepsilon > 0$ ) cannot be shared at rates above the bound in the limit of large uses. Let us discuss this follow-up paper in more detail; we refer to its arXiv version 2 (updated in September 2016).

(1) *Methodology employed.* These authors do not adopt the terminology previously established by our work (teleportation stretching, stretchable channels etc.) but one can check that they exploit our methodology to achieve some of their most important results. In fact, following our work, these authors:

- Consider a notion of channel’s REE to bound key generation
- Exploit teleportation stretching to simplify adaptive protocols for key generation/private communication.

In a few words, they adopt our general method of adaptive-to-block reduction (REE+teleportation stretching). This is what allows them to derive computable single-letter bounds for two-way assisted private communication.

To be more precise, these authors first define “classical pre- and post-processing (CPPP) protocols”. These are *non*-adaptive protocols where the remote parties are limited to a single round of initial LOCCs and another single round of final LOCCs. In this context, they derive strong converse rates for CPPP-assisted private communication over arbitrary channels (see Theorem 13 of ref. [S79, version 2]). To demonstrate results which are valid for adaptive protocols with unlimited two-way CCs (but over suitable channels), they need to employ REE+teleportation stretching; this allows them to prove their Theorems 12 and 19 (these are strong converse versions of our Theorem 5 stated in the main text). Thanks to these theorems, they can show that our upper-bounds for dephasing, erasure and Gaussian channels are strong converse rates (see Propositions 22, 23 and Theorem 24 in ref. [S79, version 2]). In particular, the explicit computations for Gaussian channels make use of the formula for the relative entropy between Gaussian states.

(2) *Protocol reduction.* As discussed in Supplementary Note 9, our adaptive-to-block reduction (valid at any dimension) must not be naively confused with the precursory but restricted arguments of BDSW [S55, Section V]. The finite- $n$  decomposition  $\Lambda_{A^n B^n \rightarrow K_A K_B}(\omega_{AB}^{\otimes n})$  written in ref. [S79, version 2] (and its implicit extension to asymptotic simulations) represents the reduction of an adaptive *key-generation* protocol which has been demonstrated in our manuscript for the first time (not in BDSW which treats quantum communication protocols and their asymptotic  $n \rightarrow +\infty$  performance). It is also clear that our approach is different from ref. [S62], which does not consider any reduction of adaptive protocols and not even key generation (in fact, ref. [S62] specifically deals with one-way entanglement distillation, furthermore restricted to Gaussian operations). For this reason, BDSW or ref. [S62] cannot play any direct role in the proof of Theorem 24 of ref. [S79, version 2] specifically dealing with key generation over CV channels.

(3) *Notation, teleportation-simulability and covariant channels.* Some definitions and results of ref. [S79, version 2] may be greatly simplified once they are connected with our previous terminology. For instance, ref. [S79, version 2] defines “teleportation-simulable” channels based on BDSW. As explained in Supplementary Note 8, the original teleportation simulation designed by BDSW is restricted to Pauli channels [S58]. Even admitting later generalizations [S56], the definition of “teleportation-simulable” channels given in [S79, version 2] does not include: (i) CV channels and (ii) the possibility of more general LOCCs beyond teleportation (including asymptotic simulations). Thus, this definition is a very special case of what we call  $\sigma$ -stretchable channels. In particular, what ref. [S79, version 2] calls a “teleportation-simulable channel with associated [Choi-matrix] state  $\omega_{AB} = \mathcal{N}_{A' \rightarrow B}(\Phi_{AA'})$ ” corresponds to a Choi-stretchable channel (in finite dimension). Ref. [S79, version 2] also considers DV channels which are “covariant” (see Definition 1 of ref. [S79, version 2]). One can check that covariant channels must be (DV) teleportation-covariant channels (contrary to the former, the latter definition catches the important physical connection with teleportation).

Then, Proposition 2 of ref. [S79, version 2] states that covariant channels are teleportation simulable with an associated Choi-matrix state. This can be proven almost immediately by using our Proposition 2 of the main text, where we state that (\*) teleportation-covariant channels are Choi-stretchable. In fact, one may just write the following:

$$\begin{aligned} \text{Covariant channel} &\Rightarrow \text{(DV) teleportation-covariant channel} \\ &\stackrel{(*)}{\Rightarrow} \text{(DV) Choi-stretchable channel simulable by teleportation} \\ &\Rightarrow \text{Teleportation simulable with an associated Choi-matrix state.} \end{aligned}$$

Note that our Proposition 2 is more general, being valid for both DV and CV channels (and it was already present in earlier arXiv versions, but with a slightly different terminology).

## Further remarks

### *Shield system*

In earlier arXiv versions of our manuscript, we proved our weak converse theorem by exploiting an (at most) exponential growth of the dimensionality of the shield system in the private state. This corresponds to the first proof in Supplementary Note 3. This assumption on the shield size is correct and fully justified by the argument of refs. [S14, S15] which may be applied to both DV and CV channels, as presented in Lemma 11 of Supplementary Note 3 for the sake of completeness. Despite the correctness of this approach, in later arXiv versions we have also provided two additional proofs, alternative but essentially equivalent to the first one (with exactly the same conclusions). Our second proof relies on an exponential increase of the mean number of photons in the private state, while our third proof is independent from the shield system. See Supplementary Note 3 for full details. It is clear that these proofs are all *complete proofs* which do not need any confirmation or validation by follow-up works (including ref. [S79]).

### *Simulation and stretching of bosonic channels*

In March 2016, several months after our manuscript was available on the arXiv, an author uploaded a paper [S80] discussing some mathematical aspects associated with our treatment of teleportation stretching with bosonic channels. Let us briefly give some background before clarifying that these mathematical aspects were already taken into account and addressed in our arXiv version 2 of December 2015 [S81].

Teleportation stretching of bosonic channels involves the use of an asymptotic CV EPR state  $\Phi$ , defined as the limit of TMSV states  $\Phi^\mu$ . As a consequence, we have to consider the following steps: (i) We first perform an imperfect stretching of the protocol based on a finite-energy TMSV state  $\Phi^\mu$ ; (ii) we compute the relevant functionals on the finite-energy decomposition of the output; and (iii) we take the infinite-energy limit  $\mu \rightarrow +\infty$  on the final result. This is actually a standard procedure in any calculus with a delta function, which is implicitly meant to be a limit of test functions. This is also why the Vaidman teleportation protocol [S82] (based on an asymptotic delta-like CV EPR state) has to be implicitly replaced by the Braunstein-Kimble protocol [S63], where the resource state is a TMSV state  $\Phi^\mu$  and the infinite-energy limit is computed at the end on the fidelity.

Such a basic argument was already present in our earlier arXiv versions. Already in December 2015 [S81] we stated that, for bosonic channels, one needs to relax the condition of infinite energy and replace the asymptotic CV EPR state  $\Phi$  by a sequence of TMSV states  $\Phi^\mu$ , defining a sequence of Choi-approximating states  $\rho_\mathcal{E}^\mu := \mathcal{I} \otimes \mathcal{E}(\Phi^\mu)$ . The latter states are then used to compute the relative entropy of entanglement before taking the limit for large  $\mu$ ; see Eq. (9) and corresponding text of ref. [S81]. Therefore, our treatment of bosonic channels was already rigorous and correct well before ref. [S80]. However, we have also realized that these non-trivial steps were too implicit. For this reason, we have decided to fully expand the specific treatment of bosonic channels in more recent arXiv versions of our manuscript. Furthermore, in order to be completely rigorous, we have also accounted for the fact that the CV Bell detection also needs to be approximated by a suitable limit of finite-energy measurements.

---

## Supplementary References

- [S1] Holevo, A. S. Entanglement-assisted capacity of constrained channels. *Probab. Theory Appli.* **48**, 243–255 (2004).
- [S2] D’Ariano, G. M., Kretschmann, D., Schlingemann, D. & Werner, R. F. Reexamination of quantum bit commitment: The possible and the impossible. *Phys. Rev. A* **76**, 032328 (2007).
- [S3] Pirandola, S. *et al.* Advances in quantum teleportation. *Nature Photon.* **9**, 641–652 (2015).
- [S4] Schumacher, B. & Nielsen, M. A. Quantum data processing and error correction. *Phys. Rev. A* **54**, 2629–2635 (1996).
- [S5] Lloyd, S. Capacity of the noisy quantum channel. *Phys. Rev. A* **55**, 1613–1622 (1997).
- [S6] García-Patrón, R., Pirandola, S., Lloyd, S. & Shapiro, J. H. Reverse coherent information. *Phys. Rev. Lett.* **102**, 210501 (2009).
- [S7] Pirandola, S., R. García-Patrón, Braunstein, S. L. & Lloyd, L. Direct and reverse secret-key capacities of a quantum channel. *Phys. Rev. Lett.* **102**, 050503 (2009).
- [S8] Devetak, I. & Winter, A. Distillation of secret key and entanglement from quantum states. *Proc. R. Soc. A* **461**, 207–235 (2005).
- [S9] Winter, A. Tight uniform continuity bounds for quantum entropies: conditional entropy, relative entropy distance and energy constraints. *Commun. Math. Phys.* **347**, 291–313 (2016).
- [S10] Weedbrook, C. *et al.* Gaussian quantum information. *Rev. Mod. Phys.* **84**, 621–669 (2012).

- [S11] Horodecki, K., Horodecki, M., Horodecki, P. & Oppenheim, J. Secure key from bound entanglement. *Phys. Rev. Lett.* **94**, 160502 (2005).
- [S12] Horodecki, K., Horodecki, M., Horodecki, P. & Oppenheim, J. General Paradigm for Distilling Classical Key From Quantum States. *IEEE Trans. Inf. Theory* **55**, 1898–1929 (2009).
- [S13] Renes, J. & Smith, G. Noisy Processing and Distillation of Private Quantum States. *Phys. Rev. Lett.* **98**, 020502 (2007).
- [S14] Christandl, M., Ekert, A., Horodecki, M., Horodecki, P., Oppenheim, J. & Renner, R. Unifying classical and quantum key distillation. *Lecture Notes in Computer Science* **4392**, 456–478 (2007). See also preprint at <https://arxiv.org/abs/quant-ph/0608199v3> (2006).
- [S15] Christandl, M., Schuch, N. & Winter, A. Entanglement of the antisymmetric state. *Comm. Math. Phys.* **311**, 397–422 (2012).
- [S16] Vedral, V. The role of relative entropy in quantum information theory. *Rev. Mod. Phys.* **74**, 197–234 (2002).
- [S17] Donald, M. J. & Horodecki, M. Continuity of Relative Entropy of Entanglement. *Phys. Lett. A* **264**, 257–260 (1999).
- [S18] Synak-Radtke, B. & Horodecki, M. On asymptotic continuity of functions of quantum states. *J. Phys. A: Math. Gen.* **39**, L423–L437 (2006).
- [S19] Holevo, A. Quantum Systems, Channels, Information: A Mathematical Introduction (De Gruyter, Berlin-Boston, 2012).
- [S20] Alicki, R. & Fannes, M. Continuity of conditional quantum mutual information. *J. Phys. A: Math. Gen.* **37**, L55–L57 (2004).
- [S21] Arvind, B. Dutta, N. Mukunda, & R. Simon. The real symplectic groups in quantum mechanics and optics. *Pramana* **45**, 471–497 (1995).
- [S22] Banchi, L., Braunstein, S.L. & Pirandola, S. Quantum fidelity for arbitrary Gaussian states. *Phys. Rev. Lett.* **115**, 260501 (2015).
- [S23] Pirandola, S., Serafini, A. & Lloyd, S. Correlation matrices of two-mode bosonic systems. *Phys. Rev. A* **79**, 052327 (2009).
- [S24] Pirandola, S. Entanglement Reactivation in Separable Environments. *New J. Phys.* **15**, 113046 (2013).
- [S25] Pirandola, S., Spedalieri, G., Braunstein, S. L., Cerf, N. J. & Lloyd, S. Optimality of Gaussian discord. *Phys. Rev. Lett.* **113**, 140405 (2014).
- [S26] Holevo, A. S. & Werner, R. F. Evaluating capacities of bosonic Gaussian channels. *Phys. Rev. A* **63**, 032312 (2001).
- [S27] Takeoka, M., Guha, S. & Wilde, M. M. Fundamental rate-loss tradeoff for optical quantum key distribution. *Nat. Commun.* **5**, 5235 (2015).
- [S28] Goodenough, K., Elkouss, D. & Wehner, S. Assessing the performance of quantum repeaters for all phase-insensitive Gaussian bosonic channels. Preprint at <https://arxiv.org/abs/1511.08710v1> (2015).
- [S29] Pirandola, S. Quantum discord as a resource for quantum cryptography. *Sci. Rep.* **4**, 6956 (2014).
- [S30] Modi, K. *et al.* The classical-quantum boundary for correlations: Discord and related measures. *Rev. Mod. Phys.* **84**, 1655–1707 (2012).
- [S31] Adesso, G. & Datta, A. Quantum versus classical correlations in Gaussian states. *Phys. Rev. Lett.* **105**, 030501 (2010).
- [S32] Giorda, P. & Paris, M.G.A. Gaussian Quantum Discord. *Phys. Rev. Lett.* **105**, 020503 (2010).
- [S33] Wolf, M. M., Pérez-García, D. & Giedke, G. Quantum Capacities of Bosonic Channels. *Phys. Rev. Lett.* **98**, 130501 (2007).
- [S34] Bennett, C. H., DiVincenzo, D. P., & Smolin, J. A. Capacities of Quantum Erasure Channels. *Phys. Rev. Lett.* **78**, 3217–3220 (1997).
- [S35] Vedral, V., Plenio, M. B., Rippin, M. A. & Knight, P. L. Quantifying Entanglement. *Phys. Rev. Lett.* **78**, 2275–2279 (1997).
- [S36] Devetak, I. & Shor, P.W. The Capacity of a Quantum Channel for Simultaneous Transmission of Classical and Quantum Information, *Commun. Math. Phys.* **256**, 287–303 (2005).
- [S37] Synak, B., Horodecki, K & Horodecki, M. Bounds on localisable information via semidefinite programming. *J. Math. Phys.* **46**, 082107 (2005).
- [S38] Fukuda, M. & Holevo, A. S. On Weyl covariant channels. Preprint at <https://arxiv.org/abs/quant-ph/0510148> (2005).
- [S39] Pirandola, S., Mancini, S., Braunstein, S. L. & Vitali, D. Minimal qudit code for a qubit in the phase-damping channel. *Phys. Rev. A* **77**, 032309 (2008).
- [S40] Takeoka, M., Guha, S. & Wilde, M. M. The Squashed Entanglement of a Quantum Channel. *IEEE Transactions on Information Theory* **60**, 4987–4998 (2014).
- [S41] Weedbrook, C. *et al.* Quantum Cryptography Without Switching. *Phys. Rev. Lett.* **93**, 170504 (2004).
- [S42] Grosshans, F. & Grangier, P. Continuous Variable Quantum Cryptography Using Coherent States. *Phys. Rev. Lett.* **88**, 057902 (2002).
- [S43] Grosshans, F. *et al.* Quantum key distribution using gaussian-modulated coherent states. *Nature* **421**, 238–241 (2003).
- [S44] Pirandola, S. *et al.* High-rate measurement-device-independent quantum cryptography. *Nature Photon.* **9**, 397–402 (2015).
- [S45] Pirandola, S. *et al.* Reply to ‘Discrete and continuous variables for measurement-device-independent quantum cryptography’. *Nature Photon.* **9**, 773–775 (2015).
- [S46] Ottaviani, C., Spedalieri, G., Braunstein, S.L. & Pirandola, S. Continuous-variable quantum cryptography with an untrusted relay: Detailed security analysis of the symmetric configuration. *Phys. Rev. A* **91**, 022320 (2015).
- [S47] Spedalieri, G. *et al.* Quantum cryptography with an ideal local relay. *Proceedings of the SPIE Security + Defence 2015 conference on Quantum Information Science and Technology*, Toulouse, France (21–24 September 2015). Paper 9648-47. See also Preprint at <https://arxiv.org/abs/1509.01113> (2015).
- [S48] Pirandola, S., Mancini, S., Lloyd, S. & Braunstein, S. L. Continuous-variable quantum cryptography using two-way quantum communication. *Nature Phys.* **4**, 726–730 (2008).

- [S49] Ottaviani, C. & Pirandola S. General immunity and superadditivity of two-way Gaussian quantum cryptography. *Sci. Rep.* **6**, 22225 (2016).
- [S50] Bennett, C. H. & Brassard, G. Quantum cryptography: Public key distribution and coin tossing. *Proc. IEEE International Conf. on Computers, Systems, and Signal Processing*, Bangalore, pp. 175–179 (1984).
- [S51] Scarani, V. *et al.* The security of practical quantum key distribution. *Rev. Mod. Phys.* **81**, 1301–1350 (2009).
- [S52] Hwang, W.-Y. Quantum Key Distribution with High Loss: Toward Global Secure Communication. *Phys. Rev. Lett.* **91**, 057901 (2003).
- [S53] Braunstein, S. L. & Pirandola, S. Side-channel-free quantum key distribution. *Phys. Rev. Lett.* **108**, 130502 (2012).
- [S54] Lo, H.-K., Curty, M. & Qi, B. Measurement-Device-Independent Quantum Key Distribution. *Phys. Rev. Lett.* **108**, 130503 (2012).
- [S55] Bennett, C. H., DiVincenzo, D. P., Smolin, J. A. & Wootters, W. K. Mixed-state entanglement and quantum error correction. *Phys. Rev. A* **54**, 3824–3851 (1996).
- [S56] Werner, R. F. All teleportation and dense coding schemes. *J. Phys. A* **34**, 7081–7094 (2001).
- [S57] Horodecki, M., Horodecki, P. & Horodecki, R. General teleportation channel, singlet fraction, and quasidistillation. *Phys. Rev. A* **99**, 1888–1898 (1999).
- [S58] Bowen, G. & Bose, S. Teleportation as a Depolarizing Quantum Channel, Relative Entropy and Classical Capacity. *Phys. Rev. Lett.* **87**, 267901 (2001).
- [S59] Albeverio, S., Fei, S.-M. & Yang, W.-L. Optimal teleportation based on Bell measurements. *Phys. Rev. A* **66**, 012301 (2002).
- [S60] Leung, D. & Matthews, W. On the power of ppt-preserving and nonsignalling codes. *IEEE Transactions on Information Theory* **61**, 4486–4499 (2015).
- [S61] Müller-Hermes, A. Transposition in Quantum Information Theory. *Master Thesis, Technische Universität München* (2012).
- [S62] J. Niset, J., Fiurasek, J. & Cerf, N. J. No-go theorem for Gaussian quantum error correction. *Phys. Rev. Lett.* **102**, 120501 (2009).
- [S63] Braunstein, S. L. & Kimble, H. J. Teleportation of continuous quantum variables. *Phys. Rev. Lett.* **80**, 869–872 (1998).
- [S64] Ji, Z., Wang, G., Duan, R., Feng, Y. & Ying, M. Parameter estimation of quantum channels. *IEEE Trans. Inform. Theory* **54**, 5172–5185 (2008).
- [S65] Nielsen, M. A. & Chuang, I. L. Programmable Quantum Gate Arrays. *Phys. Rev. Lett.* **79**, 321–324 (1997).
- [S66] Ishizaka, S. & Hiroshima, T. Asymptotic Teleportation Scheme as a Universal Programmable Quantum Processor. *Phys. Rev. Lett.* **101**, 240501 (2008).
- [S67] Kolodynski J. & Demkowicz-Dobrzanski, R. Efficient tools for quantum metrology with uncorrelated noise. *New J. Phys.* **15**, 073043 (2013).
- [S68] Pirandola, S. & Lupo, C. Ultimate precision of adaptive noise estimation. Preprint at <https://arxiv.org/abs/1609.02160> (2016).
- [S69] Pirandola, S. Capacities of repeater-assisted quantum communications. Preprint at <https://arxiv.org/abs/1601.00966> (2016).
- [S70] Demkowicz-Dobrzanski, R. & Maccone, L. Using Entanglement Against Noise in Quantum Metrology. *Phys. Rev. Lett.* **113**, 250801 (2014).
- [S71] Devetak, I. The private classical capacity and quantum capacity of a quantum channel. *IEEE Trans. Info. Theory* **51**, 44–55 (2005).
- [S72] Rains, E. M. A semidefinite program for distillable entanglement. *IEEE Trans. Info. Theory* **47**, 2921–2933 (2001).
- [S73] Audenaert, K., De Moor, B., Vollbrecht, K. G. H. & Werner, R. F. Asymptotic relative entropy of entanglement for orthogonally invariant states. *Physical Review A* **66**, 032310 (2002).
- [S74] Laurenza, R. & Pirandola, S. General bounds for sender-receiver capacities in multipoint quantum communications. Preprint at <https://arxiv.org/abs/1603.07262> (2016).
- [S75] Takeoka, M., Seshadreesan, K. P. & Wilde, M. M. Unconstrained distillation capacities of a pure-loss bosonic broadcast channel. Preprint at <https://arxiv.org/abs/1601.05563v3> (2016).
- [S76] Ottaviani, C., Laurenza, R., Cope, T. P. W., Spedalieri, G., Braunstein, S. L. & Pirandola, S. Secret key capacity of the thermal-loss channel: Improving the lower bound. *Proc. SPIE 9996, Quantum Information Science and Technology II, 999609* (2016); doi:10.1117/12.2244899. Preprint at <https://arxiv.org/abs/1609.02169> (2016).
- [S77] Pirandola, S., Laurenza, R., Ottaviani, C., Banchi, L. The Ultimate Rate of Quantum Cryptography. Preprint at <https://arxiv.org/abs/1510.08863v1> (Version 1, 29 October 2015).
- [S78] Pirandola, S. & Laurenza, R. General Benchmarks for Quantum Repeaters. Preprint at <https://arxiv.org/abs/1512.04945v1> (Version 1, 15 December 2015).
- [S79] Wilde, M. M., Tomamichel, M. & Berta, M. Converse bounds for private communication over quantum channels. Preprint at <https://arxiv.org/abs/1602.08898v2> (Version 1, 29 Feb 2016; Version 2, 7 Sep 2016).
- [S80] Namiki, R. Teleportation stretching for lossy Gaussian channels. Preprint at <https://arxiv.org/abs/1603.05292v1> (2016).
- [S81] Pirandola, S., Laurenza, R., Ottaviani, C., Banchi, L. The Ultimate Rate of Quantum Communications. Preprint at <https://arxiv.org/abs/1510.08863v2> (Version 2, 8 December 2015).
- [S82] Vaidman, L. Teleportation of quantum states. *Phys. Rev. A* **49**, 1473–1476 (1994).