

Structural Identifiability Analysis of Fractional Order Models with Applications in Battery Systems

S.M.Mahdi Alavi, Adam Mahdi, Pierre E. Jacob, Stephen J. Payne, and David A. Howey

Abstract—This paper presents a method for structural identifiability analysis of fractional order systems by using the coefficient mapping concept to determine whether the model parameters can uniquely be identified from input-output data. The proposed method is applicable to general non-commensurate fractional order models. Examples are chosen from battery fractional order equivalent circuit models (FO-ECMs). The battery FO-ECM consists of a series of parallel resistors and constant phase elements (CPEs) with fractional derivatives appearing in the CPEs. The FO-ECM is non-commensurate if more than one CPE is considered in the model. Currently, estimation of battery FO-ECMs is performed mainly by fitting in the frequency domain, requiring costly electrochemical impedance spectroscopy equipment. This paper aims to analyse the structural identifiability of battery FO-ECMs directly in the time domain. It is shown that FO-ECMs with finite numbers of CPEs are structurally identifiable. In particular, the FO-ECM with a single CPE is structurally globally identifiable.

Index Terms—System identification, Identifiability, Fractional order systems, Batteries.

I. INTRODUCTION

Parameter estimation is very important for studying and understanding of systems [1]–[6]. However, because of the specific model structure or inadequate data it might not be possible to infer some (or all) of the model parameters. *Structural identifiability* analysis is a data-free concept, which determines

S.M.M. Alavi was with the Energy and Power Group, Department of Engineering Science, University of Oxford. He is now with the Brain Stimulation Engineering Laboratory, Department of Psychiatry & Behavioral Sciences, Duke University, Durham, NC 27710, USA. Email: mahdi.alavi@duke.edu

A. Mahdi and S.J. Payne are with the Institute of Biomedical Engineering, Department of Engineering Science, University of Oxford, Old Road Campus Research Building, Oxford, OX3 7DQ, United Kingdom. Emails: {adam.mahdi, stephen.payne}@eng.ox.ac.uk

P.E. Jacob is with the Department of Statistics, Harvard University, Science Center 7th floor, 1 Oxford Street, Cambridge, MA 02138-2901, USA. Email: pierre.jacob.work@gmail.com

D.A. Howey is with the Energy and Power Group, Department of Engineering Science, University of Oxford, Parks Road, Oxford, OX1 3PJ, United Kingdom. Email: david.howey@eng.ox.ac.uk

whether the model parameters can be uniquely estimated from rich input-output data [7]. *Practical identifiability*, on the other hand, takes into account the practical aspects of the problem that come with real data including noise, bias and signal quality such as the shape of excitation, its magnitude, length, frequency ranges, etc, [8]. Thus, structural identifiability analysis is a prerequisite for practical identifiability.

Since the 1970's, several analytical techniques have been proposed for studying structural identifiability analysis based on Taylor series expansion [9], [10], similarity transformations [11]–[17], differential algebra [18], [19], and Laplace transforms (transfer functions) [7], [20], [21]. However, almost all of the proposed techniques deal with ordinary differential equations with integer orders. To the best of our knowledge, only reference [21] studies the identifiability of single-input single-output (SISO) fractional commensurate-order systems in the frequency domain. In the fractional commensurate-order systems, all the orders of derivation are integer multiples of a base order, [22]–[25]. It was shown that SISO fractional commensurate-order systems are poorly identifiable for small values of the base order, [21].

This paper presents an alternative methodology to determine the structural identifiability of SISO fractional-order (FO) systems. The method is applicable to both commensurate and non-commensurate models based in time domain. This is an advantage since typically, in real world applications, the data is given in the time domain.

Recently, there has been a significant interest in identifiability analysis of battery models. References [26]–[29] study the identifiability of electrochemical models and show that some parameters are not practically identifiable. In [30]–[32] and [33], the identifiability of conventional equivalent circuit models (ECMs) is addressed. Conventional ECMs only include resistors and standard capacitors based on the Randles circuit [34]. Their dynamics can be expressed by ordinary differential equations with integer orders. A comprehensive survey of the conventional ECMs with integer orders has been given in [35].

However, these may not accurately reflect the dynamic behaviour of real battery systems. In order to address these issues, constant phase elements (CPEs) with fractional-order dynamics are incorporated into ECMs, which results in fractional-order ECMs (FO-ECMs), [36]. Compared to conventional ECMs, FO-ECMs represent distributed electrode processes more accurately, [37] and may give more insight into battery performance, which could be useful for monitoring and diagnostic purposes [38], [39].

The usefulness of a FO-ECM highly depends on the ability to estimate its parameters. Currently, this is done by fitting the model to frequency domain impedance spectra that are obtained through Electrochemical Impedance Spectroscopy (EIS), [38], [40], [41]. However, parameter estimation of FO-ECMs directly from time-domain data is very appealing since conversion to the frequency domain may introduce bias in the estimation [42].

In this paper, a structural identifiability analysis method based on the concept of coefficient map is employed, which is applicable to general non-commensurate fractional order models. The method is applied to study structural identifiability of battery FO-ECMs, which are non-commensurate if more than one CPE is considered in the model. It is shown that the structural identifiability of battery FO-ECMs depends on the solution of a set of nonlinear coupled equations. The number of equations to be solved equals the number of CPEs. It is shown that FO-ECMs with finite numbers of CPEs are structurally identifiable and the FO-ECM with a single CPE is structurally globally identifiable.

II. MODEL STRUCTURE

In this section discrete-time state-space and transfer function models of fractional-order systems are derived.

A state-space representation of a SISO FO system is given by

$$\begin{aligned} \frac{d^\alpha x(t)}{dt^\alpha} &= \bar{A}(\beta) x(t) + \bar{B}(\beta) u(t) \\ y(t) &= M(\beta) x(t) + D(\beta) u(t) \end{aligned} \quad (1)$$

where $x(t) \in \mathbb{R}^n$ is the state vector; $u(t) \in \mathbb{R}$ and $y(t) \in \mathbb{R}$ are input and output signals, respectively; $\bar{A}(\beta) \in \mathbb{R}^{n \times n}$, $\bar{B}(\beta) \in \mathbb{R}^{n \times 1}$, $M(\beta) \in \mathbb{R}^{1 \times n}$ and $D(\beta) \in \mathbb{R}$ are system matrices which depend on the parameter vector β to be identified. Moreover,

$$\frac{d^\alpha x(t)}{dt^\alpha} = \left[\frac{d^{\alpha_1} x_1(t)}{dt^{\alpha_1}}, \dots, \frac{d^{\alpha_n} x_n(t)}{dt^{\alpha_n}} \right]^\top \quad (2)$$

is the vector of fractional-order derivatives with the unknown fractional-orders $\alpha_i \in (0, 1)$, $i = 1, \dots, n$.

Definition 1: A FO system is said to be commensurate if $i \in \{1, \dots, n\}$, $\exists \rho \in \mathbb{N}$, such that $\alpha_i = \rho \alpha$, where $\alpha \in \mathbb{R}$; otherwise it is said to be non-commensurate, [22]–[25]. \square

This paper considers general SISO non-commensurate FO systems.

A discrete-time representation of the fractional differentiation operator $d^\alpha x(t)/dt^\alpha$ is often given by the Grünwald-Letnikov approximation [22]

$$\begin{aligned} \text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\} \frac{d^\alpha x(kT_s)}{dt^\alpha} &= \\ \sum_{j=0}^{k+1} (-1)^j \text{diag} \left\{ \binom{\alpha_1}{j}, \dots, \binom{\alpha_n}{j} \right\} x((k+1-j)T_s), \end{aligned} \quad (3)$$

where T_s is the sample time, $k \in \mathbb{Z}^+$ is the time index, $\text{diag}\{\cdot\}$ denotes the diagonal matrix and $\binom{\alpha_i}{j}$ is the binomial coefficient given by

$$\binom{\alpha_i}{j} = \frac{\Gamma(\alpha_i + 1)}{\Gamma(j+1)\Gamma(\alpha_i + 1 - j)}, \quad (4)$$

where, $\Gamma(\cdot)$ denotes the gamma function

$$\Gamma(\alpha_i) = \int_0^\infty z^{\alpha_i-1} e^{-z} dz, \text{ for } \alpha_i \in \mathbb{C} \text{ with } \Re(\alpha_i) > 0.$$

For the sake of simplicity, T_s is omitted from the argument and $x(k+1-j)$ is written as x_{k+1-j} hereafter. The substitution of the Grünwald-Letnikov approximation into equation (1) gives

$$\begin{aligned} \text{diag}\{T_s^{-\alpha_1}, \dots, T_s^{-\alpha_n}\} \times \\ \sum_{j=0}^{k+1} \left((-1)^j \text{diag} \left\{ \binom{\alpha_1}{j}, \dots, \binom{\alpha_n}{j} \right\} x_{k+1-j} \right) \\ = \bar{A}(\beta) x_k + \bar{B}(\beta) u_k. \end{aligned} \quad (5)$$

Multiplying (5) by $\text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\}$ and extracting x_{k+1} from the summation gives

$$\begin{aligned} x_{k+1} &= \\ (\text{diag}\{\alpha_1, \dots, \alpha_n\} + \text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\} \bar{A}(\beta)) x_k + \\ \text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\} \bar{B}(\beta) u_k - \\ \sum_{j=2}^{k+1} \left((-1)^j \text{diag} \left\{ \binom{\alpha_1}{j}, \dots, \binom{\alpha_n}{j} \right\} x_{k+1-j} \right). \end{aligned} \quad (6)$$

Thus a discrete-time state-space model, in com-

compact form, can be written as

$$\begin{aligned} x_{k+1} &= \sum_{j=0}^k A_j(\beta, \alpha) x_{k-j} + B(\beta, \alpha) u_k \\ y_k &= M(\beta) x_k + D(\beta) u_k. \end{aligned} \quad (7)$$

with

$$\begin{aligned} \alpha &= [\alpha_1 \ \cdots \ \alpha_n] \\ A_0 &= \text{diag}\{\alpha_1, \dots, \alpha_n\} + \\ &\quad \text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\} \bar{A}(\beta) \\ A_j &= -(-1)^{j+1} \text{diag} \left\{ \binom{\alpha_1}{j+1}, \dots, \binom{\alpha_n}{j+1} \right\}, \quad (8) \\ &\quad \text{for } 1 \leq j \\ B &= \text{diag}\{T_s^{\alpha_1}, \dots, T_s^{\alpha_n}\} \bar{B}(\beta). \end{aligned}$$

Finally, the transfer function model structure parametrised by the unknown parameters

$$\theta = [\beta \ \alpha] \quad (9)$$

is given by

$$H(z, \theta) = M(\theta) \left(zI - \sum_{j=0}^T z^{-j} A_j(\theta) \right)^{-1} B(\theta) + D(\theta), \quad (10)$$

where I is the $n \times n$ identity matrix and T represents the data length, i.e., the number of samples.

Remark 1: The state-space model (7) implies that x_{k+1} depends on all the past states, x_0 up to x_k . This means that FO systems are non-Markov¹. From the transfer function perspective this means that the order of a FO system's transfer function equals the data length (equation (10)). These are the main distinguishing features of FO systems which make their analysis and identification challenging. \square

III. STRUCTURAL IDENTIFIABILITY

The goal of this section is to introduce rigorously the concept of structural identifiability, which will be applied in the following section to FO-ECMs.

Definition 2: ([4]) Consider a model \mathcal{M} with the transfer function $H(z, \theta)$, parametrised by θ , where θ belongs to an open subset $\mathcal{D}_{\theta_{\mathcal{M}}} \subset \mathbb{R}^q$, and consider the equation

$$H(z, \theta) = H(z, \theta^*), \quad \text{for almost all } z, \quad (11)$$

where $\theta, \theta^* \in \mathcal{D}_{\theta_{\mathcal{M}}}$. Then, model \mathcal{M} is said to be

¹In Markov system, x_{k+1} can be written as functions of x_k and inputs.

- *globally identifiable* if (11) has a unique solution in $\mathcal{D}_{\theta_{\mathcal{M}}}$,
- *identifiable* if (11) has a finite number of solutions in $\mathcal{D}_{\theta_{\mathcal{M}}}$,
- *unidentifiable* if (11) has an infinite number of solutions in $\mathcal{D}_{\theta_{\mathcal{M}}}$.

\square

Instead of using the above definition of structural identifiability, which appears to be a standard definition in the engineering literature, it might be more convenient to use the concept of coefficient map, which will now be reviewed.

Definition 3: Consider the following monic transfer function²

$$H(z, \theta) = \frac{f_{n_f}(\theta) z^{n_f} + f_{n_f-1}(\theta) z^{n_f-1} + \dots + f_0(\theta)}{z^{n_g} + g_{n_g-1}(\theta) z^{n_g-1} + \dots + g_0(\theta)} \quad (12)$$

where $\theta = [\theta_1 \ \cdots \ \theta_q] \in \mathcal{D}_{\theta_{\mathcal{M}}}$ is the parameter vector, and $\mathcal{D}_{\theta_{\mathcal{M}}} \subset \mathbb{R}^q$ is an open set. The *coefficient map* $\mathcal{C}_{\mathcal{M}} : \mathcal{D}_{\theta_{\mathcal{M}}} \rightarrow \mathbb{R}^{n_f+n_g+1}$ is defined as

$$\mathcal{C}_{\mathcal{M}}(\theta) = (f_{n_f}(\theta), \dots, f_0(\theta), g_{n_g-1}(\theta), \dots, g_0(\theta)). \quad (13)$$

\square

The following lemma illustrates the applicability of the coefficient map for studying the structural identifiability.

Lemma 1 ([13], [14]): Consider a model \mathcal{M} with the transfer function (12) and the associated coefficient map (13). Then model \mathcal{M} is

- *globally identifiable* if the coefficient map $\mathcal{C}_{\mathcal{M}}$ is one-to-one,
- *identifiable* if the coefficient map $\mathcal{C}_{\mathcal{M}}$ is many-to-one,
- *unidentifiable* if the coefficient map $\mathcal{C}_{\mathcal{M}}$ is infinitely many-to-one.

\square

An important special case of (12) is when the coefficients of the transfer function form the parameter vector, in which case the identifiability is given by the following lemma.

Lemma 2: Consider the following transfer function

$$H(z, \theta) = \frac{f_{n_f} z^{n_f} + f_{n_f-1} z^{n_f-1} + \dots + f_0}{z^{n_g} + g_{n_g-1} z^{n_g-1} + \dots + g_0}, \quad (14)$$

where the parameter vector only consists of the coefficients of the numerator and denominator, i.e. $\theta = [f_{n_f}, \dots, f_0, g_{n_g-1}, \dots, g_0]^T$. Then, the model

²The coefficient of the highest order term in the denominator is 1.

structure (14) is globally identifiable, see Section 4.6 of [4]. \square

The above lemma is only applicable if the parameter vector is formed by the coefficients of the transfer function. If the coefficients of the transfer function are themselves functions of some parameter vector θ , then the concept of reparametrisation can be used to study the identifiability of the model.

Definition 4: Consider a model structure \mathcal{M} with the parameter vector $\theta_{\mathcal{M}}$ belonging to the open subset $\mathcal{D}_{\theta_{\mathcal{M}}} \subset \mathbb{R}^q$. A *reparametrisation* of the model structure \mathcal{M} with the coefficient map $\mathcal{C}_{\mathcal{M}}$ is a map $\mathcal{R} : \mathcal{D}_{\theta_{\mathcal{M}}} \rightarrow \mathbb{R}^p$ such that

$$Im(\mathcal{C}_{\mathcal{M}} \circ \mathcal{R}) = Im(\mathcal{C}_{\mathcal{M}}), \quad (15)$$

where Im denotes the image of the map, and ‘ \circ ’ denotes composition. \square

Based on the above definitions and lemmas, the process of determining the structural identifiability of a model \mathcal{M} can be divided into three general steps:

- 1: Compute the transfer function of model \mathcal{M} .
- 2: Determine the corresponding coefficient map $\mathcal{C}_{\mathcal{M}}$.
- 3: If $\mathcal{C}_{\mathcal{M}}$ is one-to-one then model \mathcal{M} is globally identifiable; if $\mathcal{C}_{\mathcal{M}}$ is finitely many-to-one then \mathcal{M} is identifiable; finally if $\mathcal{C}_{\mathcal{M}}$ is infinitely many-to-one then model \mathcal{M} is unidentifiable.

IV. STRUCTURAL IDENTIFIABILITY IN BATTERY SYSTEMS

In this section, the proposed identifiability analysis method is applied to battery models and results are discussed. First, a simple integer-order derivative example is considered in order to facilitate the reading of the more involved fractional-order case.

A. Integer-order models

Consider the electric circuit as shown in Figure 1. This circuit was proposed by Randles in 1947 [34] for modeling the kinetics of rapid electrode reactions. Since then, the model has become the basis for studying various electrochemical energy storage systems such as batteries, fuel cells and supercapacitors, [43]. The resistor R_{∞} in this circuit models the battery ohmic resistance. The resistor R_1 and the capacitor C_1 denote diffusion processes or the battery charge transfer resistance (CTR) and double layer (DLC) capacitance, respectively.

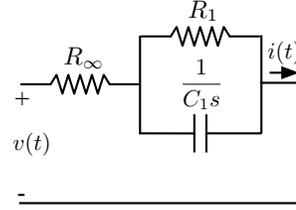


Fig. 1. The Randles circuit with standard capacitor.

Proposition 1: The Randles model given in Figure 1 with the parameter vector $\theta = [R_{\infty}, R_1, C_1]$ is structurally globally identifiable.

The above proposition will be shown in three steps.

Step 1: By Kirchhoff’s laws, it is simple to show that a transfer function of the circuit, parameterised by θ is

$$H(z, \theta) = \frac{f_1(\theta)z + f_0(\theta)}{z + g_0(\theta)}, \quad (16)$$

where

$$\begin{aligned} f_1(\theta) &= R_{\infty} \\ f_0(\theta) &= -R_{\infty} \left(1 - \frac{T_s}{R_1 C_1}\right) + \frac{T_s}{C_1} \\ g_0(\theta) &= -\left(1 - \frac{T_s}{R_1 C_1}\right). \end{aligned} \quad (17)$$

Step 2: The coefficient map associated with the model is given by

$$\mathcal{C} : \theta \rightarrow (f_1(\theta), f_0(\theta), g_0(\theta)).$$

Step 3: For global identifiability it is sufficient to show that the coefficient map is one-to-one. Since the above function is invertible with the inverse given by

$$\mathcal{C}^{-1} : (f_1, f_0, g_0) \rightarrow \left(f_1, \frac{T_s}{C_1(1 + g_0)}, \frac{T_s}{f_0 - f_1 g_0}\right),$$

the model (16) is globally identifiable. \square

More details about the structural and practical identifiability of the Randles circuit and its generalised topology are given in [43].

B. Fractional-order models

In this section, we study the identifiability of FO-ECMs directly from time-domain data. A general impedance schematic of the EIS FO-ECM is shown in Figure 2. There are two main differences between the EIS FO-ECM Figure 2 and the Randles circuit Figure 1. In the EIS FO-ECM, more than one parallel pair is seen. Each parallel pair is employed to model

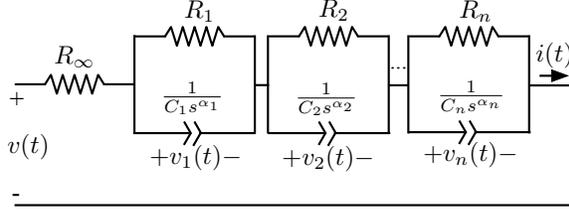


Fig. 2. The general battery electrochemical impedance spectroscopy model.

the battery processes over a certain frequency range. The Randles model can also be developed by adding more parallel pairs as discussed in [43]. The number of parallel pairs depends on the required accuracy for the frequency domain fitting of impedance spectra.

The second and main difference is that the impedance of the capacitor in the Randles circuit is given by the integer derivative, while in the FO-ECMs fractional derivatives are applied. As mentioned in Section I, these elements are referred to as constant phase elements (CPEs), [36]. CPEs model diffusion processes (or CTRs/DLCs) more accurately as shown in [42]. The impedance of the i -th CPE is given by:

$$Z_{CPE_i}(s) = \frac{1}{C_i s^{\alpha_i}}, \quad (18)$$

where C_i is a constant, s is the Laplace operator and α_i ($0 > \alpha_i > 1$) is the exponent value. The dimension of C_i is $\text{Fcm}^{-2} s^{\alpha_i-1}$ [44]. In low frequency ranges the impedance frequency response may show constant phase behaviour such that the associated parallel resistor can be considered as an open circuit. This is referred to as Warburg term in the literature [37].

It should be noted that there are techniques that approximate CPEs with ideal capacitors [45], or by a series connection of numerous R-C pairs, [46]–[48].

The parameter vector associated with Figure 2 is defined as follows:

$$\theta = [R_\infty, R_1, \dots, R_n, C_1, \dots, C_n, \alpha_1, \dots, \alpha_n]. \quad (19)$$

By defining the voltage across the CPEs as the state variables,

$$x \triangleq [v_1 \quad \dots \quad v_n]^T, \quad (20)$$

and by Kirchoff's laws, it is easy to show that A_j , B , M and D in the state-space model (7) are given by:

$$\begin{aligned} A_j(\theta) &= \text{diag}\{a_{1,j}(\theta), \dots, a_{n,j}(\theta)\} \\ B(\theta) &= [b_1(\theta) \quad \dots \quad b_n(\theta)]^T \\ M(\theta) &= [m_1 \quad \dots \quad m_n] \\ D(\theta) &= d(\theta), \end{aligned} \quad (21)$$

with

$$\begin{aligned} a_{i,0}(\theta) &= \alpha_i - \frac{T_s^{\alpha_i}}{R_i C_i} \\ a_{i,j}(\theta) &= -(-1)^{j+1} \binom{\alpha_i}{j+1} \\ b_i(\theta) &= \frac{T_s^{\alpha_i}}{C_i} \\ m_i &= 1 \\ d(\theta) &= R_\infty \end{aligned} \quad (22)$$

for $i = 1, \dots, n$ and $j = 1, 2, \dots, T$,

where T is the data length.

By using (10), a transfer function model structure of the circuit FO-ECM of Figure 2 is given by:

$$H(z, \theta) = d(\theta) + \sum_{i=1}^n \frac{m_i b_i(\theta) z^T}{z^{T+1} - \sum_{j=0}^T a_{i,j}(\theta) z^{T-j}}. \quad (23)$$

The structural identifiability of FO-ECMs with respectively one and two parallel R-CPE pairs is studied in the following sub-sections. The results provide useful insight into the general case with n CPEs. From a practical perspective, the examples under consideration in the rest of the section are sufficient to represent the basic dynamic behaviour of a large number of electrochemical systems, [42], [49].

1) $R_\infty - R_1 || \frac{1}{C_1 s^{\alpha_1}}$ circuit: Consider the EIS FO-ECM with a single parallel R-CPE in series with an ohmic resistor as shown in Figure 3.

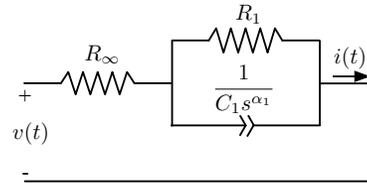


Fig. 3. The $R_\infty - R_1 || \frac{1}{C_1 s^{\alpha_1}}$ circuit.

Proposition 2: The FO-ECM shown in Figure 3 with the parameter vector $\theta = [R_\infty, R_1, C_1, \alpha_1]$ is structurally globally identifiable.

The proposition will be shown in three steps.

Step 1: Using (23) the transfer function is found to be

$$H(z, \theta) = d(\theta) + \frac{b_1(\theta)z^T}{z^{T+1} - \sum_{j=0}^T a_{1,j}(\theta)z^{T-j}}, \quad (24)$$

where the relationships between the transfer function coefficients and the model parameters are given in (22). In order to compute the coefficient map, (24) is written as a monic rational function

$$H(z, \theta) = \frac{f_{T+1}(\theta)z^{T+1} + \dots + f_0(\theta)}{z^{T+1} + g_T(\theta)z^T + \dots + g_0(\theta)}, \quad (25)$$

where

$$\begin{aligned} f_{T+1}(\theta) &= d(\theta) \\ f_T(\theta) &= b_1(\theta) - a_{1,0}(\theta)d(\theta) \\ f_{T-j}(\theta) &= -a_{1,j}(\theta)d(\theta), \text{ for } 1 \leq j \leq T \\ g_{T-j}(\theta) &= -a_{1,j}(\theta), \text{ for } 0 \leq j \leq T. \end{aligned} \quad (26)$$

Step 2: The induced coefficient map is given by

$$\mathcal{C} : \theta \rightarrow \left(f_{T+1}(\theta), \dots, f_0(\theta), g_T(\theta), \dots, g_0(\theta) \right). \quad (27)$$

Step 3: Now it will be shown that the coefficient map (27) is one-to-one. First it is noted that it can be written as a composition of two functions

$$\mathcal{C}(\theta) = \mathcal{L} \circ \mathcal{R}(\theta),$$

where

$$\mathcal{R} : \theta \rightarrow \left(d(\theta), b_1(\theta), a_{1,T}(\theta), \dots, a_{1,0}(\theta) \right),$$

where the components of the vector-function on the right-hand side are given in (22), and

$$\mathcal{L} : (d, b_1, a_{1,T}, \dots, a_{1,0}) \rightarrow \left(f_{T+1}, \dots, f_0, g_T, \dots, g_0 \right),$$

where the components of this vector-function are given in (26).

In order to show that \mathcal{C} is one-to-one it is enough to prove that the maps \mathcal{R} and \mathcal{L} , defined above, are both one-to-one.

It is claimed that \mathcal{L} is invertible and thus one-to-one. The inverse map \mathcal{L}^{-1} is obtained by solving the following set of algebraic equations recursively:

$$\begin{aligned} d &= f_{T+1} \\ a_{1,0} &= -g_T \\ b_1 &= f_T - g_T f_{T+1} \\ a_{1,j} &= -g_{T-j}, \text{ for } 1 \leq j \leq T. \end{aligned} \quad (28)$$

Now it is claimed that \mathcal{R} is one-to-one. First it is shown that α_1 can be uniquely determined by solving the second equation in (22) for $i = 1$, i.e.

$$a_{1,j}(\alpha_1) = (-1)^j \binom{\alpha_1}{j+1} \text{ for } 1 \leq j \leq T, \quad (29)$$

where again, since $\alpha_1 \in (0, 1)$, the generalised binomial coefficient is computed using formula (4). Note that the function $a_{1,1}(\alpha_1)$ is the only function in (29), which is symmetric with respect to the vertical line $\alpha_1 = 0.5$. In fact it can be shown that for any $j \neq 1$, $a_{1,j}(\alpha_1)$ is nonsymmetric (see Figure 4). The figure shows that $a_{1,j} \approx 0$ for large j .

Since each of the function (29) is unimodal its preimage does not allow for unique determination of the fractional-order α_1 . However, as shown in Figure 5, the preimage of at least two distinct coefficients $a_{1,r}(\alpha_1)$ and $a_{1,q}(\alpha_1)$, with $1 \leq \{r, q\} \leq T$ are sufficient to uniquely determine α_1 . Using the notation used in Figure 5, each equation $a_{1,j}(\alpha_1) = a_j$ gives two solutions $\alpha_1^{1,j}$ and $\alpha_1^{2,j}$, where $j \in \{1, \dots, T\}$. Therefore, two distinct coefficients $a_{1,r}$ and $a_{1,q}$ are used to form a system of algebraic equations, whose common solution is the fractional-order α_1 . This has been shown in Figure 5 for $j = 25, 50, 169$ with a true value of $\alpha_1 = 0.3$ (for the clarity of the presentation, $a_{1,1}$ is not plotted in this figure).

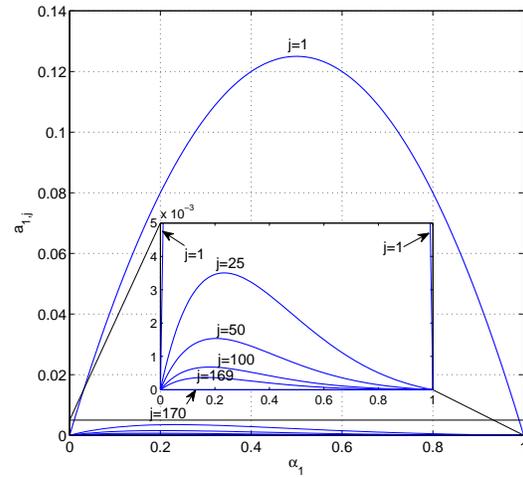


Fig. 4. $a_{1,j}$ versus α_1 within the range $0 \leq \alpha_1 \leq 1$. It is seen that $a_{1,1}$ is symmetric, and that $a_{1,j} \approx 0$ for large j .

Having determined α_1 the inverse map \mathcal{R}^{-1} can be obtained by solving the following set of equations

$$R_\infty = d, \quad C_1 = \frac{T_s^{\alpha_1}}{b_1}, \quad R_1 = \frac{T_s^{\alpha_1}}{(\alpha_1 - a_{1,0})C_1},$$

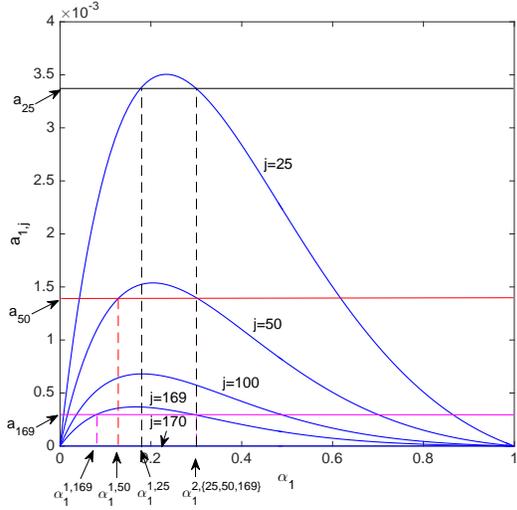


Fig. 5. A system of at least two equations $a_{1,r}(\alpha_1) = a_r$, $a_{1,q}(\alpha_1) = a_q$, where $r \neq q$ and $1 \le \{r, q\} \le T$ is sufficient in order to uniquely determine the fractional-order α_1 .

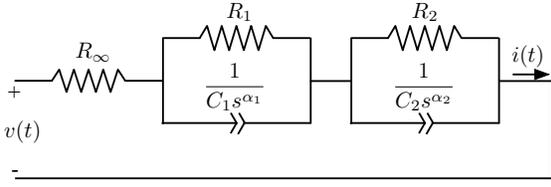


Fig. 6. The $R_\infty - R_1 \parallel \frac{1}{C_1 s^{\alpha_1}} - R_2 \parallel \frac{1}{C_2 s^{\alpha_2}}$ circuit.

which completes the claim and the proof of the proposition. \square

Practical identification of this model using both synthetic and real data has been studied in [42].

2) $R_\infty - R_1 \parallel \frac{1}{C_1 s^{\alpha_1}} - R_2 \parallel \frac{1}{C_2 s^{\alpha_2}}$ circuit: In this part, a more complex model is considered as shown in Figure 6. The circuit includes two parallel pairs of R-CPE. If $R_2 = \infty$, the CPE models the Warburg term.

Proposition 3: The FO-ECM Figure 6 with the parameter vector $\theta = [R_\infty, R_1, R_2, C_1, C_2, \alpha_1, \alpha_2]$ is structurally identifiable.

The above proposition will be shown in three steps.

Step 1: Using (23), the transfer function of the circuit is

$$H(z, \theta) = d(\theta) + \sum_{i=1}^2 \frac{b_i(\theta)z^T}{z^{T+1} - \sum_{j=0}^T a_{i,j}(\theta)z^{T-j}}, \quad (30)$$

with the coefficients given in (22). In a rational function form (30) is expressed as

$$H(z, \theta) = \frac{f_{2T+2}(\theta)z^{2T+2} + f_{2T+1}(\theta)z^{2T+1} + \dots + f_0(\theta)}{z^{2T+2} + g_{2T+1}(\theta)z^{2T+1} + \dots + g_0(\theta)}. \quad (31)$$

For the identifiability analysis, a number of key coefficients are given by:

$$\begin{aligned} f_{2T+2}(\theta) &= d \\ f_{2T+1}(\theta) &= b_1 + b_2 + d(-a_{1,0} - a_{2,0}) \\ f_{2T}(\theta) &= -b_1 a_{2,0} - b_2 a_{1,0} + \\ &\quad d(a_{1,0} a_{2,0} - a_{1,1} - a_{2,1}) \\ g_{2T+1}(\theta) &= -a_{1,0} - a_{2,0} \\ g_{2T}(\theta) &= -a_{1,1} - a_{2,1} + a_{1,0} a_{2,0} \\ g_2(\theta) &= a_{1,T} a_{2,T-2} + a_{1,T-1} a_{2,T-1} + \\ &\quad a_{1,T-2} a_{2,T} \\ g_1(\theta) &= a_{1,T} a_{2,T-1} + a_{1,T-1} a_{2,T} \\ g_0(\theta) &= a_{1,T} a_{2,T}. \end{aligned} \quad (32)$$

Step 2: The induced coefficient map is given by

$$\mathcal{C} : \theta \rightarrow (f_{2T+2}(\theta), \dots, f_0(\theta), g_{2T+1}(\theta), \dots, g_0(\theta)).$$

Step 3: Now it will be shown that the above coefficient map is identifiable, i.e. is finitely many-to-one. In order to show the identifiability the following lemma will be used.

Lemma 3: Consider g_0 , g_1 and g_2 , the three components of the coefficient map \mathcal{C} expressed in (32). Then following relations hold:

$$\begin{aligned} g_1 + g_0(T+1) \left(\frac{1}{\alpha_1 - T} + \frac{1}{\alpha_2 - T} \right) &= 0 \\ g_2 - g_0(T+1)(\hat{a} + \hat{b} + \hat{c}) &= 0, \end{aligned} \quad (33)$$

where

$$\begin{aligned} \hat{a} &= \frac{T}{(\alpha_2 - T)(\alpha_2 - T + 1)} \\ \hat{b} &= \frac{(T+1)}{(\alpha_1 - T)(\alpha_2 - T)} \\ \hat{c} &= \frac{T}{(\alpha_1 - T)(\alpha_1 - T + 1)}. \end{aligned}$$

\square

Proof: To prove the lemma, first it is noted that the relation between $a_{i,j}$ and $a_{i,j+1}$ is the following:

$$\begin{aligned}
a_{i,j+1} &= -(-1)^{j+2} \binom{\alpha_i}{j+2} \\
&= -(-1)^{j+2} \frac{\Gamma(\alpha_i + 1)}{\Gamma(j+3)\Gamma(\alpha_i - j - 1)} \\
&= -1 \times -(-1)^{j+1} \frac{\Gamma(\alpha_i + 1)}{(j+2)\Gamma(j+2) \frac{\Gamma(\alpha_i - j)}{(\alpha_i - j - 1)}} \\
&= -\frac{(\alpha_i - j - 1)}{j+2} a_{i,j}.
\end{aligned}$$

Therefore, g_1 and g_2 can be re-written as follows:

$$\begin{aligned}
g_1 &= a_{1,T}a_{2,T-1} + a_{1,T-1}a_{2,T} = \\
&= a_{1,T} \frac{-a_{2,T}(T+1)}{\alpha_2 - (T-1) - 1} + \frac{-a_{1,T}(T+1)}{\alpha_1 - (T-1) - 1} a_{2,T} \\
&= -g_0(T+1) \left(\frac{1}{\alpha_2 - T} + \frac{1}{\alpha_1 - T} \right),
\end{aligned}$$

$$\begin{aligned}
g_2 &= a_{1,T}a_{2,T-2} + a_{1,T-1}a_{2,T-1} + a_{1,T-2}a_{2,T} \\
&= a_{1,T} \frac{-a_{2,T-1}(T-1+1)}{\alpha_2 - (T-2) - 1} + \\
&\quad \frac{-a_{1,T}(T+1)}{\alpha_1 - (T-1) - 1} \frac{-a_{2,T}(T+1)}{\alpha_2 - (T-1) - 1} + \\
&\quad \frac{-a_{1,T-1}(T-1+1)}{\alpha_1 - (T-2) - 1} a_{2,T} \\
&= a_{1,T} \frac{-\frac{-a_{2,T}(T+1)}{\alpha_2 - (T-1) - 1} (T-1+1)}{\alpha_2 - (T-2) - 1} + \\
&\quad \frac{-a_{1,T}(T+1)}{\alpha_1 - (T-1) - 1} \frac{-a_{2,T}(T+1)}{\alpha_2 - (T-1) - 1} + \\
&\quad \frac{-\frac{-a_{1,T}(T+1)}{\alpha_1 - (T-1) - 1} (T-1+1)}{\alpha_1 - (T-2) - 1} a_{2,T} \\
&= g_0(T+1)(\hat{a} + \hat{b} + \hat{c}).
\end{aligned}$$

□

By the result of Lemma 3 the exponent values α_1 and α_2 are determined by solving (33). It can be easily verified (using any computer algebra package, e.g. Mathematica) that these algebraic equations admit only two real solutions, which are permuted with respect to each other. Since the mathematical expressions of the solutions are quite cumbersome, they are not provided explicitly in this paper.

Finally, it is noted that from the first equation in (32), the ohmic resistor R_∞ is estimated through the coefficient f_{2T+2} , i.e., $R_\infty = f_{2T+2}$. Then $a_{i,j}$'s are calculated recursively, backward from $j = T$ to $j = 1$ for $i = 1, 2$. By obtaining $a_{1,1}$ and $a_{2,1}$, the parameters $a_{1,0}$ and $a_{2,0}$ can be computed from the

coefficients g_{2T} and g_{2T+1} in (32). Then b_1 and b_2 are computed from the coefficients f_{2T} and f_{2T+1} in (32). And, for a given solution of (33) (there are two real solutions) parameters C_1 and C_2 are then obtained by using $b_i = T_s^{\alpha_i}/C_i$, and finally R_1 and R_2 are calculated from $a_{1,0}$ and $a_{2,0}$, respectively. This completes the Step 3 and the proof of the proposition. □

V. CONCLUSIONS

A method was proposed for the structural identifiability analysis of fractional order (FO) systems based on the concept of coefficient map. The method is applicable to both commensurate and non-commensurate models and was applied to determine the structural identifiability of battery fractional-order equivalent circuit models (FO-ECMs). This study has shown that a battery FO-ECM is structurally identifiable, and the global identifiability was proved for the FO-ECM with a single constant phase element.

ACKNOWLEDGEMENTS

Authors would like to acknowledge fundings from the UK's Engineering and Physical Sciences Research Council (EPSRC), S.M.M. Alavi and D.A. Howey under grant EP/K503769/1, A. Mahdi and S.J. Payne under grant EP/K036157/1 and P.E. Jacob under grant EP/K009362/1.

REFERENCES

- [1] K. J. Åström and P. Eykhoff, "System identification – a survey," *Automatica*, vol. 7, no. 2, pp. 123–162, 1971.
- [2] P. Young, "Parameter estimation for continuous-time models – a survey," *Automatica*, vol. 17, no. 1, pp. 23–39, 1981.
- [3] L. Ljung, "Perspectives on system identification," *Annual Reviews in Control*, vol. 34, no. 1, pp. 1–12, 2010.
- [4] —, "System identification: theory for the user," *PTR Prentice Hall Information and System Sciences Series*, vol. 198, 1987.
- [5] T. Soderstrom and P. Stoica, *System identification*. Prentice hall London, 1989, vol. 2.
- [6] Y. Zhu, *Multivariable system identification for process control*. Elsevier, 2001.
- [7] R. Bellman and K. J. Åström, "On structural identifiability," *Mathematical biosciences*, vol. 7, no. 3, pp. 329–339, 1970.
- [8] A. Raue, C. Kreutz, T. Maiwald, J. Bachmann, M. Schilling, U. Klingmüller, and J. Timmer, "Structural and practical identifiability analysis of partially observed dynamical models by exploiting the profile likelihood," *Bioinformatics*, vol. 25, no. 15, pp. 1923–1929, 2009.
- [9] H. Pohjanpalo, "System identifiability based on the power series expansion of the solution," *Mathematical biosciences*, vol. 41, no. 1, pp. 21–33, 1978.

- [10] M. J. Chappell, K. R. Godfrey, and S. Vajda, "Global identifiability of the parameters of nonlinear systems with specified inputs: a comparison of methods," *Mathematical Biosciences*, vol. 102, no. 1, pp. 41–73, 1990.
- [11] S. Vajda, K. R. Godfrey, and H. Rabitz, "Similarity transformation approach to identifiability analysis of nonlinear compartmental models," *Mathematical biosciences*, vol. 93, no. 2, pp. 217–248, 1989.
- [12] F. Anstett, G. Bloch, G. Millérioux, and L. Denis-Vidal, "Identifiability of discrete-time nonlinear systems: The local state isomorphism approach," *Automatica*, vol. 44, no. 11, pp. 2884–2889, 2008.
- [13] N. Meshkat and S. Sullivant, "Identifiable reparametrizations of linear compartment models," *Journal of Symbolic Computation*, vol. 63, pp. 46–67, 2014.
- [14] A. Mahdi, N. Meshkat, and S. Sullivant, "Structural identifiability of viscoelastic mechanical systems," *PloS one*, vol. 9, no. 2, p. e86411, 2014.
- [15] K. Glover and J. C. Willems, "Parametrizations of linear dynamical systems: canonical forms and identifiability," *Automatic Control, IEEE Transactions on*, vol. 19, no. 6, pp. 640–646, 1974.
- [16] J. Distefano III, "On the relationships between structural identifiability and the controllability, observability properties," *Automatic Control, IEEE Transactions on*, vol. 22, no. 4, pp. 652–652, 1977.
- [17] J. Van den Hof, "Structural identifiability of linear compartmental systems," *Automatic Control, IEEE Transactions on*, vol. 43, no. 6, pp. 800–818, 1998.
- [18] L. Ljung and T. Glad, "On global identifiability for arbitrary model parametrizations," *Automatica*, vol. 30, no. 2, pp. 265–276, 1994.
- [19] S. Audoly, G. Bellu, L. D'Angio, M. P. Saccomani, and C. Cobelli, "Global identifiability of nonlinear models of biological systems," *Biomedical Engineering, IEEE Transactions on*, vol. 48, no. 1, pp. 55–65, 2001.
- [20] C. Cobelli and J. DiStefano, "Parameter and structural identifiability concepts and ambiguities: a critical review and analysis," *American Journal of Physiology-Regulatory, Integrative and Comparative Physiology*, vol. 239, no. 1, pp. R7–R24, 1980.
- [21] P. Nazarian, M. Haeri, and M. S. Tavazoei, "Identifiability of fractional order systems using input output frequency contents," *ISA transactions*, vol. 49, no. 2, pp. 207–214, 2010.
- [22] A. Oustaloup, *La dérivation non entière*. Hermes, 1995.
- [23] Y. Q. Chen, I. Petras, and D. Xue, "Fractional order control-a tutorial," in *American Control Conference, 2009. ACC'09*. IEEE, 2009, pp. 1397–1411.
- [24] R. Caponetto, *Fractional order systems: modeling and control applications*. World Scientific, 2010, vol. 72.
- [25] C. A. Monje, Y. Chen, B. M. Vinagre, D. Xue, and V. Feliu-Batlle, *Fractional-order systems and controls: fundamentals and applications*. Springer Science & Business Media, 2010.
- [26] A. P. Schmidt, M. Bitzer, Á. W. Imre, and L. Guzzella, "Experiment-driven electrochemical modeling and systematic parameterization for a lithium-ion battery cell," *Journal of Power Sources*, vol. 195, no. 15, pp. 5071–5080, 2010.
- [27] J. C. Forman, S. J. Moura, J. L. Stein, and H. K. Fathy, "Genetic identification and fisher identifiability analysis of the doyle–fuller–newman model from experimental cycling of a lifepo 4 cell," *Journal of Power Sources*, vol. 210, pp. 263–275, 2012.
- [28] S. J. Moura, N. A. Chaturvedi, and M. Krstić, "Adaptive partial differential equation observer for battery state-of-charge/state-of-health estimation via an electrochemical model," *Journal of Dynamic Systems, Measurement, and Control*, vol. 136, no. 1, p. 011015, 2014.
- [29] A. M. D'Amato, J. C. Forman, T. Ersal, A. A. Ali, J. L. Stein, H. Peng, and D. S. Bernstein, "Noninvasive battery-health diagnostics using retrospective-cost identification of inaccessible subsystems," in *ASME 2012 5th Annual Dynamic Systems and Control Conference joint with the JSME 2012 11th Motion and Vibration Conference*. American Society of Mechanical Engineers, 2012, pp. 299–307.
- [30] M. Sitterly, L. Y. Wang, G. G. Yin, and C. Wang, "Enhanced identification of battery models for real-time battery management," *Sustainable Energy, IEEE Transactions on*, vol. 2, no. 3, pp. 300–308, 2011.
- [31] M. Rausch, S. Streif, C. Pankiewicz, and R. Findeisen, "Nonlinear observability and identifiability of single cells in battery packs," in *Control Applications (CCA), 2013 IEEE International Conference on*. IEEE, 2013, pp. 401–406.
- [32] A. Sharma and H. K. Fathy, "Fisher identifiability analysis for a periodically-excited equivalent-circuit lithium-ion battery model," in *American Control Conference (ACC), 2014*. IEEE, 2014, pp. 274–280.
- [33] M. J. Rothenberger, J. Anstrom, S. Brennan, and H. K. Fathy, "Maximizing parameter identifiability of an equivalent-circuit battery model using optimal periodic input shaping," in *ASME 2014 Dynamic Systems and Control Conference*. American Society of Mechanical Engineers, 2014, pp. V001T19A004–V001T19A004.
- [34] J. Randles, "Kinetics of rapid electrode reactions," *Discuss. Faraday Soc.*, vol. 1, pp. 11–19, 1947.
- [35] X. Hu, S. Li, and H. Peng, "A comparative study of equivalent circuit models for li-ion batteries," *Journal of Power Sources*, vol. 198, pp. 359–367, 2012.
- [36] K. S. Cole and R. H. Cole, "Dispersion and absorption in dielectrics i. alternating current characteristics," *The Journal of Chemical Physics*, vol. 9, no. 4, pp. 341–351, 1941.
- [37] E. Barsoukov and J. R. Macdonald, *Impedance spectroscopy: theory, experiment, and applications*. John Wiley & Sons, 2005.
- [38] U. Tröltzsch, O. Kanoun, and H.-R. Tränkler, "Characterizing aging effects of lithium ion batteries by impedance spectroscopy," *Electrochimica Acta*, vol. 51, no. 8, pp. 1664–1672, 2006.
- [39] R. R. Richardson, P. T. Ireland, and D. A. Howey, "Battery internal temperature estimation by combined impedance and surface temperature measurement," *Journal of Power Sources*, vol. 265, pp. 254–261, 2014.
- [40] J. R. Macdonald, J. Schoonman, and A. Lehen, "Applicability and power of complex nonlinear least squares for the analysis of impedance and admittance data," *Journal of Electroanalytical Chemistry and Interfacial Electrochemistry*, vol. 131, pp. 77–95, 1982.
- [41] B. A. Boukamp, "A nonlinear least squares fit procedure for analysis of immittance data of electrochemical systems," *Solid State Ionics*, vol. 20, no. 1, pp. 31–44, 1986.
- [42] S. M. M. Alavi, C. R. Birkel, and D. A. Howey, "Time-domain fitting of battery electrochemical impedance models," *Journal of Power Sources*, vol. 288, pp. 345–352, 2015.
- [43] S. M. M. Alavi, A. Mahdi, S. J. Payne, and D. A. Howey, "Structural identifiability of battery equivalent circuit models," *arXiv preprint arXiv:1505.00153*, 2015.
- [44] J.-B. Jorcin, M. E. Orazem, N. Pébère, and B. Tribollet, "Cpe analysis by local electrochemical impedance spectroscopy," *Electrochimica Acta*, vol. 51, no. 8, pp. 1473–1479, 2006.

- [45] G. L. Plett, "Extended kalman filtering for battery management systems of lipb-based hev battery packs: Part 1. background," *Journal of Power sources*, vol. 134, no. 2, pp. 252–261, 2004.
- [46] D. Andre, M. Meiler, K. Steiner, H. Walz, T. Soczka-Guth, and D. Sauer, "Characterization of high-power lithium-ion batteries by electrochemical impedance spectroscopy. ii: Modelling," *Journal of Power Sources*, vol. 196, no. 12, pp. 5349–5356, 2011.
- [47] C. Birkl and D. Howey, "Model identification and parameter estimation for lifepo4 batteries," *Hybrid and Electric Vehicles Conference 2013 (HEVC 2013)*, pp. 2.1–2.1, 2013.
- [48] Y. Hu, S. Yurkovich, Y. Guezennec, and B. Yurkovich, "Electro-thermal battery model identification for automotive applications," *Journal of Power Sources*, vol. 196, no. 1, pp. 449–457, 2011.
- [49] W. Waag and D. U. Sauer, "Adaptive estimation of the electromotive force of the lithium-ion battery after current interruption for an accurate state-of-charge and capacity determination," *Applied Energy*, vol. 111, pp. 416–427, 2013.