

Technical design and commissioning of the sensor net for fine meshed measuring of magnetic field at the KATRIN spectrometer

J. Letnev,^{a,b,1} W. Hazenbiller,^{a,d,2} A. Osipowicz,^{a,1} A. Beglarian,^c H. Bouquet,^c G. Drexlin,^{d,e} F. Glück,^d J. Garbe,^a H. Hillmer,^b P. Marte,^a T. Thümmeler,^d Ch. Weinheimer^f

^aUniversity of Applied Sciences (HFD), Leipziger Str. 123, D-36037 Fulda, Germany

^bInstitute of Nanostructure Technologies and Analytics (INA), University of Kassel, Heinrich-Plett-Str. 40, D-34132 Kassel, Germany

^cInstitute for Data Processing and Electronics, Karlsruhe Institute of Technology, Hermann-von-Helmholtz-Platz 1, D-76344 Eggenstein-Leopoldshafen, Germany

^dInstitute for Nuclear Physics (IKP), Karlsruhe Institute of Technology, Hermann-von-Helmholtz-Platz 1, D-76344 Eggenstein-Leopoldshafen, Germany

^eExperimental Particle Physics (ETP), Karlsruhe Institute of Technology, Hermann-von-Helmholtz-Platz 1, D-76344 Eggenstein-Leopoldshafen, Germany

^fInstitut für Kernphysik, WWU Münster, Wilhelm-Klemm-Str. 9, D-48149 Münster, Germany

E-mail: Johann.Letnev@et.hs-fulda.de

ABSTRACT: The Karlsruhe Tritium Neutrino experiment (KATRIN) aims to measure the absolute neutrino mass scale with an unprecedented sensitivity of $0.2 \text{ eV}/c^2$ (90% C.L.), using β decay electrons from tritium decay. The kinetic energy of the decay electrons is measured using an electrostatic integrating main spectrometer (MS) with magnetic adiabatic collimation and requires a certain magnetic field profile. For the control of the magnetic field in the MS area two networks of mobile magnetic field sensor units are developed and commissioned. The radial system is operated close to the outer surface of the MS whereas the vertical one is mounted along vertical planes left and right of the MS. The sensor setup can take several thousands magnetic field samples at a fine meshed grid, thus allowing to study the magnetic field inside the MS and the influence of magnetic materials in the vicinity of the main spectrometer.

KEYWORDS: magnetic field sensor net, Mobile Magnetic Sensor Unit, KATRIN, Spectrometer

¹Corresponding authors

²previously W. Seller

Contents

1	Introduction	1
2	The radial magnetic field measuring system	2
2.1	The Mobile Sensor Unit	4
2.2	Magnetization effect and influence of compensation systems	6
2.3	Coordinate system transformation and field determination in the analyzing plane	7
3	The vertical magnetic field measuring system	9
4	Summary and Outlook	11

1 Introduction

The Karlsruhe TRItium Neutrino experiment [1] is a next-generation experiment for a direct and model-independent determination of the absolute neutrino mass scale. By analyzing the shape of the tritium β -decay spectrum near the endpoint energy at $E_0 = 18.6$ KATRIN will achieve a sensitivity of $m_\nu = 0.2 \text{ eV}/c^2$ (90% C.L.). A schematic overview of the KATRIN setup is shown in Figure 1. The experimental setup uses a magnetic transport flux of 190 Tcm^2 to guide the β -decay electrons

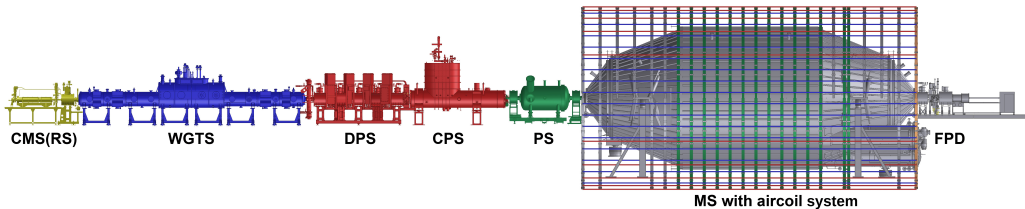


Figure 1: Schematic overview of 70m long KATRIN setup, consisting of calibration and monitor rear system (CMS/RS), the electron emitting section with the windowless gaseous tritium source (WGTS), differential pumping (DPS) and cryotrapping section (CPS), the small pre-spectrometer (PS) and the large main spectrometer (MS) with the aircoil system and lastly the segmented PIN-diode detector (FPD).

from a windowless gaseous tritium source through a pumping section towards two electrostatic energy spectrometers and onto a detector. The operating principle of the spectrometers is based on a magnetic adiabatic collimation with electrostatic filtering (MAC-E filter)[2–4], where a retarding electric potential is used to reflect electrons below a given energy threshold. In order to ensure the correct function of the MAC-E filter, a certain magnetic field profile is required. The shape of the magnetic flux tube inside the main spectrometer (MS) has a significant influence on the overall energy resolution function of the spectrometer. In addition, the alignment and shape of the

magnetic field lines plays an essential role for the electronic background via a) the generation of secondary electrons through wall contact of energetic electrons (see [Figure 2](#)) and b) the generation and storage of charged particles due to penning traps and the magnetic bottle effect. For the control

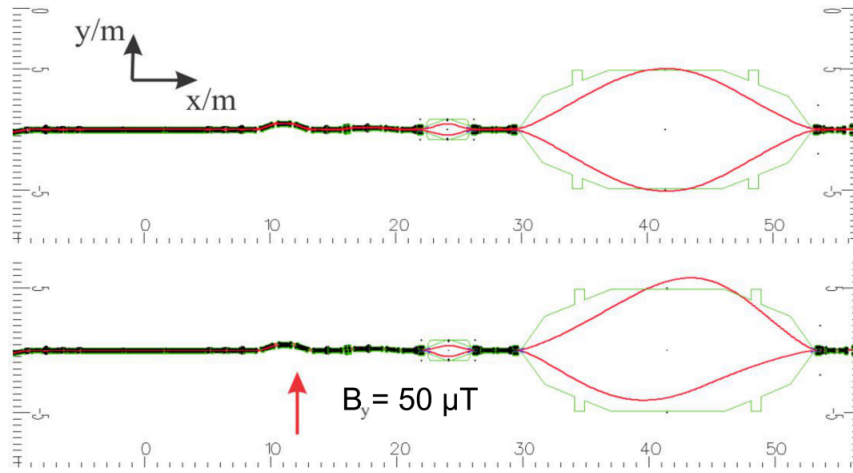


Figure 2: A CAD view (taken from a PartOpt [5] simulation) showing the KATRIN high field solenoids energized according to reference values, and in red the corresponding boundary 190 Tcm^2 magnetic transport flux lines in the central horizontal plane without air coils. Top: without external perturbation touching the spectrometer walls. Bottom: In case of an additional global external magnetic field (e.g. earth magnetic field) of $B_y = 50 \mu\text{T}$ the perturbed field lines intersect with the MS walls.

of the desired magnetic field shape, large aircoil systems [7, 14] are arranged around the MS: The earth magnetic field compensation system (EMCS) for the compensation of the earth magnetic field and the low field coil system (LFCS) for the fine tuning of the magnetic transport flux tube (see [Figure 3](#)). Although the calculation of the magnetic field inside the MS generated by all the relevant current leading elements is in principle possible and well performed, perturbing external dipoles, magnetization effects in the direct environment of the spectrometer and the incorrect alignment and orientation of the spectrometer solenoids, EMCS and LFCS can have a disturbing influence. Due to the extreme vacuum conditions the installation of magnetic field sensors inside the MS is not possible during KATRIN operation.

This paper focuses on the technical realization of two magnetic sensor networks that allow to measure the magnetic field in the direct environment of KATRIN MS over large areas with fine meshed sample positions. The radial magnetic measuring system (RMMS), based on the mobile sensor unit [9], is operated on 4 LFCS rings. The vertical magnetic measuring system (VMMS) covers vertical planes parallel to the MS beam axis.

2 The radial magnetic field measuring system

The radial magnetic field measuring system (RMMS) is a system for measuring the magnetic field close to the KATRIN MS surface. The initial concept is based on a mobile sensor unit (MobSU) [9], which moves on the inner side of the LFCS support ring and measures the magnetic field on

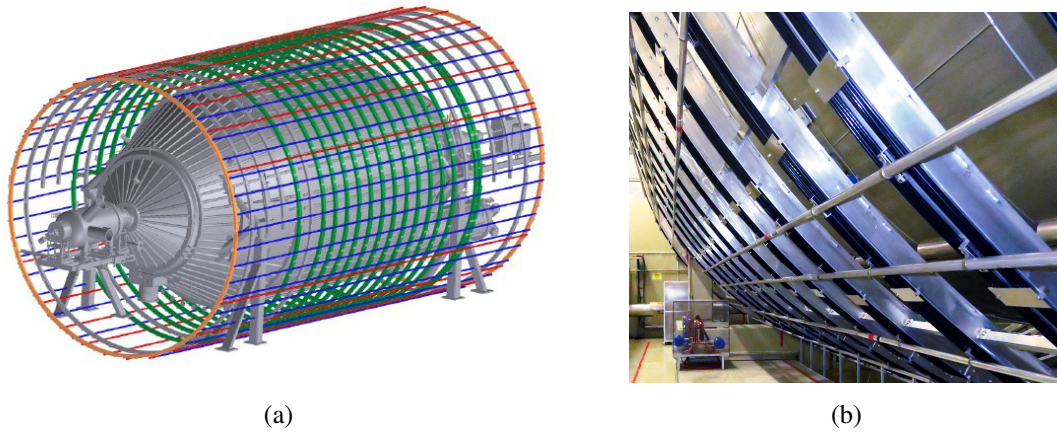


Figure 3: The CAD (a) and photographic (b) view of KATRIN main spectrometer. LFCS: The ring shaped low field coils distributed co-axially along the MS. The current leading elements of the EMCS run parallel to the spectrometer walls.

predefined sampling positions. According to the mechanical structure of the LFCS, up to 14 units can be installed. At present four of these units have been installed and fully commissioned on LFCS 3, 6, 9 and 12 (see [Figure 4](#)). This configuration has been chosen to get magnetic field values at points symmetric with respect to the analyzing plane which is characterized by the minimal magnetic field B_A at the center of the MS. [Figure 5](#) displays the schematic interaction of all involved



Figure 4: The four mounted mobile sensor units in their rest positions (docking stations) on the inner belts of the LFCS support structure. In the foreground the MobS unit on LFCS 3 close to the source side of the cylindrical part of the MS. Further away the MobS units on LFCS 6, 9 and 12 can be seen.

RMMS subsystems and their integration with the KATRIN experiment. The upper part of the figure shows the structure of RMMS with the master and control module and the four installed MobSU. The so-called docking station (DS) is the start and end point of unit motion. It also represents the

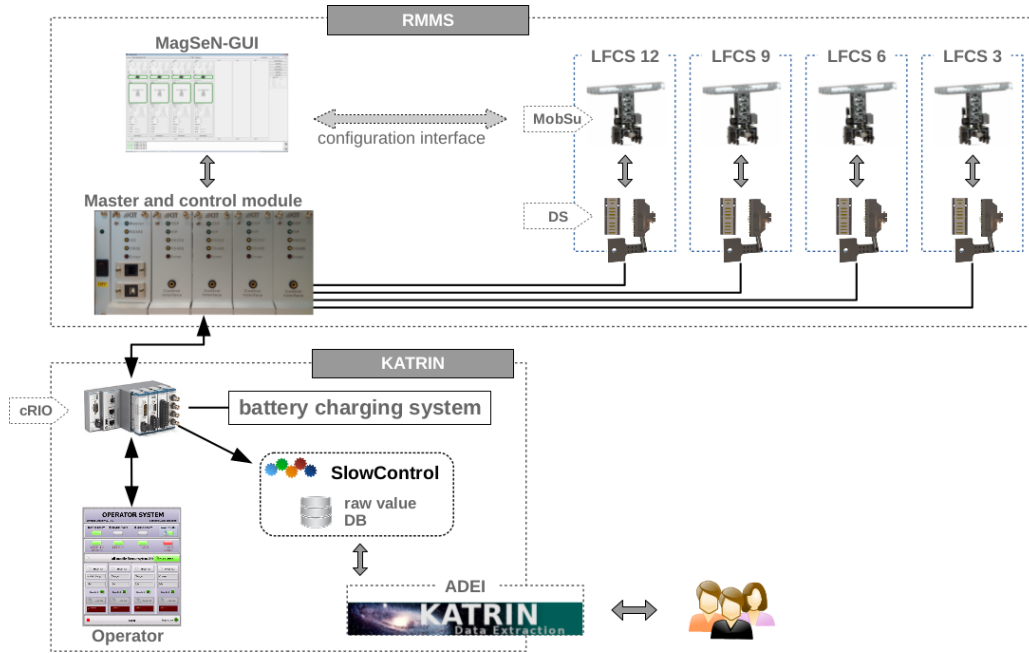


Figure 5: Schematic structure of the RMMS and its integration into the KATRIN slow control system. Figure is taken from [8].

electromechanical as well as the data transfer link between the sensor unit and the master module (see [9]) which is the interface to the KATRIN slow control database. Each subsystem of the RMMS can be configured and controlled by means of the PC tool 'MagSeN-GUI'. The connection between RMMS and the data management system and the SlowControl [10] of KATRIN is realized via a modular CompactRIO Platform¹ (cRIO) [11]. In addition to the communication and transmission of the data to the higher-level processing stage, the controlled charging of the batteries installed on the MobSU is also performed via an interface integrated in the cRIO. Equivalent to many other KATRIN subsystems, the measured data of the RMMS can be accessed via an ADEI interface [10]. The complete system is described in [8].

2.1 The Mobile Sensor Unit

The mobile sensor unit represents the actual sensor in the sense of the sensor net definition. The prototype of the unit described in [9] has been modified and its properties improved. Figure 6 shows the structure of the final MobSU version. The drive principle is now based on a combination of a tooth belt attached to the inner side of the LFCS support and toothed gear wheels within the MobSU drive. Due to the use of an aluminum skeleton layout of the drive chassis, the frame and the wings, a total weight of 2.9 kg is achieved with a unit height of 296 mm. The aluminum frame forms a Faraday cage and provides the necessary stiffness and electrical safety of the entire unit. The improved two-way spring-loaded chassis provides enough grip and dynamics to overcome the LFCS carrier's structural height, lateral offsets and mechanical discontinuities along the track. Furthermore, three-dimensional inclination sensor systems based on the FXLS8471Q [13] are

¹CompactRIO is a registered trademark of National Instruments

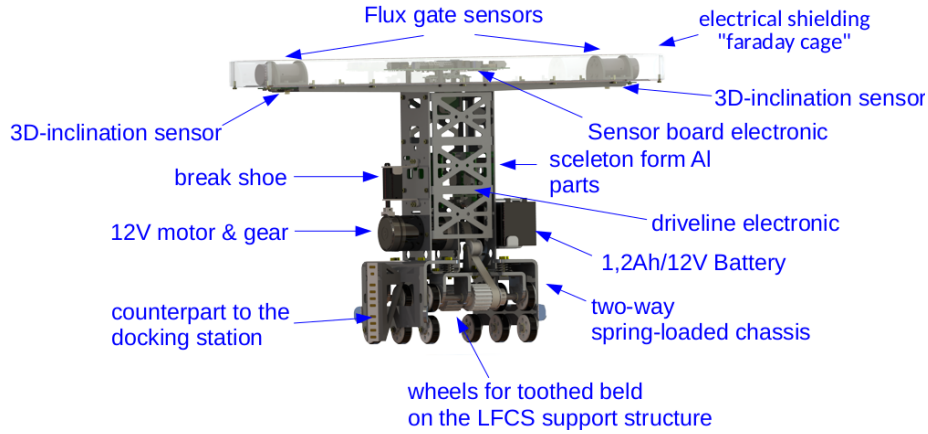


Figure 6: Mechanical structure of the mobile sensor unit with the drive, frame and wings on which the flux-gate-sensors and the inclinometers are attached. Height: 296 mm, Width: 532 mm, Weight: 2.9 kg. Distance between both flux-gate-sensors: 450 mm

positioned on the wings in such a way that they are centered parallel to the flux-gate-sensors². Due to a variation in the temporal behavior of the individual components, especially due to a dependence on the battery voltage, deviations of the positioning accuracy of the unit were detected. In order to counteract these uncertainties, a control algorithm without time dependent parameters has been developed, which is described in detail in [8]. By use of an incremental encoders, the local positions of the units on their tracks are recorded with a mechanical accuracy of $48.9 \mu\text{m}$ and digital inclination accuracy of 0.37° during the entire revolution around the spectrometer. Table 1 shows the determined sensor system accuracies. In addition, the maximum speed is reduced in

Sensor	Accuracy
Magnetometer	0.5% (at $\pm 1000 \mu\text{T}$) $\pm 20\text{nT}$
Position	$48.9 \mu\text{m} \pm 36\text{nm}$
Inclination	$0.37^\circ \pm 0.0219^\circ$

Table 1: Experimentally determined parameters for RMMS measurement accuracy after calibration process

a controlled manner for the area of downward motion of the mobile unit. This procedure makes it possible to reach the target position with an accuracy better than 1 mm. Figure 7 shows the distribution of stopping accuracy (difference between the target and reached position) for all four MobSU based on 15 randomly selected measurement runs.

In order to achieve the mechanical precision mentioned above, new concepts have been implemented in the motion control, as described in [8] in more detail. The necessary parameters are configured within the PC-Tool MagSeN-GUI. In particular, the desired number of magnetic field sampling positions on the entire LFCS ring must be set. The number of sampling positions

²custom designed sensors FL3-1000 by Stefan Mayer Instruments with an accuracy of $\pm 0.5\%$ within the range of $\pm 1000 \mu\text{T}$

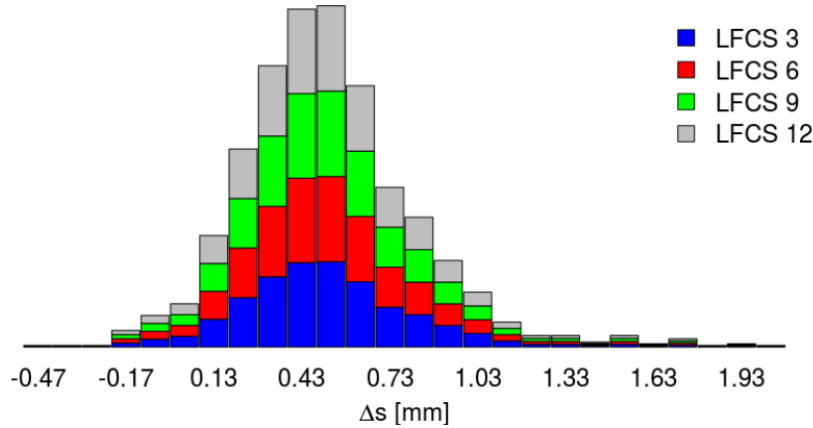


Figure 7: Distribution of the global stopping reproduction accuracy of the installed mobile units for 15 randomly selected measurement runs. Figure taken from [8].

(schematically shown in Figure 8b) is used to calculate the required distance between the stopping positions of the mobile sensor unit which affects the total duration of one measurement cycle (see Figure 8a).

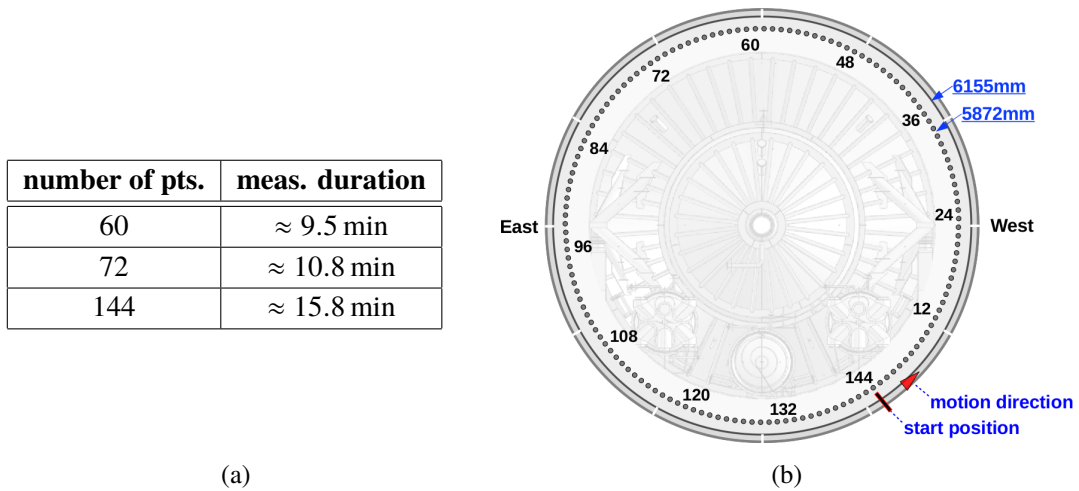


Figure 8: (a) Experimentally determined measurement duration for one measuring run depending on the configured number of positions. (b) Schematic representation of the sampling positions (dark circles) and sampling point numbers of the mobile sensor unit on the LFCS coil support structure with an average radius of 6155 mm viewed from the detector site. The average radius of the flux-gate-sensor path is 5872 mm. Starting position and motion direction are indicated.

2.2 Magnetization effect and influence of compensation systems

During the commissioning phase of the large air coil system (see [7]), the operational performance and functionality of the radial magnetic field sensor net was also inspected. For this purpose, the amperage of each individual LFCS coil was gradually adjusted³ and the magnetic field was recorded

³in 20% steps of the maximum permissible amperage (see [7, 14])

using the RMMS at $2 * 144$ measuring positions per MobSU. The 1152 points in total served as a basis for the investigation of possible magnetization effects. Figure 9a shows the absolute difference of the B_z -component⁴ of the magnetic field between the two flux gate magnetometers of a single sensor unit depending on the current in the associated LFCS coil, using LFCS 6 as an example. The black dashed line indicates the position of the slice for the hysteresis view in Figure 9b. It should be noted that all values used are in inclination corrected local MobSU coordinates.

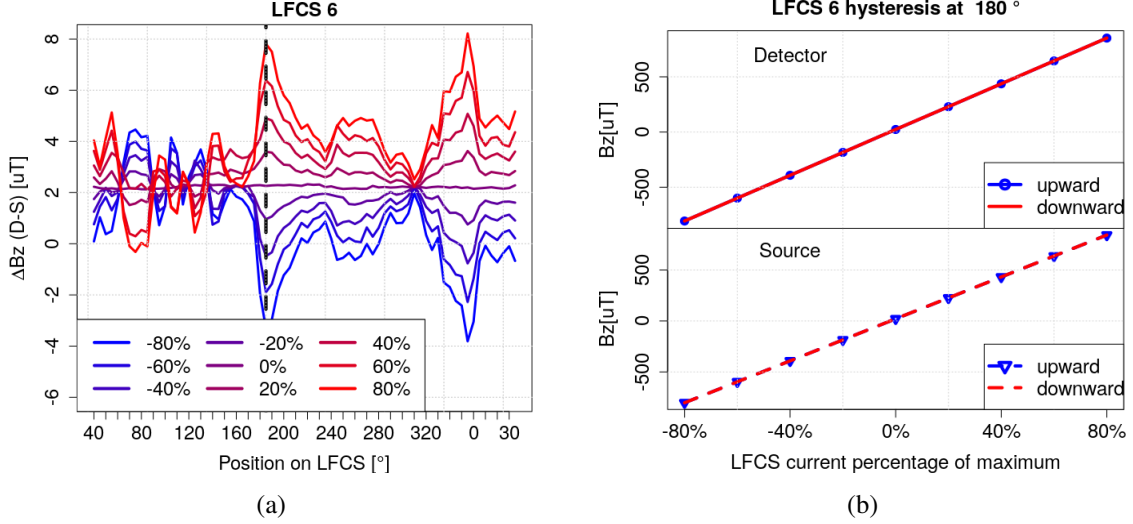


Figure 9: a) Absolute difference for B_z -component of the magnetic field between the two MobSU magnetometers for different percentages of LFCS current settings in steps of 20% of the full current. Full currents used (100%): 100 A for LFCS 1,2,12,13, 115 A for LFCS 3...11 and 70 A for LFCS 14. The MobSU position is shown in degree of rotation along the axis of the abscissas. Figure taken from [8]. b) Hysteresis view at position of 180° on the LFCS 6.

2.3 Coordinate system transformation and field determination in the analyzing plane

Due to the slight deformations and a possible misalignment of the LFCS (see [7]) the transformation of the locally obtained magnetic field values into a more global KATRIN coordinate system [15] is problematic. However, on the basis of the LFCS deformation measurement [16] (data listing the radii of the LFCS at 36 angles along the circumference) a first attempt has been made. The deviation of the LFCS radii from the ideal $R_i = 6.155$ m at the sampling positions can be approximated iteratively by a spline interpolation taking into account the manually determined start positions and angles at the docking station. Based on this, the distance traveled by the sensor unit can be taken as the arc length S of the LFCS circle to determine the global position $t_{x,y,z}$ of the unit under the condition $S_{Model} \equiv S_{MobSU}$.

$$S_{Model} = A_{corr} \cdot \int_{\alpha_{Dock}}^{\alpha_{th}} \sqrt{\left(R^2 + \left(\frac{\partial R}{\partial \alpha}\right)^2\right)}_{\alpha=u} du \quad (2.1)$$

⁴beam axis of the main spectrometer

	LFCS 3	LFCS 6	LFCS 9	LFCS 12
t_z [m] ([mm])	-4.040 (5)	-1.338 (5)	1.354 (5)	4.058 (5)
s_{Dock} [m] ([mm])	38.715 (3.96)	38.705 (3.89)	38.745 (3.11)	38.678 (3.23)
α_{Dock} [°]	36.86 (0.175)	36.04 (0.216)	37.03 (0.307)	37.07 (0.349)

Table 2: Data of the LFCS support beams : t_z the position in z direction relative to the MS center, s_{Dock} the total arc of sensor path for 1 revolution and α_{Dock} the start value for the inclination . The numbers in brackets represent the absolute deviation (min value subtracted from max value) of the measured values.

$$t_x = R \cdot \cos(\alpha_{th}) \quad t_y = R \cdot \sin(\alpha_{th}) \quad t_z = t_z \quad (2.2)$$

$A_{corr} = \frac{s_{Dock}}{s_{Model}}$ represents a standardization constant and for $\alpha_{th} = \alpha_{Dock}$ where α_{th} indicates the numerically determined theoretical rotation angle of MobSU. The experimentally determined positional data for the position in the z-direction t_z , the LFCS total circumference⁵ s_{Dock} and the start or end angle α_{Dock} of the MS revolution are summarized in Table 2. With the sensor element orientation shown in Figure 10, the known theoretical rotation angle α_{th} and the measured inclination angles \vec{g}_{DS} and \vec{g}_{SS} ⁶ of both MobSU magnetometer, the inclination corrected rotation matrix M_{Rot} can be created.

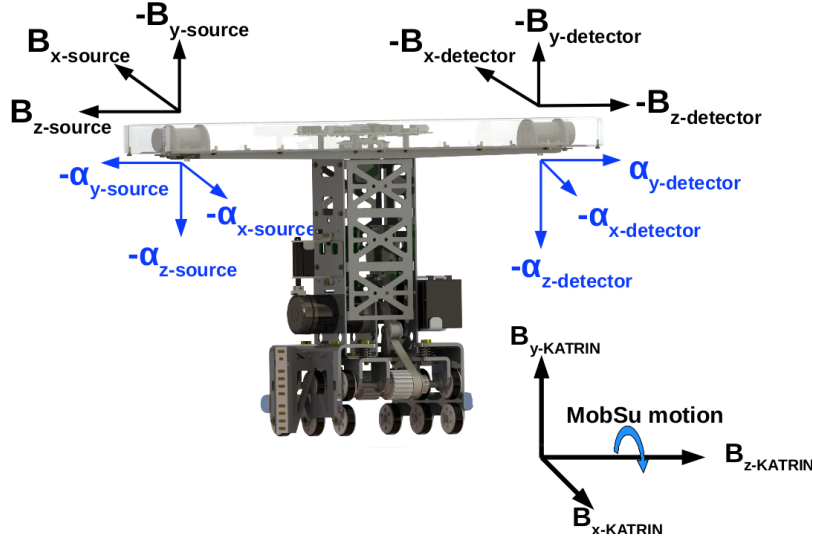


Figure 10: Orientation of the sensor components of the mobile sensor unit. Movement sequence of the unit around the spectrometer corresponds to the rotation around the longitudinal center axis of the MS (the z-axis of the global KATRIN coordinate system). Figure adopted from [8].

$$M_{Rot} = N_{MobSU} \cdot N_{Trans} \cdot K \quad (2.3)$$

Where N_{MobSU} represents an ideal rotation matrix based on α_{th} , N_{Trans} specifies the MobSU construction-related translation matrix and K indicates the inclination correction matrix. A more

⁵total travel distance of the mobile sensor unit

⁶DS for detector sided sensor and SS for source sided sensor of the mobile sensor unit

detailed description is given in [8]. The coordinate transformation has a considerable influence on the total error of the magnetic field measurement, $\overrightarrow{\Delta B}$ which is calculated according to Equation 2.4 and is shown in Figure 11.

$$\overrightarrow{\Delta B} = M_{rot_{DS/SS}} \cdot \frac{\overrightarrow{\sigma_{B_{DS/SS}}}}{\sqrt{32}} + \overrightarrow{\Delta g_{max}} \cdot |B_{DS/SS}| \quad (2.4)$$

M_{rot} specifies the mentioned corrected rotation matrix for the individual magnetometer, $\overrightarrow{\sigma_B}$ represents the corresponding uncertainty of the magnetic field measurement and $\overrightarrow{\Delta g_{max}}$ indicates the maximum error of the MobSU internal inclination system.

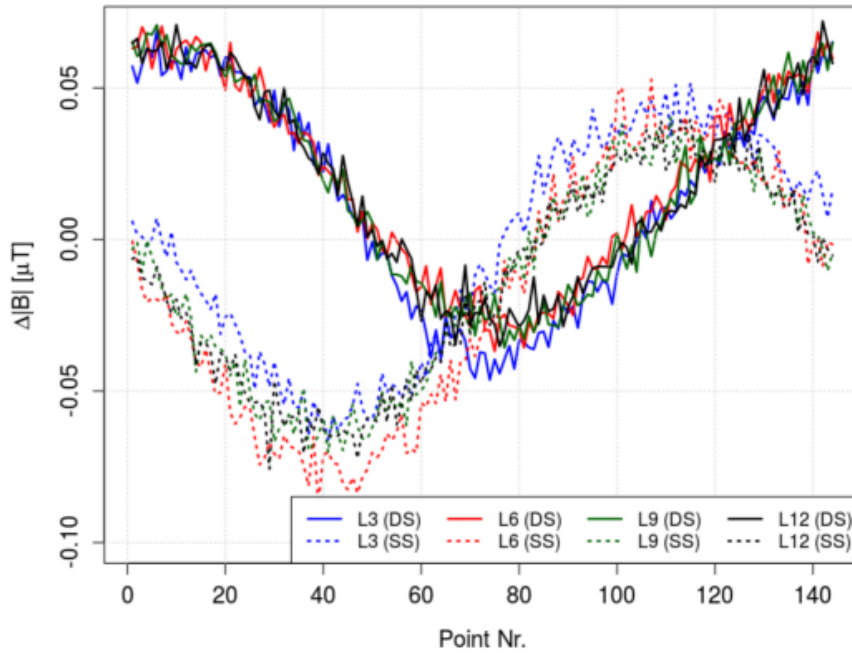


Figure 11: Total error of the magnetic field $\Delta|B|$ after transformation into the KATRIN coordinate system. Figure based on [8].

The availability of the measured values in KATRIN coordinates allows a direct comparison with simulated values. On the other hand one can use interpolation methods to derive magnetic field values inside the MS volume. The magnetic field in the analyzing plane as a result of a bi-linear interpolation on an irregular grid performed in [8] is shown in Figure 12. This method covers 86% of the total analyzing plane area.

3 The vertical magnetic field measuring system

Magnetic field investigations in the immediate environment of the MS revealed both remanent and induced magnetization effects of the hall walls (see [18]). For this reason, a vertical magnetic measuring system (VMMS) covering vertical planes parallel to hall walls has been developed. Mechanically, the VMMS is inspired by the technology of the MobSU and is based on a movable construction of linear rails which are attached to the hall pillars. In terms of measuring accuracy

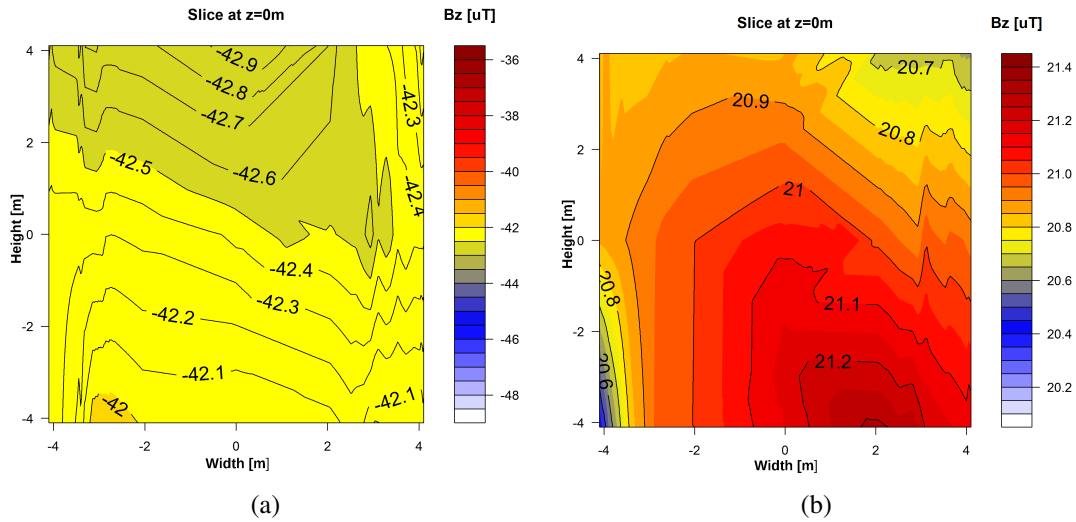


Figure 12: Interpolation results of B_z in the analysis plane (center of the MS) for (a) detector magnet at 2.5 T, pinch magnet at 4.2 T and PS2 at 3.1 T, all other magnets off (b) all magnets off, only earth magnetic field.

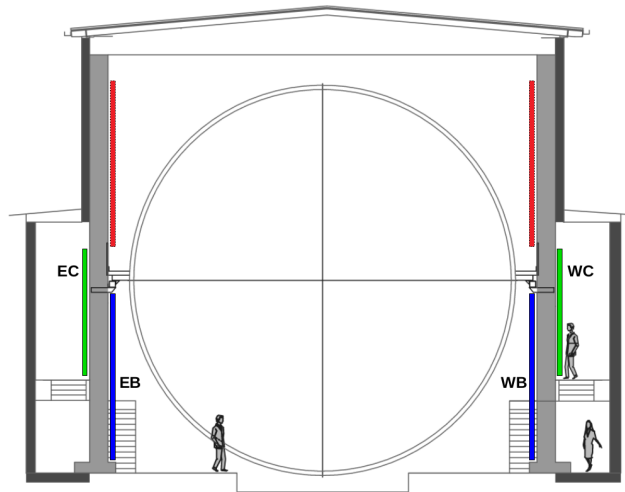


Figure 13: Schematic representation of the VMMS position within the KATRIN MS hall. Individual layers are color-coded. View from the north. Individual systems are marked with EC (east center), EB (east bottom), WC (west center) and WB (west bottom).

and positioning precision, all requirements are met equivalent to the system of the mobile sensor units. The aim is to completely cover the wall surface in the area of the cylindrical MS vessel at three height levels and to measure the magnetic field with a mesh width of 20 cm x 20 cm. At the current stage four VMMS at two height levels are installed and commissioned. [Figure 13](#) shows the position of the individual systems. The construction of the upper system (in red) is currently in the concept phase and will be finished in the near future.

[Figure 14](#) shows the schematic structure of such a VMMS system in a CAD view. The two movable components (horizontal and vertical), the movement limited hinge to prevent inadmissibly strong

pendulum movement during the movement, as well as the energy chains connecting the subsystems and the cable duct can be seen. The movement sequence is as follows: the vertical component

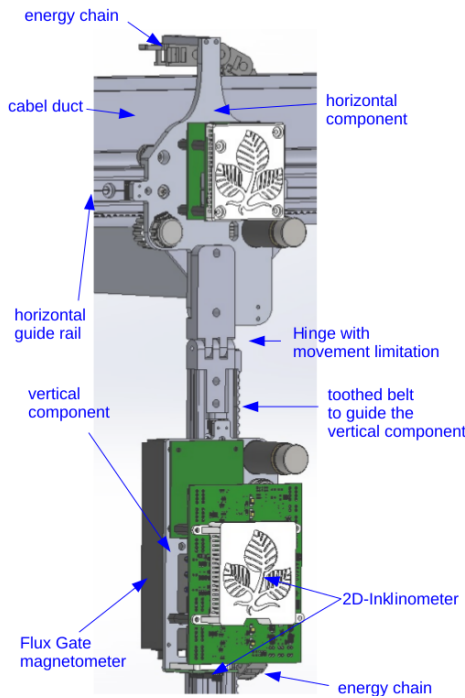


Figure 14: Schematic structure of the VMMS system in a CAD view.

starts in the lowest position and moves upwards to the next sampling position at a distance of 20 cm. After the measurement has been carried out at this point, it moves to the next sampling position. As soon as the end of the vertical linear rail has been reached⁷, the horizontal component is moved to the next position and the vertical system returns back to the initial point. After reaching the overall target position, the above procedure is repeated. In this way, a grid of magnetic field measuring points is built up until the end of the horizontal linear rail is reached. Table 3 shows a listing of the most important parameters of the VMMS with regard to track length, total measuring time and total number of measuring positions. Using the already mentioned method of bilinear interpolation on irregular grids, a more detailed investigation of the influence of magnetization effects on hall walls can be carried out. Using the EC component of VMMS as an example, the interpolation results of the magnetic field magnitude $|\vec{B}|$ are shown in the Figure 15.

4 Summary and Outlook

In order to inspect the magnetic field inside the KATRIN main spectrometer during normal operation, two high-resolution magnetic sensor systems have been developed combined to form a fine-meshed magnetic sensor network. Depending on the mesh size, several thousand magnetic field samples can be taken close to the surface of the MS (RMMS) and on vertical planes left and right to the MS (VMMS). The electromechanical features of the mobile sensor units have been

⁷this is indicated by a limit switch installed on the components

	EB	EC	WB	WC
vertical track length [m]	4.40	2.60	4.60	2.60
horizontal track length [m]	20.20	21.00	20.80	21.00
measuring positions	2346	1484	2520	1484
measuring time [h]	5.68	3.85	6.16	3.85

Table 3: Significant parameters in relation to the track length, number of measuring positions and total measuring time of individual VMMS systems.

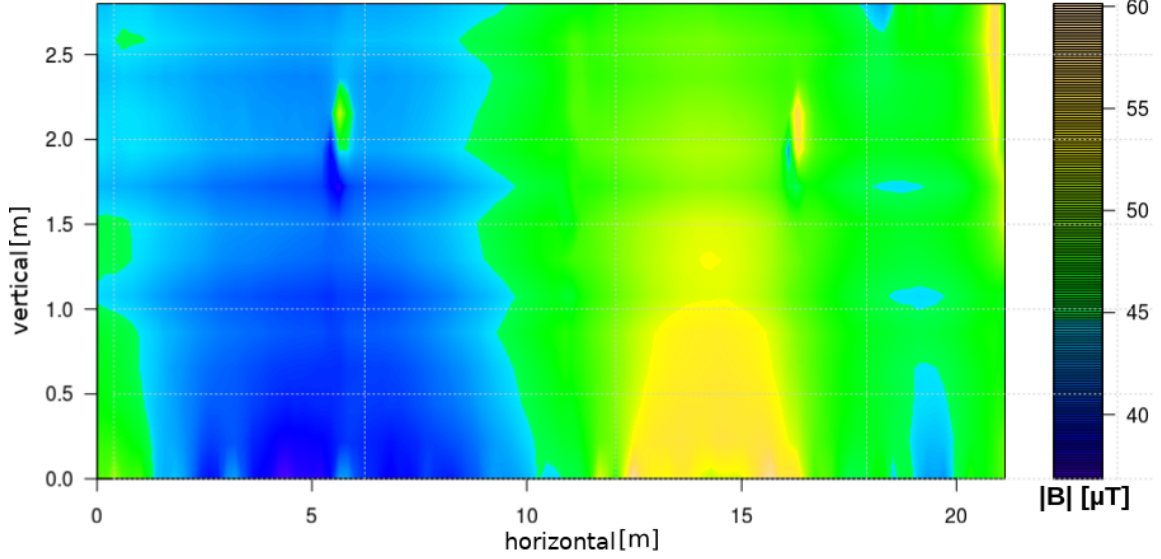


Figure 15: Interpolation result of the earth magnetic field measurement $|\vec{B}|$ in μT using 1484 sampling positions of the EC VMMS.

investigated and the serviceability of the systems has been demonstrated. It has also been shown that the magnetic field at the analyzing plane B_A , formed by the MS spectrometer magnets inside the MS, can be derived from the RMMS magnetic field samples by interpolation. However, with more refined interpolation strategies and methods like the Laplace method [17] the stability of the result should be investigated. Moreover, as the error connected with interpolation numerics generally varies with $1/N$, with N being the number of sampling points, the installation of 2 more units on LFCS 7 and LFCS 8 adjacent to the analyzing plane is advisable.

Furthermore, model based simulations of the magnetic field can be checked and improved by magnetic field samples at the MS site. Especially the magnetic dipoles method [19] needs several thousand B-field samples from RMMS and VMMS. Using this method the magnetization of model dipoles (several hundreds) can be determined and represented in simulations.

Acknowledgments

The authors wish to express gratitude to the group for Experimental Techniques of the Institute for Nuclear Physics (IKP) at KIT and for highly efficient and competent support. Furthermore, we wish

to thank Prof. Dr. E. W. Otten, Mainz University for helpful discussions and support. In addition, we like to thank the University of Applied Sciences, Fulda and the Fachbereich Elektrotechnik und Informationstechnik for their support during the entire process.

This work has been funded by the German Ministry for Education and Research under the Project codes 05A14REA, 05A11REA, 05A08RE1

References

- [1] KATRIN Collaboration, *KATRIN Design Report*, 2004, FZKA scientific report 7090, <http://bibliothek.fzk.de/zb/berichte/FZKA7090.pdf>.
- [2] V.M. Lobashev, P.E. Spivac, *A method for measuring the anti-electron-neutrino rest mass*, *Nucl. Instrum. Meth. A* **240** (1985), 305.
- [3] H. Backe, J. Bonn, Th. Edling, H. Fischer, A. Hermanni, P. Leiderer, Th. Loeken, R.B. Moore, A. Osipowicz, E. W. Otten, A Picard *A solenoid retarding spectrometer and an atomic tritium source for use in a neutrino mass experiment*, Proc.of the VIIth Moriond Workshop on “New and Exotic Phenomena”, Les Arcs, France,1987 (O. Fackler, J.Tran Thanh Van, eds.) Editions Frontiers, Gif-sur-Yvette, France 1987, p.297.
- [4] A.Picard et.al, *A solenoid retarding spectrometer with high resolution and transmission for keV electrons*, *Nucl. Instrum. Meth. B* **63** (1992) 345.
- [5] B. Zipfel, *PartOpt Precision field calculation and Particle Optics design*, 2002, <http://www.partopt.net>.
- [6] A. Osipowicz and F. Glück, *Air coil design at the MS*,14. KATRIN Collaboration Meeting, 2008,<http://fuzzy.fzk.de/bscw/bscw.cgi/d443733/95-TRP-4440-D1-FGluock-AOsipowicz.ppt>.
- [7] M. Erhard et al., *Technical design and commissioning of the KATRIN large-volume air coil system*, *Journal of Instrumentation*, 2018, Vol.13, PO2003. <http://stacks.iop.org/1748-0221/13/i=02/a=PO2003>
- [8] J. Letnev, *Ein Sensornetz zur Vermessung des Magnetfeldes am KATRIN Hauptspektrometer*, PhD Thesis, Universität Kassel, Fachbereich Elektrotechnik/Informatik, in preparation.
- [9] A. Osipowicz, W. Seller, J. Letnev, P. Marte, A. Müller, A. Spengler and A. Unru *A mobile Magnetic Sensor Unit for the KATRIN Main Spectrometer*, *Journal of Instrumentation*, 2012, 7. <http://iopscience.iop.org/1748-0221/7/06/T06002/> doi = 10.1088/1748-0221/7/06/T06002,
- [10] A. Beglarian and H. Bouquet and J. Hartmann, *Magnetic Air Field Monitoring System*, KATRIN internal document, 2013.
- [11] National Instruments, *The CompactRIO Platform*, <http://www.ni.com/compactrio/>
- [12] Marco Kleesiek, *A Data Analysis and Sensitivity-Optimization Framework for the KATRIN Experiment*, KIT/IEKP, 2014, PhD Thesis. <http://nbn-resolving.org/urn:nbn:de:swb:90-433013>
- [13] Freescale Semiconductors, *FXLS8471Q 3-Axis Linear Accelerometer*, Datasheet. <https://www.nxp.com/docs/en/data-sheet/FXLS8471Q.pdf>
- [14] Ferenc Glück, Guido Drexlin, Benjamin Leiber, Susanne Mertens, Alexander Osipowicz, Jan Reich and Nancy Wandkowsky, *Electromagnetic design of the KATRIN large-volume air coil system*. *New Journal of Physics* 15 (2013) 083025 (30pp), DOI10.1088/1367-2630/15/8/083025

- [15] Ferenc Glück, Susanne Mertens, Alexander Osipowicz, Peter Plischke, Jan Reich and Nancy Wandkowsky, *Air Coil System & Magnetic Field Sensor System*, 2009, KATRIN internal document
- [16] U. Bahlinger, *KATRIN - Prüfung Luftspuleninnenradius*, Ingenieurbüro Bahlinger, Vermessungstechnik und Geoinformation, DE-75015 Bretten, November 2009, KATRIN internal document
- [17] A. Osipowicz, U. Rausch, A. Unru and B. Zipfel, *A scheme for the determination of the magnetic field in the KATRIN main spectrometer*, arXiv:1209.5184, <http://xiv.org/abs/1209.5184>
- [18] M.G. Erhard, PhD Thesis *Influence of the magnetic field on the transmission characteristics and neutrino mass systematics of the KATRIN experiment*, Karlsruher Instituts für Technologie, Fakultät für Physik, 2016, <https://publikationen.bibliothek.kit.edu/1000065003>
- [19] Jan Reich, *Magnetic Field Inhomogeneities and Their Influence on Transmission and Background at the KATRIN Main Spectrometer* PhD thesis , KIT/IEKP, Jan 2013, <https://publikationen.bibliothek.kit.edu/1000033076>