

Charging A Smartphone Over the Air: The Resonant Beam Charging Method

Qingwen Liu#, Senior Member, IEEE, Mingliang Xiong#, Mingqing Liu#, Qingwei Jiang, Wen Fang, Yunfeng Bai

Abstract—Wireless charging for moving Internet of Things (IoT) devices such as smartphones is extremely difficult. To reduce energy dissipation during wireless transmission in mobile scenarios, laser or narrow radio beams with sophisticated tracking control are typically required. However, reaching the necessary tracking accuracy and reliability is really difficult. In this paper, inspired by the features of optical resonator and retroreflector, we develop an experiment on a self-aligned resonant beam charging system for long-distance mobile power transfer. It exploits light resonances inside a double-retroreflector-based spatially separated laser resonator (SSLR), which eliminates the requirement for any kind of tracking control. Telecentric cat's eyes are employed as the retroreflector here. The SSLR was investigated by both theoretical calculation and experiment. We also well assembled the transmitter and the receiver and demonstrated its application in mobile smartphone charging. The results show that above 5-W optical power (also obtained more than 0.6-W electrical power) transferring with negligible diffraction loss to a few-centimeter-size receiver is realized while the receiver moves arbitrarily within 2-m vertical distance and 6° field of view from the transmitter. The maximum horizontal moving range is up to ± 18 cm. This charging system empowers a smartphone in mobile operation with unlimited battery life without the need for a cable.

Index Terms—Mobile wireless power transfer, laser charging, distributed laser charging, spatially separated laser resonator.

I. INTRODUCTION

Nikola Tesla's pioneering contributions to wireless power transfer (WPT) has inspired researchers to convert scientific discovery into engineering practice for more than a century [1]. In the past decade, the tremendous emergence of mobile IoT devices (e.g., smartphones, smartwatches, robots, electric vehicles, etc.) leads to the rapid growth of WPT technologies, which could eliminate their troublesome cables and batteries [2]. Non-radiative near-field WPT realized by coils is suitable for high-efficiency transfer, however, it faces the challenge that the effective transmission distance is limited within several times of transceivers' sizes, even if the operation is in the coupled magnetic resonating regime [3–5]. Radiative far-field WPT (e.g., radio wave, light wave, and laser; see Fig. 1a) is natural for long-range transfer, but it has the difficulty that high-efficiency transfer requires sophisticated mechanism for receiver positioning and tracking, since reaching necessary

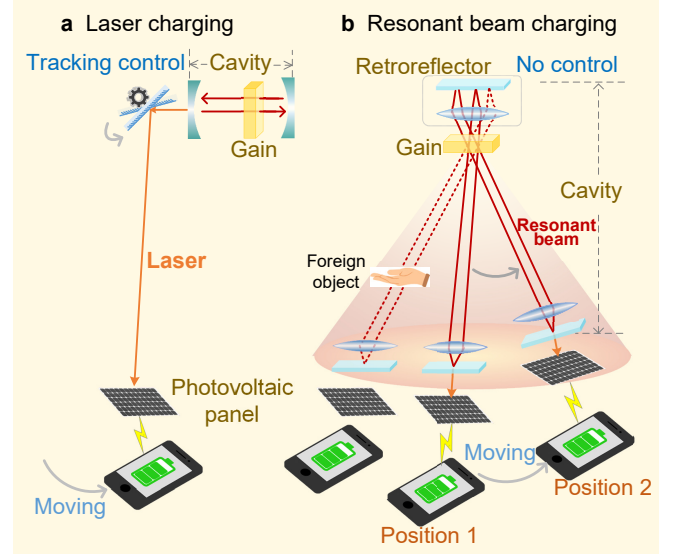


Fig. 1. Comparison of laser charging and self-aligned resonant beam charging. **a**, Laser charging. It needs tracking a moving electronic device to maintain high efficiency. **b**, Self-aligned resonant beam charging. The beam is self-aligned due to the double-retroreflector design for automatically and efficiently charging a moving electronic device without tracking control.

tracking accuracy and reliability is a serious challenge or even insurmountable obstacle [6–9].

Intuitively, if two objects exchange energy in a resonant regime, the energy transfer is expected to be high-efficiency, since the resonant field is formed by the superposition of in-phase waves (other phases are canceled by superposition) [10]. The mechanism of resonances may apply in a general physical system (e.g., acoustic, electromagnetic, astronomic, nuclear, etc.). Thus, exploiting far-field radiative resonance, simultaneously long-range and high-efficiency WPT is expected to be realized. Here, we focus on one particular physical embodiment: optical resonances [11]. Optical resonances are suitable for common applications because nearly no interference involves with most electronic devices and interactions with environmental objects are limited due to their spatially-concentrated field distribution.

Relying on optical resonances of a separated two-mirror resonator, Wang *et al.* demonstrated a WPT system up to 2-m transmission distance [12]. While the mirrors in [12] need to be aligned accurately and manually. To achieve mobility without any alignment or tracking control, recent papers presented detailed theoretical analysis and numerical simulation on the feasibility of using a double-retroreflector-based spatially separated laser resonator (SSLR) for beam self-

#Qingwen Liu, Mingliang Xiong, and Mingqing Liu contributed equally to this work. Qingwen Liu, Mingliang Xiong, Mingqing Liu, Qingwei Jiang, Wen Fang, and Yunfeng Bai are with College of Electronics and Information Engineering, Tongji University, Shanghai, People's Republic of China (e-mail: qliu@tongji.edu.cn, xiongml@tongji.edu.cn, clare@tongji.edu.cn, jiangqw@tongji.edu.cn, wen.fang@tongji.edu.cn, baiyf@tongji.edu.cn)

alignment/self-tracking; see Fig. 1b [13–15]. As depicted in Fig. 1b, both the transmitter and the receiver jointly constitute the SSLR. The standing-wave light beam in the SSLR is termed as the *resonant beam*. Both corner cube retroreflectors and telecentric cat's eye retroreflectors were investigated in recent papers. As in theoretical analysis, long-range and mobile energy transfer implemented in this way can be high-efficiency with low interference into environmental objects. Nevertheless, many detailed design information and parameters should be determined for realizing such a sophisticated structure in practice. Also, many practical issues such as thermal distortion, inhomogeneous intensity, and beam collection at the arbitrary direction are expected to be overcome by the experiment.

In this paper, we analyze theoretically and demonstrate experimentally a complete mobile resonant beam charging system, including the whole progress: pump current input, resonant beam generation and transmission, photovoltaic conversion, and charging a smartphone. All the aforementioned practical issues are addressed. By exploring the quantified analysis of electromagnetic signal, we make the following contributions:

- 1) To the best of our knowledge, this is the first time to demonstrate experimentally a complete mobile WPT system with up to 2-m distance, multi-Watt optical power, centimeter-level receiving area, and 5-V charging voltage. The safety of foreign object invasion is also verified.
- 2) Theoretical analysis and experimental measurement are well matched in this work. Parameter estimation is also conducted to determine several unmeasured parameters in this system. We use an analytical model for calculating the over-the-air transmission efficiency and the deliverable power of the proposed wireless power transfer scheme to demonstrate its low diffraction loss. The proposed analytical model in this paper needs less assumptions compared to the previously presented models.

The remainder of this paper is organized as follows. In Section II, we present the architecture of the proposed system and the analytical model for calculating the over-the-air transmission efficiency and the charging power. In Section III, we conduct both experiments and numerical calculations to prove the self-alignment characteristic and quantitatively analyze the charging/moving performance of the system. Afterwards, we discuss several related aspects such as the improvement of mobility, efficiency, safety, and extensibility in Section IV. Finally, we make a conclusion in Section V.

II. MODEL AND ANALYSIS

To describe how the resonant beam in the double-retroreflector cavity leads to a self-alignment ability, we adopt an analysis method based on the self-reproducing mode theory and numerical integration [16–19].

A. Focal telecentric cat's eye retroreflector

Figure 2a shows that a conventional telecentric cat's eye retroreflector (TCR) consists of a plane mirror and a convex lens, which are parallel to each other, where the interval between them equals the focal length of the convex lens. It can

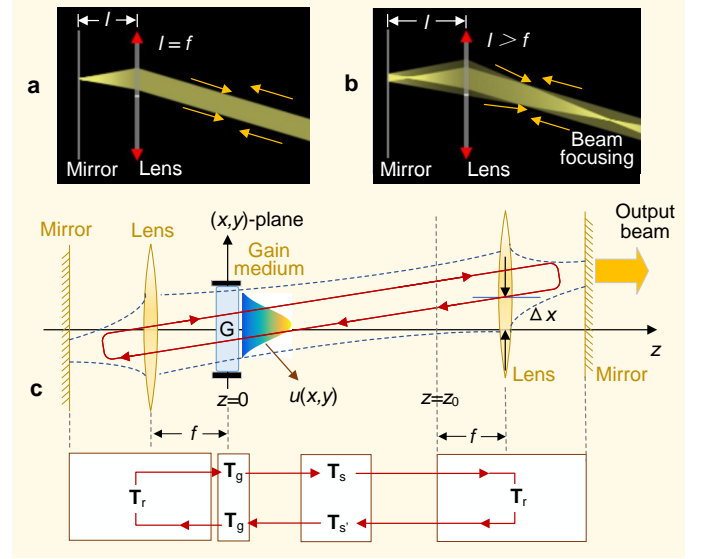


Fig. 2. Theoretical model and analysis. **a**, Conventional telecentric cat's eye retroreflector (TCR). The interval between mirror and convex lens l equals the convex lens' focal length f ($l = f$). **b**, Focal telecentric cat's eye retroreflector (FTCR). The $l > f$ setting enables beam focusing for cavity stability. **c**, Resonant beam system based on FTCRs. The self-reproducing mode theory model is illustrated by the transition matrices of field transfer for one round trip (red arrow line). Δx is the relative movement along x-axis of the retroreflector at the receiver.

reflect the incident beam from arbitrary direction back parallel to the original direction [20]. In this wireless charging system, we adopt focal telecentric cat's eye retroreflectors (FTCRs), as depicted in Fig. 2b, to ensure the stability of the SSLR [13]. The distance between the mirror and the convex lens is larger than the focal length of the convex lens, which exhibits a beam focusing ability.

Using the matrix optics method, the process that a ray passes through an optical component can be described as the ray vector multiplied by a matrix under the paraxial approximation; that is [21]

$$\begin{bmatrix} x_o \\ \theta_o \end{bmatrix} = \mathbf{M}_0 \begin{bmatrix} x_i \\ \theta_i \end{bmatrix}, \quad (1)$$

where x_i and x_o are the transverse displacements of the input ray and output ray from the optical axis, respectively, while θ_i and θ_o are the slopes of the input ray and output ray, respectively.

Moreover, if the ray passes through a series of optical components, the overall ray-transfer matrix is the production of individual matrices of these components with the opposite order [22, 23]. Thus, the ray-transfer matrix of the FTCR describes the process: A ray inputs at the incident plane, passes through all optical elements in sequence, and finally outputs from the incident plane; it is expressed as [13]

$$\begin{aligned} \mathbf{M} &= \begin{bmatrix} 1 & f \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -1/f & 1 \end{bmatrix} \begin{bmatrix} 1 & l \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} 1 & f \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -1/f & 1 \end{bmatrix} \begin{bmatrix} 1 & l \\ 0 & 1 \end{bmatrix} \\ &= \begin{bmatrix} 1 & 0 \\ -1/f_{RR} & 1 \end{bmatrix} \begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix}, \end{aligned} \quad (2)$$

where

$$f_{RR} = 1 / \left(\frac{2l}{f^2} - \frac{2}{f} \right). \quad (3)$$

f is the focal length of the lens and l is the interval between the plane mirror and the lens in the retroreflector. If $l = f$ (see Fig. 2b), the equation (2) becomes

$$\mathbf{M}_c = \begin{bmatrix} -1 & 0 \\ 0 & -1 \end{bmatrix}. \quad (4)$$

Thus, $x_o = -x_i$ and $\theta_o = -\theta_i$, i.e., the input ray passes through the reflector will return in the reverse direction. If $l > f$ (see Fig. 2b), the equation (2) becomes

$$\mathbf{M}_r = \begin{bmatrix} -1 & 0 \\ 1/f_{RR} & -1 \end{bmatrix}. \quad (5)$$

Thus, $x_o = -x_i$ and $\theta_o = -\theta_i + 1/f_{RR}$, i.e., the retroreflector exhibits the capability of beam focusing.

We use a ray-tracing optics simulator Ray-Optics (<https://github.com/ricktu288/ray-optics>) to illustrate that the FTCR-based SSLR is more stable than the cat's-eye cavity, as shown in Fig. 3. We can see that the SSLR based on conventional TCRs can only capture rays in a specific direction, while the SSLR based on FTCRs can capture many rays although they have different directions.

Figure 2c shows the SSLR-based resonant beam transfer system with a transmitter and a receiver. The transmitter includes an FTCR and a gain medium. The receiver includes the other FTCR. The collaboration between these two retroreflectors leads to the self-alignment feature of the cavity, where the resonant beam can be established between these two retroreflectors, even when the relative position of the transmitter and the receiver changes. In addition, the stability of the cavity is enhanced due to the beam-focusing ability of the FTCR. Based on the laser principle, the gain medium acts as a power amplifier, which is fed by input power and stimulates a resonant beam. If the retroreflector at the receiver is partially reflective (reflectivity is R), the resonant beam can partly pass through to form an output beam, i.e., laser. Then, the output beam is converted into electricity by a photovoltaic (PV) panel.

B. Power transfer from the transmitter to the receiver

In such a resonant beam charging system, the energy flow can be divided into 4 stages: i) the input power P_{in} at the transmitter is absorbed by the gain medium to stimulate a resonant beam; ii) the resonant beam transfers over the air to the receiver; iii) the receiver's retroreflector outputs parts of the resonant beam; and iv) the output beam is converted into electrical power P_{out} for smartphone charging. Thus, the relationship between P_{in} and P_{out} can be depicted as [12]

$$\begin{aligned} P_{out} &= \eta_{pv} \eta_e \eta_g (P_{in} - P_{th}), \\ \eta_e &= F(\eta_t), \end{aligned} \quad (6)$$

where η_{pv} is the photovoltaic efficiency, η_e is a function of η_t indicated by $F(\cdot)$, η_t is the over-the-air transmission efficiency, η_g is the gain-medium stimulation efficiency, and P_{th} is the input power threshold of enabling resonance. η_{pv} and η_g rely

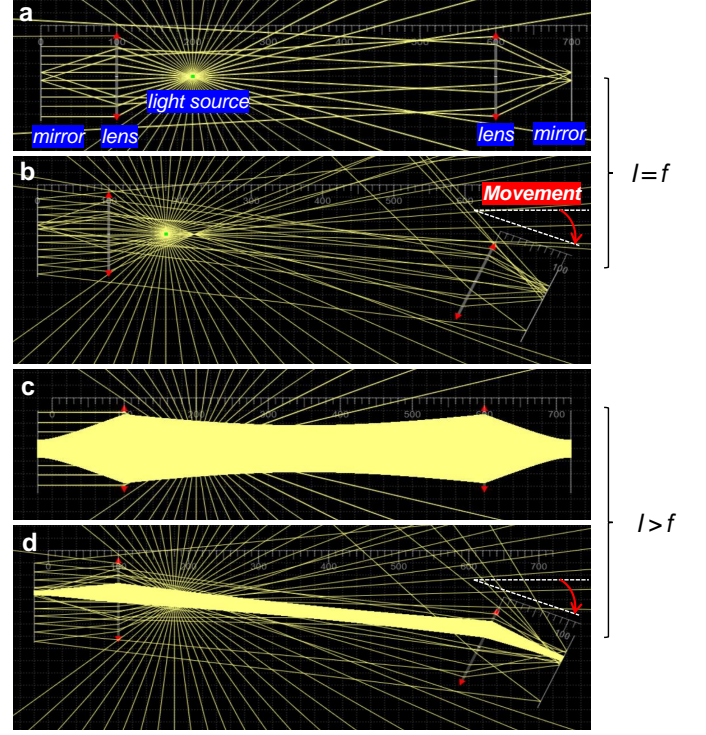


Fig. 3. Ray-Optics simulation for ray tracing comparison between the conventional TCR-based cavity and the FTCR-based cavity. **a**, conventional TCR-based cavity. A light source is set at the lens's focal point of a retroreflector and when the mirror-lens interval l equals the focal length of the lens f , i.e., $l = f$, the ray tracing can not form a stable oscillation in the cavity (the program stops running only when all the rays fly out of the scope). **b**, Conventional TCR-based cavity after movement. The stable oscillation cannot be formed. **c**, FTCR-based cavity with $l > f$. The rays in the cavity can circulate back and forth in the cavity without overflow and form a stable beam. **d**, FTCR-based cavity with $l > f$ after movement. The stable oscillation beam can still be formed.

on hardware, while η_t depends on the relative position between the transmitter and the receiver.

Based on laser principle, power is fed into the gain medium to stimulate the intra-cavity resonant beam power [16, 24, 25]. If the gain can compensate the transfer losses for one round trip within the cavity, i.e., $\exp(2g_0\ell_g) \geq \delta$, the resonance can be built up [24]. g_0 is the small-signal gain coefficient, ℓ_g is the path length of the beam passing through the gain medium, and δ represents the total round trip path loss factor including the over-the-air transmission efficiency η_t of the intra-cavity resonant beam, the loss factor of passing inside the gain medium, and the reflectivity of the retroreflector at the receiver. Only when the above resonance threshold condition is satisfied, the intra-cavity resonant beam can be established as an energy transfer channel, and the output laser beam at the receiver is converted into electricity by a photovoltaic panel. P_{th} in equation (1) is the threshold power for initializing the resonance, i.e., enabling $\exp(2g_0\ell_g) \geq \delta$.

According to the resonator model used for the calculation of the output power [16], the traveling beam intensity is amplified through the gain medium, which is characterized by the small-signal gain coefficient g_0 varying with input power P_{in} . On the other hand, the beam intensity is decreased due to diffraction losses (loss factors V_1 - V_4), scattering, and absorp-

tion inside the medium, lenses, and mirrors (loss factor V_S), and by output coupling (transmissivity of the retroreflector at the receiver is $1-R$). The output beam power is converted into electric power by a PV panel with the efficiency η_{pv} . Thus, the electric power from the PV panel can be expressed as [16]

$$P_{out} = \eta_{pv} A_b I_S \cdot \frac{(1-R)V_2}{1 - RV_2V_3 + \sqrt{R\eta_t} [1/(V_1V_2V_S) - V_S]} \cdot \left[g_0 \ell_g - |\ln \sqrt{RV_S^2 \eta_t}| \right], \quad (7)$$

where ℓ_g and I_S are the length and the saturated light intensity of the gain medium, A_b is the cross section area of the resonant beam [26]. V_1, V_2, V_3 , and V_4 indicate the transfer loss factor of the transmitter to the gain medium [16], the gain medium to the receiver, the receiver to the gain medium, and the gain medium to the transmitter, respectively, and $\eta_t = V_1V_2V_3V_4$ represents the round trip loss factor, which we defined as over-the-air transmission efficiency, as shown in Fig. 4a.

The equation (7) can be reorganized as the equation (6) which indicates three power conversion steps including: 1) from input power to the stored power in the gain medium which is ready for stimulating the resonant beam with the efficiency η_g ; 2) the stored power in the gain medium to be extracted as the output beam power with the efficiency η_e ; and 3) the output beam power to electric power by photovoltaic conversion η_{pv} . Here, η_{pv} relies on the photovoltaic hardware, while η_g can be expressed as follows

$$\eta_g = \frac{A_g I_S g_0 \ell_g}{P_{in}}, \quad (8)$$

η_e is a function of η_t indicated by $F(\eta_t)$ in equation (1) as

$$\begin{aligned} \eta_e &= F(\eta_t) \\ &= \frac{\eta_B(1-R)V_2}{1 - RV_2V_3 + \sqrt{R\eta_t} [1/(V_SV_1V_2) - V_S]}, \end{aligned} \quad (9)$$

where A_g is the power stimulating (a.k.a, pumping) area of the gain medium, and $\eta_B = A_b/A_g$ represents the overlapping efficiency. Thus, η_g relies on g_0 and ℓ_g , while η_e depends on η_t . Moreover, in order to enable resonance, the input power to the gain medium should be above a threshold P_{th} , which is depicted as

$$P_{th} = \frac{|\ln \sqrt{RV_S^2 \eta_t}| P_{in}}{g_0 \ell_g}. \quad (10)$$

C. Over-the-air transmission efficiency

To explore the over-the-air transmission efficiency η_t , we analyze the electromagnetic field propagation inside the double-retroreflector cavity and obtain the self-reproducing mode. Based on the self-reproducing mode theory [16], after being stimulated from the gain medium, the light wave will experience multiple bounces forth and back between the two retroreflectors. The light field mode is the complex value of field amplitude and phase, which can be self-reproducing after each round trip transfer until it becomes gradually stable. Once the mode reaches a steady state, the resonant beam for energy

transfer is established. Owing to the double-retroreflector cavity, the stable self-reproducing mode can be established even when the receiver changes position.

Figure 2c illustrates a three-dimensional (x, y, z) coordinate system. We set $z = 0$ at the front surface of the gain medium, which is perpendicular to z -axis, i.e., on the (x, y) -plane. $u(x, y)$ is the field mode on the front surface of the gain medium. \mathbf{u} is the vertical vector of all $u(x, y)$. The field transfer process is shown in Fig. 2c, which can be formulated as a self-consistent equation as

$$\begin{aligned} \gamma \mathbf{u} &= \mathbf{T} \mathbf{u}, \\ \mathbf{u} &= [u(x, y)]^T, \mathbf{T} = \mathbf{T}_g \mathbf{T}_r \mathbf{T}_g \mathbf{T}_{s'} \mathbf{T}_r \mathbf{T}_s. \end{aligned} \quad (11)$$

γ is the eigenvalue indicating the field change with one round-trip transmission. \mathbf{T}_r , \mathbf{T}_g , \mathbf{T}_s , and $\mathbf{T}_{s'}$ are the transition matrices of field transfer through inner-retroreflector, gain medium, free space from transmitter to receiver, and free space from receiver to transmitter, respectively. For example, \mathbf{u} will be transferred to the field mode $\mathbf{T}_s \mathbf{u}$ at the front surface of the retroreflector at the receiver by the transmitter-to-receiver field transfer depicted as \mathbf{T}_s . Thus, \mathbf{T} is the transition matrix of field transfer for one round trip, i.e., $\mathbf{T}_g \mathbf{T}_r \mathbf{T}_g \mathbf{T}_{s'} \mathbf{T}_r \mathbf{T}_s$ indicates the sequential transfer steps starting from the front surface of the gain medium and following the red-arrow-line loop.

\mathbf{T}_g , \mathbf{T}_s , and $\mathbf{T}_{s'}$ are the transition matrices of field transfer through the gain medium, free space from transmitter to receiver, and free space from receiver to transmitter, respectively, which are expressed as

$$\begin{aligned} \mathbf{T}_g \mathbf{u} &= [u(x, y) \cdot G(x, y)]^T \\ \mathbf{T}_s \mathbf{u} &= [\mathcal{F}^{-1} \{ \mathcal{F} \{ u(x, y) \} \\ &\quad \cdot S(\nu_x, \nu_y, x_0 + \Delta x, y_0 + \Delta y) \\ &\quad \cdot H(\nu_x, \nu_y, z_0 + \Delta z) \}]^T, \\ \mathbf{T}_{s'} \mathbf{u} &= [\mathcal{F}^{-1} \{ \mathcal{F} \{ u(x, y) \} \\ &\quad \cdot S(\nu_x, \nu_y, -(x_0 + \Delta x), -(y_0 + \Delta y)) \\ &\quad \cdot H(\nu_x, \nu_y, z_0 + \Delta z) \}]^T \end{aligned} \quad (12)$$

where \mathcal{F} and \mathcal{F}^{-1} denotes the two-dimensional fast Fourier transfer and inverse Fourier transfer; (x_0, y_0, z_0) and $(\Delta x, \Delta y, \Delta z)$ in functions $H(\cdot)$ and $S(\cdot)$ represents the receiver's arbitrary initial position and the relative movement; thus, the new position after movement is expressed as $(x_0 + \Delta x, y_0 + \Delta y, z_0 + \Delta z)$.

Here the gain medium is equivalent to an aperture $G(x, y)$ which is expressed as an indication function to depict the area within the aperture by 1 and the area outside the aperture by 0; that is

$$G(x, y) = \begin{cases} 1, & x^2 + y^2 \leq r_g^2 \\ 0, & \text{else} \end{cases}, \quad (13)$$

where r_g is the radius of the gain medium.

$H(\nu_x, \nu_y, d_L)$ is the free space propagation kernel of the field mode as [18]

$$H(\nu_x, \nu_y, d_L) = \exp \left[i \frac{2\pi}{\lambda} d_L \sqrt{1 - (\lambda \nu_x)^2 - (\lambda \nu_y)^2} \right], \quad (14)$$

where ν_x and ν_y represent the spatial frequency coordinates, d_L is the propagation distance, λ is the wavelength, and

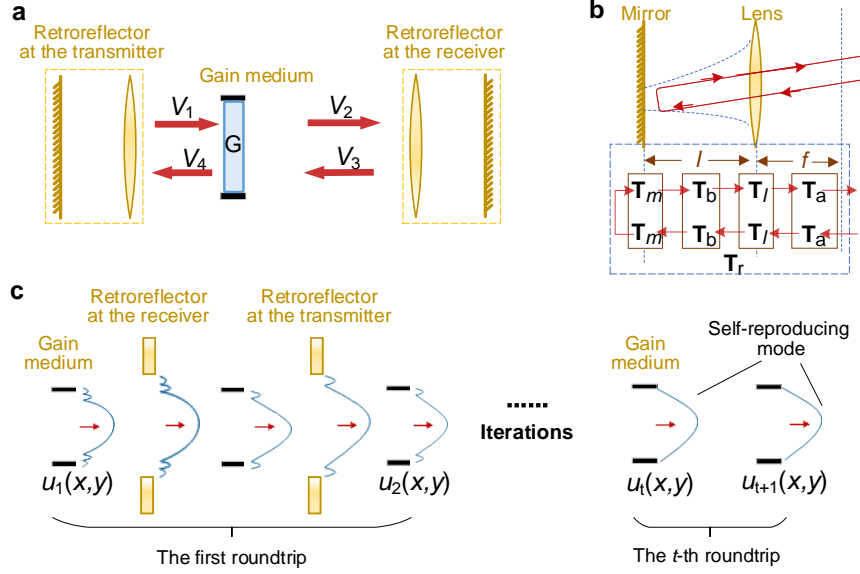


Fig. 4. Loss factors, transition matrices of retroreflector, and Fox-Li algorithm. **a**, The loss factors in the procedure of resonant beam transmission. **b**, Transition matrices of field transfer through an FTCL. **c**, Fox-Li algorithm for iterative calculation of self-reproducing mode.

$i = \sqrt{-1}$. $\mathbf{T}_a \mathbf{u}$ is actually the Rayleigh-Sommerfeld scalar diffraction integral with fast Fourier transform method which depicts the optical fields propagation and $H(\cdot)$ is the system transfer function of free-space propagation [16, 18, 24].

After receiver's movement, the retroreflector at the receiver is offset with respect to the optical axis of the previous plane in our system. $S(\nu_x, \nu_y, s_x, s_y)$ indicates the free-space propagation shift in the spatial frequency domain given by [27]

$$S(\nu_x, \nu_y, s_x, s_y) = \exp[i2\pi(\nu_x s_x + \nu_y s_y)], \quad (15)$$

where s_x and s_y are relative shift distances along x-axis and y-axis of the coordinates system between the latter plane and former plane with the field propagation.

$\mathbf{T}_r = \mathbf{T}_a \mathbf{T}_l \mathbf{T}_b \mathbf{T}_m \mathbf{T}_m \mathbf{T}_b \mathbf{T}_l \mathbf{T}_a$ denotes the transition matrix of the retroreflector as in Fig. 4b. We choose the focal plane at the mirror-opposite side of the lens as the original plane to depict the field transfer calculation of the retroreflector. \mathbf{T}_m is the transition matrix for field transfer through mirror (equivalent to an aperture), which is generally expressed as an indication function to depict the reflective area by 1 and non-reflective area by 0. \mathbf{T}_l , \mathbf{T}_b , and \mathbf{T}_a are the transition matrices for field transfer through convex lens, the interval between the lens and mirror, and interval between the lens and focal plane. The corresponding field transfer operations are defined as

$$\begin{aligned} \mathbf{T}_m \mathbf{u} &= [u(x, y) \cdot M(x, y)]^T \\ \mathbf{T}_l \mathbf{u} &= [u(x, y) \cdot L(x, y)]^T \\ \mathbf{T}_b \mathbf{u} &= [\mathcal{F}^{-1} \{ \mathcal{F} \{ u(x, y) \} \cdot H(\nu_x, \nu_y, l) \}]^T, \\ \mathbf{T}_a \mathbf{u} &= [\mathcal{F}^{-1} \{ \mathcal{F} \{ u(x, y) \} \cdot H(\nu_x, \nu_y, f) \}]^T \end{aligned} \quad (16)$$

where $M(x, y)$ is the indication function and $L(x, y)$ represents the phase changes after the field passes through a convex lens defined as

$$M(x, y) = \begin{cases} 1, & x^2 + y^2 \leq r^2, \\ 0, & \text{else}, \end{cases} \quad (17)$$

and

$$L(x, y) = \begin{cases} \exp \left[-i \frac{\pi}{\lambda f} (x^2 + y^2) \right], & x^2 + y^2 \leq r^2, \\ 0, & \text{else}, \end{cases} \quad (18)$$

where r is the radius of the retroreflector front surface, l is the interval between the flat mirror and lens in the retroreflector, f is the focal length of the lens.

After many reflections inside the double-retroreflector cavity, the resonant beam field distribution will not vary after transition and reach a steady-state field distribution, i.e., the self-reproducing mode. To solve the equation (2) and obtain the self-reproducing mode, we adopted the Fox-Li algorithm to simulate the beam oscillation process inside the resonator with iterative calculation as in Fig. 4c [17].

The process that the resonant beam reflected back and forth in the SSLR is equivalent to the beam propagation through a serial optical systems (i.e., the lenses, the mirrors, the gain medium, and the space propagation between these deceives). We assume an arbitrary initial field at the gain medium and then compute the field here after one round trip transmission as a result of the first transition. The newly calculated field after normalization is then used to compute the field at the gain medium after the second transition. Such computation will be repeated for successive transitions until a steady-state is reached. Thus, we can obtain the self-reproducing mode through iteratively computing equation (2) using this Fox-Li algorithm. The iteration can be stopped as the field becomes stable and eventually the self-reproducing mode is obtained. If the receiver is shifted by arbitrary $(\Delta x, \Delta y, \Delta z)$ relative to its original position (x_0, y_0, z_0) , only \mathbf{T}_s and $\mathbf{T}_{s'}$ need to be updated, while \mathbf{T}_g and \mathbf{T}_r are invariant to movement.

The eigensolution of the above self-consistent equation (11) can be obtained by iterative calculation [16]. The field

mode will gradually reach a steady state, i.e., achieving a self-reproducing mode, as the iterative index t increases to a certain value. The eigensolution of the above equation describes the field amplitude distribution of the steady-state resonant beam, which is self-reproducing after one round trip transfer. The corresponding eigenvalue γ depicts the field mode change after one round trip transfer **due to diffraction loss through the over-the-air transmission, and $|\gamma|^2$ is the field intensity change**. Thus, the over-the-air transmission efficiency can be calculated as [25]

$$\eta_t = |\gamma|^2 = \lim_{t \rightarrow \infty} \frac{\iint_{(x,y)} |u_{t+1}(x,y)|^2}{\iint_{(x,y)} |u_t(x,y)|^2}, \quad (19)$$

where $u_t(x,y) = u(x,y)$ for the t -th iteration. Even though the front surface of the gain medium is selected as an example in the above analysis, **any other surface along the round trip transfer in Fig. 2c can also be chosen, which leads to the same η_t using the same analysis.**

Based on the above eigenmode analysis, the resonant beam in the double-retroreflector cavity with arbitrary movement can be depicted in terms of the self-reproducing mode and the over-the-air transmission efficiency. The double-retroreflector design guarantees the steady state of the self-reproducing mode in a certain movement region without tracking control. **Readers should be noticed that although we investigate the over-the-air transmission efficiency here, many other factors such as the pump efficiency, the absorbing efficiency of the gain medium, the output laser transmission efficiency, and the PV conversion efficiency also affect the overall WPT efficiency; and we will discuss them in Section IV.**

III. CALCULATION AND EXPERIMENT

Here, we demonstrate the theoretical analysis and **the experiment of the resonant beam charging system**. Previously, optical systems have been used to illustrate the physics of resonant beam for **non-mobility** WPT [12]. Our work here differs in that we demonstrate a mobile WPT scheme.

A. Measurement setup and parameters

Figure 5 shows the **experiment setup**. The transmitter consists of **an FTCR** and an Nd:YVO₄ gain medium. A pump laser diode **with 878-nm output** feeds power to the gain medium to stimulate 1064-nm infrared resonant beam. The receiver consists of **an FTCR** with 90% reflectivity, a focal lens, a waveguide, and a photovoltaic panel. **The focal lens directed beam at arbitrary direction into the waveguide. The waveguide homogenizes the beam intensity to increase the consequent PV conversion efficiency. Finally, The output light from the waveguide is converted by the PV panel into electricity.** The radii of lenses and mirrors in the retroreflectors at both the transmitter and the receiver are 7 mm. The photovoltaic panel size is 10 × 6 mm². **A direct current to direct current (DC-DC) converter is used to convert the high-voltage and variable PV output to a stable 5-V charging voltage which is acceptable for most electronic devices [12, 28].**

A 12 × 12 mm Nd:YVO₄ gain medium is adopted at the transmitter. A steel disc with a hole radius of 2.8 mm

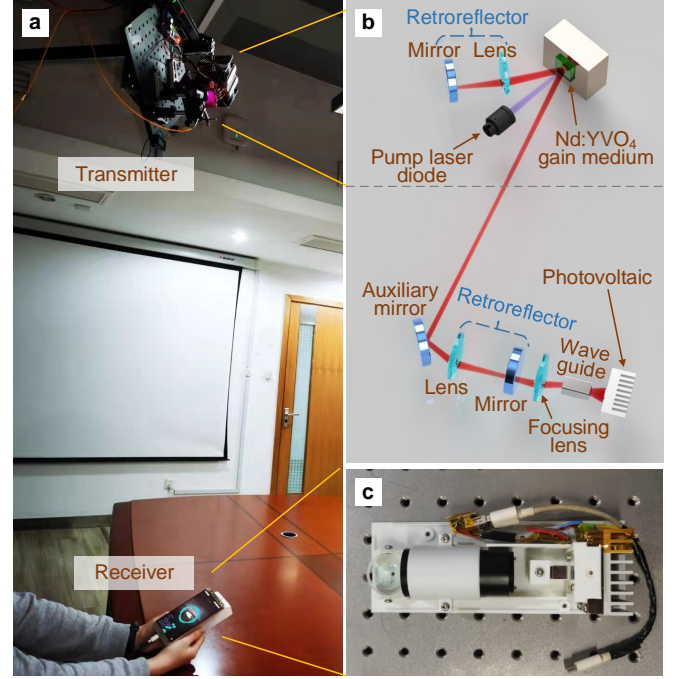


Fig. 5. Experimental verification. **a**, Experiment of charging a smartphone. **b**, Experimental components. **c**, The receiver with the size 16.7 × 6.0 × 3.6 cm³.

TABLE I
PARAMETERS IN THEORETICAL CALCULATION

Parameter	Symbol	Value
Gain medium radius	r_g	2.8 mm
Radius of lens and mirror	r	7.0 mm
Retroreflector focal length	f	50.4 mm
Retroreflector inner interval	l	52.0 mm
Input power to gain medium	P_{in}	37.3 W
Medium saturated intensity	I_s	1.26×10^7 W/m ²
Output retroreflector reflectivity	R	90%
Loss factor by optical components	V_s	0.88
Excitation efficiency	η_g	0.72
Photovoltaic efficiency	η_{pv}	0.12

is attached to the surface of the gain medium to fix the medium onto the cooling module. All mirrors and lenses in the retroreflectors are attached to an aperture with radius of 7 mm. At the receiver, the waveguide is coated with silver so that most light energy can be guided to the **PV** panel. The **FTCRs** at the transmitter and receiver share the same configuration. The focal length of the lens in the retroreflector is 50 mm ($\pm 1\%$). The interval between the lens principal plane and the mirror is 52 mm (the principal plane of the lens is closer to the mirror, and the distance from which to the center of the lens is calculated to be 0.9 mm). The input power to **the gain medium** is 37.3 W. The reflectivity of the mirror in the **FTCR** at the transmitter is near 1. However, the reflectivity of the mirror at the receiver is 90%, which means 10% beam power can pass through the mirror. **All the experiment results are obtained as the average of more than 5 measurements to eliminate any possible random factors. We calculated the field distribution, the output beam power, the output electrical power, and the over-the-air transmission efficiency using the**

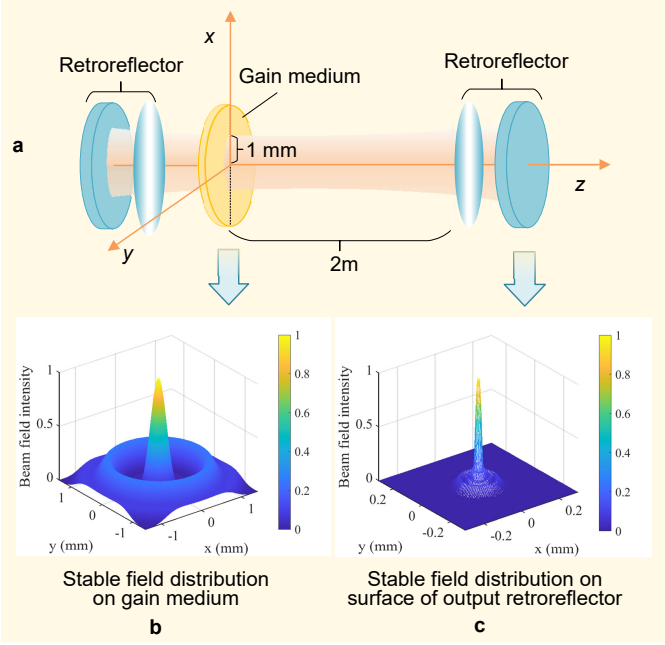


Fig. 6. Stable field distribution in the FTCCR-based resonator.

parameters estimated from the experimental setup. We started each calculation with the initial plane wave field values and waited until steady state was reached before recording the relevant results. Table I contains the parameters in theoretical calculation.

B. Theoretical and experimental results

In Fig. 6, we obtain the eigensolution of the above self-consistent equation (11) by numerical calculation and show the stable field distribution inside the SSLR. The beam field intensity is spatially-concentrated with less than 1-mm radius along the 2-m axis between the two FTCCRs, which forms a narrow beam shape as observed in the experiments.

In Fig. 7, for 2-m vertical transmission distance, the output beam power and the output electrical power are measured and calculated. The transmitter is located at the origin $(0, 0, 0)$ and the receiver is shifted on the (x, y) -plane along x -axis between $(-\Delta x, 0, 2 \text{ m})$ and $(\Delta x, 0, 2 \text{ m})$. When the shifting distance $\Delta x < 10 \text{ cm}$, the output beam power is above 5 W, the output electrical power is around 0.6 W, and the over-the-air transmission efficiency remains nearly 100% as in Fig. 9. When $\Delta x > 10 \text{ cm}$, the output beam power, the output electrical power, and the transmission efficiency drop down to zeros gradually. Thus, $-10 \text{ cm} < \Delta x < 10 \text{ cm}$ at $z = 2 \text{ m}$ from the transmitter is equivalent to around 6° field of view. Besides, we can observe that the maximum horizontal moving range (along the x -axis) where the power can be received is up to $\pm 18 \text{ cm}$.

In Fig. 8, the transmitter is located at $(0, 0, 0)$ and the receiver is moved along z -axis as $(0, 0, \Delta z)$. When $0.2 \text{ m} < \Delta z < 2 \text{ m}$, the output beam power is around 5 W, the output electrical power is above 0.6 W, and the over-the-air transmission efficiency remains nearly 100% as in Fig. 10. When $\Delta z > 2 \text{ m}$, the output optical power, the output

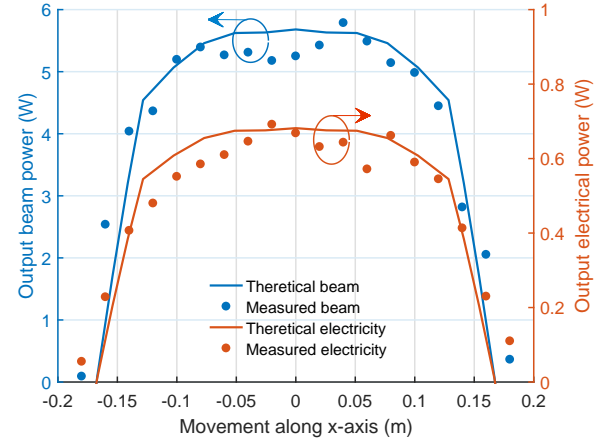


Fig. 7. Output beam power and electrical power vs. receiver's movement along x -axis.

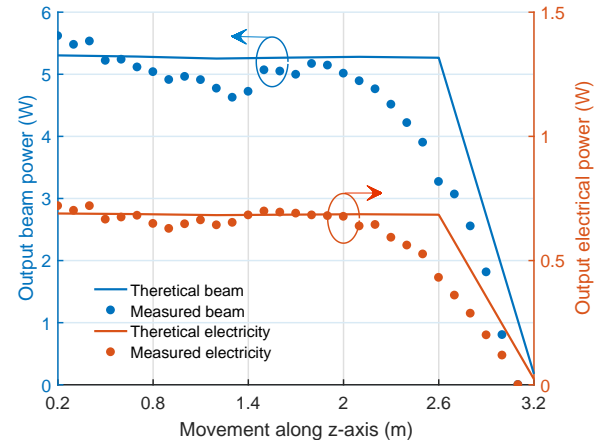


Fig. 8. Output beam power and electrical power vs. receiver's movement along z -axis.

electrical power, and the transmission efficiency start turning down to zeros gradually. We can observe that the maximum vertical moving distance (along the z -axis) is up to 3 m. The maximum transmission distance depends on the stability of the SSLR. [13] gives the boundary of the transmission distance for such a symmetric SSLR, i.e., $d < 4f_{RR}$, while the real transmission distance also depends on the losses and the gain.

The results of the numerical calculation are generally in good agreement with the corresponding measurement. Therefore, such a theoretical model can indeed be used to demonstrate the power transfer in the resonant beam charging system as predicted from the self-reproducing mode theory.

IV. DISCUSSION

Mobility: We demonstrate the above experimental system for charging a smartphone in mobile operation. From the above theoretical and experimental results, the WPT system can continuously supply above 0.5-W electrical power for a compact-size moving receiver in the coverage of 2-m distance and 6° field of view from the transmitter. A typical power supply for a smartphone is 5 V and 1 A (i.e., 5 W). Assume the smartphone needs to be fully charged once per day, and

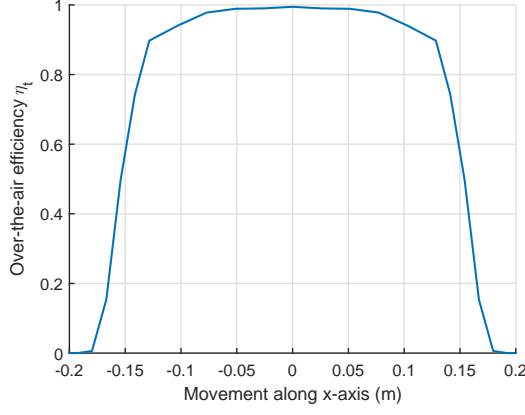


Fig. 9. Over-the-air transmission efficiency η_t vs. receiver movement along x-axis Δx from $(x_0 = 0, y_0 = 0, z_0 = 2 \text{ m})$.

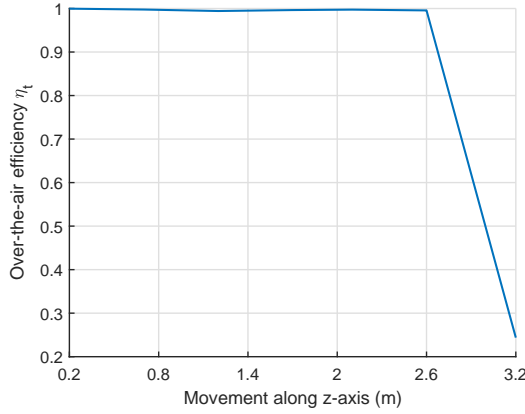


Fig. 10. η_t vs. receiver movement along z-axis Δz from $(x_0 = 0, y_0 = 0, z_0 = 0)$.

each charging duration is 1 hour. Thus, its energy consumption is 5 Wh per day. While using the demonstrated resonant beam charging system, the smartphone can be completely charged with 0.5-W charging power in 10 hours. Although the charging time is expanded, users no longer need to carry a power cable. Since the charging even occurs in mobile operation, the prospective charging time could be more than 10 hours per day, e.g., in the scenario of charging the smartphone in the area of an office table. Thus, this WPT system enables unlimited battery life for this smartphone, where charging via a power cable is no longer needed. It facilitates imaginative applications in the future such as a mobile charging network which deliveries energy to anything, anywhere, and anytime similar to mobile Internet.

Efficiency: Improvement of the power transfer efficiency from the transmitter to the receiver can be achieved by enhancing the efficiency of the power feeding to the gain medium at the transmitter, the over-the-air beam transmission, and the beam-to-electricity power conversion at the receiver. At the transmitter, the gain medium in our experiment is solid-state material. To improve the conversion efficiency of gain medium, high efficient semiconductor gain medium could be used [29, 30]. To increase the over-the-air transmission

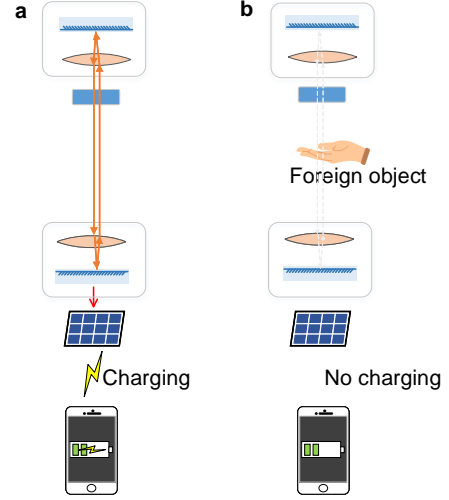


Fig. 11. Comparison of unobstructed and obstructed by a foreign object.

TABLE II
SAFETY EVALUATION FOR FOREIGN OBJECT INVASION.

Parameter	Symbol	Value
Cavity length	L	2 m
Light speed	c	$3 \times 10^8 \text{ m/s}$
Storage time	t_s	$6.67 \times 10^{-9} \text{ s}$
Output beam power	P_o	5 W
Intra-cavity stored power	P_s	50 W
Beam cross-sectional area	A_r	$1.54 \times 10^{-4} \text{ m}^2$
Beam radiant exposure	E_r	0.0022 J/m ²
Maximum permissible exposure	E_m	1000 J/m ²

efficiency, adaptive mode control schemes, e.g., adjustable optical modulator can be adopted [31]. At the receiver, we chose an off-the-shelf photovoltaic panel in our experiment. If the photovoltaic panel is optimized, e.g., designing for the specific wavelength, the output beam conversion efficiency can be enhanced [32–36]. Besides, although in this work the output mirror's reflectivity R is 90%, changing this parameter will also affect the overall transmission efficiency. Thus, to obtain a maximum output, one should find an optimum R .

Safety: As in Fig. 11, if a foreign object, such as a hand, is placed between the transmitter and the receiver, i.e., obstructs the line of sight (LOS) between the two retroreflectors, the round-trip transfer loss will suddenly increase beyond the gain, which breaks the oscillation condition; thus, the resonance will be cut off. Upon the foreign object's obstruction, the radiant exposure of resonant beam in the above experimental system is calculated as 0.0022 J/m², which is less than the maximum permissible exposure 1000 J/m² in the IEC60825-1:2014 laser safety standard [37]. The safety of foreign objects which gradually invade into the resonant beam has been quantitatively analyzed by numerical simulation in [38]. As a foreign object enters the resonator, the modes of the resonant beam change relatively with the progress of invasion. As the modes with larger radius disappear, the power transits to the inner modes, keeping the electromagnetic field leakage in an allowable range. In our mobile resonant beam charging

experiments, we also verified the invasion safety. The output laser is still safe for users, as it is directed into a waveguide and absorbed by the PV panel.

When the resonant beam is cut off by a foreign object, the maximum beam radiant exposure E_r , i.e., the radiant energy per unit area, to the foreign object can be calculated based on the circulating power model [24]. P_s is the intra-cavity resonant beam power, which can be depicted as:

$$P_s = \frac{P_o}{1 - R}, \quad (20)$$

where P_o is the output beam power, and R is the reflectivity of the retroreflector at the receiver. The power storage time t_s in the cavity can be calculated based on the cavity length (i.e. transmission distance) L and the resonant beam transmission speed as:

$$t_s = \frac{L}{c}, \quad (21)$$

where c is the light speed. Thus, the beam radiant exposure E_r can be depicted as

$$E_r = \frac{P_s t_s}{A_r}, \quad (22)$$

where A_r is the cross-sectional area of the resonant beam. We have performed the calculation for the experimental system and obtained $E_r = 0.0022 \text{ J/m}^2$ as in Table II, which is below the MPE to skin of laser radiation safety regulation $E_m = 1000 \text{ J/m}^2$ in the IEC 60825-1:2014 standard. In order to improve safety, the radius and reflectivity of the retroreflector can be adjusted to reduce radiant exposure.

Extensibility: Our work adopts an infrared wavelength as an example to verify the theory with the experiments. The principle of resonant beam in the SSLR could also be applied to other wavelengths, e.g., radio frequency [39, 40], which may be a new direction in the future study of mobile WPT.

V. CONCLUSION

In conclusion, we present both a theoretical study and an experiment on a self-aligned resonant beam in the double-retroreflector-based spatially separated laser resonator (SSLR) for mobile and over-the-air wireless charging. The spatially-concentrated field distribution of the resonant beam results in high-efficiency transmission over a long distance. Particularly, the SSLR based on focal telecentric cat's eye retroreflectors enables automatically charging a compact-size moving receiver without positioning/tracking control. Experiment results are in good agreement with the theoretical calculation. The work provides guidelines for theoretical and experimental research in the future. Several improvement points such as expanding the moving range, increasing the total efficiency, and developing multiple safeguards will be further studied.

REFERENCES

- [1] N. Tesla, "Apparatus for transmitting electrical energy," vol. US Patent 1119732, 1914.
- [2] X. Lu, D. Niyato, P. Wang, D. I. Kim, and Z. Han, "Wireless charger networking for mobile devices: fundamentals, standards, and applications," *IEEE Wireless Communi.*, vol. 22, no. 2, pp. 126–135, Apr. 2015.

- [3] G. Lerosey, "Wireless power on the move," *Nature*, vol. 546, pp. 354–355, June 2017.
- [4] Kurs, André, Karalis, Aristeidis, Moffatt, Robert, Joannopoulos, D. J., Fisher, and P. and, "Wireless power transfer via strongly coupled magnetic resonances," *Science*, 2007.
- [5] S. Assaworarith, X. Yu, and S. Fan, "Robust wireless power transfer using a nonlinear parity-time-symmetric circuit," *Nature*, vol. 546, no. 7658, pp. 387–390, 2017.
- [6] J. Fakidis, S. Videv, H. Helmers, and H. Haas, "0.5-gb/s ofdm-based laser data and power transfer using a gaas photovoltaic cell," in *IEEE Photonics Conference IPC*, Sep. 2018, pp. 1–4.
- [7] J. Fakidis, S. Kucera, H. Claussen, and H. Haas, "On the design of a free space optical link for small cell backhaul communication and power supply," in *IEEE International Conference on Communication Workshop ICCW*, Jun. 2015, pp. 1428–1433.
- [8] B. Clerckx, R. Zhang, R. Schober, D. W. K. Ng, D. I. Kim, and H. V. Poor, "Fundamentals of wireless information and power transfer: From rf energy harvester models to signal and system designs," *IEEE J. Sel. Areas Commun.*, vol. 37, no. 1, pp. 4–33, Jan. 2019.
- [9] K. Wan, Q. Xue, X. Liu, and S. Y. Hui, "Passive radio-frequency repeater for enhancing signal reception and transmission in a wireless charging platform," *IEEE Trans. Ind. Electron.*, vol. 61, no. 4, pp. 1750–1757, Apr. 2014.
- [10] T. Aoki, B. Dayan, E. Wilcut, W. P. Bowen, A. S. Parkins, T. J. Kippenberg, K. J. Vahala, and H. J. Kimble, "Observation of strong coupling between one atom and a monolithic microresonator," *Nature*, vol. 443, no. 7112, p. 671–674, Oct. 2006.
- [11] J.-M. Liu, *Optical Resonance*. Cambridge University Press, 2016, p. 204–223.
- [12] W. Wang, Q. Zhang, H. Lin, M. Liu, X. Liang, and Q. Liu, "Wireless energy transmission channel modeling in resonant beam charging for IoT devices," *IEEE Internet Things J.*, vol. 6, no. 2, pp. 3976–3986, Apr. 2019.
- [13] M. Xiong, M. Liu, Q. Jiang, J. Zhou, Q. Liu, and H. Deng, "Retro-reflective beam communications with spatially separated laser resonator," *IEEE Trans. Wireless Communi.*, vol. 20, no. 8, Aug. 2021.
- [14] M. Liu, M. Xiong, and Q. Liu, "Mobility-enhanced simultaneous lightwave information and power transfer," *IEEE Trans. Wireless Communi.*, vol. 20, no. 10, Oct. 2021.
- [15] M. Liu, H. Deng, Q. Liu, J. Zhou, M. Xiong, L. Yang, and G. B. Giannakis, "Simultaneous mobile information and power transfer by resonant beam," *IEEE Trans. on Signal Process.*, vol. 60, May 2021.
- [16] N. Hodgson and H. Weber, *Laser Resonators and Beam Propagation: Fundamentals, Advanced Concepts, Applications*, ser. Springer Series in Optical Sciences. Springer Berlin Heidelberg, 2005, vol. 108.
- [17] A. G. Fox and T. Li, "Resonant modes in a maser interferometer," *The Bell System Technical Journal*, vol. 40, no. 2, pp. 453–488, Mar. 1961.
- [18] F. Shen and A. Wang, "Fast-fourier-transform based numerical integration method for the rayleigh-sommerfeld diffraction formula," *Appl. Opt.*, vol. 45, no. 6, pp. 1102–1110, Feb. 2006.
- [19] J. A. Hudson, "Fresnel-Kirchhoff diffraction in optical systems: An approximate computational algorithm," *Appl. Opt.*, vol. 23, no. 14, pp. 2292–2295, July 1984.
- [20] T. Takatsuji, M. Goto, S. Osawa, R. Yin, and T. Kurosawa, "Whole-viewing-angle cat's-eye retroreflector as a target of laser trackers," *Meas. Sci Technol.*, vol. 10, no. 7, pp. N87–N90, Jan. 1999.
- [21] V. Magni, "Multielement stable resonators containing a variable lens," *J. Opt. Soc. Am. A*, vol. 4, no. 10, pp. 1962–1969, Oct 1987.
- [22] P. Baues, "Huygens' principle in inhomogeneous, isotropic media and a general integral equation applicable to optical resonators," *Opto-electronics*, vol. 1, no. 1, pp. 37–44, 1969.
- [23] H. Kogelnik, "Imaging of optical modes—resonators with in-

- ternal lenses,” *Bell System Technical Journal*, vol. 44, no. 3, pp. 455–494, 1965.
- [24] W. Koechner, *Solid-state laser engineering*. Berlin, Heidelberg: Springer, 2013, vol. 1.
 - [25] A. E. Siegman, *Lasers*. University Science Books, 1986.
 - [26] G. A. Deschamps, “Gaussian beam as a bundle of complex rays,” *Electronics letters*, vol. 7, no. 23, pp. 684–685, 1971.
 - [27] N. Delen and B. Hooker, “Free-space beam propagation between arbitrarily oriented planes based on full diffraction theory: a fast fourier transform approach,” *J. Opt. Soc. Am. A*, vol. 15, no. 4, pp. 857–867, Apr 1998.
 - [28] Q. Zhang, G. Wang, J. Chen, G. B. Giannakis, and Q. Liu, “Mobile energy transfer in internet of things,” *IEEE Internet of Things Journal*, vol. 6, no. 5, pp. 9012–9019, July 2019.
 - [29] T. Miyamoto, “Optical wireless power transmission using vc-sels,” in *Semiconductor Lasers and Laser Dynamics VIII*, vol. 10682. International Society for Optics and Photonics, 2018, p. 1068204.
 - [30] L. I. Berger, *Semiconductor materials*. CRC press, 1996.
 - [31] F. M. Dickey, *Laser beam shaping: theory and techniques*. CRC press, 2018.
 - [32] M. S. Aziz, S. Ahmad, I. Husnain, A. Hassan, and U. Saleem, “Simulation and experimental investigation of the characteristics of a pv-harvester under different conditions,” in *International Conference on Energy Systems and Policies ICESP*. IEEE, 2014, pp. 1–8.
 - [33] T. Salmi, M. Bouzguenda, A. Gastli, and A. Masmoudi, “Matlab/simulink based modeling of photovoltaic cell,” *Int. J. Renew. Energy Res.*, vol. 2, no. 2, pp. 213–218, 2012.
 - [34] E. Oliva, F. Dimroth, and A. Bett, “Gaas converters for high power densities of laser illumination,” *Prog. Photovolt.*, vol. 16, no. 4, pp. 289–295, 2008.
 - [35] V. Khvostikov, S. Sorokina, F. Y. Soldatenkov, and N. K. Timoshina, “Gasb-based photovoltaic laser-power converter for the wavelength $\lambda \approx 1550$ nm,” *Semiconductors*, vol. 49, no. 8, pp. 1079–1082, 2015.
 - [36] S. Liu and R. A. Dougal, “Dynamic multiphysics model for solar array,” *IEEE Trans. on Energy Convers.*, vol. 17, no. 2, pp. 285–294, 2002.
 - [37] I. E. Commission, “Safety of laser products-part 1: Equipment classification and requirements,” *International Standard*, May 2014.
 - [38] W. Fang, H. Deng, Q. Liu, M. Liu, Q. Jiang, L. Yang, and G. B. Giannakis, “Safety analysis of long-range and high-power wireless power transfer using resonant beam,” *IEEE Trans. Signal Process.*, vol. 69, pp. 2833–2843, May 2021.
 - [39] J. D. Breeze, E. Salvadori, J. Sathian, N. M. Alford, and C. W. Kay, “Continuous-wave room-temperature diamond maser,” *Nature*, vol. 555, no. 7697, pp. 493–496, 2018.
 - [40] G. Lerosey, J. de Rosny, A. Tourin, A. Derode, G. Montaldo, and M. Fink, “Time reversal of electromagnetic waves,” *Phys. Rev. Lett.*, vol. 92, p. 193904, May 2004.