
ARTIFICIAL BANDWIDTH EXTENSION USING DEEP NEURAL NETWORK AND H^∞ SAMPLED-DATA CONTROL THEORY

Deepika Gupta

Department of Electronics and Electrical Engineering
 Indian Institute of Technology Guwahati
 Guwahati, Assam, India
 deepika.gupta@iitg.ac.in

Hanumant Singh Shekhawat

Department of Electronics and Electrical Engineering
 Indian Institute of Technology Guwahati
 Guwahati, Assam, India
 h.s.shekhawat@iitg.ac.in

August 31, 2021

ABSTRACT

Artificial bandwidth extension is applied to speech signals to improve their quality in narrowband telephonic communication. For accomplishing this, the missing high-frequency (high-band) components of speech signals are recovered by utilizing a new extrapolation process based on sampled-data control theory and deep neural network (DNN). The H^∞ sampled-data control theory helps in designing of a high-band filter to recover the high-frequency signals by optimally utilizing the inter-sample signals. Non-stationary (time-varying) characteristics of speech signals forces to use numerous high-band filters. Hence, we use a deep neural network for estimating the high-band filter information and a gain factor for a specified narrowband information of the unseen signal. The objective analysis is done on the TIMIT dataset and RSR15 dataset. Additionally, the objective analysis is performed separately for the voiced speech as well as for the unvoiced speech as generally needed in speech processing. Subjective analysis is done on the RSR15 dataset.

Keywords DNN · H^∞ -norm · sampled-data control theory

1 Introduction

High quality of speech signals in the narrowband (NB) voice communications can be acquired by expanding the bandwidth of narrowband speech signals. It is done by an artificial bandwidth extension (ABE) technique. The frequencies up to 4 kHz can be transmitted through the NB, i.e., 0 – 4 kHz, communication channels Li and Lee [2015]. Therefore, the missing high-band (HB), i.e., 4 – 8 kHz, information of the speech signals is recovered back at the recipient side by utilizing the ABE technique.

Numerous ABE strategies have been proposed dependent upon the speech production model (SPM) in which the speech signal is the output of a speech production filter (SPF) (spectral envelope) driven by a residue signal Shao [2005]. An HB residue signal and an HB spectral envelope are to be assessed by utilizing the NB signal for ABE. For accomplishing this, an HB residue signal is obtained by applying different kinds of procedures on the narrowband residue signal, for example, bandpass-envelope modulated Gaussian noise (BP-MGN) Qian and Kabal [2003], full-wave rectification Fuemmeler et al. [2001], Abel and Fingscheidt [2018], pitch adaptive modulation Jax and Vary [2003], spectrum folding Enbom and Kleijn [1999], spectral translation Jax and Vary [2003], Makhoul and Berouti [1979], and harmonic noise model (HNM) Vaseghi et al. [2006]. An HB spectral envelope is estimated from a codebook mapping or a statistical modeling approach by utilizing the narrowband spectral envelope. The NB spectral envelope and the HB spectral envelope information can be represented by line spectral frequencies (LSF) Li and Kang [2016], linear prediction coefficients (LPC) Andersen et al. [2015], Mel frequency cepstral coefficients (MFCC) Sunil and Sinha [2012] and linear frequency cepstral coefficients (Cepstrum) Abel and Fingscheidt [2018]. A few strategies are created which are different from the speech production model. In Kim et al. [2008], temporal envelope and fine structure of sub-bands are taken into account for ABE. In Li and Lee [2015], Sadasivan et al. [2016], Bin et al. [2015], Bachhav et al. [2017], the WB magnitude spectrum is taken directly for extracting bene-

ficial HB and NB information. In Sunil and Sinha [2014], sparse modeling is used for ABE, wherein it requires a separate dictionary for voiced speech and unvoiced speech. The HB information for a given NB information can be assessed by the codebook mapping approaches such as vector quantization Fuemmeler et al. [2001], Unno and McCree [2005], and the statistical modeling approaches, for example, Gaussian mixture models (GMMs) Bachhav et al. [2017], Pulakka et al. [2011], Nour-Eldin and Kabal [2011], Ohtani et al. [2014], Li et al. [2018], hidden Markov models (HMM) with GMM Abel and Fingscheidt [2018], Seltzer and Acero [2007], Song and Martynovich [2009], Yağlı et al. [2013], and deep neural network (DNN) topologies Li and Lee [2015], Abel and Fingscheidt [2018], Li and Kang [2016], Bin et al. [2015], Hinton et al. [2012], Xu et al. [2014], Wang et al. [2015], Abel and Fingscheidt [2017].

As per the theory of speech production, speech production filter can be represented accurately by a pole-zero model Marelli and Balazs [2010]. Most of the existing methods based on speech production theory, use an all-pole model Abel and Fingscheidt [2018], Li and Kang [2016] which is invertible. However, it may not be sufficient to represent envelopes of utterances like fricatives, nasals, laterals, and the burst interval of stop consonants, since zeros present in SPF’s frequency response Marelli and Balazs [2010]. In our paper, pole-zero model is used to represent the speech production filter which may not be invertible system Marelli and Balazs [2010]. Therefore, this problem is converted into a closed loop system which is solved using the H^∞ sampled-data control theory Chen and Francis [1995a], Yamamoto et al. [2012]. It gives a robust solution in case of small modelling error Shaked and Theodor [1992]. We design a discrete filter to reconstruct the wideband speech signal based on a discrete signal model (or the speech production model in the ABE case) using the H^∞ norm. The process uses available gain, phase, and inter-sample information optimally Yamamoto et al. [2012]. This approach has been utilized for the audio signal in Yamamoto et al. [2012], however, for a linear time-invariant (LTI) audio signal model. It is well known that a speech signal is stationary only for short duration (approximately 10-30 ms). It means an LTI signal model is valid only for this duration. Hence, a large number of LTI signal models and their corresponding number of reconstruction filters are essential for a better reconstruction. However, this is impractical. To this end, we build a DNN model of reconstruction filters along with NB information itself for practical usage. The GMM modeling technique is sufficient, as demonstrated in Gupta and Shekhawat [2019a]. However, Gupta and Shekhawat [2019a] demands a change in the existing transmitter set-up, which is costly. In this paper, we have proposed a new approach for synthesizing the HB signal using the H^∞ sampled-data system theory and DNN (which performs better than GMM), without changing the existing transmitter set-up. Also, we use the standard technique of gain adjustment between estimated HB signal and original HB signal, and DFT (discrete Fourier transform) addition method for adding NB and HB signals with slight modification Wang et al. [2015], Nour-Eldin and Kabal [2008], Abel et al. [2018]. An analysis is done by considering the two datasets using the DNN model.

2 A proposed set-up for ABE of speech signals

This section has an explanation of the proposed framework for the ABE. An outline of the proposed framework is shown in Fig. 1. It has two primary subblocks: a training block and an extension block. These subblocks are explained within the forthcoming subsections.

2.1 Framing

The fact that speech signals are non-stationary signals is well known Loizou [2007]. Thus, the rectangular window of 25 ms length is used to divide these signals into frames. These frames are supposed to be stationary signals, which allow us to find an LTI signal model for each frame. The overlap between nearby frames is settled to 50%. This process is the same in the training block and the extension block.

2.2 Training Block

The training block in Fig. 1 has two sequential processes, one of them is to extract features for training, and another is to train the DNN model Abel and Fingscheidt [2018] by utilizing the training features.

2.2.1 Feature extraction

Feature extraction is performed frame-wise. First, an HB feature is computed using the WB stationary signal ($S_{WB}[n']$). For this, we join the transmitter (Tx) set-up and ABE process used at the receiver (Rx) side in Fig. 2 for a single frame. In Fig. 2, $\downarrow 2$ depicts a downsampler with downsampling factor 2, H is the non-causal FIR (finite impulse response) low pass filter, $\uparrow 2$ depicts an upsampler with upsampling factor 2, and filter A is the reciprocal of the all-pole model of signal $S_{NB}[n]$ obtained by linear prediction (LP) analysis Makhoul [1975]. An output of the

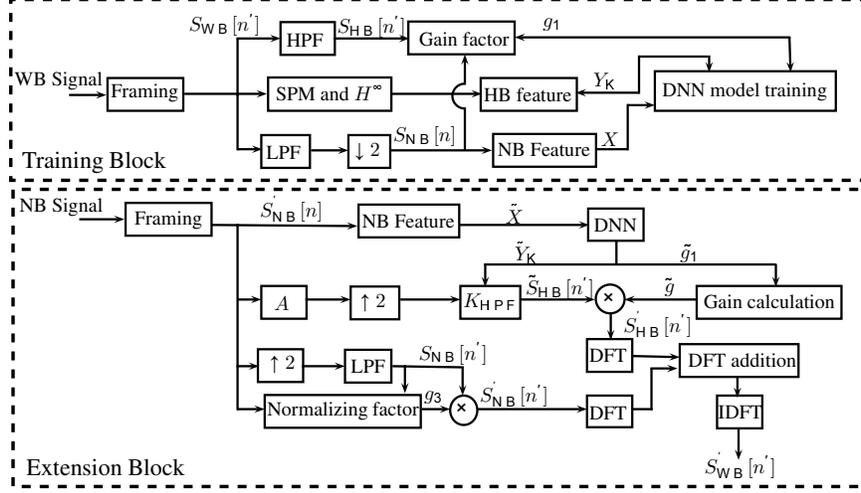


Figure 1: Block diagram consisting the training of the DNN model and bandwidth extension of the narrowband signal.




Figure 2: A block for the producing the NB signal and reconstruction of a wideband signal.

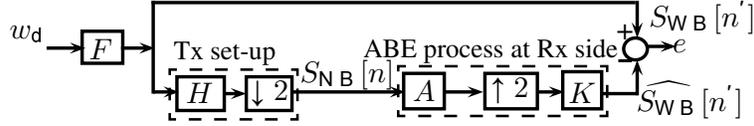


Figure 3: Proposed an error set-up for a WB signal reconstruction.

filter A is the narrowband residue signal. $S_{NB}[n]$ is the narrowband signal, and $\hat{S}_{WB}[n']$ is the estimated wideband signal, with n and n' are the 8 kHz and 16 kHz sample index, respectively. Further, we proposed an error set-up in Fig. 3 for finding the filter K , wherein we extract the wideband information in terms of the speech production model (signal model) F . We obtained the signal model F using Prony's method Markel and Gray [2013]. The number of poles and zeros was empirically calculated for each frame in such a way that the error is minimized. $S_{WB}[n']$ is the output of signal model F driven by the white noise for unvoiced speech or an impulse train for voiced speech. Here, a filter K is obtained by minimizing the error e by the following optimization problem.

Problem 1 Given a speech production model (signal model) F and a low pass filter H , design a stable and causal synthesis filter K_{opt} defined as

$$K_{opt} := \arg \min_K (\|\mathbb{W}\|_\infty),$$

where \mathbb{W} is the discrete error system defined as

$$\mathbb{W} := F - K(\uparrow 2)A(\downarrow 2)HF, \quad (1)$$

with input w_d (either white noise for the unvoiced speech or quasi-periodic impulse train for the voiced speech) and output e (see Fig. 3). $\|\mathbb{W}\|_\infty$ denotes the H^∞ -norm of the system \mathbb{W} , which is defined as (see Yamamoto et al. [2012]),

$$\|\mathbb{W}\|_\infty := \sup_{w_d \neq 0} \frac{\|e\|_2}{\|w_d\|_2}.$$

Further, problem 1 can be reformulated as an H^∞ sampled-data control problem Chen and Francis [1995b]. The H^∞ norm is generally preferred in case of the signal modeling error Shaked and Theodor [1992]. The solution is essentially given in Appendix A (see also Chen and Francis [1995a], Yamamoto et al. [2012], Gupta and Shekhawat [2019a,b]). The obtained infinite impulse response filter K consists the NB information and HB information as well. Here, we

need to estimate the HB information of an WB signal only. So, filter K is cascaded with a causal FIR high pass filter for extracting its HB information only. As a result, we obtain a new HB IIR filter K_{HPF} . The obtained HB IIR filter is converted into a finite impulse response filter by truncating its Taylor series. We did the FIR approximation of IIR filter K_{HPF} empirically using a process similar to Gupta and Shekhawat [2019a,b]. Later on, an order of FIR filter is fixed to 21. In essence, this FIR filter consists the high-band spectral envelope information. This FIR approximation of IIR filter K_{HPF} is used as the HB feature vector. Narrowband feature vector is representing the linear prediction coefficients (LPC) Aida-Zade et al. [2006], which are calculated by using the signal ($S_{\text{NB}}[n]$). The dimension of the NB feature vector is settled to eleven.

For gain adjustment, energy of the estimated HB signal is set equal to the energy of original HB signal. For this, the gain factor is calculated as

$$g_1 = \log 10 \frac{\sum_{n'=1}^N S_{\text{HB}}[n']^2}{\sum_{n=1}^{N/2} S_{\text{NB}}[n]^2}, \quad (2)$$

where $S_{\text{HB}}[n']$ signifies the HB signal acquired by high pass filtering of the signal $S_{\text{WB}}[n']$, and N is the signal $S_{\text{HB}}[n']$ length.

2.2.2 DNN model

After extracting the features for training, the DNN model is trained using the NB feature vector as an input vector $X \in \mathbb{R}^{11}$, and the concatenated HB feature vector $Y_K \in \mathbb{R}^{21}$ and gain factor g_1 as an output vector with the mean square error being considered as a loss function (see DNN-R in Abel and Fingscheidt [2018]). The mean and variance normalization (MVN) has also applied to both the input vector and the output vector Li and Lee [2015].

2.3 Extension Block

After training the DNN model, WB signal is assessed in the extension block, which has three main parallel procedures, as explained briefly in the next sections.

2.3.1 High-band feature and gain estimation

Firstly, the NB feature vector is computed for a given NB signal $S'_{\text{NB}}[n]$. MVN is applied to the NB feature vector and then fed to the DNN. A reverse MVN procedure is applied to the DNN output Li and Lee [2015]. As a result, we acquire the estimated HB feature vector (\tilde{Y}_K) and gain \tilde{g}_1 .

2.3.2 High-band signal estimation

In the initial step, we calculate the filter A for a given NB signal $S'_{\text{NB}}[n]$. The NB signal $S'_{\text{NB}}[n]$ is now passed through the filter A and then upsampled by a factor of 2. The resulting signal is then fed via the estimated HB filter K_{HPF} , which gives an intermediate HB signal $\tilde{S}_{\text{HB}}[n']$. Next, the synthesized energy of $\tilde{S}_{\text{HB}}[n']$ is made approximately equivalent to the energy of the corresponding original HB signal by introducing gain adjustment as

$$S'_{\text{HB}}[n'] = \tilde{g} \tilde{S}_{\text{HB}}[n'], \quad (3)$$

where

$$\tilde{g} = \sqrt{\frac{10^{\tilde{g}_1}}{10^{\tilde{g}_2}}}, \text{ with } \tilde{g}_2 = \log 10 \frac{\sum_{n'=1}^N \tilde{S}_{\text{HB}}^2[n']}{\sum_{n=1}^{N/2} S'^2_{\text{NB}}[n]}.$$

$S'_{\text{HB}}[n']$ is the estimated HB signal.

2.3.3 Narrowband signal processing

The NB signal $S_{\text{NB}}[n']$ is accessed by passing the NB signal $S'_{\text{NB}}[n]$ through the $\uparrow 2$ following the filter H . Then, the following equation calculates a normalization factor g_3 as Gupta and Shekhawat [2019b]

$$g_3 = \frac{\max(S'_{\text{NB}}[n])}{\max(S_{\text{NB}}[n'])}.$$

The NB signal $S'_{\text{NB}}[n']$ is then calculated as

$$S'_{\text{NB}}[n'] = g_3 S_{\text{NB}}[n].$$

Table 1: Performances computed on the validation set in case of use the filter K_{HPF} directly, i.e., oracle K_{HPF} , in Fig. 1 for ABE.

Conditions	$S_{NB}[n']$	$S'_{NB}[n']$	Time addition without gain		Time addition with Gain		DFT addition with Gain	
			K_{HPF} (IIR)	K_{HPF} (FIR)	K_{HPF} (IIR)	K_{HPF} (FIR)	K_{HPF} (IIR)	K_{HPF} (FIR)
LSD	11.2339	9.5331	8.7417	8.7201	7.3694	7.4207	6.8355	6.7871
segSNR	4.83	14.70	13.18	13.36	13.18	13.06	13.76	13.70
MOS-LQO	3.8468	3.6932	3.6889	3.6832	3.6833	3.6062	3.9137	3.9185

2.3.4 Wideband signal estimation

The estimated HB signal $S'_{HB}[n']$ and the NB signal $S'_{NB}[n']$ are not added directly because the estimated HB signal $S'_{HB}[n']$ contains some information in its narrowband region. The filter K_{HPF} is not ideal HB filter. Somehow, it passes some amount of NB information. Thereby, we add them in the frequency domain using the DFT Abel et al. [2018]. For this, we take N point DFT of both signals. The DFT addition is applied to them and computed as

$$S'_{WB}[k] = \begin{cases} S'_{NB}[k], & k = 0, 1, \dots, \frac{N}{4} \\ S'_{HB}[k], & k = \frac{N}{4} + 1, \dots, \frac{N}{2} + \frac{N}{4} - 1 \\ S'_{NB}[k], & k = \frac{N}{2} + \frac{N}{4}, \dots, N - 1 \end{cases}$$

where the resulting $S'_{WB}[k]$ is the DFT of an estimated wideband signal. Here, $S'_{NB}[k]$ and $S'_{HB}[k]$ are the DFTs of $S'_{NB}[n']$ and $S'_{HB}[n']$ signals, respectively. Lastly, the inverse DFT (IDFT) of $S'_{WB}[k]$ is computed giving the estimated wideband signal ($S'_{WB}[n']$). An advantage of this process is no over-estimation in any of the bands. Later, it can be seen its effect on performances in Section 3.2.

3 Experimental Set-up and Results

3.1 Experimental Set-up

We analyze the performances for the TIMIT dataset Garofolo [1993] and the RSR15 dataset Larcher et al. [2014]. Both the datasets contain the recorded speech files at a sampling rate of 16 kHz. TIMIT dataset is already segmented into two distinct sets as a testing set and a training set. We truncate these sets so that new truncated sets have the same percentage of female and male speech files. Then, the truncated train and test sets are taken as a training set and a validation set, respectively. Then, performances are evaluated on the speech files belonging to the RSR15 dataset. Both causal high pass filter (HPF) and non-causal low pass filter (LPF) are the same as characterized in Gupta and Shekhawat [2019b].

3.2 Results

Objective and subjective assessments are carried out to analyze the quality of the artificially extended speech signals. For this purpose, segSNR (segmental signal to noise ratio) Hu and Loizou [2008], objective metrics MOS-LQO (mean opinion score listening quality objective) itu [2003], and LSD (log spectral distance for WB) Abel et al. [2018], and subjective measure MOS-LQS (subjective listening quality mean opinion score) Malfait et al. [2006] are chosen. Further, experiments are carried out on the validation set for the different actions such as the NB processing, gain adjustment, and the DFT addition in the condition of utilizing the filter K_{HPF} directly (oracle K_{HPF}) in Fig. 1. It is done to investigate the performances acquired by the proposed filter K_{HPF} under two conditions: IIR and FIR with 21 coefficients. As we see the performances for each significant output such as $S_{NB}[n']$, $S'_{NB}[n']$, time added output without gain adjustment, time added output with gain adjustment, i.e., $S'_{NB}[n'] + S'_{HB}[n']$, and DFT addition output with gain adjustment, i.e., $S'_{WB}[n']$, on the validation set in Table 1. As evident from Table 1, the gain adjustment improves the LSD significantly applied to the time addition case. Then, the DFT addition improves the all objective measures more than the time addition by considering the gain adjustment for both additions. Next, we proceed to measure the performances for the proposed approach using the DNN model.

3.2.1 Objective assessment

Here, we do tests to decide an optimal DNN architecture for the proposed HB feature and the LPC NB feature. For deciding the DNN architecture, hyper-parameters such as the batch size, epoch, and the learning rate are fixed to 300, 50, and 0.01, respectively. Different DNN architectures are trained using the training set features over the fixed AdaMax (adaptive moment estimation based on the infinity norm) Kingma and Ba [2014] optimizer, ReLU activation function

Table 2: LSD computed on the validation set by changing N_{HL} and N_U for the fixed batch size 300 and ReLU activation function in hidden layers.

N_{HL}	N_U	LSD	N_{HL}	N_U	LSD
3	128	7.1899	4	1024	7.1478
3	256	7.1866	5	128	7.1842
3	512	7.1801	5	256	7.1518
3	1024	7.1723	5	512	7.1638
4	128	7.1582	5	1024	7.1485
4	256	7.1511	6	128	7.1500
4	512	7.1448	6	256	7.1661

Table 3: Performances figured out on the testing set (RSR15) for the proposed approach and the existing approaches.

Method	MOS-LQO	LSD	segSNR
Proposed approach with 128 GMMs	3.6186	8.3984	12.3040
Proposed approach with DNN model	3.7474	8.1927	12.3463
Spectrum folding approach with DNN model	3.4693	8.5207	11.9991
Modulation technique with DNN model	3.2478	8.7193	11.1167
Cepstral Domain with DNN model	3.7018	8.5566	13.3632

in hidden layers, linear activation function in the output layer, and LPC NB feature definition. Batch normalization before activation function and L^2 -regularization are utilized as well. The decay rates β_1 for the first-moment estimate and β_2 for the second-moment estimate are set at 0.9 and 0.999 for the AdaMax optimizer, respectively. Then, different DNN topologies obtained by changing the number of hidden layers (N_{HL}) and the number of neurons (N_U) in each hidden layer are trained. These topologies are tested by computing the LSD on the validation set, as tabulated in Table 2. In Table 2, we see that increasing the number of hidden layers (N_{HL}) are influencing LSD more than increasing the number of neurons (N_U) in each hidden layer. We pick a topology for DNN with 4 N_{HL} and 512 N_U . Furthermore, this architecture is tuned for different sizes, and then batch size 180, producing minimum LSD, is selected. Thus, we use an optimal DNN topology planned with the ReLU activation function in hidden layers, 180 batch size, four hidden layers, 512 units in each hidden layer for inspecting the test set performance. Then, objective metrics are arranged in Table 3 for the artificially extended speech files belonging to the test set by the proposed framework using DNN model also, GMM model Kain and Macon [1998], the modulation technique Abel and Fingscheidt [2018] with utilizing gain defined in Nour-Eldin and Kabal [2008], cepstral domain approach Abel et al. [2018] and the spectrum folding technique utilizing gain defined in Wang et al. [2015] with keeping the same experimental conditions such as window duration, type of window, NB processing, dimensions of HB feature and NB feature, and DNN model. But, the input feature dimension is required high for the cepstral domain approach, as see Abel et al. [2018]. The LSF feature is used to represent the NB and HB features for the modulation technique and spectrum folding technique. As viewed in Table 3, the proposed approach improves MOS-LQO and LSD significantly, whereas the cepstral domain approach gives better segSNR in comparison to the other approaches.

Additionally, we figure out the performances for two kinds of speech signals: voiced speech and unvoiced speech. These signals are extracted from the test set speech signals using the glottal activity detection (GAD) technique Adiga and Prasanna [2015]. Performances are listed in Table 4 for the voiced speech and Table 5 for the unvoiced speech obtained by the proposed approach and the existing approaches. All the objective measures are improved by the proposed approach using the DNN model for both kinds of speech in comparison to the GMM model. LSD is significantly decreased by 0.30 dB for voiced speech and 0.18 dB for the unvoiced speech by the proposed approach using the DNN model with respect to the GMM model. segSNR is high for the voiced speech because of their high energy in comparison to the unvoiced speech. It is a verifiable truth that voiced speech and unvoiced speech energies lie a lot of in NB and HB, respectively. Therefore, measured LSD is lower for the voiced speech than the unvoiced speech. segSNR is obtained comparatively better for the cepstral domain approach than the other approaches for both types of speech. Rest of the measures are obtained better by the proposed approach using the DNN model.

3.2.2 Subjective assessment

In a typical telephonic conversation, the perceptual quality of the receiving speech signal has given more priority. For this, subjective assessment is done by following [rec, 1996, Annex E]. A CMOS score is computed by averaging the score between -3 (much worse) to 3 (much better) given by twelve speakers for the randomly selected twenty artificially extended speech files. Speakers are naive for this assessment. This score is calculated for the three condi-

Table 4: Performances figured out for voiced speech extracted from the speech files belonging to the test set

Conditions	MOS-LQO	LSD	segSNR
Proposed approach using 128 GMMs	4.2663	7.9297	16.3455
Proposed approach using DNN model	4.2666	7.6227	16.7151
Spectrum folding approach with DNN model	4.1630	8.0643	15.5798
Modulation technique with DNN model	3.9243	7.8000	15.2600
Cepstral Domain with DNN model	4.2496	7.5966	17.7857

Table 5: Performances figured out for unvoiced speech extracted from the speech files belonging to the test set

Conditions	MOS-LQO	LSD	segSNR
Proposed approach using 128 GMMs	4.2485	8.3967	10.3930
Proposed approach using DNN model	4.2514	8.2123	10.4058
Spectrum folding approach with DNN model	4.1977	8.5109	10.3963
Modulation technique with DNN model	3.9289	8.6697	9.5482
Cepstral Domain with DNN model	4.2143	9.1502	11.3974

Table 6: Subjective assessment evaluated on artificially extended speech files belonging to the test set using the DNN model

Conditions	CMOS
Spectrum folding vs Proposed approach	0.6150
Modulation technique vs Proposed approach	0.6450
Cepstral Domain vs Proposed approach	0.5950

tions in which the artificially extended speech files by the proposed approach are compared to the artificially extended speech files by the three existing approaches using the same DNN model. As evident in Table 6, CMOS is improved by 0.6150, 0.6450, and 0.5950 value for the proposed approach in comparison to the spectrum folding approach, modulation technique, and cepstral domain approach using the same DNN model, respectively.

4 Conclusion

This work proposes a new ABE approach for speech signals that uses the (discrete domain) H^∞ sampled-data control theory and a DNN model along with well-known techniques of gain adjustment and the DFT addition with a slight modification. The H^∞ optimization and the speech production model help in acquiring a high-band filter, which takes the inter-sample signal, the signal model's gain and phase characteristics into account. Objective and subjective measures used in our analysis are improved by the proposed approach in comparison to the existing approaches using the same DNN model. This paper shows the potential of the sampled-data system in speech processing with a lot of possibilities for further research.

Appendix A

The error system in Fig. 3 is a multi-rate system that can be converted into a single rate system using the lifting technique Chen and Francis [1995a,b]. The z-transform representations of lifting and inverse lifting Yamamoto et al. [2012] are

$$\mathbf{L}_N = (\downarrow N) [1 \quad z \quad z^2 \quad \dots \quad z^{N-1}]^T, \quad (4a)$$

$$\mathbf{L}_N^{-1} = [1 \quad z^{-1} \quad z^{-2} \quad \dots \quad z^{-(N-1)}] (\uparrow N). \quad (4b)$$

Proposition 1 Let the transfer function $G(z)$ be represented in state space as

$$G(z) := \left[\begin{array}{c|c} \mathbf{A} & \mathbf{B} \\ \hline \mathbf{C} & \mathbf{D} \end{array} \right] = \mathbf{D} + \mathbf{C}(z\mathbf{I} - \mathbf{A})^{-1}\mathbf{B},$$

with $\mathbf{A} \in \mathbb{R}^{N \times N}$, $\mathbf{B} \in \mathbb{R}^{N \times p}$, $\mathbf{C} \in \mathbb{R}^{m \times N}$, $\mathbf{D} \in \mathbb{R}^{m \times p}$ matrices, m and p being the dimensions of output and input of $G(z)$, respectively. Next, the lifted (by a factor of 2) transfer function of $G(z)$ in state space form is represented as

$$\overline{G}(z) := \mathbf{L}_2 G(z) \mathbf{L}_2^{-1} = \left[\begin{array}{c|cc} \mathbf{A}^2 & \mathbf{A}\mathbf{B} & \mathbf{B} \\ \hline \mathbf{C} & \mathbf{D} & \mathbf{0} \\ \hline \mathbf{C}\mathbf{A} & \mathbf{C}\mathbf{B} & \mathbf{D} \end{array} \right], \quad (5)$$

where \mathbf{L}_2 and \mathbf{L}_2^{-1} can be obtained by using (4a) and (4b) respectively.

Proof 1 See [Chen and Francis, 1995b, Theorem 8.2.1].

We use (5) to get the following results from Yamamoto et al. [2012]

$$\begin{aligned} K(z)(\uparrow 2) &= \mathbf{L}_2^{-1} \tilde{K}(z), \\ K(z) &= [1 \quad z^{-1}] \tilde{K}(z^2), \end{aligned} \quad (6)$$

where $\tilde{K}(z) := \overline{K}(z) [1 \quad 0]_{1 \times 2}^T$ and $\overline{K}(z) := \mathbf{L}_2 K(z) \mathbf{L}_2^{-1}$. The error system \mathbb{W} defined in (1) can be written in z -domain

$$\mathbb{W}(z) := F(z) - \mathbf{L}_2^{-1} \tilde{K}(z) A(z) (\downarrow 2) H(z) F(z). \quad (7)$$

Here, $H(z)$ is a non-causal and zero phase FIR low pass filter. Let $H(z)$ be represented as

$$\begin{aligned} H(z) &= a_q z^{-q} + \dots + a_1 z^{-1} + a_0 + a_1 z^1 + \dots + a_q z^q, \\ &= z^q H_{\text{causal}}(z), \end{aligned} \quad (8)$$

where $H_{\text{causal}}(z) := (a_q z^{-2q} + \dots + a_1 z^{-(q+1)} + a_0 z^{-q} + a_1 z^{-(q-1)} + \dots + a_q)$ with $a_i \in \mathbb{R}$ and q can be assumed even integer number without loss of generality. We substitute $H(z)$ from (8) into (7) as

$$\begin{aligned} \mathbb{W}(z) &= F(z) - \mathbf{L}_2^{-1} \tilde{K}(z) A(z) (\downarrow 2) z^q H_{\text{causal}}(z) F(z), \\ &= F(z) - \mathbf{L}_2^{-1} \tilde{K}(z) A(z) z^{q/2} (\downarrow 2) F_a(z), \end{aligned} \quad (9)$$

where $F_a(z) := H_{\text{causal}}(z) F(z)$. $F_a(z)$ and $\tilde{K}(z) A(z) z^{q/2}$ are the transfer functions at different sampling rate. Hence, we lift the input and output of \mathbb{W} by a factor of 2. It gives the lifted transfer function of \mathbb{W} as follows

$$\begin{aligned} \overline{\mathbb{W}}(z) &= \mathbf{L}_2 \mathbb{W}(z) \mathbf{L}_2^{-1}, \\ &= \overline{F}(z) - \tilde{K}(z) A(z) z^{q/2} S \overline{F}_a(z), \end{aligned}$$

with $\overline{F}(z) := \mathbf{L}_2 F(z) \mathbf{L}_2^{-1}$, $S = [1 \quad 0]$, and $\overline{F}_a(z) := \mathbf{L}_2 F_a(z) \mathbf{L}_2^{-1}$. After applying lifting to the multi rate system \mathbb{W} , we obtain a single rate system $\overline{\mathbb{W}}$ which is a non-causal system due to the presence of $z^{q/2}$. $\overline{\mathbb{W}}$ needs to convert into a causal system to utilize the robust control tool in MATLAB Chiang and Safonov [1997]. Therefore, we make it causal by multiplication with $z^{-q/2}$ in the subsequent step,

$$\begin{aligned} \mathcal{W} &= z^{-q/2} \overline{\mathbb{W}}, \\ &= z^{-q/2} \overline{F}(z) - \tilde{K}(z) A(z) S \overline{F}_a(z). \end{aligned} \quad (10)$$

Finally, we get a causal as well as single rate system \mathcal{W} . Now, original system \mathbb{W} has been converted into \mathcal{W} . However, H^∞ -norm of these modified systems remain the same as the original system, i.e., $\|\mathcal{W}\|_\infty = \|\overline{\mathbb{W}}\|_\infty = \|\mathbb{W}\|_\infty$ Chen and Francis [1995b]. The H^∞ -norm of the system \mathcal{W} is minimized by using an optimal filter $\tilde{K}(z)$. (10) is written in the form of a standard feedback control system (closed loop system) as depicted in Fig. 4 Chen and Francis [1995b]. Here, NB_{res} denotes the NB residual, $\mathbf{0}$ is a zero matrix of 1×2 , I is an identity matrix of 2×2 , $\tilde{w}_d = \mathbf{L}_2 w_d$, and $\tilde{e} = \mathbf{L}_2 e$. Further, we obtain an optimal filter $\tilde{K}(z)$ with the help of robust control toolbox in MATLAB Chiang and Safonov [1997]. To this end, an optimal synthesis filter $K(z)$ is obtained from $\tilde{K}(z)$ by using (6).

References

Kehuang Li and Chin-Hui Lee. A deep neural network approach to speech bandwidth expansion. In *Proceedings IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4395–4399. IEEE, 2015.

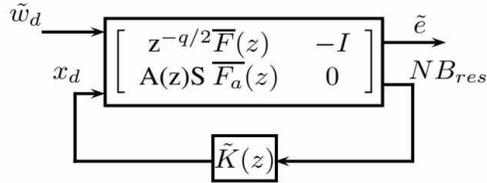


Figure 4: Standard feedback control system

- Xu Shao. *Robust Algorithms for Speech Reconstruction on Mobile Devices*. PhD thesis, University of East Anglia, 2005.
- Yasheng Qian and Peter Kabal. Dual-mode wideband speech recovery from narrowband speech. In *Eighth European Conference on Speech Communication and Technology, GENEVA, Switzerland*, pages 1433–1436, 2003.
- Jason A Fuemmeler, Russell C Hardie, and William R Gardner. Techniques for the regeneration of wideband speech from narrowband speech. *EURASIP Journal on Applied Signal Processing*, 2001(1):266–274, 2001.
- Johannes Abel and Tim Fingscheidt. Artificial Speech Bandwidth Extension Using Deep Neural Networks for Wideband Spectral Envelope Estimation. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 26(1):71–83, 2018.
- Peter Jax and Peter Vary. On artificial bandwidth extension of telephone speech. *Signal Processing*, 83(8):1707–1719, 2003.
- Niklas Enbom and W Bastiaan Kleijn. Bandwidth expansion of speech based on vector quantization of the mel frequency cepstral coefficients. In *Proceedings IEEE Workshop on Speech Coding*, pages 171–173. IEEE, 1999.
- John Makhoul and Michael Berouti. High-frequency regeneration in speech coding systems. In *Proceedings IEEE International Conference on Acoustics, Speech, and Signal Processing, Cambridge, United Kingdom*, volume 4, pages 428–431. IEEE, 1979.
- Saeed Vaseghi, Esfandiari Zavarehei, and Qin Yan. Speech bandwidth extension: Extrapolations of spectral envelope and harmonicity quality of excitation. In *Proceedings International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, volume 3, pages III–844–III–847. IEEE, 2006.
- Yaxing Li and Sangwon Kang. Artificial bandwidth extension using deep neural network-based spectral envelope estimation and enhanced excitation estimation. *IET Signal Processing*, 10(4):422–427, 2016.
- Bjarke Andersen, Jakob Dyreby, Brian Jensen, Frederik Holmelund Kjærskov, Ole Lodahl Mikkelsen, Peter Drustrup Nielsen, and Henrik Zimmermann. Bandwidth Expansion of Narrow Band speech using Linear Prediction. *web source*, 26, 2015.
- Y Sunil and R Sinha. Exploration of class specific ABWE for robust children’s ASR under mismatched condition. In *Proceedings International Conference on Signal Processing and Communications (SPCOM)*, pages 1–5. IEEE, 2012.
- Kyung-Tae Kim, Min-Ki Lee, and Hong-Goo Kang. Speech bandwidth extension using temporal envelope modeling. *IEEE Signal Processing Letters*, 15:429–432, 2008.
- Jishnu Sadasivan, Subhadip Mukherjee, and Chandra Sekhar Seelamantula. Joint dictionary training for bandwidth extension of speech signals. In *Proceedings International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5925–5929. IEEE, 2016.
- Liu Bin, Tao Jianhua, Wen Zhengqi, Li Ya, Danish Bukhari, et al. A novel method of artificial bandwidth extension using deep architecture. 2015.
- Pramod B Bachhav, Massimiliano Todisco, Moctar Mossi, Christophe Beaugeant, and Nicholas Evans. Artificial bandwidth extension using the constant-Q transform. In *Proceedings International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5550–5554. IEEE, 2017.
- Y Sunil and Rohit Sinha. Sparse representation based approach to artificial bandwidth extension of speech. In *2014 International Conference on Signal Processing and Communications (SPCOM)*, pages 1–5. IEEE, 2014.
- Takahiro Unno and Alan McCree. A robust narrowband to wideband extension system featuring enhanced codebook mapping. In *Proceedings IEEE International Conference on Acoustics, Speech, and Signal Processing, 2005.*, volume 1, pages 1–805. IEEE, 2005.

-
- Hannu Pulakka, Ulpu Remes, Kalle Palomäki, Mikko Kurimo, and Paavo Alku. Speech bandwidth extension using gaussian mixture model-based estimation of the highband mel spectrum. In *Proceedings IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5100–5103. IEEE, 2011.
- Amr H Nour-Eldin and Peter Kabal. Memory-based approximation of the gaussian mixture model framework for bandwidth extension of narrowband speech. In *Proceedings Twelfth Annual Conference of the International Speech Communication Association*, 2011.
- Yamato Ohtani, Masatsune Tamura, Masahiro Morita, and Masami Akamine. Gmm-based bandwidth extension using sub-band basis spectrum model. In *Proceedings Fifteenth Annual Conference of the International Speech Communication Association*, 2014.
- Sen Li, Stéphane Villette, Pravin Ramadas, and Daniel J Sinder. Speech bandwidth extension using generative adversarial networks. In *Proceedings IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5029–5033. IEEE, 2018.
- Michael L Seltzer and Alex Acero. Training wideband acoustic models using mixed-bandwidth training data for speech recognition. *IEEE Transactions on Audio, Speech, and Language Processing*, 15(1):235–245, 2007.
- Geun-Bae Song and Pavel Martynovich. A study of hmm-based bandwidth extension of speech signals. *Signal Processing*, 89(10):2036–2044, 2009.
- Can Yağlı, MA TuğTekin Turan, and Engin Erzin. Artificial bandwidth extension of spectral envelope along a viterbi path. *Speech Communication*, 55(1):111–118, 2013.
- Geoffrey Hinton, Li Deng, Dong Yu, George Dahl, Abdel-rahman Mohamed, Navdeep Jaitly, Andrew Senior, Vincent Vanhoucke, Patrick Nguyen, Brian Kingsbury, et al. Deep neural networks for acoustic modeling in speech recognition. *IEEE Signal processing magazine*, 29, 2012.
- Yong Xu, Jun Du, Li-Rong Dai, and Chin-Hui Lee. An experimental study on speech enhancement based on deep neural networks. *IEEE Signal processing letters*, 21(1):65–68, 2014.
- Yingxue Wang, Shenghui Zhao, Wenbo Liu, Ming Li, and Jingming Kuang. Speech bandwidth expansion based on deep neural networks. In *Proceedings Sixteenth Annual Conference of the International Speech Communication Association*, 2015.
- Johannes Abel and Tim Fingscheidt. A dnn regression approach to speech enhancement by artificial bandwidth extension. In *2017 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, pages 219–223. IEEE, 2017.
- Damián Marelli and Peter Balazs. On pole-zero model estimation methods minimizing a logarithmic criterion for speech analysis. *IEEE Transactions on Audio, Speech, and Language Processing*, 18(2):237–248, 2010.
- Tongwen Chen and Bruce A Francis. Design of multirate filter banks by H^∞ optimization. *IEEE Transactions on Signal Processing*, 43(12):2822–2830, 1995a.
- Yutaka Yamamoto, Masaaki Nagahara, and Pramod P Khargonekar. Signal Reconstruction via H^∞ Sampled-Data Control Theory Beyond the Shannon Paradigm. *IEEE Transactions on Signal Processing*, 60(2):613–625, 2012.
- Uri Shaked and Yahali Theodor. H^∞ optimal estimation: a tutorial. In *Proceedings 31st IEEE Conference on Decision and Control*, pages 2278–2286. IEEE, 1992.
- Deepika Gupta and Hanumant Singh Shekhawat. Artificial bandwidth extension using H^∞ optimization. *Proc. Interspeech 2019*, pages 3421–3425, 2019a.
- Amr H Nour-Eldin and Peter Kabal. Mel-frequency cepstral coefficient-based bandwidth extension of narrowband speech. In *Proceedings Ninth Annual Conference of the International Speech Communication Association*, 2008.
- Johannes Abel, Maximilian Strake, and Tim Fingscheidt. A simple cepstral domain dnn approach to artificial speech bandwidth extension. In *Proceedings IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5469–5473. IEEE, 2018.
- Philipos C Loizou. *Speech enhancement: theory and practice*. CRC press, 2nd edition, 2007. ISBN 13: 978-1-4665-0422-6.
- John Makhoul. Linear prediction: A tutorial review. in *Proceedings IEEE*, 63(4):561–580, 1975.
- John D Markel and AH Jr Gray. *Linear prediction of speech*, volume 12. Springer Science & Business Media, 2013.
- Tongwen Chen and Bruce A Francis. *Optimal sampled-data control systems*, volume 124. Springer, 1995b.
- Deepika Gupta and HS Shekhawat. Artificial bandwidth extension using H^∞ optimization and speech production model. In *2019 29th International Conference Radioelektronika (RADIOELEKTRONIKA)*, pages 1–6. IEEE, 2019b.

-
- KR Aida-Zade, C Ardil, and SS Rustamov. Investigation of combined use of mfcc and lpc features in speech recognition systems. *World Academy of Science, Engineering and Technology*, 19:74–80, 2006.
- John S Garofolo. Timit acoustic phonetic continuous speech corpus. *Linguistic Data Consortium*, 1993.
- Anthony Larcher, Kong Aik Lee, Bin Ma, and Haizhou Li. Text-dependent speaker verification: Classifiers, databases and rsr2015. *Speech Communication*, 60:56–77, 2014.
- Yi Hu and Philipos C Loizou. Evaluation of objective quality measures for speech enhancement. *IEEE Transactions on Audio, Speech, and Language processing*, 16(1):229–238, 2008.
- ITU-T, Recommendation P862.1: Mapping function for transforming P. 862 raw result scores to MOS-LQO. *International Telecommunication Union, Geneva, Switzerland*, 2003.
- Ludovic Malfait, Jens Berger, and Martin Kastner. P. 563—The ITU-T standard for single-ended speech quality assessment. *IEEE Transactions on Audio, Speech, and Language Processing*, 14(6):1924–1934, 2006.
- Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- Alexander Kain and Michael W Macon. Spectral voice conversion for text-to-speech synthesis. In *Proceedings IEEE International Conference on Acoustics, Speech, and Signal Processing*, volume 1, pages 285–288. IEEE, 1998.
- Nagaraj Adiga and SRM Prasanna. Detection of glottal activity using different attributes of source information. *IEEE Signal Processing Letters*, 22(11):2107–2111, 2015.
- ITU-T, Recommendation P.800: Methods for subjective determination of transmission quality. *International Telecommunication Union, Geneva*, page 22, 1996.
- Richard Y Chiang and Michael G Safonov. *MATLAB : Robust Control Toolbox User’s Guide*. Math Works, 1997.