

Modified Afshar Experiment: Calculations

Eduardo V. Flores
Department of Physics & Astronomy
Rowan University

Abstract

The Afshar experiment is a relatively simple two-slit experiment with results that appear to show a discrepancy with the predictions of Bohr's Principle of Complementarity. We report on the results of a calculation using a simpler but equivalent set-up called the modified Afshar experiment. Numerical results are in agreement with the experimental measurements performed on the Afshar experiment set-up. Calculations show that the level of which-way information of individual particles in the Afshar experiment is higher than originally estimated.

KEY WORDS: principle of complementarity; wave-particle duality; non-perturbative measurements; double-slit experiment; Afshar experiment.

Introduction

The Afshar experiment consists of coherent light incident onto a pair of pinholes [1,2]. The two emerging beams from the pinholes spatially overlap in the far-field and interfere to produce a pattern of alternating bright and dark fringes. At an appropriate distance from the pinholes thin wires are placed at the minima of the interference pattern. Beyond the wires there is a lens that focuses the light onto two photon detectors located at the image of each pinhole. When an interference pattern is not present, as in the case when only one pinhole is open, the wire grid obstructs the beam and produces scattering,

thus reducing the total flux at the corresponding detector by about 14.38% [2]. However, when the interference pattern is present the disturbance to the incoming beams due to the wires is minimal, about 1%. From comparative measurements of the total flux with and without the wire grid, the presence of an interference pattern is inferred in a non-perturbative manner. Thus, the parameter V that measures the visibility of the interference pattern is near its maximum value of 1.

When the wire grid is not present quantum optics predicts that a photon that hits a given detector originates from the corresponding pinhole with a very high probability. The parameter K that measures the “which-way” information is 1 in this case. When a wire grid is placed at the dark fringes, where the wave-function is zero, the photon flux at the detectors hardly changes. We argue [1,2,3] that this is an indication that the wires have barely altered the “which-way” information, thus, K is also nearly 1, which is in apparent violation of the Greenberger-YaSin inequality $V^2 + K^2 \leq 1$, a modern version of Bohr’s principle of complementarity [4].

The modified Afshar experiment is a simpler and more transparent version of the Afshar experiment for calculation and analysis purposes. A laser beam impinges on a 50:50 beam splitter and produces two spatially separated coherent beams of equal intensity (Fig.1). The beams overlap at some distance. Beyond the region of overlap the two beams fully separate again. There, two detectors are positioned such that detector 1 detects only the photons originating from mirror 1, and detector 2 detects only photons originating from mirror 2. Where the beams overlap they interfere forming a pattern of bright and dark fringes. At the center of the dark fringes we place thin wires.

The modified Afshar experiment is equivalent to the Afshar experiment, except it

does not use lenses. In particular, when the wire-grid is not present, the photons are free all the way from a mirror to its corresponding detector. Thus, the application of momentum conservation is straight forward. When a detector clicks, momentum conservation allows us to identify the particular path the photon took. This particular technique has been used before in experiments such as Wheeler's delayed choice experiment [5]. Thus, we have full which-way information about the photon from the time it enters the interferometer until it hits the detector.

When the wire grid is in place it affects the path of the photon. To determine this effect we need to calculate wire diffraction. Once again, a wire diffraction calculation is simpler in the modified Afshar experiment where a uniform beam interacts with thin wires.

2. Babinet's Principle

Diffraction of a laser beam by thin slits is one of the simplest calculations in optics. In our case we have thin wires instead of thin slits. Fortunately, the classical results for thin slits can be used in the modified Afshar experiment by a simple application of the principle of superposition also known as Babinet's principle [6]. We call \vec{E}_0 the electric field that arrives at the detection region when the laser beam is unperturbed, in other words, in the absence of the wire-grid. When the wire-grid is in place, the electric field that arrives at the detection region is \vec{E}_w . If instead of the wire-grid we use its complementary screen to disturb the laser beam then the electric field at the detection region is now \vec{E}_s . Babinet's principle states that $\vec{E}_0 = \vec{E}_s + \vec{E}_w$. In the case of the wire-grid its complementary screen is a thin-slits-grid where each slit is of the

same thickness as a wire. In our calculations we use the Fraunhofer approximation since the distances from the sources and detectors to the diffracting object is a meter or more, which is relatively large compared to the size of the diffracting object, which is a millimeter or less. In the calculations below we assume a single polarization for light.

3. The Single Beam Case

Since it is important for us to make contact with the experimental results obtained by Afshar et al., we first calculate wire diffraction for a single beam case. The single beam case is equivalent to having a single pinhole open. When pinhole A was open Afshar et al [2] observed a 14.14% reduction in the photon count at detector 1 and a deflection of 0.678% of the total number of photons to detector 2. When pinhole B was open and pinhole A was closed they reported a 14.62% decrease in photon count at detector 2. Unfortunately, they did not report the corresponding deflection to detector 1. We use their numbers to calibrate and test the modified Afshar experiment set-up. We use as free parameters the radius of the beam and the thickness of the wires. Afshar et al. use a ratio of about 10 to 1 for the center to center separation between wires to the thickness of a wire; we maintain the same ratio in the modified set up. In their experiment they use light with $\lambda = 638 \text{ nm}$, six wires with a thickness of $b = 128 \mu\text{m}$, and their center to center wire separation is $d = 1.34 \text{ mm}$. In our calculation we use light with the same wavelength. We use six wires each with a thickness of $32 \mu\text{m}$, the center to center wire separation is $319 \mu\text{m}$ and the beam width is 3.22 mm .

The two laser beams that hit the slits propagate symmetrically on the y-z plane and cross each other at the origin (see Fig. 2). Each beam makes an angle α with the z-

axis; α is small, 0.001 radians. The slit-grid is centered at the origin of the x-y plane. The long side of the slits is more than a centimeter long and it is parallel to the x-axis. Since the width of the beam is less than 5 millimeters no diffraction takes place along the x-direction. Diffraction takes place on the y-z plane. On this plane, diffraction is a function of the angle θ that diffracted light makes with the z-axis.

The electric field produced by the interaction of a single beam with an opaque screen with N thin slits is a well known result given by: $E_s = \Lambda f(\theta) \sin(\omega t - \kappa R)$, where Λ is a constant, ω is the angular frequency of light, κ is the corresponding wave number, t is time, R is the distance from the center of the screen to the detector, and $f(\theta)$ is given by [6]

$$f(\theta) = \frac{1}{N} \left(\frac{\sin(\beta \sin(\theta))}{\beta \sin(\theta)} \right) \left(\frac{\sin(N\gamma \sin(\theta))}{\sin(\gamma \sin(\theta))} \right). \quad (1)$$

The thickness of the slit (b), the center to center separation between slits (d), and the magnitude of the wave vector (κ) determine β ($\beta = \kappa b / 2$) and γ ($\gamma = \kappa d / 2$). To fully determine the electric field E_s at the detection region we need to find Λ . We use energy conservation to determine this constant. In our case energy is proportional to the integral of the intensity over the area of the region under consideration. The energy that goes through the slits is equal to the energy that reaches the whole detection region. Thus, we find that Λ is equal to $0.10751306E_0$, where E_0 is the electric field of the unperturbed laser beam.

We use Babinet's principle to find the electric field, $E_w = E_0 - E_s$, produced by wire diffraction from the slit diffraction field E_s and the unperturbed beam field E_0 . In

our case the electric field E_0 is zero everywhere except for a very small region where the detector in front of the unblocked mirror is placed. In regions where $E_0 = 0$ the electric field produced by the wire-grid is identical, except for a minus sign, to the electric field produced by the slit-grid, $E_w = -E_s$. We note that the calculation of the electric field E_w at the detector in front of the original beam is complicated by the fact that the phase difference between of E_s and E_0 is not a simple relation. Energy conservation is an alternative way to calculate the photon count at the detector in front of mirror.

Now that we have obtained the electric field E_w we can calculate the intensity and predict the photon count relative to the unperturbed case. At the detection region two particular places are of great interest to us, the first being the detector in front of the original beam ($\theta = 0$). We use energy conservation to calculate the percent photon count at this detector. We define f as the photon count with respect to the photon count of the undisturbed beam times 100,

$$f = \frac{\text{photon count}}{\text{photon count undisturbed beam}} \times 100. \quad (2)$$

The photon count for the undisturbed beam, f_0 , is 100%. The calculation of the photon count losses at the wires, f_w , is simple; it involves an integral of the uniform intensity of light over the section of the wires that face the incoming beam; the result is 7.59199%. The photon count of light diffracted everywhere except at the detector in front of the incoming beam, f_s , is obtained from the integral of E_s^2 over the whole detection region except at the detector in front of incoming beam; this value is 6.9652%. The equation of energy conservation is:

$$f_0 = f_w + f_s + f_D. \quad (3)$$

The only unknown here is the photon count at the detector in front of incoming beam, f_D . Thus, we get $f_D = 85.4428\%$. This number corresponds to a 14.55% decrease in photon count which is in reasonable agreement with the experiment.

The second place of particular interest is the location of the other detector ($\theta = 2\alpha = 0.002$) not in front of the incoming beam. The first diffraction peak happens to be right at the center of the second detector, $\theta = .002$ rad. Afshar et al reported that 0.678% of the photons in the original beam end up at their detector 2 [2]. We integrate E_s^2 over the area of the second detector and predict that 0.627% of the photons of the original beam end up at the second detector. The relatively small discrepancy between the Afshar experiment and the modified Afshar experiment could be explained by the approximations made in the modified Afshar experiment to keep the calculations simpler such as the use of the plane wave approximation. Also, there are experimental limitations such as the use of non-ideal lenses, imperfect alignments, and limitations of single photon detectors. On top of these issues, Afshar et al. did not have theoretical predictions at their disposal to guide their measurements.

4. Two Beam Case

The crucial calculation is wire diffraction when both beams are unblocked in the modified set-up. The calculation provides the information needed to determine the theoretical which-way information and visibility. The technique is similar to the one beam case. Thus, we first calculate the diffraction produced by a thin-slit-grid located at the minima of the interference pattern and then we use Babinet's principle to obtain the

wire-grid diffraction.

We approximate the two beams as two plane waves with wave vectors $\vec{\kappa}_1 = -\hat{y}\kappa \sin \alpha + \hat{z}\kappa \cos \alpha$ and $\vec{\kappa}_2 = \hat{y}\kappa \sin \alpha + \hat{z}\kappa \cos \alpha$ (See Fig. 2). Superposition of the two plane waves $E_0 e^{i(\vec{\kappa}_1 \cdot \vec{r} - \omega t)} + E_0 e^{i(\vec{\kappa}_2 \cdot \vec{r} - \omega t)}$ results in a plane wave $E_{eff} e^{i(\vec{\kappa}' \cdot \vec{r} - \omega t)}$, where the wave vector $\vec{\kappa}' = \hat{z}\kappa \cos \alpha$ is directed perpendicular to the wire-grid, and E_{eff} is an effective amplitude given by $E_{eff} = 2E_0 \cos(\kappa \sin(\alpha)y)$. Dark fringes appear around regions along the y-axis that fulfill condition: $\kappa \sin(\alpha)y = (2n + 1)\pi / 2$ for all integers n . We calculate the diffraction produced by a thin-slit-grid located at the center of the dark fringes of the interference pattern. Near the center of a dark fringe the effective amplitude is approximated by expanding $2E_0 \cos(\kappa \sin(\alpha)y)$ about this point. In this region the cosine function is linear with alternating slope from slit to slit. The result is $E_{eff} = \pm 2E_0 \kappa \sin(\alpha)u$, where u is the distance from the center of the dark fringe.

For the particular case of a single thin slit at the center of a dark fringe the diffraction integral is

$$\int_{-b/2}^{b/2} \frac{E_{eff}}{r} \sin(\omega t - \kappa r) du, \quad (4)$$

where b is the thickness of the slit, r is the distance from a source point to the detector, and the effective amplitude is approximated by $E_{eff} = 2E_0 \kappa \sin(\alpha)u$. The distance r is given by $r = (R^2 + u^2 - 2R \sin(\theta)u)^{1/2}$, where R is the distance from the origin to the detector, and the angle θ is the angle that diffracted light makes with the z-axis. Since the phase is much more sensitive to small changes than the amplitude we may replace r in the amplitude by R but r in the phase by $R - u \sin(\theta)$. Thus, the integral is now

$$\Omega \int_{-b/2}^{b/2} u \sin(\omega t - \kappa R + u \kappa \sin(\theta)) du, \quad (5)$$

where $\Omega = \frac{2E_0 \kappa \sin \alpha}{R}$. Integrating this expression gives the electric field at the detector region as a function of θ for the single slit case. However, we need to calculate the effect of six slits.

The calculation of the electric field produced by 6 slits is a relatively simple extension of equation (5).

$$\sum_{j=0}^{j=5} (-1)^j \Omega \int_{jd-b/2}^{jd+b/2} (y - jd) \sin(\omega t - \kappa R + y \kappa \sin(\theta)) dy, \quad (6)$$

where d is the center to center distance between adjacent slits. The resulting electric field is a long expression that is easy to obtain with programs such as Mathematica. For our calculation we are more interested in the intensity. We calculate the intensity I by taking the time average of the square of the electric field,

$$I = \frac{2\Omega^2}{(\kappa \sin \theta)^4} \{b \kappa \sin \theta \cos(1/2 b \kappa \sin \theta) - 2 \sin(1/2 b \kappa \sin \theta)\}^2 \times \\ \{\sin(1/2 d \kappa \sin \theta) - \sin(3/2 d \kappa \sin \theta) + \sin(5/2 d \kappa \sin \theta)\}^2. \quad (7)$$

A plot of the intensity I as a function of θ is presented in Fig. 3. We notice that this diffraction pattern predicted by the modified Afshar experiment calculation has been observed experimentally using the Afshar experiment set-up [7]. This is an additional confirmation of the equivalence of the two set-ups.

To complete our work we calculate the percent photon count at either detector, f_D . For this purpose we use the conservation of energy equation (3). The photon count for the undisturbed beam, f_0 , is 100%. The photon count losses at the wires is

$f_w = 0.125667\%$. For the two beam case the photon count f_s represents photons diffracted everywhere except at both detectors; from the calculation we find that $f_s = 0.124709\%$. Using equation (3) we get $f_D = 99.7496\%$. Therefore, the percent decrease in photon count at either detector is 0.25%. Afshar et al. reported that the percent decrease in photon count at their detector 1 was 0.31% [2]. Our calculation is in reasonable agreement with this measurement. They also reported that their detector 2 showed a decrease in photon count of 1.13% which is high compared with our calculation. The discrepancy is understandable considering that they did not have a theoretical calculation to guide their findings and that their experiment is quite sensitive to correct alignment.

5. Conclusion

To end our report we comment on the light that our calculation sheds on the visibility and which-way information for the Afshar experiment. First, our calculation was based on the formation of an interference pattern, at the location of the wire-grid, with visibility 1. For experimental limits of the visibility from the final results we refer to the work of Afshar et al. [2] and Flores [8]. Our calculation has interesting implications for the which-way information. We assume that all the diffracted light has no which-way information. The calculation shows that most of the diffracted light falls away from the detectors. In fact in Fig. 3 we can see that the location of the detectors is at the very first peak of either side of the pattern. Integrating the intensity over the detector area allows us to get the fractional photon count of diffracted light that reaches the detector, $9.58447 \times 10^{-6} \approx 1/100,000$. Now, the situation seems clearer to us. Consider 100,000

particles that come from a given mirror towards its corresponding detector one at a time. The wires stop 126 of these particles. Diffraction away from detector accounts for 125 particles. Only 1 particle is diffracted to the detector. Since this particle has been diffracted it has no which-way information. The remaining 99,748 particles have which-way information; they come directly from the mirror to its corresponding detector. Thus, the which-way information parameter K is close to 1. The significance of these findings for Bohr's principle of complementarity is still under debate [2].

The author would like to thank Prof. Ernst Knoesel, Scott Roszko, and Gabriela Hristescu for their help with this work.

References

[1] S.S. Afshar, Violation of the principle of complementarity, and its implications, *Proc. of SPIE* **5866** (2005) 229-244.

[arXiv:quant-ph/0701027v1](https://arxiv.org/abs/quant-ph/0701027v1)

[2] S.S. Afshar, E. Flores, K.F. McDonald, E. Knoesel, Paradox in Wave-Particle Duality for Non-Perturbative Measurements, *Found. Phys.*37, 295 (2007)

[arXiv:quant-ph/0702188v1](https://arxiv.org/abs/quant-ph/0702188v1)

[3] E. Flores, E. Knoesel, Why Kastner analysis does not apply to a modified Afshar experiment, *E. Proc. of SPIE*, Vol.6664, 66640O, (2007)

[arXiv:quant-ph/0702210v1](https://arxiv.org/abs/quant-ph/0702210v1)

[4] D. Greenberger and A. Yasin, "Simultaneous wave and particle knowledge in a neutron interferometer," *Phys. Lett. A* 128, 391 (1988).

[5] J. A. Wheeler, “Law Without Law,” *Quantum Theory and Measurement* (Princeton: Princeton University Press, 1983)

[6] E. Hecht, A. Zajac, *Optics* (Addison-Wesley, Reading, MA, 1974).

[7] R. Bounpastore, E. Knoesel, E. Flores, paper in preparation

[8] E. Flores, Reply to Comments of Steuernagel on the Afshar’s Experiment.

[arXiv:0802.0245v1](https://arxiv.org/abs/0802.0245v1)

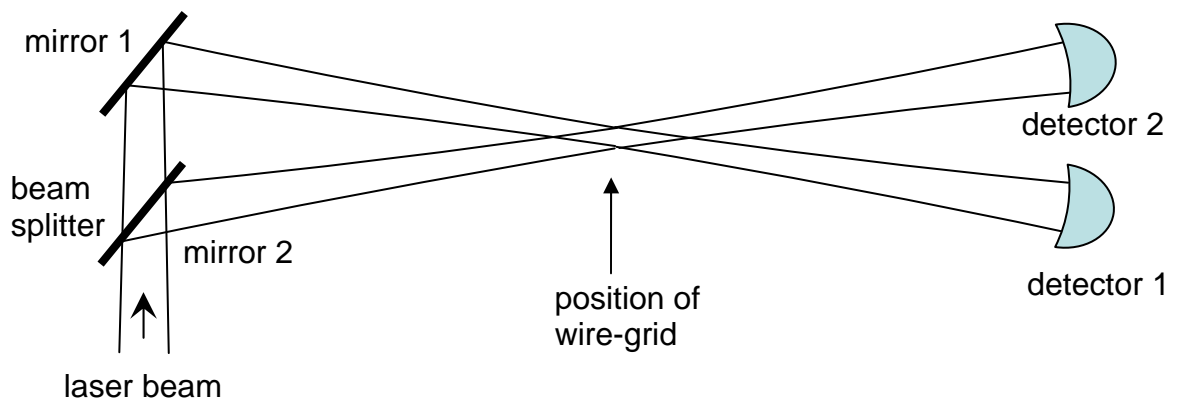


Fig 1 Modified Afshar experiment. The separation of the two beams occurs without an imaging system.

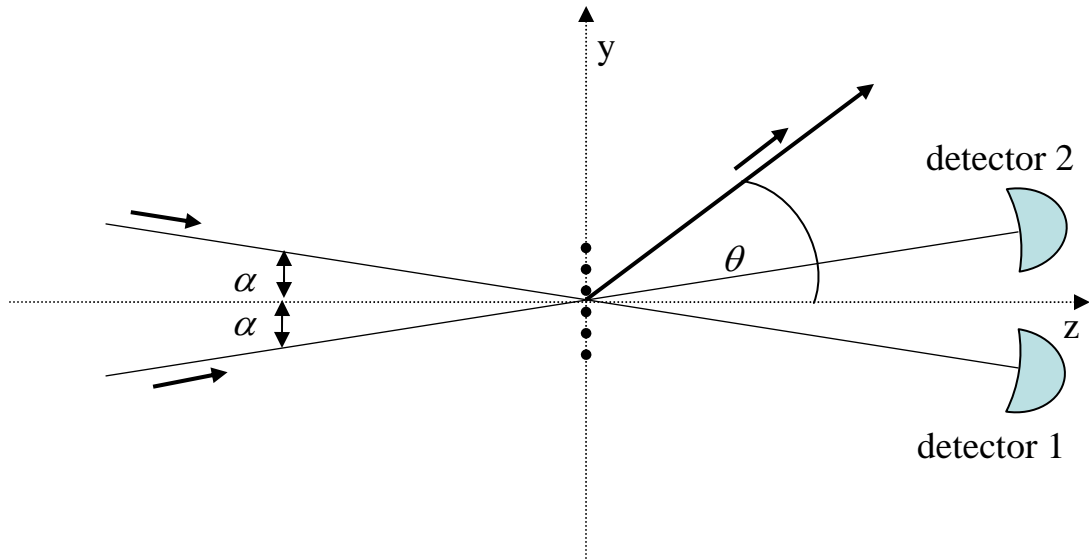


Fig. 2 Two laser beams approach the wire-grid at a small angle $\alpha = 0.001$ rad with the z-axis. The wire-grid is centered at origin and lays on the xy-plane. Diffracted light makes an angle θ with respect to the z-axis. Two detectors are located right in front of each incoming beam.

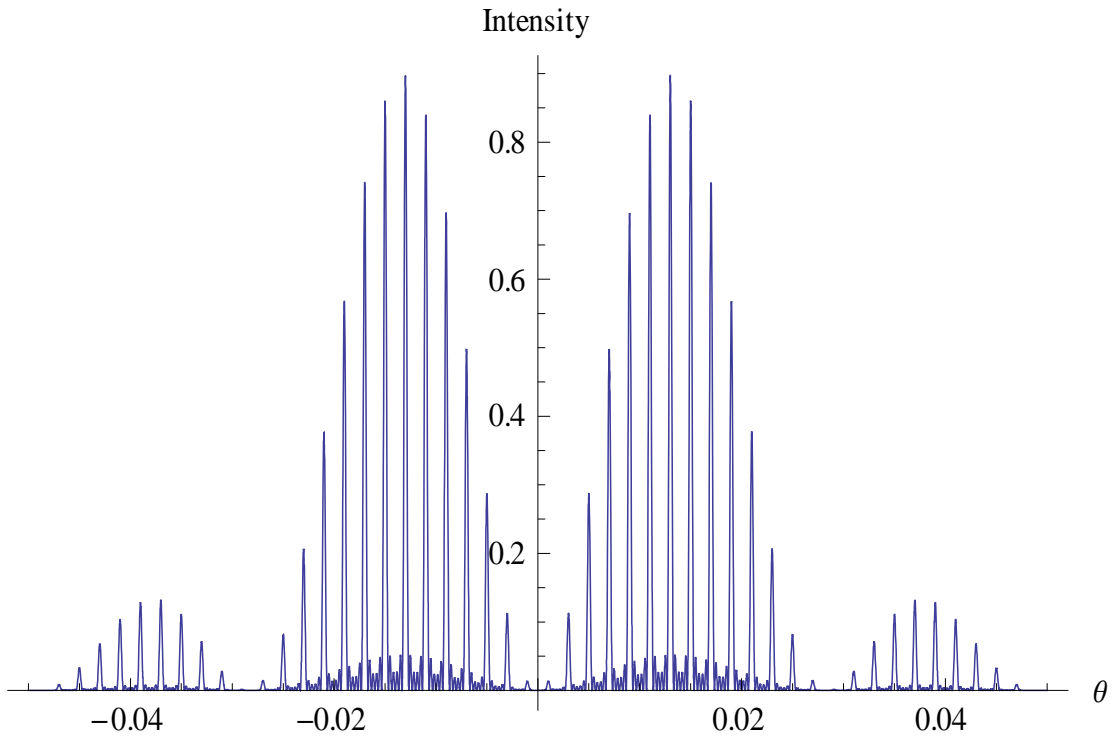


Fig. 3 A plot of the intensity I as a function of θ for the case when two coherent beams interfere and then diffract due to a thin-slit-grid located at center of dark fringes. Notice that detectors 1 and 2 are symmetrically located right at the first peak, $\theta = \pm 0.001$ rad. The intensity at the first peak is hardly noticeable in the graph.