

# Quantum networks with coherent routing of information through multiple nodes

Hlér Kristjánsson,<sup>1,2</sup> Yan Zhong (钟妍),<sup>3</sup> Anthony Munson,<sup>4,1</sup> and Giulio Chiribella<sup>3,1,2,5,\*</sup>

<sup>1</sup>*Quantum Group, Department of Computer Science, University of Oxford,  
Wolfson Building, Parks Road, Oxford, United Kingdom*

<sup>2</sup>*HKU-Oxford Joint Laboratory for Quantum Information and Computation*

<sup>3</sup>*QICI Quantum Information and Computation Initiative, Department of Computer Science,  
The University of Hong Kong, Pok Fu Lam Road, Hong Kong*

<sup>4</sup>*Department of Physics, University of Maryland, College Park, MD, United States of America*

<sup>5</sup>*Perimeter Institute for Theoretical Physics, 31 Caroline Street North, Waterloo, Ontario, Canada*

Large-scale communication networks, such as the internet, achieve the transmission of information from a sender to a distant receiver by routing packets of data through many intermediate nodes. Classically, each packet has to follow a well-defined path through the network. In a quantum network, however, it is in principle possible to route information along multiple paths in a coherent quantum superposition. Here we develop a model of quantum communication network with coherent routing of information through multiple intermediate nodes. In this model, we show that the distance over which information can be transmitted reliably can be significantly extended. Surprisingly, this improvement takes place also for purely classical channels, such as binary asymmetric channels. In the ideal setting where the coherent superposition of paths is not affected by noise, we find that classical data can be reliably transmitted at a constant rate through asymptotically long sequences of binary asymmetric channels, which in normal conditions would lead to an exponential decay of the transmission rate. In more realistic conditions involving decoherence on the paths, we find that the combined use of coherent control on the path and local operations at intermediate nodes achieves significantly higher communication rates over finite distances.

## I. INTRODUCTION

Quantum communication networks promise major advantages with respect to traditional telecommunication networks, enabling a private transmission of messages via quantum key distribution [1, 2] and even enhancing the transmission of classical data [3]. A major challenge for quantum communication networks is the presence of noise, which exponentially suppresses the transmission of quantum states over large distances. One way to address this challenge is to use quantum repeaters [4], that is, intermediate stations that establish high-quality quantum communication links over shorter distances, and then merge them through a procedure of entanglement swapping [5]. Quantum repeaters manage to increase the quality of quantum communication using a variety of error correction and entanglement purification techniques [6]. On the other hand, the rate of quantum communication remains an issue, because establishing high-quality communication links requires repeated rounds of transmission. This problem motivates a search for methods to improve the rates of quantum communication channels, by directly reducing noise in the transmission lines, and/or by making use of encoding strategies that approach the communication capacity of a given noisy channel [7, 8].

A promising way to increase the transmission rates of noisy quantum channels is to exploit the ability of quantum particles to propagate through multiple trajectories. As highlighted by the iconic double slit experiment [9],

quantum particles can simultaneously visit multiple alternative regions, thereby experiencing a coherent superposition of alternative evolutions [10–12]. The possibility of sending quantum particles along a superposition of paths is expected to be a feature of the future quantum internet [13] and is realised by a set of devices known as quantum routers [14–19]. In a seminal work, Gisin, Linden, Massar, and Popescu [20] showed that the interference of noisy processes could be used to filter out errors, guaranteeing security in highly noisy regimes where traditional communication protocols were vulnerable to attacks [21]. More recently, a series of works have explored the rates for classical and quantum communication achievable with superpositions of paths [22–24]. Still, the study of quantum communication in a superposition of paths is still in its infancy. Most of the existing proposals have focused on the transmission of information directly from a sender to a receiver, while in a fully developed quantum communication network, the presence of intermediate nodes offers new opportunities that have remained unexplored so far.

In this work, we develop a model of quantum communication networks where information can be routed through multiple intermediate nodes on a coherent superposition of paths. The power of this model is demonstrated through a concrete example, where we show that suitable operations by quantum repeaters at intermediate nodes can mitigate noise, and, in special situations, even allow the transmission of classical data over arbitrarily long distances, thus evading the exponential decay of communication rates that affects standard communication networks. In the idealised case where the path degree of freedom is not affected by decoherence, the

---

\* giulio.chiribella@cs.ox.ac.uk

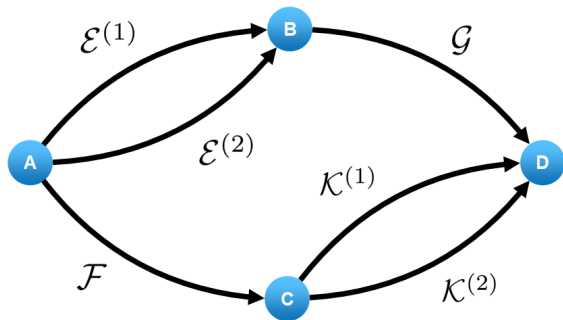


FIG. 1. *Quantum network with coherent control of the communication paths.* The vertices represent the communicating parties, while the arrows represent the available communication channels. When multiple communication paths are available, the information carriers can propagate in a superposition of alternative paths.

protocol enables classical communication at a finite rate through asymptotically long sequences of noisy channels. In more realistic scenarios exhibiting decoherence across the various paths, our scheme provides a finite classical capacity advantage for various sequences of noisy channels. Remarkably, these effects take place even for the quantum realisation of purely classical channels, such as binary asymmetric channels.

## II. RESULTS

**Quantum networks with coherent control.** Let us start by formulating a general model of communication networks with quantum control over the trajectories connecting a sender to a receiver through intermediate nodes. In the basic scenario, illustrated in Figure 1, the communication network is described by a directed graph, where the vertices represent communicating parties and the edges represent communication channels between them.

When a communication channel is not used, we will model its input as being the ‘vacuum state’, a state orthogonal to all the states used to encode information. This modelling is inspired by the concrete example of quantum communication with polarisation qubits, where the information is encoded in the subspace generated by the one-photon states  $|1\rangle_{\mathbf{k},H} \otimes |0\rangle_{\mathbf{k},V}$  and  $|0\rangle_{\mathbf{k},H} \otimes |1\rangle_{\mathbf{k},V}$ , while the absence of inputs is described by the vacuum state  $|0\rangle_{\mathbf{k},H} \otimes |0\rangle_{\mathbf{k},V}$ , where  $\mathbf{k}$  denotes the wave vector and  $H(V)$  horizontal (vertical) polarisation.

The action of a communication channel in this extended setting is specified by a *vacuum extension*  $\tilde{\mathcal{E}}$  [23] of the original quantum channel  $\mathcal{E}$  acting on the one-particle subspace  $\mathcal{H}$ . The vacuum extension  $\tilde{\mathcal{E}}$  is described by Kraus operators  $\{\tilde{E}_i := E_i + \alpha_i |\text{vac}\rangle \langle \text{vac}|\}$ , where  $\{E_i\}$  are Kraus operators of the original channel, and  $\{\alpha_i\}$  are complex *vacuum amplitudes*, satisfying  $\sum_{i=0}^{r-1} |\alpha_i|^2 = 1$ .

The vacuum amplitudes specify the coherence between the one-particle evolution and the evolution of the vacuum. Note, that we take the vacuum Hilbert space  $\mathcal{H}_{\text{vac}}$  to be one-dimensional with unique state  $|\text{vac}\rangle$ ; the extended Hilbert space acted on by the vacuum extension is  $\tilde{\mathcal{H}} := \mathcal{H} \oplus \mathcal{H}_{\text{vac}}$ .

Superpositions of different network paths, for example between nodes  $A$  and  $B$  in Figure 1, can then be realised by superposing single-particle states of the form  $|\psi\rangle_1 \otimes |\text{vac}\rangle_2$  and  $|\text{vac}\rangle_1 \otimes |\psi\rangle_2$ , where the subscripts 1 and 2 refer to the input ports of the channels  $\mathcal{E}^{(1)}$  and  $\mathcal{E}^{(2)}$  in Figure 1, respectively.

More concisely, the transmission can be modelled in terms of a single particle possessing an external degree of freedom, which controls the path of the particle in space, and is represented by the qubit Hilbert space  $\mathcal{H}_P$ . In this picture, when the external degree of freedom is in the superposition state  $|+\rangle = (|0\rangle + |1\rangle)/\sqrt{2}$  (with  $|0\rangle$  and  $|1\rangle$  corresponding to the orthogonal classical paths), the effective evolution of a particle travelling from node  $A$  to node  $B$  of Figure 1 is described by the quantum channel  $\mathcal{S}_{\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}}^{|+\rangle\langle+|}$  with Kraus operators [23]

$$S_{ij} = E_i^{(1)} \alpha_j^{(2)} \otimes |0\rangle\langle 0| + E_j^{(2)} \alpha_i^{(1)} \otimes |1\rangle\langle 1|, \quad (1)$$

where the channel  $\tilde{\mathcal{E}}$  with Kraus operators  $\{\tilde{E}_i^{(k)} := E_i^{(k)} + \alpha_i^{(k)} |\text{vac}\rangle \langle \text{vac}|\}$  is a vacuum extension of channel  $\mathcal{E}^{(k)}$ , for  $k = 1, 2$ . We describe the evolution  $\mathcal{S}_{\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}}^{|+\rangle\langle+|}$  as a superposition of the two channels  $\mathcal{E}^{(1)}$  and  $\mathcal{E}^{(2)}$ , specified by the vacuum extensions  $\tilde{\mathcal{E}}^{(1)}$  and  $\tilde{\mathcal{E}}^{(2)}$ .

In the case of two identical transmission lines  $\tilde{\mathcal{E}}$  and the path initialised in the  $|+\rangle$  state, the output state of the superposition channel is

$$\begin{aligned} \mathcal{S}_{\tilde{\mathcal{E}}, \tilde{\mathcal{E}}}^{|+\rangle\langle+|}(\rho) &= \frac{\mathcal{E}(\rho) + F\rho F^\dagger}{2} \otimes |+\rangle\langle+| \\ &+ \frac{\mathcal{E}(\rho) - F\rho F^\dagger}{2} \otimes |-\rangle\langle-|, \end{aligned} \quad (2)$$

where the first (second) factor of each simple tensor corresponds to the message (path) and  $F := \sum_i \bar{\alpha}_i E_i$ . (See Appendix A for the derivation.) We call  $F$  the *vacuum interference operator*, as it determines the amount of interference between the channel  $\mathcal{E}$  and the vacuum. Crucially, the output state in Eq. (2) depends on the input state  $\rho$  through the terms  $\pm F\rho F^\dagger$ , which can enable communication even when the original channel has zero capacity [22, 23].

Given two nodes of a quantum communication network, the problem is to find the optimal way to transfer information from one node to the other. This amounts to optimising the encoding operations performed by the sender, the decoding operations performed by the receiver, and the operations performed by the intermediate parties to assist the communication between the sender and receiver. In the following, we will call such intermediate operations *repeaters*, even though these operations

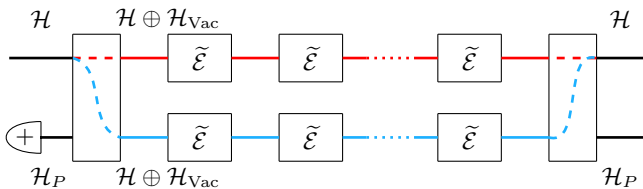


FIG. 2. Circuit diagram of a superposition of two sequences of  $n$  channels  $\mathcal{E}$ , specified by the vacuum extensions  $\tilde{\mathcal{E}}$ . The path and the internal degree of freedom of the information carrier are associated to two Hilbert spaces  $\mathcal{H}_P$  and  $\mathcal{H}$ , respectively. The path is initialised in the superposition state  $|+\rangle = (|0\rangle + |1\rangle)/\sqrt{2}$ , with the state  $|0\rangle$  corresponding to the first sequence (top, in red) and the state  $|1\rangle$  corresponding to the second sequence (bottom, in blue). The bipartite gates at the beginning and the end represent the change of description from the single-particle picture to a two-mode picture, where each of the alternative paths corresponds to one of the modes being occupied and the other mode in the vacuum state, represented by the Hilbert space  $(\mathcal{H} \otimes \mathcal{H}_{\text{Vac}}) \oplus (\mathcal{H}_{\text{Vac}} \otimes \mathcal{H})$  (see Appendix A for a formal derivation).

need not to be the traditional operations performed by quantum repeaters, e.g. they need not be entanglement purification operations.

With this general framework in place, in the following we shall construct concrete examples of network protocols for classical communication, exploiting the interference of multiple repeaters placed on alternative communication paths.

**Communication through asymptotically long sequences of binary asymmetric channels.** An important type of classical noisy channel is the binary asymmetric channel, which transmits a bit with different probabilities of error depending on whether the bit value is 0 or 1. The quantum realisation of this channel is given by the map

$$\mathcal{E}(\rho) = (1-q)|0\rangle\langle 0| \langle 0|\rho|0\rangle + q|1\rangle\langle 1| \langle 0|\rho|0\rangle + p|0\rangle\langle 0| \langle 1|\rho|1\rangle + (1-p)|1\rangle\langle 1| \langle 1|\rho|1\rangle. \quad (3)$$

In the following, we shall consider first the special case of binary asymmetric channel in which the value 0 is transmitted without error, namely  $q = 0$ . The resulting channel is known as the  $Z$ -channel [25, 26] and has several applications in optical communications [27]. The quantum realisation of the  $Z$ -channel is the map

$$\mathcal{E}(\rho) = p|0\rangle\langle 0| + (1-p)\rho_{\text{diag}}, \quad (4)$$

with  $\rho_{\text{diag}} := |0\rangle\langle 0| \langle 0|\rho|0\rangle + |1\rangle\langle 1| \langle 1|\rho|1\rangle$ .

Now, suppose that a quantum particle has to traverse  $n$   $Z$ -channels on the way from the sender to the receiver. If the particle follows a definite path, its state after the transmission will be

$$\mathcal{E}^n(\rho) = [1 - (1-p)^n] |0\rangle\langle 0| + (1-p)^n \rho_{\text{diag}}, \quad (5)$$

which is equivalent to another  $Z$ -channel with effective error probability  $1 - (1-p)^n$ . For large  $n$ , the dependence

of the output on the input vanishes exponentially, resulting in an exponential decay of the transmission rate.

Now, suppose that two alternative paths are available, and that the particle can traverse them in a quantum superposition, as depicted in Figure 2. If the particle's path is initialised in the  $|+\rangle$  state, then the output state is

$$\mathcal{S}_{\tilde{\mathcal{E}}^n, \tilde{\mathcal{E}}^n}^{|+\rangle\langle +|}(\rho) = \frac{\mathcal{E}^n(\rho) + F^n \rho F^{\dagger n}}{2} \otimes |+\rangle\langle +| + \frac{\mathcal{E}^n(\rho) - F^n \rho F^{\dagger n}}{2} \otimes |-\rangle\langle -|. \quad (6)$$

The situation is now different, due to the presence of the vacuum interference operator  $F$ . In the large  $n$  limit, the operator  $F^n$  tends to the projector  $\Pi$  on the eigenspace of  $F$  with maximum eigenvalue, that is, the eigenspace with eigenvalue 1. Hence, the output state converges to

$$\mathcal{S}_{\infty}^{|+\rangle\langle +|}(\rho) := \lim_{n \rightarrow \infty} \mathcal{S}_{\tilde{\mathcal{E}}^n, \tilde{\mathcal{E}}^n}^{|+\rangle\langle +|}(\rho) = \frac{|0\rangle\langle 0| + \Pi \rho \Pi}{2} \otimes |+\rangle\langle +| + \frac{|0\rangle\langle 0| - \Pi \rho \Pi}{2} \otimes |-\rangle\langle -|. \quad (7)$$

This state has a non-trivial dependence on the input state  $\rho$  and therefore permits a transmission of classical data, despite the fact that the paths are asymptotically long.

The crucial question, at this point, is whether or not the operator  $F$  has a non-trivial eigenspace with eigenvalue 1. We now show that the answer is affirmative in a natural physical realisation of the  $Z$ -channel. Let us regard the channel as the result of two steps: first, a decoherence in the computational basis  $\{|0\rangle, |1\rangle\}$ , and then a random operation that replaces the input with the state  $|0\rangle$  with probability  $p$ , or leaves the input state invariant with probability  $1-p$ . For the physical realisation of the decoherence map, we take a controlled-NOT interaction with an environment  $E_1$ , initially in the state  $|0\rangle$ . In this realisation, the vacuum extension is easily found: if the system is not present, then the environment remains in the state  $|0\rangle$ . Overall, this first interaction is described by the gate

$$\tilde{U}_{\widetilde{M}E_1} = |0\rangle\langle 0| \otimes I_{E_1} + |1\rangle\langle 1| \otimes X_{E_1} + |\text{vac}\rangle\langle \text{vac}| \otimes I_{E_1}, \quad (8)$$

where the subscript  $E_1$  denotes operators acting on the environment, and  $X := |0\rangle\langle 1| + |1\rangle\langle 0|$ . Similarly, the interaction that replaces the input state with the state  $|0\rangle$  can be modelled as a SWAP gate, where the state of the system is swapped with the state of an environment  $E_2$ , initially in the state  $|0\rangle$ . Again, if the system is not present, the environment remains in the state  $|0\rangle$ . Overall, this interaction is described by the gate

$$\tilde{V}_{\widetilde{M}E_2} = |0\rangle\langle 0| \otimes |0\rangle\langle 0|_{E_2} + |1\rangle\langle 1| \otimes |1\rangle\langle 1|_{E_2} + |0\rangle\langle 1| \otimes |1\rangle\langle 0|_{E_2} + |1\rangle\langle 0| \otimes |0\rangle\langle 1|_{E_2} + |\text{vac}\rangle\langle \text{vac}| \otimes I_{E_2}. \quad (9)$$

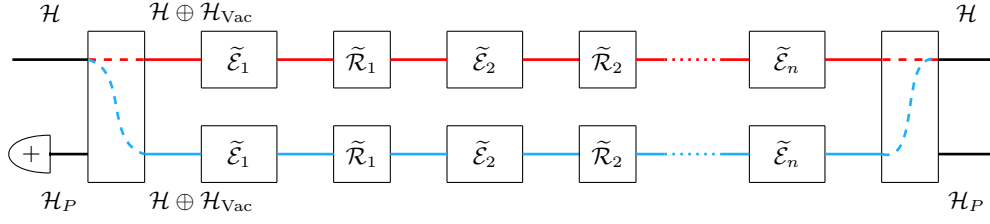


FIG. 3. Circuit diagram of a superposition of two sequences of  $n$  channels  $(\mathcal{E}_1, \dots, \mathcal{E}_n)$ , specified by the vacuum extensions  $(\tilde{\mathcal{E}}_1, \dots, \tilde{\mathcal{E}}_n)$ , with intermediate repeaters  $(\tilde{\mathcal{R}}_1, \dots, \tilde{\mathcal{R}}_{n-1})$ .

Once the environments  $E_1$  and  $E_2$  are discarded, the above interactions give rise to an extended channel  $\tilde{\mathcal{C}}_1$  with Kraus operators  $\tilde{C}_{10} = |0\rangle\langle 0| \oplus |\text{vac}\rangle\langle \text{vac}|$  and  $\tilde{C}_{11} = |0\rangle\langle 1|$ . This channel is applied to the input with probability  $p$ . With probability  $1 - p$ , instead, only the first interaction takes place, resulting in an extended channel  $\tilde{\mathcal{C}}_2$  with Kraus operators  $\tilde{C}_{20} = |0\rangle\langle 0| \oplus |\text{vac}\rangle\langle \text{vac}|$  and  $\tilde{C}_{21} = |1\rangle\langle 1|$ . Overall, the evolution of the system is described by the extended channel  $\tilde{\mathcal{E}} = p\tilde{\mathcal{C}}_1 + (1-p)\tilde{\mathcal{C}}_2$ . This channel has vacuum interference operator  $F = |0\rangle\langle 0|$  with unit eigenvalue. Hence, the above physical model permits communication through asymptotically long distances.

Specifically, the limit channel (7) becomes

$$\mathcal{S}_{\infty}^{|\pm\rangle\langle\pm|}(\rho) = |0\rangle\langle 0| \otimes (q_+ |+\rangle\langle +| + q_- |-\rangle\langle -|), \quad (10)$$

with  $q_{\pm} := (1 \pm \langle 0|\rho|0\rangle)/2$ . This channel is equivalent to a classical  $Z$ -channel with error probability  $p = 1/2$ , and the classical capacity of such a channel is known to be  $\log_2(5/4) \approx 0.32$  [28].

Summarising, we have shown that one can achieve classical communication with a constant capacity of 0.32 bits, even in the extreme limit of an asymptotically long sequence of  $Z$ -channels.

**Extension to variable bases.** So far, we have considered only networks whose errors arise from identical  $Z$ -channels, all defined with respect to the computational basis, and all with the same error probability  $p$ . However, in practice, it is reasonable to expect variations within the error parameters between different parts of the network. For any chosen path through the network, the sequence of errors acting on the particle could be modelled as a sequence of possibly non-identical  $Z$ -channels  $\mathcal{E}_n \circ \mathcal{E}_{n-1} \circ \dots \circ \mathcal{E}_1$ , with

$$\mathcal{E}_k(\rho) = p_k |\eta_k\rangle\langle \eta_k| + (1 - p_k) \rho_{\text{diag}}^{(k)}, \quad (11)$$

where  $k \in \{1, \dots, n\}$ ,  $p_k$  is a probability,  $\{|\eta_k\rangle, |\eta_{k,\perp}\rangle\}$  is an orthonormal basis, and  $\rho_{\text{diag}}^{(k)} := \langle \eta_k|\rho|\eta_k\rangle |\eta_k\rangle\langle \eta_k| + \langle \eta_{k,\perp}|\rho|\eta_{k,\perp}\rangle |\eta_{k,\perp}\rangle\langle \eta_{k,\perp}|$ .

For all  $k$ , let  $\tilde{\mathcal{E}}_k$  be a vacuum extension of the channel  $\mathcal{E}_k$ . A superposition of two identical sequences  $\tilde{\mathcal{E}}_n \circ \tilde{\mathcal{E}}_{n-1} \circ \dots \circ \tilde{\mathcal{E}}_1$  yields a concatenated vacuum interference operator  $F = F_n F_{n-1} \dots F_1$ , where each  $F_k = |\eta_k\rangle\langle \eta_k|$

is the vacuum interference operator for  $\tilde{\mathcal{E}}_k$ . Assuming that for all  $k$ ,  $|\langle \eta_{k+1}|\eta_k\rangle| < 1$ ,  $F$  approaches zero as  $n \rightarrow \infty$ . One can circumvent the vacuum interference operator's decay by inserting at each node in the network, an intermediate repeater  $\tilde{\mathcal{R}}_k$  engineered to have vacuum interference operator  $G_k = |\eta_{k+1}\rangle\langle \eta_k| + G_k^{\text{rest}}$ , where  $G_k^{\text{rest}}$  is any operator such that  $G_k$  is a valid vacuum interference operator satisfying  $G_k |\eta_k\rangle = |\eta_{k+1}\rangle$ . It is always possible to construct such a repeater  $\tilde{\mathcal{R}}_k$  by defining the unitary channel  $\tilde{\mathcal{R}}_k = \tilde{R}_k(\cdot)\tilde{R}_k^\dagger$ , with  $\tilde{R}_k = (|\eta_{k+1}\rangle\langle \eta_k| + G_k^{\text{rest}}) \oplus |\text{vac}\rangle\langle \text{vac}|$ . This construction yields an effective vacuum interference operator for the whole sequence of  $Z$ -channels and repeaters:  $F_{\text{eff}} = F_n G_{n-1} F_{n-1} \dots G_1 F_1$ .

The superposition of two identical sequences of non-identical  $Z$ -channels concatenated with repeaters is depicted in Figure 3. If the path is initialised in the  $|+\rangle$  state, then the output state of the superposed channel is

$$\begin{aligned} \mathcal{S}^{|\pm\rangle\langle\pm|}(\rho) &= (\tilde{\mathcal{E}}_n \tilde{\mathcal{R}}_{n-1} \tilde{\mathcal{E}}_{n-1} \dots \tilde{\mathcal{R}}_1 \tilde{\mathcal{E}}_1, (\tilde{\mathcal{E}}_n \tilde{\mathcal{R}}_{n-1} \tilde{\mathcal{E}}_{n-1} \dots \tilde{\mathcal{R}}_1 \tilde{\mathcal{E}}_1))(\rho) \\ &= \frac{\mathcal{E}_n \circ \mathcal{E}_{n-1} \circ \dots \circ \mathcal{E}_1(\rho) + F_{\text{eff}} \rho F_{\text{eff}}^\dagger}{2} \otimes |+\rangle\langle +| \\ &\quad + \frac{\mathcal{E}_n \circ \mathcal{E}_{n-1} \circ \dots \circ \mathcal{E}_1(\rho) - F_{\text{eff}} \rho F_{\text{eff}}^\dagger}{2} \otimes |-\rangle\langle -|. \end{aligned} \quad (12)$$

If  $p_k > 0$  for all  $k$  and if the sequence  $\{|\eta_k\rangle\}_{k=1}^{\infty}$  has a well-defined limit  $|\eta_*\rangle := \lim_{k \rightarrow \infty} |\eta_k\rangle$ , then, in the asymptotic limit  $n \rightarrow \infty$ , the output state in Eq. (12) becomes

$$|\eta_*\rangle\langle \eta_*| \otimes (q_+ |+\rangle\langle +| + q_- |-\rangle\langle -|), \quad (13)$$

where  $q_{\pm} := (1 \pm \langle \eta_1|\rho|\eta_1\rangle)/2$ . This expression has the same form as Eq. (10), enabling classical communication at a non-zero rate through asymptotically long sequences of non-identical erasure channels.

**Characterisation of the channels permitting classical communication through asymptotically long sequences.** In the previous two sections, we showed that for  $Z$ -channels, superposing asymptotically long sequences enables the transmission of classical information at a non-zero rate. In this section, we present necessary and sufficient conditions for this phenomenon to be realised with a generic sequence of identical quantum channels.

Recall our expectation that, without repeater channels, one can communicate non-zero classical information through a superposition of sequences of identical channels if and only if the channels' vacuum interference operator  $F$  has eigenvalue 1. If this statement is true, then we expect an even stronger statement to be true: with repeater channels, one can communicate non-zero classical information through a superposition of sequences of identical channels if and only if  $F$  has singular value 1. For, if the vacuum interference operator  $G$  of a repeater channel renders an effective vacuum interference operator  $F_{\text{eff}} := GF$  with eigenvalue 1, then the stronger statement reduces to the weaker one. An example of such a pair  $F$  and  $G$  is given in Appendix B.

Motivated by this line of reasoning, we establish the following theorem for asymptotically long sequences of identical quantum channels  $\mathcal{E}$ .

**Theorem 1.** *Let  $\mathcal{E} : \mathcal{L}(\mathcal{H}_X) \rightarrow \mathcal{L}(\mathcal{H}_Y)$  be a quantum channel. Let  $\tilde{\mathcal{E}}$  be a vacuum extension of  $\mathcal{E}$ , with vacuum interference operator  $F$  and Kraus representation  $\{\tilde{E}_i := E_i \oplus \alpha_i |\text{vac}\rangle\langle\text{vac}|\}_{i=0}^{r-1}$ . Assume that for every repeater channel  $\mathcal{Q} : \mathcal{L}(\mathcal{H}_Y) \rightarrow \mathcal{L}(\mathcal{H}_X)$ , the classical capacity of the concatenated channel  $\mathcal{E} \circ (\mathcal{Q} \circ \mathcal{E})^{n-1}$  tends to zero as  $n \rightarrow \infty$ . Then, the following are equivalent:*

1. *There exists a repeater channel  $\mathcal{R} : \mathcal{L}(\mathcal{H}_Y) \rightarrow \mathcal{L}(\mathcal{H}_X)$  with vacuum extension  $\tilde{\mathcal{R}}$  and vacuum interference operator  $G$ , such that the superposition of two independent identical sequences of channels  $\mathcal{S}_{\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}}^{|\rangle\langle|+|} : \mathcal{L}(\mathcal{H}_X) \rightarrow \mathcal{L}(\mathcal{H}_Y \otimes \mathcal{H}_P)$  has classical capacity strictly greater than zero as  $n \rightarrow \infty$ .*
2. *The vacuum interference operator  $F$  has singular value 1.*

Moreover, the above conditions hold only if

3. *There exist two pure states  $|\phi\rangle \in \mathcal{H}_X$  and  $|\zeta\rangle \in \mathcal{H}_Y$  such that  $\mathcal{E}(|\phi\rangle\langle\phi|) = |\zeta\rangle\langle\zeta|$ , and there exists  $\theta \in \mathbb{R}$  such that  $\alpha_i = e^{i\theta} \sqrt{\langle\phi|E_i^\dagger E_i|\phi\rangle}$  for all  $i = 0, 1, \dots, r-1$ .*

The proof is given in Appendix C. The above theorem characterises completely the set of channels that have zero capacity when used asymptotically many times in a definite path, and yet yield finite capacity when used on a superposition of paths. In the following we shall go beyond this special set of channels and analyse the advantages of the superposition of paths in the non-asymptotic case.

### Decoherence on the path and general channels.

The possibility of communication at a finite rate through asymptotically long paths is important as a proof of principle. On the other hand, its practical applicability is limited by two crucial assumptions: (a) that the path degree of freedom remains completely noiseless throughout the whole sequence, and (b) that the quantum channels along the paths have vacuum interference operators

with a singular value equal to 1. However, in practice, these assumptions are only justified as idealisations of more complex scenarios; realistic transmission lines do not in general retain perfect coherence on the path degree of freedom, nor will they always correspond to channels with unit singular values of their vacuum interference operators.

In the following, we examine what happens in the realistic case where the above assumptions are relaxed. We perform numerical simulations of various superpositions of binary asymmetric channels to calculate lower bounds to their classical capacity. To this purpose, we evaluate the maximum Holevo information of the superposition of channels over all input ensembles consisting of two orthogonal states [24]. This gives a lower bound to the Holevo capacity, which in turn gives a lower bound to the classical capacity [29]. We compare this with the analytically known expression for the classical capacity of the corresponding sequence of binary asymmetric channels without a superposition of paths. For the  $Z$ -channel with probability  $p$ , the capacity is given by  $\log[1 + (1-p)p^{p/(1-p)}]$  [28], whilst the capacity of the binary asymmetric channel with error probabilities  $q$  and  $p$  is given by a similar but longer formula, which can be found in Ref. [30], Eq. (19).

Let us start by relaxing the assumption that the path is completely noiseless. In particular, we consider a dephasing error on the path. That is, between each pair of nodes, the path qubit undergoes the dephasing channel

$$\mathcal{D}(\omega) = sZ\omega Z + (1-s)\omega, \quad (14)$$

where  $s \in [0, 1/2]$  is a probability and  $\omega \in \mathcal{L}(\mathcal{H}_P)$  is the initial state of the path.

We consider again two independent identical sequences of a quantum channel  $\mathcal{E}$ , with vacuum extension  $\tilde{\mathcal{E}}$  and vacuum interference operator  $F$ . The resulting *dephased superposition of channels* is:

$$\begin{aligned} \mathcal{S}_{\tilde{\mathcal{E}}^n, \tilde{\mathcal{E}}^n; s}^{|\rangle\langle|+|}(\rho) &= \frac{\mathcal{E}^n(\rho) + \gamma(F^n \rho F^{\dagger n})}{2} \otimes |+\rangle\langle+| \\ &+ \frac{\mathcal{E}^n(\rho) - \gamma(F^n \rho F^{\dagger n})}{2} \otimes |-\rangle\langle-|, \end{aligned} \quad (15)$$

where  $\gamma = (1-2s)^n$  (see Appendix D for the derivation).

This shows that the magnitude of the coherence terms  $\pm\gamma(F^n \rho F^{\dagger n})$  decreases exponentially with sequence length  $n$ . However, for finite  $n$  and small enough dephasing probability  $s$ , communication is still possible – in stark contrast to using the channels in a classical configuration without a superposition of paths.

To illustrate the effect of dephasing, Figure 4 shows a numerical plot of (lower bounds to) the classical capacity against sequence length  $n$  for a dephased superposition of two identical sequences of  $Z$ -channels with error probability  $p = 0.5$ , for various dephasing parameters  $s$  on the path. Note that  $s = 0$  corresponds to no dephasing, while  $s = 0.5$  corresponds to complete dephasing on the path so that the final state of the path is simply the maximally

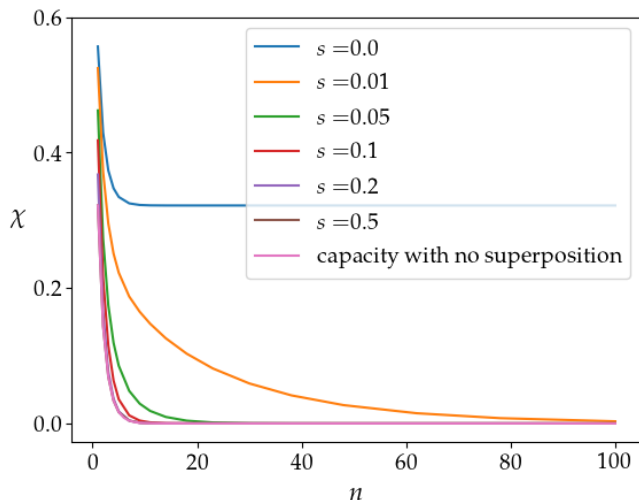


FIG. 4. Lower bounds to the classical capacity against sequence length  $n$  for a dephased superposition of two identical sequences of  $Z$ -channels, with erasure probability  $p = 0.5$ , for dephasing on the path with parameter  $s$ . A comparison with the capacity of the  $Z$ -channel with error probability 0.5 without a superposition of channels is shown, highlighting that the superposition of channels gives an advantage in the capacity at low  $n$  for  $s \lesssim 0.1$ .

mixed state; this is equivalent to using a single sequence of  $n$  channels without a superposition of paths. We see that for every value of  $n$ , the lower bound to the capacity monotonically increases as  $s$  decreases from 0.5 to 0, and an observable advantage over no superposition of paths is still present for low  $n$  when  $s \lesssim 0.1$ .

The second relaxation of our initial assumptions is to consider quantum channels with non-unit singular values of their vacuum interference operator. While in this case it is not possible to achieve communication through asymptotically many uses of the channels, we now show that a communication advantage is still present for a *finite* number of uses.

To illustrate the advantage, we consider a binary asymmetric channel  $\mathcal{E}$  with  $q > 0$ , whose vacuum extension does not give rise to unit singular values.

As in the above, we assume that the channel is implemented via a controlled-NOT interaction with an environment initially in the state  $|0\rangle$ , followed by a choice of two random operations that either replace the input state with the state  $|0\rangle$ , with probability  $p$ , or with the state  $|1\rangle$ , with probability  $q$  (where  $p + q \leq 1$ ). For this implementation, we obtain a vacuum extension of the binary

asymmetric channel described by the Kraus operators

$$\begin{cases} \tilde{E}_{1,0} &= \sqrt{p}|0\rangle\langle 0| \oplus |\text{vac}\rangle\langle \text{vac}| \\ \tilde{E}_{1,1} &= \sqrt{p}|0\rangle\langle 1| \\ \tilde{E}_{2,0} &= \sqrt{q}|1\rangle\langle 0| \\ \tilde{E}_{2,1} &= \sqrt{q}|1\rangle\langle 1| \\ \tilde{E}_{2,\text{vac}} &= \sqrt{q}|\text{vac}\rangle\langle \text{vac}| \\ \tilde{E}_{3,0} &= \sqrt{1-p-q}(|0\rangle\langle 0| \oplus |\text{vac}\rangle\langle \text{vac}|) \\ \tilde{E}_{3,1} &= \sqrt{1-p-q}|1\rangle\langle 1|, \end{cases} \quad (16)$$

which gives a vacuum interference operator of the form  $F = (1-q)|0\rangle\langle 0|$ .

Figure 5 shows (lower bounds to) the capacity as a function of  $n$ , for a superposition of two identical sequences of such binary asymmetric channels with error probabilities  $p = 0.2$  and  $p = 0.5$ , and various values of  $q$ .

In order to compare the capacity to the case without a superposition of paths, we note that the concatenation of  $n$  identical binary asymmetric channels  $\mathcal{E}^n$  with error probabilities  $(q, p)$  is itself a binary asymmetric channel with error probabilities  $(q_{(n)}, p_{(n)})$ , where

$$\begin{cases} p_{(n)} &= p \sum_{k=0}^{n-1} (1-p-q)^k \\ q_{(n)} &= q \sum_{k=0}^{n-1} (1-p-q)^k. \end{cases} \quad (17)$$

This enables the capacity to be calculated exactly. For each channel shown in Figure 5, the corresponding capacity without a superposition of paths is also shown.

For every choice of error probabilities  $p$  and  $q$ , the coherent routing of paths provides a non-zero advantage in the classical capacity for small  $n$ . The gap between the capacities of the implementations with and without a superposition of paths increases as  $q$  tends to 0, in the limit of which we recover the ideal case of the  $Z$ -channel.

### III. DISCUSSION

Our work provides a new paradigm of quantum communication networks with coherent routing of information through multiple paths. This model includes earlier results that showed improvements of communication through individual channels superposed either in space [22, 23] or in time [24]. These works considered direct communication from a sender to a receiver, possibly through multiple communication channels. Here, instead, we address the network scenario where information is sent through multiple intermediate nodes, undergoing a noisy channel between every two successive nodes. In this scenario, the main question is how the rate of information transmission scales with the number of nodes between the sender and the receiver. Our main result is that coherent control can sometimes be used to suppress the exponential decay of information through asymptotically long paths in the network, provided that the path is immune from decoherence. In more realistic scenarios

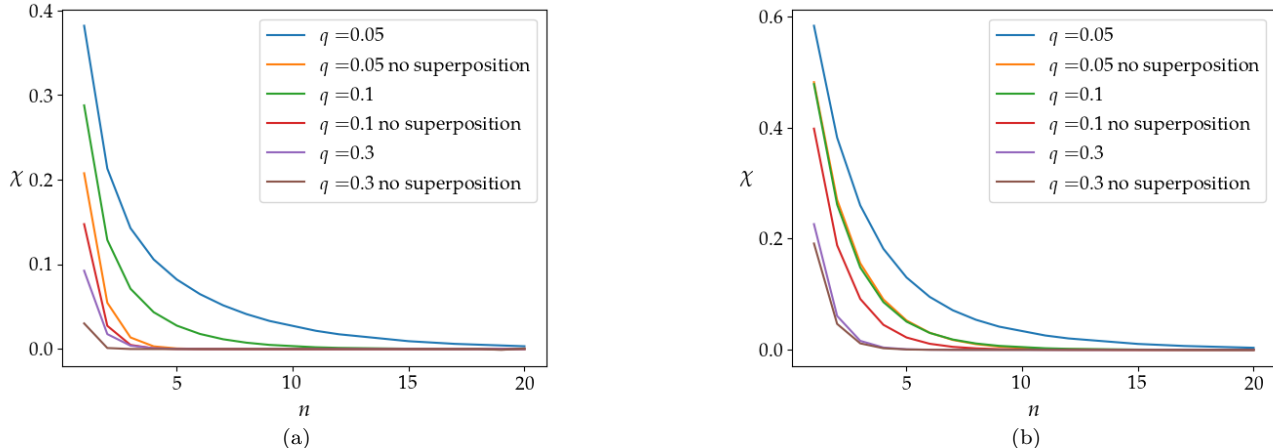


FIG. 5. Lower bounds to the classical capacity against sequence length  $n$  for a superposition of two identical sequences of binary asymmetric channels, with error probabilities (a)  $p = 0.5$  and (b)  $p = 0.2$ , and variable error probabilities  $q$ . The figure also shows a comparison with using the same sequence of  $n$  binary asymmetric channels without a superposition of paths, where the capacity is analytically known [30].

with small deviations from the ideal case, we still observe enhancements in the classical capacity for finite sequence lengths, compared to the case where the particle is sent on a classical trajectory.

### ACKNOWLEDGEMENTS

We acknowledge discussions with Alastair Abbott, Mio Muraio, Sergii Strelchuk, Guillaume Boisseau, Santiago Sempere Llagostera, Robert Gardner, and Kwok Ho Wan. This work is supported by the UK Engineering and Physical Sciences Research Council (EPSRC) through

grant EP/R513295/1. Research at the Perimeter Institute for Theoretical Physics is supported by the Government of Canada through the Department of Innovation, Science and Economic Development Canada and by the Province of Ontario through the Ministry of Research, Innovation and Science. This publication was made possible through the support of the grant 61466 ‘The Quantum Information Structure of Spacetime (QISS)’ (qiss.fr) from the John Templeton Foundation. The opinions expressed in this publication are those of the authors and do not necessarily reflect the views of the John Templeton Foundation.

- 
- [1] C. H. Bennett and G. Brassard, in *Int. Conf. on Computers, Systems and Signal Processing (Bangalore, India, Dec. 1984)* (1984) pp. 175–9.
- [2] A. K. Ekert, *Physical Review Letters* **67**, 661 (1991).
- [3] C. H. Bennett and S. J. Wiesner, *Physical Review Letters* **69**, 2881 (1992).
- [4] N. Sangouard, C. Simon, H. de Riedmatten, and N. Gisin, *Rev. Mod. Phys.* **83**, 33 (2011).
- [5] M. Żukowski, A. Zeilinger, M. A. Horne, and A. K. Ekert, *Physical Review Letters* **71**, 4287 (1993).
- [6] W. Dür, H.-J. Briegel, J. I. Cirac, and P. Zoller, *Physical Review A* **59**, 169 (1999).
- [7] J. H. Shapiro, *IEEE Journal of Selected Topics in Quantum Electronics* **15**, 1547 (2009).
- [8] H. Kristjánsson, R. Gardner, and G. Chiribella, *Ofcom* (2021).
- [9] R. Feynman, R. Leighton, and M. Sands, *The Feynman Lectures on Physics, vol. 3* (Addison-Wesley, 1964).
- [10] Y. Aharonov, J. Anandan, S. Popescu, and L. Vaidman, *Physical Review Letters* **64**, 2965 (1990).
- [11] D. K. Oi, *Physical Review Letters* **91**, 067902 (2003).
- [12] J. Åberg, *Annals of Physics* **313**, 326 (2004).
- [13] H. J. Kimble, *Nature* **453**, 1023 (2008).
- [14] X. Zhan, H. Qin, Z.-h. Bian, J. Li, and P. Xue, *Physical Review A* **90**, 012331 (2014).
- [15] M. Caleffi, *IEEE Access* **5**, 22299 (2017).
- [16] P. J. Pemberton-Ross and A. Kay, *Physical Review Letters* **106**, 020503 (2011).
- [17] L. Zhou, L.-P. Yang, Y. Li, C. Sun, *et al.*, *Physical Review Letters* **111**, 103604 (2013).
- [18] C. Chudzicki and F. W. Strauch, *Physical Review Letters* **105**, 260501 (2010).
- [19] W.-B. Yan and H. Fan, *Scientific Reports* **4**, 1 (2014).
- [20] N. Gisin, N. Linden, S. Massar, and S. Popescu, *Physical Review A* **72**, 012338 (2005).
- [21] L.-P. Lamoureux, E. Brainin, N. Cerf, P. Emplit, M. Haelterman, and S. Massar, *Physical Review Letters* **94**,

- 230501 (2005).
- [22] A. A. Abbott, J. Wechs, D. Horsman, M. Mhalla, and C. Branciard, *Quantum* **4**, 333 (2020).
- [23] G. Chiribella and H. Kristjánsson, *Proc. R. Soc. A* **475**, 20180903 (2019).
- [24] H. Kristjánsson, W. Mao, and G. Chiribella, *Physical Review Research* **3**, 043147 (2021).
- [25] S. Golomb, *IEEE Transactions on Information Theory* **26**, 372 (1980).
- [26] I. S. Moskowitz, S. J. Greenwald, and M. H. Kang, in *Proceedings 1996 IEEE Symposium on Security and Privacy* (IEEE, 1996) pp. 2–11.
- [27] L. Baumert, R. McEliece, and H. Rumsey, *JPL Deep Space Network Progress Report* **42**, 49 (1979).
- [28] T. Richardson and R. Urbanke, *Modern Coding Theory* (Cambridge University Press, 2008).
- [29] A. S. Holevo, *Problemy Peredachi Informatsii* **8**, 62 (1972).
- [30] S. M. Moser, P.-N. Chen, and H.-Y. Lin, *Dept. El. & Comp. Eng., National Chiao Tung University, Taiwan* (2009).
- [31] H. Kristjánsson, G. Chiribella, S. Salek, D. Ebler, and M. Wilson, *New Journal of Physics* **22** (2020).

### Appendix A: Derivation of Eq. (1)

A channel  $\tilde{\mathcal{E}} : \mathcal{L}(\tilde{\mathcal{H}}) \rightarrow \mathcal{L}(\tilde{\mathcal{H}})$  is a *vacuum extension* of a channel  $\mathcal{E} : \mathcal{L}(\mathcal{H}) \rightarrow \mathcal{L}(\mathcal{H})$  if it satisfies

$$\begin{cases} \tilde{\mathcal{E}}(\rho) = \mathcal{E}(\rho) & \forall \rho \in \mathcal{L}(\mathcal{H}) \\ \tilde{\mathcal{E}}(|\text{vac}\rangle\langle\text{vac}|) = |\text{vac}\rangle\langle\text{vac}|. \end{cases} \quad (\text{A1})$$

This gives the Kraus decomposition of a vacuum extension as

$$\{\tilde{E}_i := E_i + \alpha_i |\text{vac}\rangle\langle\text{vac}|\}_{i=0}^{r-1}, \quad (\text{A2})$$

where  $\{E_i\}_{i=0}^{r-1}$  are Kraus operators of the original channel, and  $\{\alpha_i\}_{i=0}^{r-1}$  are complex *vacuum amplitudes*, satisfying  $\sum_{i=0}^{r-1} |\alpha_i|^2 = 1$  [23].

Given two channels  $\mathcal{E}^{(1)}, \mathcal{E}^{(2)}$ , with vacuum extensions  $\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}$ , we define a superposition of the two channels, specified by the vacuum extensions  $\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}$ , with the path fixed in state  $\omega$ , as the channel

$$\mathcal{S}_{\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}}^\omega(\rho) := \mathcal{U}^\dagger \circ \tilde{\mathcal{E}}^{(1)} \otimes \tilde{\mathcal{E}}^{(2)} \circ \mathcal{U}(\rho \otimes \omega). \quad (\text{A3})$$

Here,  $\mathcal{U}(\cdot) := U(\cdot)U^\dagger$  is the isomorphism  $\mathcal{H} \otimes \mathcal{H}_P \rightarrow (\mathcal{H}^{(1)} \otimes \mathcal{H}_{\text{vac}}^{(2)}) \oplus (\mathcal{H}_{\text{vac}}^{(1)} \otimes \mathcal{H}^{(2)})$  that identifies the message  $M$  and path  $P$  in the ‘particle picture’ with the one-particle sector of the composite system  $(\mathcal{H}^{(1)} \oplus \mathcal{H}_{\text{vac}}^{(1)}) \otimes (\mathcal{H}^{(2)} \oplus \mathcal{H}_{\text{vac}}^{(2)})$  in the ‘mode picture’. Explicitly,  $\mathcal{U}$  is defined by [23]

$$\begin{aligned} \mathcal{U}(|\psi\rangle_M \otimes |0\rangle_P) &:= |\psi\rangle_{M^{(1)} \oplus \text{vac}} \otimes |\text{vac}\rangle_{M^{(2)} \oplus \text{vac}} \\ \mathcal{U}(|\psi\rangle_M \otimes |1\rangle_P) &:= |\text{vac}\rangle_{M^{(1)} \oplus \text{vac}} \otimes |\psi\rangle_{M^{(2)} \oplus \text{vac}}. \end{aligned} \quad (\text{A4})$$

Substituting Eq. (A2) into Eq. (A3) gives the Kraus decomposition of Eq. (1) for the superposition channel  $\mathcal{S}_{\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}}^\omega$ .

### Appendix B: Vacuum interference operator with singular value 1

We present an example of a pair of vacuum interference operators  $F$  and  $G$  whose composition  $GF$  has eigenvalue 1 even while  $F$  and  $G$  do not.

Consider a  $Z$ -channel with error probability  $p = 1$  whose vacuum extension  $\tilde{\mathcal{A}}$  has Kraus operators of the more general form  $\{|0\rangle\langle 0| \oplus \alpha_0 |\text{vac}\rangle\langle\text{vac}|, |0\rangle\langle 1| \oplus \alpha_1 |\text{vac}\rangle\langle\text{vac}|\}$ . In this case,  $F = |0\rangle\langle\alpha|$ , where  $|\alpha\rangle := \alpha_0|0\rangle + \alpha_1|1\rangle$ .  $F$  does not have eigenvalue 1 (unless  $\alpha_0 = 1$ ) but does have singular value 1, since  $F^\dagger F = 1$ .

Now consider a repeater channel  $\mathcal{R}$  whose vacuum extension  $\tilde{\mathcal{R}}$  has Kraus operators  $\{|\alpha\rangle\langle 0| \oplus |\text{vac}\rangle\langle\text{vac}|, |\alpha^\perp\rangle\langle 1| \oplus 0\}$ , where  $|\alpha^\perp\rangle := \bar{\alpha}_1|0\rangle - \bar{\alpha}_0|1\rangle$  is a state orthogonal to  $|\alpha\rangle$ . Observe that  $\mathcal{R}(|0\rangle\langle 0|) = |\alpha\rangle\langle\alpha|$  and that the vacuum interference operator  $G$  of  $\tilde{\mathcal{R}}$  satisfies  $G = |\alpha\rangle\langle 0| = F^\dagger$ . Importantly,  $GF = |0\rangle\langle 0|$  has eigenvalue 1. Furthermore, for all  $n$ ,

$$\mathcal{S}_{(\tilde{\mathcal{R}}\tilde{\mathcal{A}})^n, (\tilde{\mathcal{R}}\tilde{\mathcal{A}})^n}^{|\alpha\rangle\langle\alpha|}(\rho) = |0\rangle\langle 0| \otimes [q_+|+\rangle\langle +| + q_-|-\rangle\langle -|], \quad (\text{B1})$$

where  $q_\pm = (1 \pm \langle\alpha|\rho|\alpha\rangle)/2$ . Since this output state has the same form as Eq. (10), we conclude that the above channel has non-zero classical capacity for all  $n$ .

### Appendix C: Proof of Theorem 1

**Proof.** Recall that the largest singular value of an operator  $H$  is equal to its operator norm  $\|H\|_\infty$ . Recall also that the superposition of two independent identical sequences of channels  $\mathcal{S}_{\text{sup}}^{|\alpha\rangle\langle\alpha|}[\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}] : \mathcal{L}(\mathcal{H}_X) \rightarrow \mathcal{L}(\mathcal{H}_Y \otimes \mathcal{H}_P)$  is given by

$$\begin{aligned} \mathcal{S}_{\text{sup}}^{|\alpha\rangle\langle\alpha|}[\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}](\rho) \\ = \frac{\mathcal{E} \circ (\mathcal{R} \circ \mathcal{E})^{n-1}(\rho) + F(GF)^{n-1}\rho F(GF)^{n-1}}{2} \otimes |+\rangle\langle +| \\ + \frac{\mathcal{E} \circ (\mathcal{R} \circ \mathcal{E})^{n-1}(\rho) - F(GF)^{n-1}\rho F(GF)^{n-1}}{2} \otimes |-\rangle\langle -|. \end{aligned} \quad (\text{C1})$$

1  $\Rightarrow$  2: We prove the contrapositive. First, note that for any vacuum interference operator  $H$ ,  $\|H\|_\infty \leq 1$  [31] (see also Eq. (C3) below). Let  $G$  be a vacuum interference operator of a quantum channel  $\mathcal{R} : \mathcal{L}(\mathcal{H}_Y) \rightarrow \mathcal{L}(\mathcal{H}_X)$ . Suppose  $\|F\|_\infty \neq 1$ . Then  $\|F\|_\infty < 1$ . Since the operator norm is sub-multiplicative,  $\|GF\|_\infty \leq \|G\|_\infty \|F\|_\infty < 1$ . It follows that as  $n \rightarrow \infty$ ,  $(GF)^{n-1} \rightarrow 0$  and hence  $F(GF)^{n-1} \rightarrow 0$ . Therefore, the off-diagonal path terms vanish, and  $\mathcal{S}_{\text{sup}}^{|\alpha\rangle\langle\alpha|}[\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}](\rho) \rightarrow \mathcal{E} \circ (\mathcal{R} \circ \mathcal{E})^{n-1}(\rho) \otimes I/2$ , which has capacity zero as  $n \rightarrow \infty$ .

2  $\Rightarrow$  3: By definition,

$$\|F\|_\infty := \max_{\{|\phi\rangle \in \mathcal{H}_X, \|\phi\|=1\}} \|F|\phi\rangle\|, \quad (\text{C2})$$



where, as usual,  $\|\cdot\|$  denotes the Euclidean norm. Now, letting  $|\phi\rangle \in \mathcal{H}_X$  be a unit vector such that  $\|F\|_\infty = \|F|\phi\rangle\|$ , we obtain the following (in)equalities:

$$\begin{aligned}
\|F\|_\infty &= \|\bar{\alpha}_0 E_0|\phi\rangle + \bar{\alpha}_1 E_1|\phi\rangle + \cdots + \bar{\alpha}_{r-1} E_{r-1}|\phi\rangle\| \quad (\text{C3}) \\
&\leq \|\bar{\alpha}_0 E_0|\phi\rangle\| + \|\bar{\alpha}_1 E_1|\phi\rangle\| + \cdots + \|\bar{\alpha}_{r-1} E_{r-1}|\phi\rangle\| \\
&= \left| \bar{\alpha}_0 \sqrt{\langle\phi|E_0^\dagger E_0|\phi\rangle} \right| + \cdots + \left| \bar{\alpha}_{r-1} \sqrt{\langle\phi|E_{r-1}^\dagger E_{r-1}|\phi\rangle} \right| \\
&\leq \sqrt{(|\alpha_0|^2 + |\alpha_1|^2 + \cdots + |\alpha_{r-1}|^2)} \\
&\quad \cdot \sqrt{\langle\phi|E_0^\dagger E_0|\phi\rangle + \langle\phi|E_1^\dagger E_1|\phi\rangle + \cdots + \langle\phi|E_{r-1}^\dagger E_{r-1}|\phi\rangle} \\
&= 1 \cdot \sqrt{\langle\phi| \sum_{i=0}^{r-1} E_i^\dagger E_i |\phi\rangle} \\
&= 1 \quad (\text{C4})
\end{aligned}$$

The first inequality follows from the triangle inequality and is saturated if and only if there exists a pure state  $|\zeta\rangle \in \mathcal{H}_Y$  such that

$$\frac{\bar{\alpha}_0 E_0|\phi\rangle}{\|\bar{\alpha}_0 E_0|\phi\rangle\|} = \frac{\bar{\alpha}_1 E_1|\phi\rangle}{\|\bar{\alpha}_1 E_1|\phi\rangle\|} = \cdots = \frac{\bar{\alpha}_{r-1} E_{r-1}|\phi\rangle}{\|\bar{\alpha}_{r-1} E_{r-1}|\phi\rangle\|} = |\zeta\rangle. \quad (\text{C5})$$

If this equation is satisfied, then for all  $i \in \{0, 1, \dots, r-1\}$ ,

$$|\zeta\rangle\langle\zeta| = \frac{\bar{\alpha}_i E_i|\phi\rangle}{\|\bar{\alpha}_i E_i|\phi\rangle\|} \cdot \frac{\alpha_i \langle\phi|E_i^\dagger}{\|\alpha_i \langle\phi|E_i^\dagger\|} = \frac{E_i|\phi\rangle\langle\phi|E_i^\dagger}{\langle\phi|E_i^\dagger E_i|\phi\rangle}. \quad (\text{C6})$$

This implies that

$$\begin{aligned}
\mathcal{E}(|\phi\rangle\langle\phi|) &= \sum_{i=0}^{r-1} E_i|\phi\rangle\langle\phi|E_i^\dagger = \left( \sum_{i=0}^{r-1} \langle\phi|E_i^\dagger E_i|\phi\rangle \right) |\zeta\rangle\langle\zeta| \\
&= |\zeta\rangle\langle\zeta|. \quad (\text{C7})
\end{aligned}$$

That is,  $\|F\|_\infty = 1$  only if there exists a pure state in  $\mathcal{H}_X$  which is mapped to a pure state in  $\mathcal{H}_Y$  by  $\mathcal{E}$ .

The second inequality follows from the Cauchy-Schwarz inequality. It is saturated if and only if there exists  $\theta \in \mathbb{R}$  such that  $\alpha_i = e^{i\theta} \sqrt{\langle\phi|E_i^\dagger E_i|\phi\rangle}$  for all  $i \in \{0, 1, \dots, r-1\}$ .

2  $\Rightarrow$  1: If  $\|F\|_\infty = 1$ , then there exist two states  $|\phi\rangle \in \mathcal{H}_X$  and  $|\zeta\rangle \in \mathcal{H}_Y$  such that  $F|\phi\rangle = |\zeta\rangle$ . Thus,  $(|\phi\rangle\langle\zeta|F)^n|\phi\rangle = |\phi\rangle$  for all  $n \in \mathbb{N}$ .

Let  $\mathcal{R} : \mathcal{L}(\mathcal{H}_Y) \rightarrow \mathcal{L}(\mathcal{H}_X)$  be a quantum channel with vacuum extension  $\tilde{\mathcal{R}}$ . Let the Kraus operators of  $\tilde{\mathcal{R}}$  be

$\{\tilde{R}_0 = |\phi\rangle\langle\zeta| \oplus |\text{vac}\rangle\langle\text{vac}| \} \cup \{\tilde{R}_i = |\phi\rangle\langle i \oplus 0\}_{i=1}^{r-1}$ , where  $\{|i\rangle\}_{i=0}^{r-1}$  is a basis of  $\mathcal{H}_Y$  with the definition  $|0\rangle := |\zeta\rangle$ .

Let  $G$  be the vacuum interference operator of  $\tilde{\mathcal{R}}$ . Then  $G = |\phi\rangle\langle\zeta|$  and thus  $GF|\phi\rangle = |\phi\rangle$ . It follows that the effective vacuum interference operator  $F_{\text{eff}} = F(GF)^{n-1}$  satisfies  $F_{\text{eff}}|\phi\rangle = |\zeta\rangle$  and hence  $\|F_{\text{eff}}\|_\infty = 1$ .

Furthermore, there exists a state  $|\xi\rangle \in \mathcal{H}_X$  orthogonal to  $|\phi\rangle$  such that  $F_{\text{eff}}|\xi\rangle \neq |\zeta\rangle$ ; otherwise,  $F_{\text{eff}} \frac{|\phi\rangle + |\xi\rangle}{\sqrt{2}} = \sqrt{2}|\zeta\rangle$ , which implies  $\|F_{\text{eff}}\|_\infty \neq 1$ , a contradiction.

Since  $\mathcal{E} \circ (\mathcal{R} \circ \mathcal{E})^{n-1}$  has classical capacity that approaches zero as  $n \rightarrow \infty$ , then for all  $\rho \in \mathcal{L}(\mathcal{H}_X)$ ,  $(\mathcal{E} \circ (\mathcal{R} \circ \mathcal{E})^{n-1})(\rho) = \sigma$  for some  $\sigma \in \mathcal{L}(\mathcal{H}_Y \otimes \mathcal{H}_P)$ . Therefore

$$\begin{aligned}
\mathcal{S}_{\text{sup}}^{|\chi|+}[\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}](&|\phi\rangle\langle\phi|) \\
&\neq \mathcal{S}_{\text{sup}}^{|\chi|+}[\tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}, \tilde{\mathcal{E}} \circ (\tilde{\mathcal{R}} \circ \tilde{\mathcal{E}})^{n-1}](&|\xi\rangle\langle\xi|), \quad (\text{C8})
\end{aligned}$$

i.e., the superposition channel yields distinct output states for two distinct input states. This result proves that the superposition channel has a classical capacity strictly greater than zero as  $n \rightarrow \infty$ .  $\square$

#### Appendix D: Derivation of Eq. (15)

We consider the case where the path degree of freedom undergoes the dephasing error (14). This is equivalent to dephasing between the one-particle and vacuum sectors on one branch of the superposition:

$$\mathcal{D}_s = s(I \oplus -|\text{vac}\rangle\langle\text{vac}|)\rho(I \oplus -|\text{vac}\rangle\langle\text{vac}|) + (1-s)\rho, \quad (\text{D1})$$

where  $s \in [0, 0.5]$ . Then, the dephased superposition of channels is given by

$$\mathcal{S}_{\tilde{\mathcal{E}}^{(1)}, \tilde{\mathcal{E}}^{(2)}; s}^\omega(\rho) := \mathcal{U}^\dagger \circ \tilde{\mathcal{E}}^{(1)} \otimes (\mathcal{D}_s \circ \tilde{\mathcal{E}}^{(2)}) \circ \mathcal{U}(\rho \otimes \omega). \quad (\text{D2})$$

(Note, that  $\mathcal{D}_s$  commutes with any vacuum extended channel  $\tilde{\mathcal{E}}^{(2)}$ , because any vacuum extended channel is block diagonal with respect to the one-particle/vacuum sector partition.)

Now consider the case where the message travels in a superposition of two identical channels  $\mathcal{E}$ , with vacuum extensions  $\tilde{\mathcal{E}}$ , and the path qubit is initialised in the  $|+\rangle$  state. A direct calculation (e.g. by substituting the Kraus operators  $\{E_i \oplus \alpha_i |\text{vac}\rangle\langle\text{vac}|\}_{i=0}^{r-1}$  of  $\tilde{\mathcal{E}}$  into Eq. (D2)), reveals that

$$\begin{aligned}
\mathcal{S}_{\tilde{\mathcal{E}}, \tilde{\mathcal{E}}; s}^{|\chi|+}(\rho) &= \frac{\mathcal{E}(\rho) + (1-2s)(F\rho F^\dagger)}{2} \otimes |+\rangle\langle +| \\
&+ \frac{\mathcal{E}(\rho) - (1-2s)(F\rho F^\dagger)}{2} \otimes |-\rangle\langle -|, \quad (\text{D3})
\end{aligned}$$

Applying Eq. (D2)  $n$  times, we obtain Eq. (15) in the main text.