

# Squashing Models for Optical Measurements in Quantum Communication

Normand J. Beaudry<sup>1</sup>, Tobias Moroder<sup>1,2</sup>, Norbert Lütkenhaus<sup>1,2</sup>

<sup>1</sup> *Institute for Quantum Computing, University of Waterloo, Waterloo, Canada*

<sup>2</sup> *Quantum Information Theory Group, Institute of Theoretical Physics I,  
and Max-Planck Research Group, Institute of Optics,  
Photonics and Information, University Erlangen-Nuremberg, Erlangen, Germany*

(Dated: October 17, 2019)

Measurements with photodetectors are naturally described in the infinite dimensional Fock space of one or several modes. For some measurements a model has been postulated which describes the full mode measurement as a composition of a mapping (squashing) of the signal into a small dimensional Hilbert space followed by a specified target measurement. We present a formalism to investigate whether a given measurement pair of mode and target measurements can be connected by a squashing model. We show that a measurement used in the BB84 protocol does allow a squashing description, although the corresponding six-state protocol measurement does not. As a result, security proofs for the BB84 protocol can be based on the assumption that the eavesdropper forwards at most one photon, while the same does not hold for the six-state protocol.

PACS numbers: 42.50.Ex, 03.67.Hk, 42.79.Sz

Detection devices play an important role in quantum communication protocols. In the theoretic design of these protocols signals are often thought of as qubits, and therefore low-dimensional Hilbert spaces only need to be considered. In optical implementations the signals are realized by photons, which are naturally described by the Fock spaces of spatio-temporal modes. Our goal is to determine how one can reduce the large-dimensional description of optical measurements of these modes to a particular lower-dimensional one. Our insight will provide a powerful tool to ease the analysis of optical implementations of quantum communication protocols.

A typical measurement in quantum communication is the one used in the BB84 QKD protocol [1], in which the incoming light is split by a polarizing beam-splitter, which can be oriented either along the horizontal/vertical basis (labelled as  $z$ ) or in the  $+45/-45$  degree basis (labelled as  $x$ ). The signal is then sent to a threshold detector which cannot resolve the number of photons by which they are triggered. This measurement can be described as a single Positive Operator Valued Measure (POVM) with non-commuting POVM elements. It has been postulated that there exists a squashing model for this setup, which first maps (squashes) the incoming signal to a one-photon polarization Hilbert space, followed by the same BB84 measurement. A recent important security proof [2] is based on this detector property.

In this article, we define a squashing model and lay out a framework to determine whether a given detection device allows a squashing model. We then prove for the BB84 measurement that a squashing model exists. Surprisingly, the corresponding measurement in the six-state protocol [3, 4] does not admit a squashing model.

First, we will define a squashing model more precisely. A full measurement,  $F_M$ , described by a POVM with elements  $F_M^{(i)}$  defined on a large (possibly infinite dimensional) Hilbert space  $M$  is said to *admit a squashing*

*model with respect to a target measurement,  $F_Q$ , with POVM elements  $F_Q^{(i)}$  on a smaller dimensional Hilbert space  $Q$  if a squashing map  $\Lambda$  from  $M$  to  $Q$  exists, such that the composition of the squashing map and the measurement on  $Q$  is statistically equivalent to the measurement on system  $M$ . In other words, the two measurement models in Fig. 1 must act identically for any input signal.*

The measurement description via the POVM elements  $F_M^{(i)}$  and  $F_Q^{(i)}$  need not correspond to the basic events by the detectors, such as the pattern of detector clicks, but can involve some post-processing. For example, in the optical implementation of the BB84 measurement above, double clicks occur if both detectors fire due to a multi-photon input, while after squashing at most one photon is contained in the signal and so no double-clicks can occur. Therefore, to match the number of possible outcomes, we can choose to map double-clicks of the full mode measurement randomly to the single-click event of one of the two detectors. This mapping has been introduced before in the security analysis of QKD [5, 6].

In the context of QKD, the existence of a squash model implies that the corresponding squashing map can become part of the eavesdropper's (Eve's) attack. Therefore we can assume, without loss of generality, that Eve sends a signal in the Hilbert space  $Q$  to the receiver, Bob. As an example, many security proofs assume that Eve forwards polarized single photons (qubits) or vacuum states to the receiver. If a given full optical implementation of a polarization measurement has a squashing model connecting it to the single photon polarization measurement assumed in the security proof, then this proof is also automatically valid for the full optical implementation of the protocol. Additionally, squashing the detection to a finite-dimensional system makes it possible to use the fast converging de Finetti theorems of Renner [7] on the level of the squashed system, even if

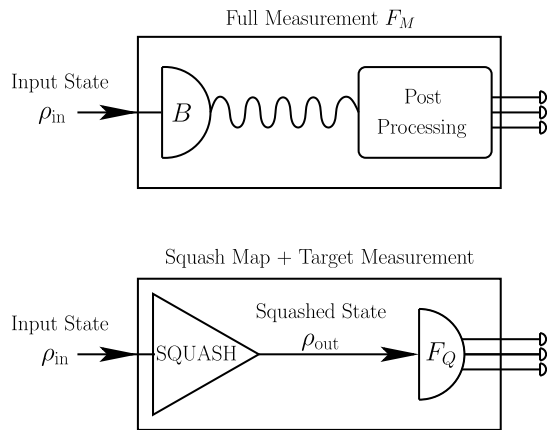


FIG. 1: The mode measurement  $F_M$  (above) has a general optical input  $\rho_{in}$ , which is first measured by a receiver's physical detector  $B$ , followed by classical post-processing. The squashed measurement (below) has the same general optical input  $\rho_{in}$ , which is then squashed by a map  $\Lambda$  to a smaller Hilbert space, followed by a fixed physical measurement  $F_Q$ . It is required that both of these measurements produce the same output statistics for all  $\rho_{in}$ .

the original full system is infinite dimensional.

Notice that the existence of a squashing model for a given mode measurement  $F_M$  and target measurement  $F_Q$  is the question of the existence of a particular squasher connecting these measurements. Any valid squasher must be a trace preserving completely positive map and can be described by a set of Kraus operators  $\{A_k\}$  (possibly countable infinitely many), which obey  $\sum_k A_k^\dagger A_k = \mathbb{1}_M$ . So in order to have a squashing map for a given measurement  $F_M$  (defined by a detector set-up and a post-processing scheme) we must have the outcomes of the full mode detector and the outcomes of the squasher followed by the target detection  $F_Q$  to be the same. This can be stated formally as

$$\begin{aligned} \text{Tr}(\rho F_M^{(i)}) &= \text{Tr}(\Lambda(\rho_{in}) F_Q^{(i)}) = \text{Tr}\left(\sum_k A_k \rho_{in} A_k^\dagger F_Q^{(i)}\right) \\ &= \text{Tr}\left(\rho_{in} \sum_k A_k^\dagger F_Q^{(i)} A_k\right) = \text{Tr}\left(\rho_{in} \Lambda^\dagger(F_Q^{(i)})\right) \end{aligned} \quad (1)$$

where  $\rho_{in}$  is the density matrix of the incoming signal. We require Eqn. (1) to hold for all incoming signals  $\rho_{in}$ , which is fulfilled if and only if

$$F_M^{(i)} = \Lambda^\dagger(F_Q^{(i)}) = \sum_k A_k^\dagger F_Q^{(i)} A_k \quad (2)$$

holds. That is, the adjoint squashing map  $\Lambda^\dagger$  with Kraus operators  $A_k^\dagger$  map each qubit POVM operator to the corresponding POVM operator for the mode detector. The adjoint map is again a completely positive map. It is not necessarily trace preserving, but it is unital.

Note that the squashing map must be independent of a measurement basis choice, such as in the BB84 protocol. Also, it does not matter whether this choice is fed into the detector externally or chosen within the detector. The internal choice can be conveniently described by one single POVM, which is the union of the weighted POVM elements of the individual measurements. This POVM satisfies Eqn. (2), just the same as the POVM with an external choice. Note that this internal basis choice does not correspond to the so-called *passive* detection scheme, for example in the BB84 protocol, where a 50/50 beamsplitter divides the incoming signal between two measurement set-ups, each in the two measurement bases. Here the POVM elements are structurally different than the active measurement POVM.

The question for the existence of a suitable adjoint squashing map  $\Lambda^\dagger$  has been formulated as the search for suitable Kraus operators  $A_k^\dagger$ . As the Kraus operators are not unique, we reformulate the condition Eqn. (2) using the Choi-Jamiołkowski isomorphism [8]. It relates the map  $\Lambda^\dagger$  to a bipartite operator  $\tau$  on a duplicated output Hilbert space  $QQ'$  by applying the map to half of a maximally entangled state  $|\psi^+\rangle$  as  $\tau = \Lambda^\dagger \otimes \text{id}(|\psi^+\rangle\langle\psi^+|)$ . From this representation one can form the transfer matrix  $\tau^R$  by reordering the coefficients via  $\langle k, k' | \tau^R | l, l' \rangle = \langle k, l | \tau | k', l' \rangle$  [9]. Given an operator  $O = \sum_{i,j} o_{i,j} |i\rangle\langle j|$ , we introduce its vector notation as  $|O\rangle\rangle = \sum_{i,j} o_{i,j} |i\rangle|j\rangle$ , and so we can write  $|\Lambda^\dagger(O)\rangle\rangle = \tau^R |O\rangle\rangle$ . In this formulation, we can phrase the search for a squashing model for a mode measurement  $F_M$  and a target measurement  $F_Q$  as the search for a map  $\tau$  such that

$$\tau^R |F_Q^{(i)}\rangle\rangle = |F_M^{(i)}\rangle\rangle, \quad (3a)$$

$$\langle k, k' | \tau^R | l, l' \rangle = \langle k, l | \tau | k', l' \rangle, \quad (3b)$$

$$\tau^\dagger = \tau \geq 0. \quad (3c)$$

Here  $\tau$  corresponds to the adjoint map  $\Lambda^\dagger$ . The constraint that  $\Lambda^\dagger$  be unital, and therefore  $\Lambda$  trace-preserving, is already contained in the above conditions, as the POVM elements on  $M$  and  $Q$  each add up to the identity operator in their respective Hilbert spaces, as can be easily seen in the formulation of Eqn. (2). Overall, we have reformulated the search for a suitable squashing operation as the search for a positive semidefinite operator  $\tau \geq 0$  that satisfies a fixed number of linear constraints, which can be efficiently solved using convex optimization. Searching for completely positive maps using these techniques has been used, for example, in [10, 11].

To simplify the search for the appropriate squashing operation, we can exploit further properties of the physical measurement. Typical measurement schemes only involve photon counting and hence commute with a quantum non-demolition (QND) measurement of the total number of photons. Consequently, we can decompose the squashing operation into a photon number measurement, followed by the appropriate squashing operation

conditioned on the outcome of the QND measurement, as schematically indicated in Fig. 2. This model now casts the problem into finite dimensions, since we only need to find the corresponding map for each finite dimensional photon number subspace.

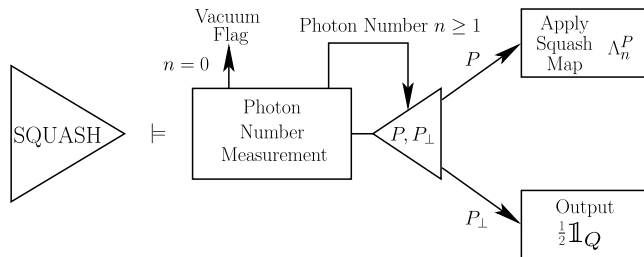


FIG. 2: Reduction of the considered squashing operation of the BB84 protocol. The squashing operation can be modelled as a photon number measurement followed by a projection measurement onto a 4-dimensional subspace. Depending on the outcome of these measurements, one either proceeds with a low-dimensional squashing operation  $\Lambda_n^P$  or outputs a completely mixed qubit state.

We now consider the situation where we choose as target measurements the full mode measurement restricted to the Fock space containing zero or one photon, which is a qutrit space. As the resulting POVM elements  $F_Q^{(i)}$  still commute with a QND measurement of the total photon number, this means that the squashing map can be thought of as statistically outputting either no photon or one photon. We can now split off the zero-photon case easily in the typical scenario, where the mode and target measurements have the vacuum projection as one POVM element, while none of the other elements contain a vacuum component. As a result, the squasher will output a vacuum signal if and only if the photon number  $n$  measured in the QND measurement on the input mode space is zero. To simplify the presentation, we split these events off as a flag (see Fig. 2) sent by the squasher, signalling that the input signal contains no photon, and we can now restrict ourselves to the case that for  $n \geq 1$  input photons, the squasher outputs exactly one photon in the relevant modes, which enters the target measurement. In the case of the BB84 and the six-state measurements two polarization modes are sufficient to describe the multiphoton Hilbert space, so we can assume that for  $n \neq 0$  exactly one qubit in the form of a photon with polarization degrees of freedom is output from the squashing operation. In this formulation the POVM elements  $F_Q^{(i)}$  are now restricted to the mode measurements of the one-photon Hilbert space, as the vacuum events have been replaced by the flag structure of the squasher.

As a third step, we refine the squasher further by using the specific structure of the BB84 measurement. Here the mode measurement operators on the  $n$ -photon subspace

( $n \geq 1$ ) can be conveniently written as

$$F_{M,n}^{(b,\alpha)} = \frac{(-1)^b}{4} (|n,0\rangle_\alpha \langle n,0| - |0,n\rangle_\alpha \langle 0,n|) + \frac{\mathbb{1}}{4}, \quad (4)$$

where  $\alpha \in \{x, z\}$  labels the basis choice for the polarizing beamsplitter,  $b \in \{0, 1\}$  corresponds to the “0” or “1” outcome of the detector, and  $|l, k\rangle_\alpha$  is a two-mode Fock state with photon numbers  $l$  and  $k$  with respect to the polarization mode basis  $\alpha$ . We define a subspace  $P$  spanned by the 4 vectors  $|n, 0\rangle_\alpha$  and  $|0, n\rangle_\alpha$ , and its orthogonal complement  $P_\perp$  in the  $n$ -photon subspace. A QND measurement with respect to these two subspaces commutes with each measurement POVM  $F_Q^{(i)}$ , and thus can precede the target detection scheme without loss of generality. We can therefore define independent squashing maps for each of the two sub-spaces, similarly to the treatment of the Fock spaces of photon number  $n$ .

It is now easy to identify the squashing map starting on the  $P_\perp$ -subspace since the POVM elements  $F_{M,n}^{(b,\alpha)}$  restricted to this subspace are given by  $\mathbb{1}_{P_\perp}/2$ . An obvious choice for the squashing map here is to output the completely mixed qubit state, which triggers each POVM  $F_Q^{(b,\alpha)}$  with equal probability (see Fig. 2). This means we can now focus on the remaining part of the squashing operation, namely for all  $n \geq 1$  the maps  $\Lambda_n^P$  from the four-dimensional subspace  $P$  of the  $n$ -photon Fock space to the qubit space.

If the incoming signal is projected onto the subspace  $P$  then either the map  $\tau_{odd}$  or  $\tau_{even}$  will be applied, depending on the parity of photon number  $n$ . First consider the case where  $n$ , the outcome of the QND measurement of the total photon number, is odd. We use the following orthonormal basis to represent the 4-dimensional subspace  $P$ :  $|\phi_1\rangle = |n, 0\rangle_x$ ,  $|\phi_2\rangle = |0, n\rangle_x$ , and

$$\begin{aligned} |\phi_3\rangle &= \frac{1}{C_1} \left( \sqrt{2^{n-2}} (|n, 0\rangle_z + |0, n\rangle_z) - |n, 0\rangle_x \right) \\ |\phi_4\rangle &= \frac{1}{C_1} \left( \sqrt{2^{n-2}} (|n, 0\rangle_z - |0, n\rangle_z) - |0, n\rangle_x \right), \end{aligned} \quad (5)$$

where we define  $C_g \equiv \sqrt{2^{n-g} - 1}$ . The qubit measurement operators  $\{F_Q^{(b,\alpha)}\}$  are given by:

$$\left\{ \begin{pmatrix} \frac{1-b}{2} & 0 \\ 0 & 0 \end{pmatrix}, \begin{pmatrix} 0 & 0 \\ 0 & \frac{1}{2} \end{pmatrix}, \frac{1}{4} \begin{pmatrix} 1 & 1 \\ 1 & 1 \end{pmatrix}, \frac{1}{4} \begin{pmatrix} 1 & -1 \\ -1 & 1 \end{pmatrix} \right\} \quad (6)$$

in the standard basis. The mode measurement operators  $F_{M,n}^{(b,\alpha)}$  in the basis given by Eqn. (5) are

$$F_{M,n}^{(b,x)} = \begin{bmatrix} \frac{1-b}{2} & 0 & 0 & 0 \\ 0 & \frac{b}{2} & 0 & 0 \\ 0 & 0 & \frac{1}{4} & 0 \\ 0 & 0 & 0 & \frac{1}{4} \end{bmatrix}, F_{M,n}^{(b,z)} = \frac{\mathbb{1}}{4} + \frac{(-1)^b}{4} \begin{bmatrix} 0 & s & 0 & t \\ s & 0 & t & 0 \\ 0 & t & 0 & u \\ t & 0 & u & 0 \end{bmatrix}$$

where  $\mathbb{1}$  is the  $4 \times 4$  identity matrix and we define the constants  $s \equiv 2^{1-n}$ ,  $t \equiv sC_1$ ,  $u \equiv 1 - s$ . All that is required

to convert these to their vectorized form  $|F_Q^{(b,\alpha)}\rangle\rangle$  and  $|F_M^{(b,\alpha)}\rangle\rangle$ , is to concatenate the columns of their matrix form into vectors.

Now we are ready to impose Eqs. (3) on the adjoint squashing map. First note that  $\tau^R$  maps real vectors into real vectors (Eqn. (3a)), and therefore the complex conjugate  $(\tau^R)^*$  also maps these vectors to each other. As a result, the average of these two also performs the mapping, and so we can assume that  $\tau^R$  is a matrix with real entries. Also, the target measurement operators,  $|F_Q^{(b,\alpha)}\rangle\rangle$ , only span a three dimensional vector-space, so the matrix  $\tau^R$  is not completely determined by the linear constraints. Keeping the undetermined entries as open parameters  $a_i$ , we then obtain  $\tau_{odd}$ , which is given by

$$\begin{bmatrix} 1 & 0 & 0 & a_1 & 0 & a_2 & 0 & a_3 \\ 0 & 0 & s - a_1 & 0 & -a_2 & 0 & t - a_3 & 0 \\ 0 & s - a_1 & 0 & 0 & 0 & a_4 & 0 & a_5 \\ a_1 & 0 & 0 & 1 & t - a_4 & 0 & -a_5 & 0 \\ 0 & -a_2 & 0 & t - a_4 & \frac{1}{2} & 0 & 0 & a_6 \\ a_2 & 0 & a_4 & 0 & 0 & \frac{1}{2} & u - a_6 & 0 \\ 0 & t - a_3 & 0 & -a_5 & 0 & u - a_6 & \frac{1}{2} & 0 \\ a_3 & 0 & a_5 & 0 & a_6 & 0 & 0 & \frac{1}{2} \end{bmatrix}.$$

Using the assignment  $a_1 = s, a_2 = 0, a_3 = t, a_4 = 0, a_5 = 0, a_6 = 1/2 - s$  for the open parameters ensures that  $\tau$  is positive semidefinite. It can also be shown that this choice of parameters is the only such choice, and therefore the squashing operation is unique.

Following a similar procedure we can also construct the adjoint squashing operation for even  $n$ . The last two components of the basis for the subspace  $P$  become

$$\begin{aligned} |\phi_3\rangle &= \frac{1}{\sqrt{2}} (|n, 0\rangle_z - |0, n\rangle_z) \\ |\phi_4\rangle &= \frac{1}{C_2} \left( \sqrt{2^{n-3}} (|n, 0\rangle_z + |0, n\rangle_z) - \frac{|n, 0\rangle_x + |0, n\rangle_x}{\sqrt{2}} \right) \end{aligned} \quad (7)$$

In this basis the adjoint squashing operation is given uniquely by

$$\tau_{even} = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & \sqrt{s} & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & \sqrt{s} & 0 & 0 & 0 \\ 0 & 0 & 0 & \sqrt{s} & \frac{1}{2} & 0 & 0 & w \\ \sqrt{s} & 0 & 0 & 0 & 0 & \frac{1}{2} & w & 0 \\ 0 & 0 & 0 & 0 & 0 & w & \frac{1}{2} & 0 \\ 0 & 0 & 0 & 0 & w & 0 & 0 & \frac{1}{2} \end{bmatrix}, \quad (8)$$

where  $w = C_2/\sqrt{2^n}$ . Therefore, the squashing operation for the BB84 detector with active basis choice and the described post-processing exists and it is unique. As mentioned earlier this implies that any security proof of the qubit BB84 protocol generalizes to the case where Bob performs the described full optical measurement.

The six-state protocol adds another measurement direction to the BB84 setting, which sorts the polarization of the incoming photons according to a circular basis choice (labelled  $y$ ). Using the same post-processing scheme of the double clicks results in similar measurement operators as given by Eqn. (4) with  $\alpha \in \{x, y, z\}$  as well as performing a renormalization. Hence the overall measurement description of the six-state protocol is similar to the BB84 case, where the transfer matrix  $\tau^R$  is now completely determined by the linear constraints, as the POVM elements of  $F_Q$  span the whole operator space. However, this measurement device cannot be squashed down to the qubit level, since  $\tau \not\geq 0$ . We can verify this statement independent of any of the reductions introduced earlier: all we need to show is that  $\tau = \Lambda^\dagger \otimes \text{id}(|\psi^+\rangle\langle\psi^+|) \not\geq 0$ . Since the qubit measurements of the six-state protocol are complete, the input operator  $|\psi^+\rangle\langle\psi^+|$  can be expanded into the basis  $\{F_Q^{(i)} \otimes \sigma_j\}$ , where the  $\sigma_j$  are the Pauli operators. This decomposition has the advantage that the adjoint map  $\Lambda^\dagger$  can be applied directly to the first subsystem by using the substitution  $F_Q^{(i)} \mapsto F_M^{(i)}$ , which is clear from the properties of the adjoint squasher. This results in

$$\tau = \frac{1}{4} \left\{ \mathbb{1}_M \otimes \mathbb{1}_{Q'} + 3 \sum_{\alpha=\{x,y,z\}} \left( F_M^{(0,\alpha)} - F_M^{(1,\alpha)} \right) \otimes \sigma_\alpha^T \right\}. \quad (9)$$

This operator  $\tau$  has negative eigenvalues, starting in the two photon subspace. For example, if one tests the operator with the state

$$|\theta_-\rangle = \sqrt{\frac{1}{3}} |1, 1\rangle_{M_z} \otimes |0\rangle_{Q'} - \sqrt{\frac{2}{3}} |2, 0\rangle_{M_z} \otimes |1\rangle_{Q'}, \quad (10)$$

where  $|0\rangle_{Q'}$  and  $|1\rangle_{Q'}$  are canonical orthogonal basis states, we find  $\langle\theta_-|\tau|\theta_-\rangle = -1/4$ . This concludes the proof that a squashing map for the six-state protocol does not exist.

To summarize, we have given necessary and sufficient linear conditions on a positive operator so that a mode measurement can be represented by a concatenation of a squashing operation and a lower dimensional target measurement. The implications of our analysis applied to the BB84 protocol is that any security proof assuming single photons or vacuum to arrive at Bob's detector translates to a full optical implementation with threshold detectors as long as the post-processing of randomly assigning bit-value outcomes for double clicks is performed. In addition, any other QKD protocol that uses the same detector also has this property. The squashing model for this BB84 measurement has been independently obtained by Tsurumaru and Tamaki [12]. In contrast, the same strategy for the six-state protocol does not lead to success. Note that other post-processing methods of the mode measurement and target measurements could lead to some squashing model for the six-state protocol measurement. As the squashing property holds for the

detection set-up independent of the use of the detection device, the method outlined in our article will help to simplify the analysis in other quantum communication contexts, including the verification of entanglement of optical modes with threshold detectors.

The authors acknowledge financial support via the European Projects SECOQC and QAP, by the NSERC Discovery Grant, QuantumWorks and CSEC. We also thank Marco Piani for helpful discussions and feedback.



[1] C. H. Bennett and G. Brassard, in *Proceedings of IEEE International Conference on Computers, Systems, and Signal Processing, Bangalore, India* (IEEE, New York, 1984), pp. 175–179.

[2] X.-F. Ma, C.-H. Fung, and H.-K. Lo, *Phys. Rev. A* **76**, 012307 (2007).  
 [3] D. Bruß, *Phys. Rev. Lett.* **81**, 3018 (1998).  
 [4] H. Bechmann-Pasquinucci and N. Gisin, *Phys. Rev. A* **59**, 4238 (1999).  
 [5] N. Lütkenhaus, *Phys. Rev. A* **59**, 3301 (1999).  
 [6] N. Lütkenhaus, *Phys. Rev. A* **61**, 052304 (2000).  
 [7] R. Renner, *Nature Physics* **3**, 645 (2007).  
 [8] A. Jamiolkowski, *Rep. Mat. Phys.* **3**, 275 (1972).  
 [9] K. Życzkowski and I. Bengtsson, *Open Syst. Inf. Dyn.* **11**, 3 (2004).  
 [10] A. S. Fletcher, P. W. Shor, and M. Z. Win, *Phys. Rev. A* **75**, 012338 (2007).  
 [11] M. Reimpell and R. F. Werner, *Phys. Rev. Lett.* **94**, 080501 (2005).  
 [12] T. Tsurumaru, K. Tamaki, arXiv:0803.4226v2 [quant-ph] (2008).