

PREPARED FOR SUBMISSION TO JINST

2022 TOPICAL WORKSHOP ON ELECTRONICS FOR PARTICLE PHYSICS

19<sup>TH</sup> TILL 23<sup>TH</sup> SEPTEMBER

BERGEN, NORWAY

## LAPPD operation using ToFPETv2 PETSYS ASIC

---

**A. Seljak,<sup>a,b,1</sup> A. Lozar,<sup>b</sup> S. Korpar,<sup>a,c</sup> R. Pestotnik,<sup>a</sup> R. Dolenc,<sup>a,b</sup> P. Križan,<sup>a,b</sup> M. Bračko<sup>a,c</sup>**

<sup>a</sup>*Experimental particle physics department - F9, Jozef Stefan Institute, Ljubljana, Slovenia*

<sup>b</sup>*University of Ljubljana, Faculty of Mathematics and Physics, Ljubljana, Slovenia*

<sup>c</sup>*University of Maribor, Faculty of Chemistry and Chemical Engineering Maribor, Slovenia*

*E-mail:* [Andrej.Seljak@ijs.si](mailto:Andrej.Seljak@ijs.si)

**ABSTRACT:** Single photon sensitive detectors used in high energy physics are, in some applications, required to cover very large areas, and more specifically in very strong demand with an ever finer imaging and timing capability for Cherenkov Ring Imaging Detector (RICH) configurations. We are evaluating the Large Area Picosecond Photo-detector (LAPPD) produced by INCOM company [1], as a possible candidate for future RICH detector upgrades. In this work we perform tests on the first generation device, which is capacitively coupled to a custom designed anode back plane, consisting of various pixels and strips varying in size, that allows for connecting various readout systems such as standard laboratory equipment, as well as the TOFPET2 ASIC from PETsys company [2]. Our aim is to evaluate what can be achieved by merging currently available technology, in order to find directions for future developments adapted for specific uses.

**KEYWORDS:** Photon detectors for UV, visible and IR photons (vacuum) (photomultipliers, HPDs, others), Data acquisition concepts, Data acquisition circuits

---

<sup>1</sup>Corresponding author.

---


## Contents

<b>1</b>	<b>Introduction and motivation</b>	<b>1</b>
<b>2</b>	<b>Large Area Picosecond Photo-Detector</b>	<b>2</b>
<b>3</b>	<b>PETsys TOFPET2 ASIC and readout</b>	<b>3</b>

---

## 1 Introduction and motivation

Ring Imaging Cherenkov detectors represent an indispensable tool for particle identification at particle colliding accelerators. A small number of photons being emitted by charged particle tracks in radiators, such as Aerogels or gas mixtures, need to be detected on a detector plane of usually very large size, and require considerable spatial resolution for imaging Cherenkov rings (Figure 1). With every increment of luminosity, an ever finer pixel granularity of the detector is needed to keep its occupancy at manageable levels. This creates a considerable drawback in the amount of channels to be read at ever high frequencies. The number of readout channels scales quadratically with the lateral dimensions of the (square shaped) detector, which in turn creates a real problem in data transmission rates. Considering a binary readout of a detector the size of a  $m^2$ , the pixel pitch of a mm, at nominal 40MHz bunch crossing, yields a raw data rate of 40TB/s. Nowadays the time of flight (TOF) information from the vertex point to the detector plane is also under consideration. Considering a TOF information below some 100 ps, this feature alone enables an additional handle over the ability to do (mis)identification of charged particles, which substantially improves the overall detector efficiency, so it is strongly considered for future upgrades [3].

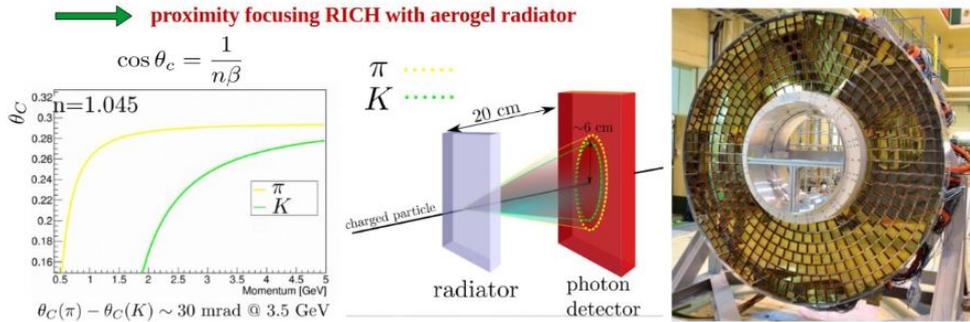

**Figure 1.** Kaon and Pion Cherenkov angle emission as a function of particle momentum. RICH detector configuration using Aerogel as radiator, and image of the Belle II ARICH detector installed at Belle II spectrometer.


The development of single photon sensitive imaging detectors has found solutions for covering large areas using several mm sized pixels, and in an opposite extreme of having pixelated chips with

pixel pitch in the hundreds micrometer range. Both of these approaches are scalable, although the fine pitch pixelated electronics have large power consumption, and are unpractical for very large surfaces. A pixel pitch of around a mm seems to be the target for future LHCb and Belle II RICH upgrades, considering the detector occupancy at nominal luminosity.

Such pixel pitch seems to fall in a technological gap where pixelated chip based implementations are impractical and too fine pitched, readout pixels of several mm resolution is too coarse, and timing dependent pixel position estimation schemes are inadequate due to countrate inability. Hence some 3 dimensional stacking of a pixelated anode pads, and a wire bonded or ball bonded ASIC dies on an interpose board represents a viable solution. Although at this point in time it isn't yet clear which kind of photo detector will be favored for future RICH detectors, in this work we analyze a present state of the art detector and readout electronics, which were not designed specifically to couple, but represent a doable starting point for future developments.


## 2 Large Area Picosecond Photo-Detector

The LAPPD Generation I is a large size device which uses a photo-cathode on the entrance window for quantum conversion, and a dual chevron stacked  $20\ \mu\text{m}$  Micro Channel Plate (MCP) for signal amplification. The gain at nominal power supply voltages is around  $10^7$ , while the dark count self-contribution is  $150\ \text{counts/s/cm}^2$ . These vacuum sealed devices, the size of 8x8 inch, enable to capacitively couple an anode plane through a 4 mm thick glass on the back side, thus enabling the user to design a customized anode plane, and using the readout system of one's preference. Some commercially designed readout systems using waveform sampling technology to sense the strip line patterns on the anode backplane, extrapolating the X and Y coordinate from the time of arrival at each end in one dimension, and charge sharing for the other were already proposed [4]. We explore the possibility to physically pixelate the device in order to increment the count rate ability, as well to improve on the spatial resolution compared to the strip readout. The custom designed PCB (Figure 2) based back-plane is segmented with various pixel sizes ranging from inch by inch, half inch pitch, to mm sized strips, as well as 6mm pitch pads.

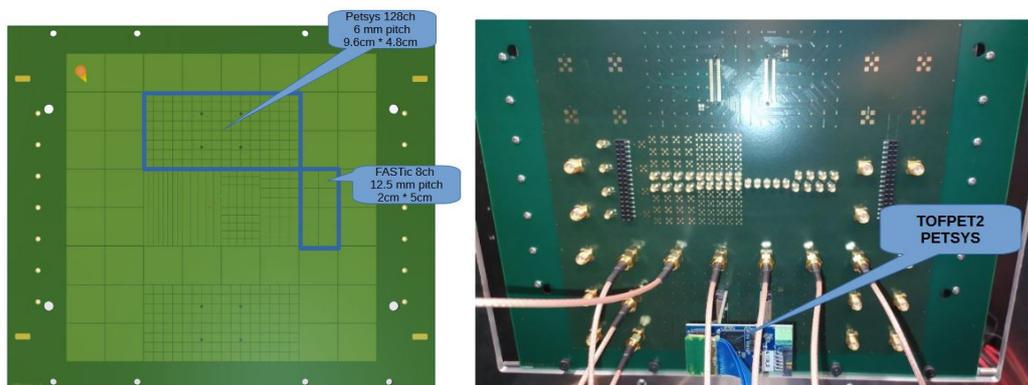

**Figure 2.** Screenshot of the PCB drawing showing various pad sizes and their locations, image of the PCB board attached to the LAPPD detector and the location of the 128 channel PETSys readout.

Our setup is composed of the LAPPD photo detector, the ALPHALAS 30 ps laser [5] attenuated to mostly single photon levels, having a focusing head mounted on translation stages in order to position the 100  $\mu\text{m}$  laser spot, and an oscilloscope for monitoring signals (Figure 3). Initially we observed that due to the relative permittivity of the ceramic on the back plane, as well as its thickness, the induced charge spreads considerably. If one would look into making a binary readout, the minimal pixel pitch for this particular device is of 6 mm to collect some 30 percent of charge per event. The PETsys readout system measures the jitter between firing the laser, and the photon time of arrival (TOA) for every pixel and charge.

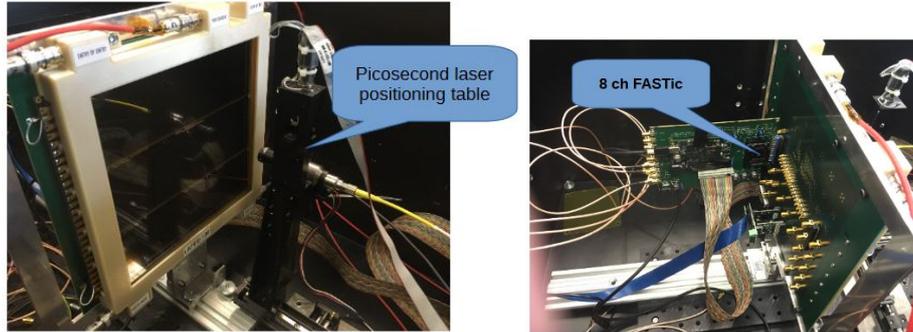


**Figure 3.** Image of the LAPPD detector in the setup, image of the anode plane with FASTic and PETsys attached electronics.


### 3 PETsys TOFPET2 ASIC and readout

The PETsys TOFPET2 ASIC is provided in a contained module having two chips, 64 channels each. Such modules aggregate on an FPGA based board providing up to 1024 readout channels, being read from a PC via an ethernet cable. The chip's channel is composed of an input signal front end, a baseline and threshold adjustable level toward a comparator, firing internal TDCs providing the TOA and TOT information. Since the chip was conceived for SiPM/crystal PET, its energy output information is not sensitive enough to measure faint MCP signals, however those can be derived from the TOT information with limited accuracy. The internal TDC bin is of 30 ps while the dynamic range for measuring charge is up to 1500pC. Its pulse polarity can be reversed, and the maximum hit rate is 600 kHz. During the test we illuminated near the center of the pad connected to the arbitrary chosen channel number 91. Figure 4 shows a schematic view of the ASIC construction [2], the measured response to mostly single photons of 128 calibrated channels, and the threshold scan profile for channel 91 which was randomly chosen for representation.

Analyzing the same set of data, we explore the relation between the TOA and TOT looking for a possible adjustment of the time walk (Figure 5), due to the fluctuation of the amount of charge for a single photon coming from the MCP. It turns out the chip's sensitivity level in TOT mode is capable to provide enough information to correct the TOA, and we managed to obtain the timing resolution of the system down to 80 ps sigma using the information from a single channel. Such figure could probably be improved considering the information from the neighboring channels as well.

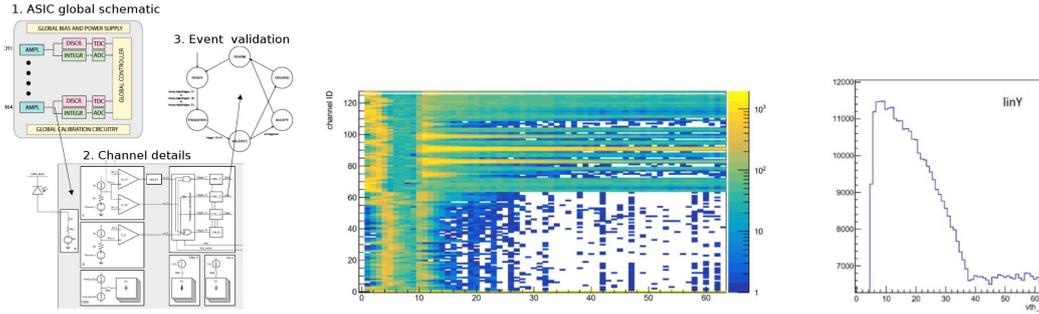


**Figure 4.** Block schematic of the ASIC, calibrated threshold scan with channel 91 illuminated (Y-channel, X-Threshold, Z-Magnitude), and threshold scan profile of channel 91, counts as a function of threshold.

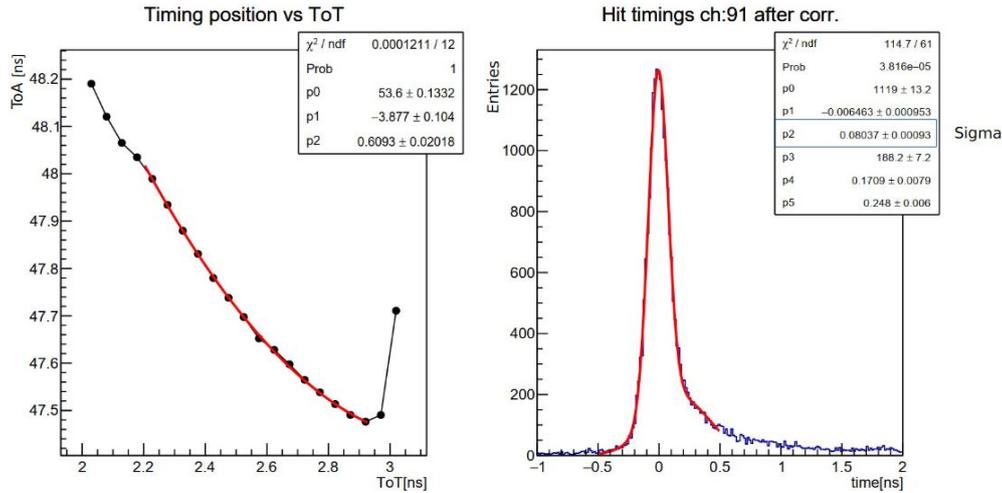

**Figure 5.** TOA as a function of TOT, and time walk corrected TOA for channel 91 with the result of 80 ps sigma from a double Gaussian fit.

Further more, from the same set of data, we analyze the possibility to improve the photon entrance position below the pad physical (6 mm) size. The binary hit count map was produced by histogramming events (Figure 6), while illuminating the center of a single pixel, and with a fixed threshold. We used the TOT information of the ASIC to estimate the charge amount and calculate the photon entrance position from the charge center of gravity for every event. The approach favorably improved the spatial resolution, which we found to be in mm range Full Width Half Maximum (FWHM).

The LAPPD is a very large device with the flexibility of making custom pads to attach the readout system. During tests we noticed that due to charge spread in the enclosure back-plane, the minimal anode pad pitch is around 6 mm to perform a binary readout. Below this size one can employ charge center of gravity reconstruction for a given event, in order to achieve a better spatial resolution. The Petsys - ToFPET2 is a commercially available ASIC, available along with a complete readout system, which seems to work quite well with the LAPPD. Using some careful tuning it is possible to achieve a mm size FWHM pixels, with a timing blow 100 ps. Further more the system has 1024 channels which, using a pad size equal or above above 0.9 cm, can handle two

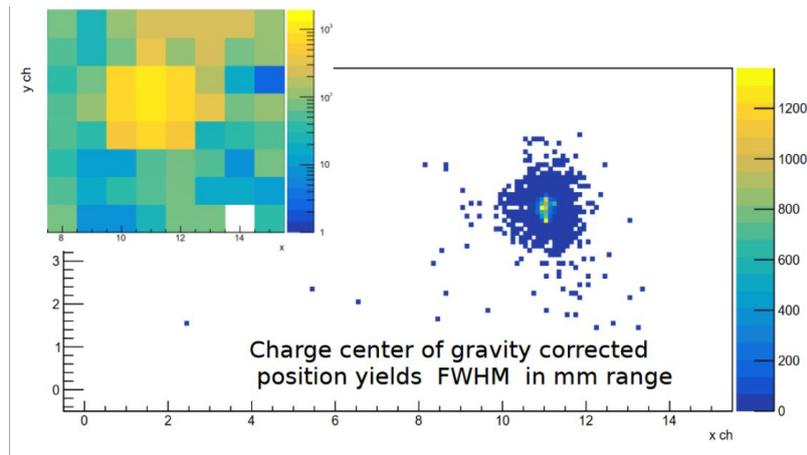

**Figure 6.** Left top is binary histogrammed output illuminating channel 91, and right is the recalculated position using the center of gravity estimation. One unit is equivalent to 6 mm.

LAPPD devices. The ASICs front end seems to be capable of resolving fC charges with sub 100 ps timing resolution, and enough granularity to provide information in order to enhance the spatial resolution. Perhaps in some future chip redesign the levels and functionality will be addressed to increment the count rate as well.

The evaluated combination naturally isn't yet capable to handle the expected event rates of 40 MHz, however it enabled a demonstration of admirable resolution with fine timing abilities, where large surfaces need to be covered and the expected single photon occurrences are very low. Indeed a very good result!

All authors declare that they have no known conflicts of interest in terms of competing financial interests or personal relationships that could have an influence or are relevant to the work reported in this paper. The authors acknowledge the financial support from the Slovenian Research Agency (re-search core fundings No. P1-0389 and P1-0135, postgraduate research funding and project No. J2-1735).

## References

- [1] LAPPD, <https://incomusa.com/lappd/>, (accessed October 2022)
- [2] PETsys, <https://www.petsyselectronics.com/>, (accessed October 2022)
- [3] Keizer, F. (2020), *Sub-nanosecond Cherenkov photon detection for LHCb particle identification in high-occupancy conditions and semiconductor tracking for muon scattering tomography (Doctoral thesis)*, (DOI:10.17863/CAM.45822)
- [4] Bernhard W. Adams et al., *A Brief Technical History of the Large-Area Picosecond Photodetector (LAPPD) Collaboration*, (arXiv:1603.01843)
- [5] ALPHALAS, <https://www.alphalas.com/>, (accessed October 2022)