

ISI-Mitigating Character Encoding for Molecular Communications via Diffusion

Haewoong Hyun, *Graduate Student Member, IEEE*, Changmin Lee, *Member, IEEE*, Miaowen Wen, *Senior Member, IEEE*, Sang-Hyo Kim, *Member, IEEE*, and Chan-Byoung Chae, *Fellow, IEEE*

Abstract—This letter introduces a novel algorithm for generating codebooks in molecular communications (MC). The proposed algorithm utilizes character entropy to effectively mitigate inter-symbol interference (ISI) during MC via diffusion. Based on Huffman coding, the algorithm ensures that consecutive bit-1s are avoided in the resulting codebook. Additionally, the error-correction process at the receiver effectively eliminates ISI in the time slot immediately following a bit-1. We conduct an ISI analysis, which confirms that the proposed algorithm significantly reduces decoding errors. Through numerical analysis, we demonstrate that the proposed codebook exhibits superior performance in terms of character error rate compared to existing codebooks. Furthermore, we validate the performance of the algorithm through experimentation on a real-time testbed.

Index Terms—Molecular communications, Huffman coding, inter-symbol interference, and testbed.

I. INTRODUCTION

Molecular communication (MC) is a new communication paradigm that utilizes molecules as information carriers. This transfer of information can take place through various types of transmission, such as diffusion in a free space, transfer through gap junction channels, conveyance on a molecular rail using a motor like a microtubule, or propulsion by bacterial motors [1]. In addition, there are various methods available to observers for decoding information once they receive messenger molecules. The most commonly used method is based on decoding the concentration of molecules [2].

In environments with degraded or obstructed radio wave signals, electromagnetic (EM) wave-based communication becomes impractical due to substantial path loss, especially in underground or confined spaces [3], [4]. MC offers an alternative approach, utilizing molecules for transmission. MC brings several advantages, including low power consumption, nano-level applicability, and biocompatibility, making it highly useful in EM-degraded environments. As the healthcare industry gains attention, the demand for deploying MC within the human body environment is growing [5].

Previous research on MC has classified it into diffusion-based and non-diffusion-based categories. The most basic form of diffusion-based MC occurs in three-dimensional (3D)

The work is supported in part by the National Research Foundation of Korea (NRF) Grant through the Ministry of Science and ICT (MSIT), Korea (RS-2023-00208922, 2022R1A5A1027646).

The work of S.-H. Kim is supported in part by the Basic Science Research Program through the NRF of Korea funded by the MSIT under Grant NRF-2021R1A2C1008913.

H.-W. Hyun, C.-M. Lee and C.-B. Chae are with the School of Integrated Technology, Yonsei University, Seoul 03722, Korea (e-mail: {godnd980627, cm.lee, cbchae}@yonsei.ac.kr).

S.-H. Kim is with the Department of Electrical and Computer Engineering, Sungkyunkwan University, Suwon, Gyeonggi 16419, South Korea (email: iamshkim@skku.edu).

M. Wen is with the School of Electronic and Information Engineering, South China University of Technology, Guangzhou 510640, China (email: eemwwen@scut.edu.cn).

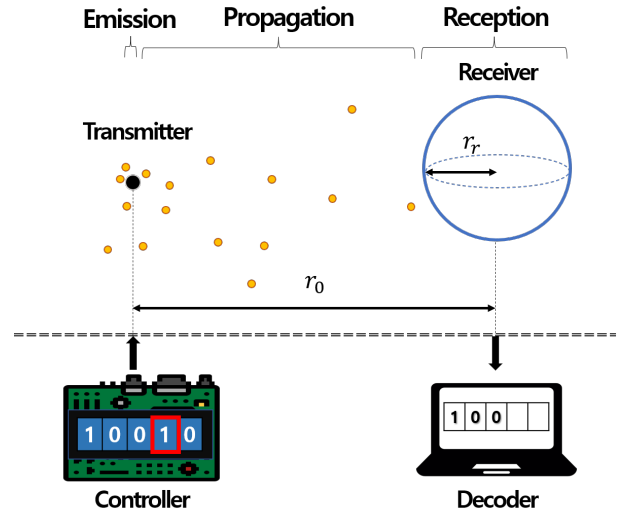


Fig. 1. System model of molecular communication between a point transmitter and a fully absorbing spherical receiver.

diffusion space, owing to its stochastic simplicity. However, this method suffers from severe inter-symbol interference (ISI) problems due to its long-tail channel-impulse response in a diffusive environment [6]. As a result, it is essential to propose a new codebook that is suitable for MC and can overcome the inadequacy of existing codebooks [7]. To this end, this letter presents a codebook-generating algorithm that minimizes ISI errors.

The coding technique for MC consists of source-coding and channel coding. In the area of channel-coding techniques for MC, researchers have conducted studies that consider the characteristics of MC channels with severe ISI [8], [9]. Regarding source-coding techniques for MC, the authors of [10] proposed a modified inverse source-coding scheme that is specifically designed for diffusion-based MC systems. This scheme aims to control the percentage of bit-1 and bit-0 in the transmitted data. However, researchers need to further investigate the area of source-coding in MC, as it has not been explored to the same extent as channel coding. Thus, this letter focuses on source-coding for MC and presents a source-coding algorithm for MC via diffusion.

A lossless data-compression scheme known as entropy coding can remove statistical redundancy. Engineers designing a codebook consider the entropy of characters to minimize the expected number of bits in the codebook, which also affects data rates [11]. A codebook that employs entropy coding exhibits superior performance in terms of data rates and power consumption. Therefore, we propose a codebook-generating algorithm based on Huffman coding, which takes into account the frequency of characters as well as the advantages of the decoding process, such as unique decodability [12].

ITA-2 (International Telegraph Alphabet 2) is a commonly

TABLE I
PROPOSED CODEBOOK FOR THE ALPHABET

Alphabet	Huffman code	ITA-2	Proposed code	Prob (%)
E	101	10000	10010	11.2
A	0000	11000	0000	8.5
R	0001	01010	00010	7.6
I	0010	01100	00100	7.5
O	0100	00011	01000	7.2
T	0101	00001	010010	7.0
N	0110	00110	010100	6.7
S	1001	10100	100010	5.7
L	1100	01001	101000	5.5
C	1110	01110	1010100	4.5
U	00110	11100	0010100	3.6
D	01110	10010	01010100	3.4
P	01111	01101	010101010	3.2
M	10000	00111	100000	3.0
H	10001	00101	100010	3.0
G	11010	01011	10100100	2.5
B	11110	10011	101010100	2.1
F	001110	10110	001010100	1.8
Y	001111	10101	0010101010	1.8
W	110110	11001	1010010100	1.3
K	110111	11110	10100101010	1.1
V	111110	01111	10101010100	1.0
X	11111100	10111	10101010101000	0.3
Z	11111101	10001	101010101010010	0.3
J	11111110	11010	101010101010100	0.1
Q	11111111	11101	1010101010101010	0.1
Length	4.2738	5	6.2491	

B. Error Correction at Receiver

Algorithm 2 The error-correction process at the receiver

- 1: Received signal sequence: $r[k]$ \triangleright k -bits length signal
- 2: **for** i **do** = 1 to k
- 3: **if** i is not k and $r[i]$ is bit-1 **then**
- 4: Input bit-0 into $r[i+1]$

In this step, the error-correction algorithm is used to eliminate the ISI response to a_2 . Although the proposed codebook ensures that no adjacent bit-1s occur in the transmitted codewords, which can mitigate ISI, it is important to note that ISI can still lead to decoding errors at the receiver, such as adjoining bit-1s in the decoded codewords. Therefore, the error-correction process corrects any such errors by forcing the bit right next to a decoded bit-1 to be a bit-0. This process is sequentially performed starting from the front of the received signals.

For example, if the received signal is 001101110, the error-correction process corrects it to 001001010 by altering the next bit after bit-1, in the third and the sixth place, to bit-0. This algorithm effectively mitigates the most significant ISI effect caused by the second time slot after releasing the molecules, which can improve the character error rate (CER) performance. Table I presents an example of our proposed codebook in comparison with the Huffman code.

C. ISI Analysis

To demonstrate the effectiveness of the proposed algorithms, we compare the expected ISI of the Huffman codebook with that of the proposed codebook. ISI, which is the interference caused by all preceding bit-1s on the current slot within the

TABLE II
PARAMETERS USED IN THE SIMULATION

Parameter	Value
Diffusion coefficients (D)	$79.4 \mu\text{m}^2/\text{s}$
Distances between Tx and Rx (r_0)	$4 \mu\text{m}$
Receiver radius (r_r)	$2 \mu\text{m}$

channel memory M , can be used to evaluate the effect of ISI on the bit error rate. To analyze the impact of ISI on the increasing error rate, we need to consider only the ISI terms for bit-0. The effects of ISI on bit-0 can be expressed as a linear combination of the channel coefficients, as follows:

$$E[\text{ISI}_0] = p_0 \sum_{i=1}^K \sum_{j=2}^M a_j p^i s^i s^{M-j+1} \quad (2)$$

where p_0 is the appearance probability of bit-0 in the codebook, K is the number of all possible sequences transmitted before the bit-0 slot, s^i_k is the k -th bit of the i -th sequence of all possible sequences with length M containing the current bit-0, and p^i is the probability of i -th sequences in all possible sequences [16].

We define N_0^H as the number of possible sequences that affect the current bit-0 slot. In (3), p_h^i is the probability of the i -th sequences of all possible sequences of the Huffman codebook. The expectation of ISI for bit-0 of the Huffman codebook for the current slot is as follows:

$$E[\text{ISI}_0^H] = p_0 \sum_{i=1}^{N_0^H} \sum_{j=2}^M a_j p_h^i s^i s^{M-j+1}. \quad (3)$$

Assume that the number of all possible sequences before bit-0 for the proposed codebook with channel memory M is N_0^P . Therefore, the expectation of ISI of the proposed codebook for the current bit-0 slot is as follows:

$$E[\text{ISI}_0^P] = p_0 \sum_{i=1}^{N_0^P} \sum_{j=3}^M a_j p_p^i s^i s^{M-j+1} \quad (4)$$

where p_p^i represents the proportion of the i -th sequence among all possible sequences before the occurrence of bit-0 in the proposed codebook. In the case of the proposed codebook, error correction effectively eliminates the ISI caused by adjacent bit-1s. As a result, $E[\text{ISI}_0^P]$ does not include the a_2 term.

In this letter, we calculated that $E[\text{ISI}_0^H]$ is equal to $0.2719a_2 + 0.2745a_3$ and $E[\text{ISI}_0^P]$ is equal to $0.1904a_3$, for the alphabet codebook based on [15] and $M = 3$. This letter presents an algorithm to remove the effect of a_2 , a channel coefficient that has the greatest impact on ISI, so we analyze ISI based on channel memory 3. These values were obtained using the channel coefficients given in Table II and equations (2) and (3). For any arbitrary alphabet and its probability profile, the proposed codebook generally prevents the effect of a_2 on $E[\text{ISI}_0^P]$. As a result, the coefficients of ISI terms, represented by a_i in $E[\text{ISI}_0^P]$, are lower than the coefficients of both 0.5 for the uncoded case and the Huffman codebook. This implies that the proposed codebook has a lower expected ISI for a bit-0 compared to both the uncoded case and the Huffman codebook. This result is maintained in a larger channel memory environment.

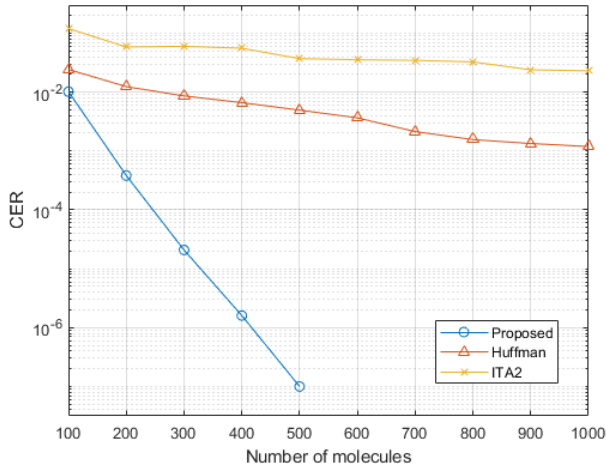


Fig. 2. CER versus the number of molecules per character for ITA-2, Huffman, and the proposed codebook. Here, we assume the alphabet appearance probability according to [15] at two characters per second.

D. Threshold Decision

We utilize the adaptive threshold proposed in [16] for conventional codebooks in this letter. However, as mentioned earlier, the proposed codebook is not affected by the bit-10 case, and thus, an appropriate threshold must be set for it. Let the number of molecules emitted per bit-1 be N , and let bit- X denote either bit-0 or bit-1. The CER of the proposed codebook (CER_P) is based on the probabilities of two scenarios: if the transmitted signal in the last three slots is bit- $X01$, the receiver determines the current bit to be bit-0, and if the transmitted signal is bit- 100 , the receiver decides the current bit to be bit-1. Let $\mathbb{X} = [X_{i-2}, X_{i-1}, X_i]$ represent the transmitted signals for the $(i-2)$ -th, $(i-1)$ -th, and i -th time slots, and let Y_i represent the received signal for the i -th time slot. The CER of the proposed codebook can then be expressed as follows:

$$CER_P = \Pr[Y_i = 1 | \mathbb{X} = [1, 0, 0]] + \Pr[Y_i = 0 | \mathbb{X} = [X, 0, 1]]. \quad (5)$$

We assume that R_i is the sequence of the number of molecules received in each time slot for the i -th codeword, except zero. And R_i^{exc} is the sequence of slots in R_i excluding the slots for bit-10. We obtain two values, $N_1 = \min_i(\max(R_i))$ and $N_3 = \mathbb{E}[\max(R_i^{exc})]$, for threshold setting through pilot signals for all codewords. In this process, we balance the probabilities of the two error causes for the proposed codebook. To minimize the error rate, the threshold should be the internally dividing point between N_1 and N_3 with a ratio of $\sqrt{N_1(1 - N_1/N)} : \sqrt{N_3(1 - N_3/N)}$. This approach is used to decide the threshold, as it approximately minimizes the error in the situation where molecules follow Brownian motion.

IV. SIMULATION AND TESTBED RESULTS

A. Performance Evaluations

We established the system parameters for the simulations, as outlined in Table II, to evaluate the performance of each codebook based on the CER level. The graphs presented in this paper depict the results. The appearance probability of the alphabet follows [15] for the selection of codebooks.

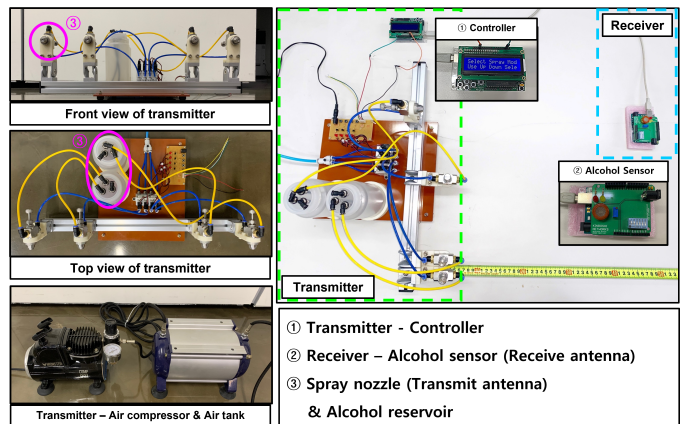


Fig. 3. Testbed configuration.

To ensure a fair comparison of the performance of each codebook in molecular communication, several components must be considered when transmitting the molecular signal. Firstly, to assess the performance of each codebook at the same data rate, we set the same character-transmitting duration, which represents the time required to send one character, and determine the symbol slot for each codebook based on its long-term average bit length. Secondly, we balance the number of emitting molecules per bit-1, which is considered the signal power for MC. The Huffman and proposed codebooks have the same long-term average number of bit-1s per character (1.9753 bit-1 per character), while the ITA-2 codebook has an average of 2.4696 bit-1s per character. To ensure a fair comparison among the different codebooks in terms of the number of emitted molecules per character, we employed a ratio of 1:1:0.7998 for bit-1 molecules in the simulation for the Huffman, proposed, and ITA-2 codebooks, respectively. By balancing these factors, we can ensure a fair and accurate comparison of the performance of each codebook in molecular communication.

We employ the binomial distribution to determine the number of molecules received for each symbol slot in the simulation. As we assume a fully absorbing receiver in the system model, molecules counted in the previous slot are excluded from subsequent slots. Thus, if the transmitter emits N molecules, the number of received molecules at the receiver is represented as follows:

$$n_i \sim \mathcal{B}(N - \sum_{k=1}^{i-1} n_k, a_i / (1 - \sum_{k=1}^{i-1} a_k))$$

where n_i is the number of received molecules in the i -th slot after the emitting time slot. In this study, we use the values from n_1 to n_{10} in a single release of molecules for channel memory 10. To obtain statistically stable results, the simulation is repeated 1,000,000 times for each 10-length random alphabet sequence, and the reported results are the average values.

Fig. 2 illustrates the relationship between the CER and the number of molecules per bit, with a transmission rate of two characters per second (cps), using the alphabet appearance probability from [15]. The conventional codebooks (Huffman and ITA-2) use the adaptive threshold [16], while the proposed codebook uses the pilot signals as described in Section III-D to determine the threshold. The x-axis represents the number of molecules per character in the simulation. The figure shows that the proposed codebook outperforms the

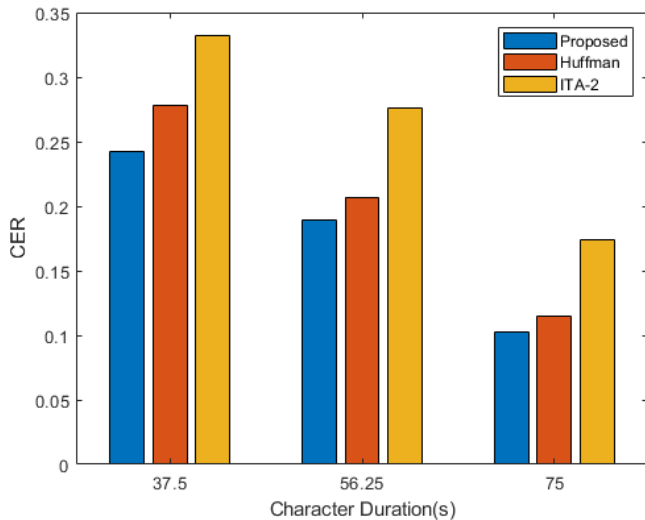


Fig. 4. CER of transmitting alphabet, which has an appearance probability according to [15], using ITA-2, Huffman, and the proposed codebook in the testbed.

conventional codebooks across the entire range of the number of molecules. Despite the longer symbol slot durations of the proposed codebook compared to the conventional codebooks, the proposed codebook achieves a lower CER due to the effect of error-correction at the receiver. The channel coefficient ratio of the substantive coefficient a_1 for transmitting a signal is much larger than that of other slots which belong to the ISI term, giving the conventional codebooks an advantage.

B. Testbed Result

We evaluated the performance of the proposed codebook through real-time experiments conducted on a macro-scale testbed, as illustrated in Fig. 3, comprising a transmitter and receiver. The air compressor condenses the air and delivers it to an air tank in the transmitter section. The controller manages the spray nozzle that is connected to the alcohol reservoir, which receives compressed air from the air tank. The nozzle sprays alcohol when the controller opens the spray nozzle. The receiver detects the emitted alcohol molecules using the alcohol sensor and decodes the received signal based on the selected codebook.

The distance between the transmitter and receiver was fixed at 1 meter. To ensure the descending order of the channel coefficients, we set the symbol slot duration to be longer than five seconds. Consequently, we evaluated the CER performance for character-transmitting durations of over 30 seconds. The number of molecules per character for each codebook was controlled by adjusting the spray duration, i.e., the duration in which the controller opens the spray nozzle to emit alcohol molecules. To ensure a fair comparison of power consumption among the three codebooks, i.e., the Huffman, the proposed, and the ITA-2, we set the spray duration for bit-1 at a 1:1:0.7998 ratio.

The results presented in Fig. 4 indicate that the proposed codebook outperforms the existing codebooks in terms of CER across all character duration ranges, as confirmed through the real-time experiment conducted in the testbed. This result is consistent with the simulation performance trend of the proposed codebook, despite the scaling difference in the channel

impulse response resulting from the different scales of the two environments. This proves the feasibility of the proposed algorithm in the long-tail channel situation.

V. CONCLUSION

In this letter, we proposed algorithms for generating a codebook and correcting errors that effectively mitigate ISI. Algorithm 1, which inserts bit-0, reduces error rates, but the symbol duration is shorter due to more bit-0s when compared to the Huffman and ITA-2 codebooks. The error-correction process removed incorrect bit errors immediately after bit-1, resulting in better CER performance than the existing codebooks. The proposed algorithm's performance was verified through simulation and on a real-time testbed, and it can be applied to other molecular communication (MC) situations that experience ISI due to a long-tail channel-impulse response, such as diffusion MC and drift-based MC with similar impulse response patterns. In future research, we intend to explore the impact of the appearance-frequency distribution of transmitting characters on the CER. We also plan to extend our work by considering arbitrary appearance probabilities of characters. Furthermore, we aim to compare the performance of our proposed algorithm with various other channel coding techniques for mitigating ISI.

REFERENCES

- [1] V. Jamali, A. Ahmadzadeh, W. Wicke, A. Noel, and R. Schober, "Channel modeling for diffusive molecular communication—a tutorial review," *Proc. IEEE*, vol. 107, no. 7, pp. 1256–1301, Jul. 2019.
- [2] N. Farsad, H. B. Yilmaz, A. Eckford, C.-B. Chae, and W. Guo, "A comprehensive survey of recent advancements in molecular communication," *IEEE Commun. Surv. Tuts.*, vol. 18, no. 3, pp. 1887–1919, Q3 2016.
- [3] A. E. Forooshani, S. Bashir, D. G. Michelson, and S. Noghanian, "A survey of wireless communications and propagation modeling in underground mines," *IEEE Commun. Surv. Tuts.*, vol. 15, no. 4, pp. 1524–1545, Q4 2013.
- [4] C. Lee, B. Koo, C.-B. Chae, and R. Schober, "The Internet of bio-nano things in blood vessels: System design and prototypes," *IEEE/KICS Jour. Commun. Networks*, vol. 25, no. 2, pp. 1–10, April 2023.
- [5] S. Ghavami, "Anomaly detection in molecular communications with applications to health monitoring networks," *IEEE Trans. on Molecular, Biological and Multi-Scale Commun.*, vol. 6, no. 1, pp. 50–59, 2020.
- [6] B. Tepekule, A. E. Pusane, H. B. Yilmaz, C.-B. Chae, and T. Tugcu, "ISI Mitigation techniques in molecular communication," *IEEE Trans. Mol. Biol. Multi-Scale Commun.*, vol. 1, no. 2, pp. 202–216, Jun. 2015.
- [7] S. Gil, "Teletypewriter communication codes," Jul. 2001. [Online]. Available: <http://www.baudot.net/docs/smith--teletype-codes.pdf>
- [8] P. Shih, C. Lee, P. Yeh, and K. Chen, "Channel codes for reliability enhancement in molecular communication," *IEEE J. Sel. Areas Commun.*, vol. 31, no. 12, pp. 857–867, Dec. 2013.
- [9] A. O. Kislal, H. B. Yilmaz, A. E. Pusane, and T. Tugcu, "ISI-Aware channel code design for molecular communication via diffusion," *IEEE Trans. NanoBiosci.*, vol. 18, no. 2, pp. 205–213, Apr. 2019.
- [10] T. B. Dhayabaran, G. T. Raja and M. Magarini, "Low complex receiver design for modified inverse source coded diffusion-based molecular communication systems," *IEEE Trans. on Molecular, Biological and Multi-Scale Commun.*, vol. 7, no. 4, pp. 239–252, 2021.
- [11] M. T. Cover, *Elements of information theory*. John Wiley and Sons, 1999.
- [12] D. A. Huffman, "A method for the construction of minimum-redundancy codes," *Proc. IRE*, vol. 40, no. 9, pp. 1098–1101, Sep. 1952.
- [13] T. Nakano, A. W. Eckford, and T. Haraguchi, *Molecular communication*. Cambridge University Press, 2013.
- [14] H. B. Yilmaz, A. C. Heren, T. Tugcu, and C.-B. Chae, "Three-dimensional channel characteristics for molecular communications with an absorbing receiver," *IEEE Commun. Lett.*, vol. 18, no. 6, pp. 929–932, Jun. 2014.
- [15] B. Duckett, *Concise Oxford English Dictionary (11th edition)*. Reference Reviews, 2005, vol. 19, no. 1.
- [16] A. O. Kislal, B. C. Akdeniz, C. Lee, A. E. Pusane, T. Tugcu, and C.-B. Chae, "ISI-Mitigating channel codes for molecular communication via diffusion," *IEEE Access*, vol. 8, pp. 24 588–24 599, 2020.