

# Redundancy Transmission in UAV-Aided LoRa Networks Featuring Wake-Up Radios

Siddhartha S. Borkotoky  
School of Electrical Sciences  
Indian Institute of Technology Bhubaneswar  
20ee01042@iitbbs.ac.in, borkotoky@iitbbs.ac.in

**Abstract**—We consider a LoRa sensor network featuring a UAV-mounted gateway for collecting sensor data (messages). Wake-up radios (WuR) are employed to inform the sensors of the UAV’s arrival. Building on an existing random access scheme for such setups, we propose and evaluate two redundancy transmission protocols for enhancing the reliability of the data transfer. One protocol employs fountain-coded transmissions, whereas the other performs message replication. Our results illustrate how redundancy transmission can be beneficial under the time constraints imposed by the UAV’s limited hovering duration, and how node density, hovering time, and sensor energy budget impact the performance of the schemes.

**Index Terms**—LoRa, UAV, Wake-Up Radio, Fountain Coding, Message replication

## I. INTRODUCTION

The LoRa technology has enabled many IoT applications requiring sensor nodes to make long-distance transmission of small data packets [1]. By increasing the value of a modulation parameter called the spreading factor (SF), LoRa can provide larger communication ranges at the cost of longer airtimes and higher energy consumption [2]. To reduce the energy expenditure when the receiver is at a large distance, and to facilitate communications when it is not at all reachable, there have been recent efforts towards incorporating UAVs into LoRa networks [3]–[6]. The idea is to employ a UAV-mounted LoRa gateway that hovers over a cluster of sensors from time to time, so that the sensors can transmit their data to the UAV over a short distance. The UAV relays the sensor data over a high-capacity link to the final destination.

Communication protocol design for such UAV-aided sensor networks must address questions such as how the sensors can be alerted when the UAV arrives so that they can transmit their data, how the sensors should access the shared uplink channel, and how to ensure acceptable reliability levels on the uplink. These questions must be answered keeping in mind that the sensors are battery powered and hence energy constrained, and the UAV hovers above a sensor cluster only for a limited amount of time. In this paper, we build on the solution proposed in [6], in which wake-up radios (WuRs) [7] are employed to inform the sensors of the UAV’s presence, followed by a random access scheme that incorporates frequency hopping and random SF selection. As our major contribution, we propose two redundancy-transmission schemes to improve the probability of data delivery to the UAV.

**Related Works:** Integration of UAVs into LoRa networks has been considered in [3]–[6]. Among these, [3]–[5] do not consider the issue of informing the sensors about the UAV’s arrival. The matter is addressed in [6], where the sensors and the UAV are equipped with WuR modules in addition to the main radio (i.e., the LoRa transceiver). The salient feature of a WuR is its extremely low power consumption while scanning for and receiving signals [7]. When the UAV is not present, the sensors keep their main radio switched off, while keeping the WuR on. Upon arrival, the UAV transmits a series of wake-up beacons (WUBs) from its WuR module to awaken and synchronize the sensors, which then power on their main radio and access the shared channel with random selection of transmission slots, frequency band, and SF.

**Our Contributions:** The simplicity of the method in [6] makes it well-suited for deployment using unsophisticated sensor nodes. However, as with all random access schemes, the message transmissions are prone to collisions and losses. As a remedy, we devise two redundancy transmission schemes to enhance the message delivery performance. One scheme employs fountain coding, and transmits redundancy in the form of random linear combinations of the sensor readings. The other scheme performs message replication by transmitting multiple copies of a reading. We present analytical derivations of the schemes’ performance, so that design decisions can be made without resorting to time-consuming simulations.

## II. SYSTEM MODEL

We consider a cluster of  $n$  LoRa sensors or end devices (EDs). Each ED performs a measurement of some physical parameter every  $T_e$  seconds. The UAV arrives above the cluster every  $T_u$  seconds. Thus, every ED has  $m = T_u/T_e$  readings (messages) to send to the UAV. As described in detail in the next section, the UAV transmits WUBs to wake up the sensors. Let  $P_b$  denote the probability that a WUB from the UAV is received by an ED. The main radio module at an ED is a LoRa transceiver that can transmit over  $N_f$  non-overlapping frequency bands. Each message is transmitted as a LoRa frame. The UAV forwards the received data to the final destination (e.g., a control station) via an error-free link.

LoRa frame characteristics depend on the SF, which is an integer between 7 and 12. The higher the SF, the greater the immunity against thermal noise and longer the frame duration. The SFs are quasi-orthogonal; that is, a frame is

TABLE I  
IMPORTANT NOTATIONS

Symbol	Definition
$n$	No. of EDs in the cluster
$T_e$	Sensor measurement collection period
$T_u$	UAV arrival period
$m$	No. of messages an ED has to transfer to UAV
$P_W(i)$	Probability that an ED wakes up in slot $i$
$N_f$	Number of frequency bands
$N_s$	No. of slots over which the UAV receives
$P_b$	Probability that a WUB is successfully received
$\eta_k$	Probability that SF $k$ is used for a frame
$\mathcal{T}(s)$	Probability that a message is sent in slot $s$
$\varepsilon$	Number of redundant frames to be sent
$q$	Order of Galois field for fountain coding

highly likely to survive interference from a colliding frame having a different SF, but is highly likely to be lost upon collision with the same SF. Exact mathematical models for this behavior can be found, for example, in [8]. For analytical simplicity, here we assume as in [6] that different-SF collisions do not enforce losses, whereas same-SF collisions always do. This is a reasonable assumption under mild fading and comparable distances from all sensors to the UAV [6].

#### A. Sensor Wake-Up and Uplink Channel Access

The method of [6] is employed for this purpose. It involves slotted communications from the EDs to the UAV with slot length  $T_s$ . The UAV hovers over the EDs for  $N_s$  slots, numbered 0 through  $N_s-1$ . At every slot beginning, the UAV broadcasts a WUB whose data field contains the current slot number  $i$  and the value of  $N_s$ . Once awake, an ED transmits its messages to the UAV using one of the methods to be described in Section III. For every transmission on the ED-to-UAV uplink, one of the  $N_f$  frequency bands is chosen uniformly at random. Likewise, the SF is chosen uniformly at random from the set  $\mathbf{K} = \{7, 8, \dots, K_m\}$ , where  $7 \leq K_m \leq 12$ . Thus, the probability of selecting SF  $k \in \mathbf{K}$  is

$$\eta_k = 1/(K_m - 6). \quad (1)$$

#### B. Sensor Transmission Limits

The energy budget of a sensor imposes a limit on how many frames the sensor can send per data-collection cycle. Let  $L_f(k)$  be the length of a LoRa frame using SF  $k$ , and let  $P_t$  be the transmit power of a sensor. Thus, the average energy consumption per frame is  $P_t \bar{L}_f$ , where  $\bar{L}_f$  is the average frame length, given by

$$\bar{L}_f = \sum_{k=7}^{K_m} \eta_k L_f(k) \quad (2)$$

The maximum number of frames a sensor can send per data-collection cycle is

$$N_{\max} = E_{\max}/(P_t \bar{L}_f), \quad (3)$$

where  $E_{\max}$  is the maximum permissible energy expenditure per cycle. It is a design parameter that depends on factors such as battery capacity and expected sensor lifetime. We assume that  $N_{\max} > m$ .

#### C. Fountain Coding

Fountain coding [9] is an erasure-correction technique that involves the transmission of linear combinations of source messages (sensor readings in this case). Fountain codes include LT codes, raptor codes, random linear codes, etc. We consider random linear codes here. Let  $\{\psi_0, \psi_1, \dots, \psi_{m-1}\}$  denote the source messages at an ED. These are mapped to  $m + \varepsilon$  coded messages  $\{c_0, c_1, \dots, c_{m+\varepsilon-1}\}$ , where

$$c_j = \sum_{l=0}^{m-1} \alpha_l^{(j)} \psi_l, \quad (4)$$

where the coefficients  $\alpha_l^{(j)}$  are chosen at random from a Galois field of a given order  $q$  ( $\text{GF}(q)$ ). The original  $m$  messages can be decoded from a set of  $z$  coded messages if the set contains  $m$  linearly independent combinations of the messages. This occurs with probability [10]

$$P_{\text{dec}}(z) = \begin{cases} \prod_{v=0}^{m-1} (1 - q^{v-z}), & z \geq m \\ 0, & z < m. \end{cases} \quad (5)$$

#### III. REDUNDANCY TRANSMISSION SCHEMES

Both our proposed schemes employ the transmission of up to  $m + \varepsilon$  frames per cycle, where the design parameter  $\varepsilon \leq N_{\max} - m$  represents the amount of redundancy. We begin by defining the quantities

$$N(i) = N_s - i \quad (6)$$

and

$$\gamma(i) = N(i) - m. \quad (7)$$

Thus, for an ED that wakes up in slot  $i$ , there are  $N(i)$  slots remaining in the session, of which  $\gamma(i)$  are available for redundancy transmission. Note that  $\gamma(i)$  may be 0 or negative depending on the value of  $i$ . The two redundancy transmission schemes operate as follows:

##### A. Coded Redundancy Transmission

An ED first checks if there are enough slots available to transmit  $\varepsilon$  redundant frames, that is, whether  $\gamma(i) \geq \varepsilon$ .

If  $\gamma(i) \geq \varepsilon$ : The ED encodes the  $m$  source messages into  $m + \varepsilon$  fountain-coded messages and transmits them over  $m + \varepsilon$  randomly chosen slots out of the  $N(i)$  available slots.

If  $\gamma(i) < \varepsilon$ : Fountain coding is not applied. Instead, if  $m \leq N(i)$ , the  $m$  messages are transmitted over  $m$  randomly chosen slots. If  $m > N(i)$ , then the ED randomly selects  $N(i)$  messages and sends them over the  $N(i)$  slots. Messages not selected are discarded and deemed to be lost.

##### B. Replica Transmission

This scheme employs message replication, with transmission decisions made as follows:

If  $\gamma(i) \geq 0$ : We define the quantity

$$\hat{\varepsilon}(i) = \min\{\gamma(i), \varepsilon\}, \quad (8)$$

and let  $m_q$  and  $m_r$  denote the quotient and the remainder, respectively, when  $\hat{\varepsilon}(i)$  is divided by  $m$ . Now each of the  $m$  messages is sent  $m_q$  times; in addition,  $m_r$  messages are randomly picked for one additional transmission.

If  $\gamma(i) < 0$ : This implies  $N(i) < m$ . The ED randomly selects  $N(i)$  messages and sends them over the  $N(i)$  slots. Messages not selected are discarded and deemed to be lost.

#### IV. PERFORMANCE ANALYSIS

Let the *message delivery probability* denote the probability that an arbitrary message from an ED is delivered to the control station. We derive it below for the two schemes.

##### A. Coded Redundancy Transmission

First note that the probability mass function for the slot in which an ED wakes up (denoted by  $W$ ) is

$$P_W(i) = (1 - P_b)^i P_b \quad (9)$$

for  $0 \leq i \leq N_s - 1$ , and 0 otherwise.

*Lemma 1:* An ED that wakes up in slot  $i$  transmits a frame to the UAV in slot  $s$  with probability

$$P_{\text{tx}}(s|W = i) = \begin{cases} \frac{m+\varepsilon}{N(i)}, & s \geq i, \gamma(i) \geq \varepsilon \\ \min\left\{\frac{m}{N(i)}, 1\right\}, & s \geq i, \gamma(i) < \varepsilon \\ 0 & s < i. \end{cases} \quad (10)$$

*Proof:* By definition, the ED has  $N(i)$  slots available for use. If  $\gamma(i) \geq \varepsilon$ , then  $m+\varepsilon$  coded messages are randomly distributed over  $N(i)$  slots; hence the probability of choosing a certain slot is  $(m+\varepsilon)/N(i)$ . If  $\gamma(i) < \varepsilon$ , then  $m$  uncoded messages are to be distributed over  $N(i)$  slots; the probability of choosing a certain slot is either  $m/N(i)$  (if  $m \leq N(i)$ ), or 1 (if  $m > N(i)$ , meaning all slots are used and some messages are dropped.) This is succinctly expressed as  $\min\{m/N(i), 1\}$ . Of course, the probability of choosing slot  $s$  is 0 if  $s < i$ . ■

Let the *transmission success probability* (denoted  $\zeta(s)$ ) be the probability that a frame sent in slot  $s$  is successfully received at the UAV. Consider such a frame F from an arbitrary ED E. Then  $\zeta(s)$  is the probability that no other ED transmits in slot  $s$  using the same SF and the same frequency band. It can be determined as follows:

*Lemma 2:* The probability that a given ED  $E'$  transmits a frame in a given slot  $s$  is

$$P_{\text{col}}(s) = \sum_{j=0}^{\min\{N_s-m-\varepsilon, s\}} \frac{m+\varepsilon}{N(j)} P_W(j) + \theta_s \sum_{j=N_s-m-\varepsilon+1}^s \min\left\{\frac{m}{N(j)}, 1\right\} P_W(j), \quad (11)$$

where

$$\theta_s = \begin{cases} 1, & s > N_s - m - \varepsilon \\ 0, & \text{otherwise.} \end{cases} \quad (12)$$

*Proof:* Suppose  $E'$  wakes up in slot  $j$ . Then  $\gamma(j) \geq \varepsilon$  if  $j \leq N_s - m - \varepsilon$ . From the argument in Lemma 1, the probability

of selecting slot  $s$  in this case is  $(m+\varepsilon)/N(j)$ . The first term in (11) averages this probability over all  $j$  such that  $\gamma(j) \geq \varepsilon$ . The min operation in the upper limit of the summation ensures that we consider only the values of  $j$  up to  $s$  (since an ED waking up after slot  $s$  cannot transmit in slot  $s$ .) Similarly, the second summation accounts for the transmission probabilities for all  $j$  such that  $\gamma(j) < \varepsilon$ . The multiplier  $\theta_s$  ensures that we consider the second summation only when there exists a  $j$  that simultaneously satisfies both  $\gamma(j) < \varepsilon$  and  $j \leq s$ . ■

The transmission from  $E'$  must employ the same SF and the same channel as F to cause a loss. Note that these occur with probability  $\eta_k$  and  $1/N_f$ , respectively. Hence, the probability that one given ED (namely,  $E'$ ) enforces the loss of F is

$$\mathcal{L}(s) = \eta_k P_{\text{col}}(s)/N_f. \quad (13)$$

Since there are  $n-1$  EDs excluding the sender of F, the transmission success probability for F is given by

$$\zeta(s) = (1 - \mathcal{L}(s))^{n-1} = (1 - \eta_k P_{\text{col}}(s)/N_f)^{n-1}. \quad (14)$$

To derive the message delivery probability, consider an arbitrary message  $\psi$  from an arbitrary ED E. Suppose E wakes up in slot  $i$ . Then the following events can occur:

1)  $\gamma(i) \geq \varepsilon$ : In this case, E performs fountain coding and transmits  $m+\varepsilon$  coded messages. Thus, the MDP for  $\psi$  is the probability that the received set of coded messages is decodable. The message delivery probability then becomes

$$\mathcal{S}_1(i) = \sum_{z=m}^{m+\varepsilon} \xi(z, i) P_{\text{dec}}(z) = \sum_{z=m}^{m+\varepsilon} \xi(z, i) \prod_{v=0}^{m-1} (1 - q^{v-z}), \quad (15)$$

where  $\xi(z, i)$  is the probability that  $z$  out of the  $m+\varepsilon$  transmissions are successful. Finding an exact expression for  $\xi(z, i)$  is complicated due to the slot-dependent nature of the transmission success probability  $\zeta(s)$ . However, a fairly accurate approximation may be obtained by assuming that the transmission success events over different slots are mutually independent and has a fixed probability  $\hat{\zeta}$ , and then using the binomial mass function

$$\xi(z, i) \approx \binom{m+\varepsilon}{z} \hat{\zeta}^z (1 - \hat{\zeta})^{m+\varepsilon-z}. \quad (16)$$

The parameter  $\hat{\zeta}$  is obtained by averaging the transmission success probabilities for the  $N(i)$  slots that are available to the ED. That is

$$\hat{\zeta} = \frac{1}{N(i)} \sum_{s=i}^{N_s-1} \zeta(s). \quad (17)$$

2)  $\gamma(i) < \varepsilon$ : In this case, fountain coding is not performed, and the message  $\psi$  is sent as it is. The probability that  $\psi$  is sent over slot  $s$  is given by [6]

$$\mathcal{T}(s, i) = \frac{1}{N(i)} \min\left\{\frac{N(i)}{m}, 1\right\}, \quad i \leq s \leq N_s - 1. \quad (18)$$

The message delivery probability is thus

$$\mathcal{S}_2(i) = \sum_{s=i}^{N_s-1} \mathcal{T}(s, i) \zeta(s). \quad (19)$$

The overall message delivery probability is

$$\mathcal{S} = \sum_{i=0}^{N_s-m-\varepsilon} P_W(i) \mathcal{S}_1(i) + \sum_{i=N_s-m-\varepsilon+1}^{N_s-1} P_W(i) \mathcal{S}_2(i), \quad (20)$$

where the first summation is over those values of the wake-up instant  $i$  such that  $\gamma(i) \geq \varepsilon$ , and the second one is for  $\gamma(i) < \varepsilon$ .

### B. Replica Transmission

*Lemma 3:* An ED that wakes up in slot  $i$  transmits a frame to the UAV in slot  $s$  with probability

$$\hat{P}_{\text{tx}}(s|W=i) = \begin{cases} \frac{m+\hat{\varepsilon}(i)}{N(i)}, & s \geq i, \gamma(i) > 0 \\ \min\left\{\frac{m}{N(i)}, 1\right\}, & s \geq i, \gamma(i) \leq 0 \\ 0, & s < i. \end{cases} \quad (21)$$

*Proof:* The proof is same as that of Lemma 1, except that an ED transmits redundancy for any  $\gamma(i) > 0$ , and  $\hat{\varepsilon}(i)$  is the number of redundant frames sent. ■

*Lemma 4:* The probability that a given ED  $E'$  transmits a frame in a given slot  $s$  is

$$\begin{aligned} \hat{P}_{\text{col}}(s) &= \sum_{j=0}^{\min\{N_s-m, s\}} \frac{m+\hat{\varepsilon}(j)}{N(j)} P_W(j) \\ &+ \hat{\theta}_s \sum_{j=N_s-m+1}^s \min\left\{\frac{m}{N(j)}, 1\right\} P_W(j), \end{aligned} \quad (22)$$

where

$$\hat{\theta}_s = \begin{cases} 1, & s > N_s - m \\ 0, & \text{otherwise.} \end{cases} \quad (23)$$

*Proof:* The proof is same as that of Lemma 2, except that an ED transmits redundancy for any  $\gamma(i) > 0$ , and  $\hat{\varepsilon}(i)$  is the number of redundant frames sent. ■

Using the same argument as in Section IV-A, the transmission success probability for a frame is expressed as

$$\hat{\zeta}(s) = \left(1 - \eta_k \hat{P}_{\text{col}}(s)/N_f\right)^{n-1}. \quad (24)$$

To derive the message delivery probability, consider an arbitrary message  $\psi$  from an arbitrary ED  $E$ . Suppose  $E$  wakes up in a slot  $i$ . Then the following events can occur:

1)  $\gamma(i) > 0$ : Of the  $m$  messages,  $m_r(i)$  are sent  $m_q(i)+1$  times, and the remaining  $m - m_r(i)$  are sent  $m_q(i)$  times. Thus,  $\mathcal{P}_1(i) = (m - m_r(i))/m$  and  $\mathcal{P}_2(i) = m_r(i)/m$  denote the probability that a given message is sent  $m_q(i)$  times and  $m_q(i)+1$  times, respectively. The corresponding probabilities

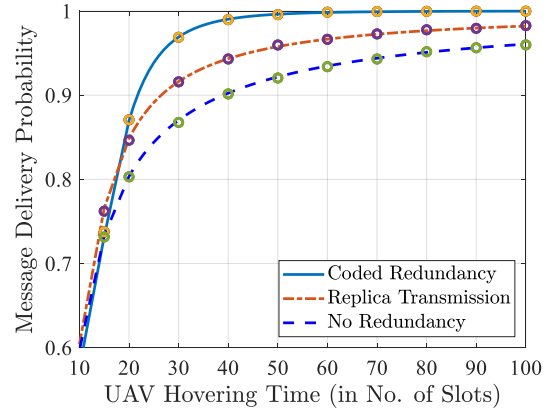


Fig. 1. Reliability of the schemes as a function of the UAV's hovering time  $N_s$ . Circles represent simulated values, the lines show analytically obtained results ( $\varepsilon=4$ ).

that at least one copy of the message is delivered are approximately  $1 - (1 - \hat{\zeta})^{m_q(i)}$  and  $1 - (1 - \hat{\zeta})^{m_q(i)+1}$ , where  $\hat{\zeta}$  is defined as in (17).

$$\begin{aligned} \hat{\mathcal{S}}_1(i) &= \mathcal{P}_1(i) \left(1 - (1 - \hat{\zeta})^{m_q(i)}\right) \\ &+ \mathcal{P}_2(i) \left(1 - (1 - \hat{\zeta})^{m_q(i)+1}\right). \end{aligned} \quad (25)$$

2)  $\gamma(i) \leq 0$ : In this case, the probability that a given message is sent over slot  $s$ , and the subsequent message delivery probability are the same as in the coded transmission scheme, and are given by (18) and (19), respectively.

Using a similar argument as used for (20), the overall message delivery probability for replica transmission is

$$\hat{\mathcal{S}} = \sum_{i=0}^{N_s-m} P_W(i) \hat{\mathcal{S}}_1(i) + \sum_{i=N_s-m+1}^{N_s-1} P_W(i) \hat{\mathcal{S}}_2(i), \quad (26)$$

where  $\hat{\mathcal{S}}_2(i)$  is the same as  $\mathcal{S}_2(i)$  given by (19).

## V. NUMERICAL RESULTS

We compare the proposed mechanisms with the scheme of [6], in which no redundancy is transmitted. MATLAB simulations with 10,000 simulation runs per data point were performed to verify the accuracy of our analytical results. Unless otherwise specified,  $n=20$ ,  $T_e=1$  hour,  $T_u=5$  hours (hence  $m=5$ ),  $N_f=8$ ,  $P_b=0.25$ ,  $\mathbf{K} = \{7, 8, 9\}$ , and  $q=256$ . We keep  $P_b$  small to model an unfavorable scenario where WUB receptions face significant challenge, possibly owing to the UAV's hovering altitude.

Fig. 1 shows the message delivery probabilities for  $\varepsilon=4$ . We observe that when the UAV hovers for 15 or more slots, both redundancy schemes noticeably outperform the baseline scheme with no redundancy. The relative improvement is the highest when  $N_s$  is around 30. For  $N_s > 18$ , coding outperforms replica transmission. As the hovering time becomes much larger, the gap between the three schemes reduces. They are expected to asymptotically converge, because as  $N_s \rightarrow \infty$ , the collision probability becomes arbitrarily small, and all

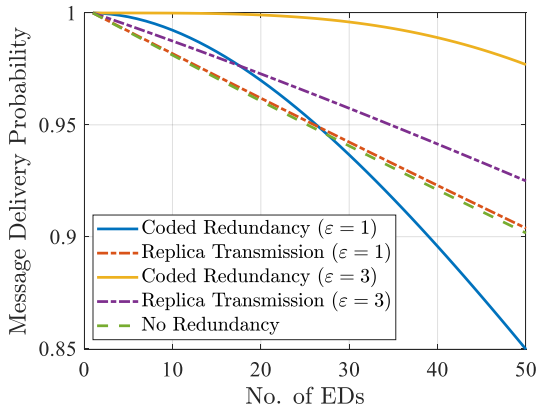


Fig. 3. Reliability as a function of node density  $n$  ( $N_s = 60$ ).

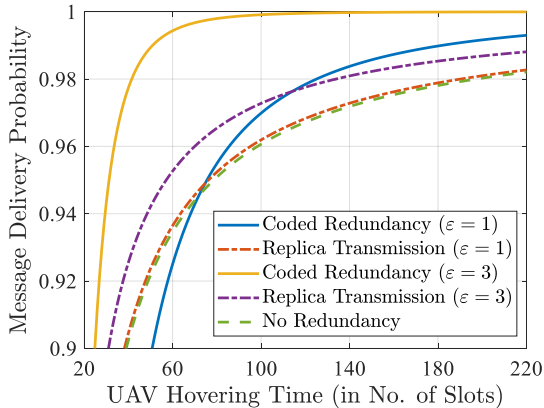


Fig. 2. Reliability as a function of UAV hovering time  $N_s$  ( $\epsilon = 1$  and 3.)

messages are successfully delivered. However, for smaller (and more realistic) hovering times, redundancy is beneficial.

The impact of  $\epsilon$  is further examined in Fig. 2, where results for  $\epsilon = 1$  and  $\epsilon = 3$  are shown. For  $\epsilon = 3$ , the same conclusions as made from Fig. 1 are applicable. However, for  $\epsilon = 1$ , replica transmission provides only marginal improvement over the baseline scheme. Further, coded redundancy suffers significant performance deterioration relative to the other two schemes when  $N_s < 70$ . This is attributed to the fact that when  $\epsilon = 1$ , the set of coded messages is not decodable whenever there is more than a single erasure. Even with a single or no erasure, decoding may fail due to the rank of the set of received packets being less than  $m$ ; however, with a large  $q$  (e.g., as in our case), that probability is quite small. For  $N_s > 70$ , frame losses become rarer, and coded redundancy outperforms both replica transmission as well as the baseline scheme for  $\epsilon = 1$ .

Fig. 3 shows the impact of the number of EDs in the cluster. With increasing node density, more collisions occur,

and the performance of each scheme degrades. But with  $\epsilon = 3$ , both redundancy schemes outperform the baseline, with coded redundancy being significantly better. For  $\epsilon = 1$ , replica transmission performs virtually the same as the baseline, whereas coded redundancy is worse than the baseline for high node densities (due to more frame losses leading to rank deficiency) and is better when there are fewer EDs.

## VI. CONCLUSION

We proposed and evaluated two redundancy transmission mechanisms for improving the reliability of data transfer in UAV-aided LoRa networks, and illustrated their performance gains vis-à-vis an existing benchmark. Our results showed that unless the maximum number for redundant frames a sensor can send per data-collection cycle is very small, redundancy transmission provides noticeable improvements over a scheme without redundancy. Whether to transmit redundancy – and if so, which type – should be determined based on the sensors’ energy budget (which dictates the maximum redundancy), the UAVs hovering time, and the node density. The analytical framework presented above aids such decision making.

## REFERENCES

- [1] C. Milarokostas, D. Tsolkas, N. Passas, and L. Merakos, “A comprehensive study on LPWANs with a focus on the potential of LoRa/LoRaWAN systems,” in *IEEE Communications Surveys & Tutorials*, vol. 25, no. 1, pp. 825–867, 2023.
- [2] O. Georgiou and U. Raza, “Low power wide area network analysis: Can LoRa scale?,” in *IEEE Wireless Communications Letters*, vol. 6, no. 2, pp. 162–165, April 2017.
- [3] R. Xiong, C. Liang, H. Zhang, X. Xu, and J. Luo, “FlyingLoRa: Towards energy efficient data collection in UAV-assisted LoRa networks,” *Computer Networks*, vol. 220, 2023.
- [4] F. De Rango and D. Stumpo, “Supporting path planning in LoRa-based UAVs for dynamic coverage for IoT devices,” *2023 IEEE 20th Consumer Communications & Networking Conference (CCNC)*, Las Vegas, NV, USA, 2023, pp. 337–340.
- [5] L. -Y. Chen, H. -S. Huang, C. -J. Wu, Y. -T. Tsai and Y. -S. Chang, “A LoRa-based air quality monitor on unmanned aerial vehicle for smart city,” 2018 International Conference on System Science and Engineering (ICSSE), New Taipei, Taiwan, 2018, pp. 1–5.
- [6] S. M. S. Panga and S. S. Borkotoky, “Leveraging wake-up radios in UAV-aided LoRa networks: Some preliminary results on a random-access scheme,” *2023 17th International Conference on Telecommunications (ConTEL)*, Graz, Austria, 2023, pp. 1–7.
- [7] R. Piyare, A. L. Murphy, C. Kiraly, P. Tosato and D. Brunelli, “Ultra low power wake-up radios: A hardware and networking survey,” in *IEEE Communications Surveys & Tutorials*, vol. 19, no. 4, pp. 2117–2157, 2017.
- [8] A. Mahmood, E. Sisinni, L. Guntupalli, R. Rondón, S. A. Hassan, and M. Gidlund, “Scalability analysis of a LoRa network under imperfect orthogonality,” in *IEEE Transactions on Industrial Informatics*, vol. 15, no. 3, pp. 1425–1436, March 2019.
- [9] D. J. C. MacKay, “Fountain codes,” *IEE Proceedings – Communications*, vol. 152, no. 6, pp. 1062–1068, Dec. 2005.
- [10] X. Zhao, “Notes on “Exact decoding probability under random linear network coding”,” in *IEEE Communications Letters*, vol. 16, no. 5, pp. 720–721, May 2012.