

Semilinear response for the heating rate of cold atoms in vibrating traps

ALEXANDER STOTLAND¹, DORON COHEN¹ AND NIR DAVIDSON²

¹*Department of Physics, Ben-Gurion University, Beer-Sheva, 84005, Israel*

²*Department of Physics of Complex Systems, Weizmann Institute of Science, Rehovot, 76100 Israel*

PACS 03.65.-w – Quantum mechanics

Abstract. - The calculation of the heating rate of cold atoms in vibrating traps requires a theory that goes beyond the Kubo linear response formulation. If a strong “quantum chaos” assumption does not hold, the analysis of transitions shows similarities with a percolation problem in energy space. We show how the texture and the sparsity of the perturbation matrix, as determined by the geometry of the system, dictate the result. An improved sparse random matrix model is introduced: it captures the essential ingredients of the problem, and leads to a generalized variable range hopping picture.

The rate of energy absorption by particles that are confined by vibrating walls was of interest in past studies of nuclear friction [1–4], where it leads to the damping of the wall motion. More recently it has become of interest in the context of cold atoms physics. In a series of experiments [5–7] with “atom-optics billiards” some surprising predictions [8] based on linear response theory (LRT) have been verified.

In the present study we consider the case where the billiard is fully chaotic [a] but with nearly integrable shape (Fig.1). We explain that in such circumstances LRT is *not* applicable (unless the driving is extremely weak such that relaxation dominates). Rather, the analysis that is relevant to the typical experimental conditions should go beyond LRT, and involve a “resistor network” picture of transitions in energy space, somewhat similar to a percolation problem. Consequent we predict that the rate of energy absorption would be suppressed by orders of magnitude, and provide some analytical estimates which are supported by a numerical calculation.

We assume that an experimentalist has control over the position (R) of a wall element that confines the motion of cold atoms in an optical trap. We consider below the effect of low frequency noisy (non periodic) driving. This means that R is not strictly constant in time, either because of drifts [9] that cannot be eliminated in realistic circumstances, or else deliberately as a way to probe

the dynamics of the atoms inside the trap [10]. We assume the usual Markovian picture of Fermi-Golden-rule transitions between energy levels, which is applicable in typical circumstances as described in standard textbooks (e.g. [11]). These transitions lead to diffusion in the energy space. If the atomic cloud is characterized by a temperature T , then the diffusion in energy would lead to heating with the rate $\dot{E} = D/T$ (see e.g. section IV of [4]), and hence to an increase in the temperature of the cloud.

Naively one expects to observe an LRT behavior. That means to have $D \propto [\text{RMS}(\dot{R})]^2$, and more specifically to have a linear relation between the diffusion coefficient and the power spectrum of the driving:

$$D \equiv G \times \text{RMS}(\dot{R})^2 = \int_0^\infty \tilde{C}(\omega) \tilde{S}(\omega) d\omega \quad (1)$$

Here $\tilde{S}(\omega)$ is the power spectrum of \dot{R} , and $\tilde{C}(\omega)$ is related to the susceptibility of the system. From the experimentalist’s point of view the second equality in Eq.(1) can be regarded as providing a practical definition for $\tilde{C}(\omega)$, if the response is indeed linear.

We shall explain in this paper that the applicability of LRT in our problem is very limited, namely LRT would lead to wrong predictions in *typical* experimental circumstances. Rather we are going to use a more refined theory, which we call semi-linear response theory

(SLRT) [12, 13], in order to determine D . The theory is called SLRT because on the one hand the power spectrum $\tilde{S}(\omega) \mapsto \lambda \tilde{S}(\omega)$ leads to $D \mapsto \lambda D$, but on the other hand $\tilde{S}(\omega) \mapsto \tilde{S}_1(\omega) + \tilde{S}_2(\omega)$ does not lead to $D \mapsto D_1 + D_2$. This semi-linearity can be tested in an experiment in order to distinguish semi-linear response from linear response. Accordingly, in SLRT the spectral function $\tilde{C}(\omega)$ of Eq.(1) becomes ill defined, while the coefficient G in Eq.(1) is still physically *meaningful*, and can be measured in an actual experiment.

If we assume small driving amplitude the Hamiltonian matrix can be written as $\mathcal{H} = \{E_n\} + f(t)\{V_{nm}\}$, where

$$V_{nm} = \left\langle n \left| \frac{d\mathcal{H}}{dR} \right| m \right\rangle \quad (2)$$

is the perturbation matrix. More than 50 years ago Wigner had proposed to regard the perturbation matrix of a complex system as a random matrix (RMT) whose elements are taken from a Gaussian distribution. Later Bohigas had conjectured that the same philosophy applies to quantized chaotic systems. For such matrices the validity of LRT can be established on the basis of the Fermi-golden-rule picture, and the expression for G is the Kubo formula:

$$G = \pi \varrho_E \langle \langle |V_{nm}|^2 \rangle \rangle \quad [\text{LRT/SLRT}] \quad (3)$$

where $\langle \langle x \rangle \rangle$ in the LRT context is the algebraic average $\langle \langle x \rangle \rangle_a = \langle x \rangle$ over the near diagonal matrix elements [c], and ϱ_E is the density of states (DOS). SLRT leads to a look-alike result for G , namely Eq.(3), where $\langle \langle x \rangle \rangle$ is defined via a *resistor-network calculation* that had been inspired by [14]. Preliminary versions of Eq.(3) in the SLRT context have been introduced in [12], and the general resistor-network calculation procedure has been matured in later publications [13] in a different context [b].

Within the RMT framework an element x of $|V_{nm}|^2$ is regarded as a random variable, and the histogram of all x values is used in order to define an appropriate ensemble. For sake of later discussion we define, besides the algebraic average $\langle \langle x \rangle \rangle_a$ also the harmonic average as $\langle \langle x \rangle \rangle_h = [\langle 1/x \rangle]^{-1}$ and the geometric average as $\langle \langle x \rangle \rangle_g = \exp[\langle \ln x \rangle]$. The result of the resistor network calculation is labeled as $\langle \langle x \rangle \rangle$ (without subscript).

Our interest is in the circumstances where the strong ‘‘quantum chaos’’ assumption of Wigner fails. This would be the case if the distribution of x is wide in log scale. If x has (say) a log-normal distribution, then it means that the typical value of x is much smaller compared with the algebraic average. This means that the perturbation matrix V_{nm} is effectively sparse (a lot of vanishingly small elements). We can characterize the sparsity by the parameter $q = \langle \langle x \rangle \rangle_g / \langle \langle x \rangle \rangle_a$. We are going to explain that for typical experimental conditions we might encounter

sparse matrices for which $q \ll 1$. Then the energy spreading process is similar to percolation in energy space, and the SLRT version of Eq.(3) becomes essential.

Outline. – In what follow we present our model system, analyze it within the framework of SLRT, and then introduce an RMT model with log-normal distributed elements, that captures the essential ingredients of the problem. We show that a generalized resistor network analysis for the transitions in energy space leads to a generalized Variable Range Hopping (VRH) picture (the standard VRH picture has been introduced by Mott in [15] and later refined by [16, 17] using the resistor network perspective of [14]). Our RMT based analytical estimates are verified against numerical calculation. Finally we discuss the experimental aspect, and in particular define the physical circumstances in which SLRT rather than LRT applies. These two theories give results that can differ by orders of magnitude.

Modeling. – Consider a strictly rectangular billiard whose eigenstates are labeled by $\mathbf{n} = (n_x, n_y)$. The perturbation due to the movement of the ‘vertical’ wall does not couple states that have different mode index n_y . Due to this selection rule, states that are nearby in energy are not coupled. But if we deform slightly the potential (Fig.1a), or introduce a bump (Fig.1b) then states with different mode index are mixed. If this deformation is *smooth* then only nearby modes are coupled, while if the deformation is *diffractive*, then all the modes are mixed simultaneously. Essentially the same considerations apply for the circular cavity of Fig.1c, where an off-center scatterer couples radial and angular motion, and which is more suitable for a real experiment (but less convenient for numerical analysis).

The distinction between ‘smooth’ and ‘diffractive’ deformation becomes very important if the cavity has a large aspect ratio. In the latter case different modes have different DOS, the low-DOS modes are sparse within the high-DOS modes, and consequently for a smooth deformation we expect the perturbation matrix to become *textured*. This means that there are stripes where the matrix elements are larger, and bottlenecks where they are all small.

The emergence of texture is more obvious if we consider the geometry of Fig.1d, where we have a divided cavity with a small weakly connected chamber where the driving is applied. If the chamber were disconnected, then only chamber states with energies E_r would be coupled by the driving. But due to the connecting corridor there is mixing of bulk states with chamber states within energy strips around E_r . The coupling between two cavity states E_n and E_m is very small outside of the E_r strips. This means that the near diagonal elements of V_{nm} have wide variation, and hence wide $\log(x)$ distribution. But obviously the appropriate term for the characterization of this feature is not ‘sparsity’ but ‘texture’.

The SLRT calculation. – As in the standard derivation of the Kubo formula, also within the framework of SLRT [12,13], the leading mechanism for absorption is assumed to be Fermi Golden Rule (FGR) transitions. The FGR transition rate is proportional to the squared matrix elements $|V_{nm}|^2$, and to the power spectrum at the frequency $\omega = E_n - E_m$. It is convenient to define the normalized spectral function $\tilde{F}(\omega)$, such that

$$\tilde{S}(\omega) \equiv \text{RMS}(\dot{R})^2 \times \tilde{F}(\omega) \quad (4)$$

Contrary to the naive expectation the theory does not lead to the Kubo formula. This is because the rate of absorption depends crucially on the possibility to make *connected* sequences of transitions. It is implied that both the texture and the sparsity of the $|V_{nm}|^2$ matrix play a major role in the calculation of G . Consequently SLRT leads to a formula for G that can be cast into the form of Eq.(3), provided the definition of $\langle\langle \dots \rangle\rangle$ is modified. The modified definition is implied by regarding the energy levels as the *nodes* of a resistor network, and the FGR transition rates as the *bonds* that connect different nodes. Following [13] we define the inverse resistance of a bond as

$$\mathfrak{g}_{nm} \equiv 2\varrho_{\text{E}}^{-3} \frac{|V_{nm}|^2}{(E_n - E_m)^2} \tilde{F}(E_m - E_n) \quad (5)$$

and define $\langle\langle |V_{nm}|^2 \rangle\rangle$ as the inverse resistivity of the network. It is a simple exercise to verify that if all the matrix elements are the same, say $|V_{nm}|^2 = c$, then $\langle\langle |V_{nm}|^2 \rangle\rangle = c$ too. But if the matrix is sparse or textured then typically

$$\langle\langle |V_{nm}|^2 \rangle\rangle_{\text{h}} \ll \langle\langle |V_{nm}|^2 \rangle\rangle \ll \langle\langle |V_{nm}|^2 \rangle\rangle_{\text{a}} \quad (6)$$

In the case of sparse matrices this is a mathematically strict inequality, and we can use a generalized VRH scheme which we describe below in order to get an estimate for $\langle\langle x \rangle\rangle$. If the *element-size* distribution of $\log(x)$ is not too stretched a reasonable approximation is $\langle\langle x \rangle\rangle \approx \langle\langle x \rangle\rangle_{\text{g}}$, simply because the geometric mean is the *typical* (median) value for the size of the elements. However, if $|V_{nm}|^2$ has either a very stretched element-size distribution, or if it has texture, then our VRH analysis below show that the geometric average becomes merely an improved *lower bound* for the actual result.

Analysis. – We consider a particle of mass M in a two dimensional box of length L_x and width L_y , such that $0 < x < L_x$ and $0 < y < L_y$. See Fig.1b. With the driving the length of the box becomes $R = L_x + f(t)$. The Hamiltonian is

$$\mathcal{H} = \text{diag}\{E_n\} + u\{U_{nm}\} + f(t)\{V_{nm}\} \quad (7)$$

where $\mathbf{n} = (n_x, n_y)$ is a composite index that labels the energy levels $E_{\mathbf{n}}$ of a particle in a rectangular box of size $L_x \times L_y$. The deformation is described by a normalized Gaussian potential $U(x, y)$ of width (σ_x, σ_y) positioned at the central region of the box. Its matrix elements are

U_{nm} , and it is multiplied in the Hamiltonian by a parameter u which signifies the strength of the deformation. Note that the limit $\sigma \rightarrow 0$ is well defined and corresponds to an “s-scatterer”. The perturbation matrix due to the $f(t)$ displacement of the wall is

$$V_{nm} = -\delta_{n_y, m_y} \times \frac{\pi^2}{ML_x^3} n_x m_x \quad (8)$$

The power spectrum of \dot{f} is assumed to be constant within the frequency range $|\omega| < \omega_c$ and zero otherwise. This means that $\tilde{F}(\omega) = 1$ up to this cutoff frequency. We have also considered (not presented) an exponential line shape $\tilde{F}(\omega) = \exp(-|\omega/\omega_c|)$. After diagonalization of $\{E_n\} + u\{U_{nm}\}$ the Hamiltonian takes the form

$$\mathcal{H} = \text{diag}\{E_n\} + f(t)\{V_{nm}\} \quad (9)$$

where n (not bold) is a running index that counts the energies in ascending order. The DOS remains essentially the same as for $u = 0$, namely,

$$\varrho_{\text{E}} = \frac{1}{2\pi} ML_x L_y \quad (10)$$

The perturbation matrix $|V_{nm}|^2$ is sparse and textured (see Fig.2). First we discuss the sparsity, and the effect of the texture will be addressed later on.

Considering first zero deformation ($u = 0$) it follows from Eq.(8) that the non-zero elements of the perturbation matrix are $|V_{nm}|^2 \approx |Mv_{\text{E}}^2/L_x|^2$, where $v_{\text{E}} = \text{sqr}t{2E}/M$. The algebraic average of the near diagonal elements equals this value (of the large size elements) multiplied by their percentage. To evaluate this percentage let us consider an energy window dE . The number of near-diagonal elements V_{nm} within the strip $|E_{n_x, n_y} - E_{m_x, m_y}| < d\varepsilon$ is $\varrho_{\text{E}}^2 dE d\varepsilon$. It is a straightforward exercise to find out that the the number of non-zero elements (i.e. with $n_y = m_y$) is the same number multiplied by $[2\pi M v_{\text{E}} L_y]^{-1}$. Consequently

$$\langle\langle x \rangle\rangle_{\text{a}} \approx \left[\frac{1}{2\pi M v_{\text{E}} L_y} \right] \left| \frac{M v_{\text{E}}^2}{L_x} \right|^2 = \frac{M v_{\text{E}}^3}{2\pi L_y L_x^2} \quad (11)$$

Somewhat surprisingly this result turns out to be the same (disregarding an order unity numerical prefactor) as for a strongly chaotic cavity (see Eq.(I3) of Ref. [4]), as if there is no sparsity issue. This implies that irrespective of the deformation u , the LRT Kubo result that comes out from Eq.(3) is just the 2D version of the well known wall formula (see Sec.7 of Ref. [4]):

$$G_{\text{LRT}} = \frac{4}{3\pi} \frac{M^2 v_{\text{E}}^3}{L_x} \quad (12)$$

As stated in the introduction we are interested not in G_{LRT} but in G_{SLRT} , which can differ by many orders of magnitudes.

For sufficiently small u the large size matrix elements are not affected, and therefore the algebraic average stays

the same. But in the SLRT calculation we care about the small size matrix elements, that are zero if $u = 0$. Due to the first-order mixing of the levels, the typical overlap $|\langle \mathbf{m} | n \rangle|$ between perturbed and unperturbed states is $|u U_{nm} / (E_n - E_m)|$. The typical size of a *small* V_{nm} element is the multiplication of this overlap (evaluated for energy level difference $\sim \omega_c$) by the size of a *non-zero* V_{nm} element. Consequently the small size matrix elements are proportional to u^2 . The geometric average simply equals their typical size, leading to

$$\langle \langle x \rangle \rangle_g \approx \frac{4M^2 v_E^4}{L_x^3 L_y \omega_c^2} \exp[-M^2 v_E^2 (\sigma_x^2 + \sigma_y^2)] \times u^2 \quad (13)$$

Motivated by the discussion below Eq.(6) we replace in Eq.(3) the algebraic average by the geometric average and get a crude estimate for the SLRT result.

$$G_{\text{SLRT}} \approx q \times G_{\text{LRT}} \quad [\text{crude!}] \quad (14)$$

where

$$q = \frac{\langle \langle x \rangle \rangle_g}{\langle \langle x \rangle \rangle_a} \propto u^2 \quad \text{see Eqs.(11,13)} \quad (15)$$

It follows from the above (and see Fig.3) that for small deformations $q \ll 1$, and consequently we expect $G_{\text{SLRT}} \ll G_{\text{LRT}}$. This should be contrasted with the case of strongly deformed box for which all the elements are of the same order of magnitude and q becomes of order unity. Our next task is to further improve the estimate in Eq.(14) using a proper resistor network calculation.

RMT modeling. – The $|V_{nm}|^2$ matrix looks like a random matrix with some distribution for the size of the elements (see Fig.4). It might also possess some non-trivial texture which we ignore within the RMT framework. The RMT perspective allows us to derive a quantitative theory for G using a generalized VRH estimate. Let us demonstrate the procedure in the case of an homogeneous (neither banded nor textured) random matrix with log-normal distributed elements. The mean and the variance of $\ln(x)$ are trivially related to geometric and the algebraic averages. Namely, $\langle \ln(x) \rangle = \ln \langle \langle x \rangle \rangle_g$ and $\text{Var}(x) = -2 \ln(q)$. Given a hopping range $|E_m - E_n| \leq \omega$ we can look for the typical matrix element x_ω for connected sequences of transitions, which we find by solving the equation $\varrho_E \omega F(x_\omega) \sim 1$, where $F(x)$ is the probability to find a matrix element larger than x within the strip. This gives

$$x_\omega \approx \langle \langle x \rangle \rangle_g \exp \left[2\sqrt{-\ln q} \right] \quad (16)$$

From this equation we deduce the following: For $q \lesssim 1$, meaning that the distribution is not too wide, $x_\omega \approx \langle \langle x \rangle \rangle_g$ as anticipated. But as the matrix gets more sparse ($q \ll 1$), the result deviates from the geometric average, the latter becoming merely a lower bound.

The generalized VRH estimate is based on optimization of the integral $\int x_\omega \tilde{F}(\omega) d\omega$. For the rectangular $\tilde{F}(\omega)$ which has been assumed below Eq.(8) this optimization is trivial and gives $\approx x_{\omega_c}$, leading to

$$G_{\text{SLRT}} = q \exp \left[2\sqrt{-\ln q} \right] \times G_{\text{LRT}} \quad (17)$$

where G_{LRT} is given by Eq.(12) and q is given by Eq.(15). We have also tested the standard VRH that assumes an exponential $\tilde{F}(\omega)$ (not presented).

Numerical results. – The analytical estimates in Eqs.(11,13) are supported by the histograms of Fig.4. For each choice of the parameters (AS, σ, u) we calculate the *algebraic*, and the *geometric* and the *SLRT* resistor network averages of $\{|V_{nm}|^2\}$. See Fig.5 and Fig.6. We also compare the actual results for G_{SLRT} with those that were obtained from a log-normal RMT ensembles with the same algebraic and geometric averages as that of the physical matrix [d]. As further discussed in the next paragraph one concludes that the agreement of the physical results with the associated VRH estimate Eq.(17) is very good whenever the perturbation matrix is not textured, which is in fact the typical case for non-extreme aspect ratios.

In order to figure out whether the result is fully determined by the distribution of the elements or else texture is important we repeat the calculation for *untextured* versions of the *same* matrices. The untextured version of a matrix is obtained by performing a random permutation of its elements along the diagonals. This procedure affects neither the bandprofile nor the $\{|V_{nm}|^2\}$ distribution, but merely removes the texture. In Fig.5 we see that the physical results cannot be distinguished from the untextured results, and hence are in agreement with the RMT and with the associated VRH estimate. On the other hand, in Fig.6, which is for large aspect ratio, we see that the physical results deviate significantly from the untextured result. As the width of the Gaussian potential becomes larger (smoother deformation), the texture becomes more important. These observation are in complete agreement with the expectations that were discussed in the modeling section.

Experiment. – As in [5–7] a collection of $N \sim 10^6$ atoms, say ^{85}Rb atoms ($M = 1.4 \times 10^{-25} \text{kg}$), are laser cooled to low temperature of $T \sim 10 \mu\text{K}$, such that the typical thermal velocity is $v_E \sim 0.05 \text{m/s}$. The atoms are trapped in an optical billiard whose blue-detuned light walls confine the atoms by repulsive optical dipole potential. The motion of the atoms is limited to the billiard plane by a strong perpendicular optical standing wave. The thickness of the billiard walls ($\sim 10 \mu\text{m}$) is much smaller than its linear size ($L \sim 200 \mu\text{m}$). The 2D mean level spacing is $\Delta = \varrho_E^{-1} \sim 2.5 \times 10^{-34} \text{J}$, which is $2.4 H z$. One or more of the billiard walls can be vibrated with several kHz frequency by modulating the laser intensity. The dimensionless spectral bandwidth of this

driving can be set as say $\omega_c/\Delta \sim 1000$, with an amplitude $\sim 10\mu\text{m}$, such that $\dot{R} \sim 0.015\text{m/s}$. The temperature of the trapped atoms can then be measured as a function of time by the time-of-flight method. The LRT estimate $G_{\text{LRT}} \sim 1.3 \times 10^{-51} \text{Js/m}^2$ would lead to heating rate $\dot{E} \sim 2 \times 10^{-27} \text{J/s}$ which is $\sim 0.15\text{mK/s}$. Having control over u we can have $q \sim 10^{-5}$ that would imply factor 100 suppression, i.e. an estimated heating rate of few $\mu\text{K/sec}$. Such heating rate can be accurately measured, yielding high sensitivity to the energy diffusion process studied here.

SLRT vs LRT. – Typically the environment introduces in the dynamics an incoherent relaxation effect. If the relaxation rate is strong compared with the rate of the externally driven transitions, then the issue of having “connected sequences of transitions” becomes irrelevant, and the SLRT slowdown of the absorption is not expected. In the latter case LRT rather than SLRT is applicable. It follows that for finite relaxation rate there is a crossover from LRT to SLRT behavior as a function of the intensity of the driving. In cold atom experiments the relaxation effect can be controlled, and typically it is negligible. Hence SLRT rather than LRT behavior should be expected. This implies, as discussed above, a much smaller absorption rate. Furthermore, as discussed in the introduction, one can verify experimentally the signature of SLRT: namely, the effect of adding independent driving sources is expected to be non-linear with respect to their spectral content.

Conclusions. – In this work we have introduced a theory for the calculation of the heating rate of cold atoms in vibrating traps. This theory, that treats the diffusion in energy space as a resistor network problem, is required if the cavity is not strongly chaotic and if the relaxation effect is small. The SLRT result, unlike the LRT (Kubo) result is extremely sensitive to the sparsity and the textures that characterize the perturbation matrix of the driving source. For typical geometries the ratio between them is determined by the sparsity parameter q as in Eq. (17), and hence is roughly proportional to the deformation (u^2) of the confining potential. If the cavity has a large aspect ratio, and the deformation of the confining potential is smooth, then the emerging textures in the perturbation matrix of the driving source become important, and then the actual SLRT result becomes even smaller.

By controlling the density of the trapped atoms, or their collisional cross section (e.g. via the Feshbach resonance) the atomic collision rate can be tuned by many orders of magnitude. Their effect on the dynamics can thus be made either negligible (as assumed above) or significant, thereby serving as an alternative (but formally similar) mechanism for *weak breakdown of integrability*. It follows that heating rate experiments can be used not only to probe the deformation (u) of the confining potential, but also to probe the interactions between the atoms.

This research was supported by a grant from the USA-Israel Binational Science Foundation (BSF).

REFERENCES

- [1] J. Blocki, Y. Boneh, J.R. Nix, J. Randrup, M. Robel, A.J. Sierk and W.J. Swiatecki, *Ann. Phys.* **113**, 330 (1978).
 - [2] S.E. Koonin, R.L. Hatch and J. Randrup, *Nucl. Phys. A* **283**, 87 (1977).
 - [3] S.E. Koonin and J. Randrup, *Nucl. Phys. A* **289**, 475 (1977).
 - [4] D. Cohen, *Annals of Physics* **283**, 175 (2000); cond-mat/9902168.
 - [5] N. Friedman, A. Kaplan, D. Carasso, and N. Davidson, *Phys. Rev. Lett.* **86**, 1518 (2001).
 - [6] A. Kaplan, N. Friedman, M. F. Andersen, and N. Davidson, *Phys. Rev. Lett.* **87**, 274101 (2001).
 - [7] M. Andersen, A. Kaplan, T. Grunzweig and N. Davidson, *Phys. Rev. Lett.* **97**, 104102 (2006).
 - [8] A. Barnett, D. Cohen and E.J. Heller, *Phys. Rev. Lett.* **85**, 1412 (2000); *J. Phys. A* **34**, 413 (2001).
 - [9] T. A. Savard, L. M. Ohara and J. E. Thomas, *Phys. Rev. A* **56**, R1095 (1997).
 - [10] S. Friebel, C. D’Andrea, J. Walz, M. Weitz, and T. W. Hansch, *Phys. Rev. A* **57**, R20 (1998).
 - [11] W.H. Louisell, *Quantum Statistical Properties of Radiation*, (Wiley, London, 1973).
 - [12] D. Cohen, T. Kottos and H. Schanz, *J. Phys. A* **39**, 11755 (2006). M. Wilkinson, B. Mehlige, D. Cohen, *Europhysics Letters* **75**, 709 (2006).
 - [13] S. Bandopadhyay, Y. Etzioni and D. Cohen, *Europhysics Letters* **76**, 739 (2006). A. Stotland, R. Budoyo, T. Peer, T. Kottos and D. Cohen, *J. Phys. A* **41**, 262001 (FTC) (2008).
 - [14] A. Miller and E. Abrahams, *Phys. Rev.* **120**, 745 (1960).
 - [15] N.F. Mott, *Phil. Mag.* **22**, 7 (1970). See also N.F. Mott and E.A. Davis, *Electronic processes in non-crystalline materials*, (Clarendon Press, Oxford, 1971).
 - [16] V. Ambegaokar, B. Halperin, J.S. Langer, *Phys. Rev. B* **4**, 2612 (1971).
 - [17] M. Pollak, *J. Non-Cryst. Solids* **11**, 1 (1972).
- [a] Our interest is in systems that are classically chaotic. This means exponential sensitivity to change in initial conditions, without having mixed phase space.
- [c] The average is taken over all the elements within the energy window of interest as determined by the preparation temperature. The weight of $|V_{nm}|^2$ in this average is determined by the spectral function as $\tilde{S}(E_n - E_m)$.
- [b] In the original application of SLRT, R is the magnetic flux through a ring, \dot{R} is the electromotive force, and G is the mesoscopic conductance (up to a factor).
- [d] Since for the log-normal distribution the median equals the geometric average, we used the median in the definition of q for the sake of the numerical stability.

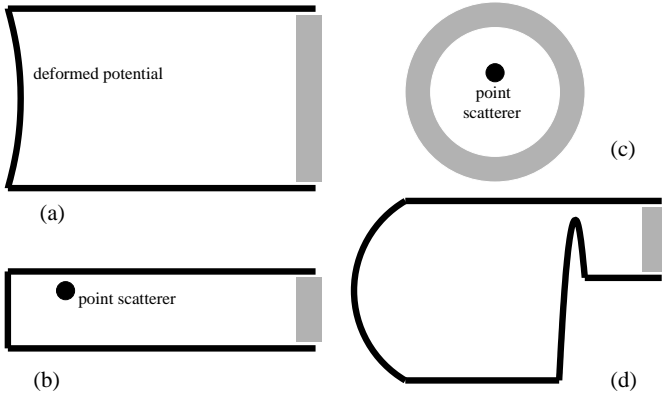


Fig. 1: Model systems: The atoms are held by a potential that may consist of static walls (solid lines), a vibrating wall (shaded lines), and bumps (thick points). The numerics has been done for (b) with a Gaussian bump. We work with two different aspect ratios. For the aspect ratio $AS = 20$ we take $L_x = 200$ and $L_y = 10$. For the aspect ratio $AS = 1$ we take $L_x = 40$ and $L_y = 40$. The position of the Gaussian bump was randomly chosen within the region $[0.4, 0.6]L_x \times [0.4, 0.6]L_y$. The width of the Gaussian is $\sigma_x = \sigma_y = \sigma$. We have assumed noisy driving with $\omega_c = 7\Delta$, where $\Delta = 1/\rho_E$ is the mean level spacing, and the units were such that $M = 1$.

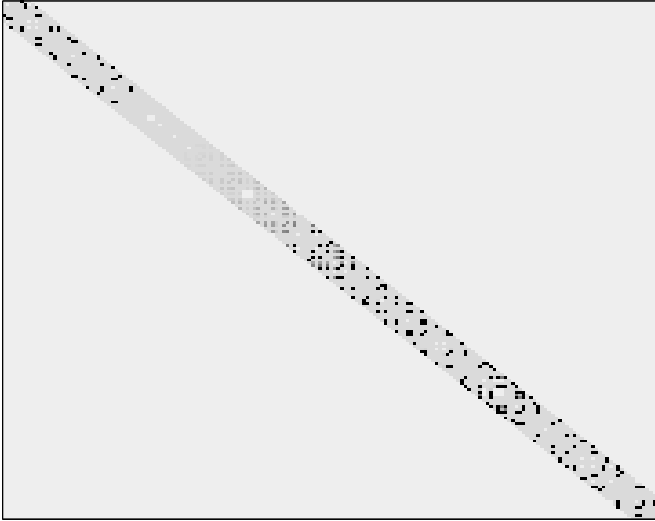


Fig. 2: Image of the perturbation matrix $|V_{nm}|^2$ due to a wall displacement of a rectangular-like cavity that has an aspect ratio $AS = 20$. The potential floor is deformed due to the presence of a $\sigma=0$ scatterer with $u = 10^{-4}$ (see text). The matrix is both sparse and textured. The texture becomes more prominent for smooth ($\sigma \sim L_y$) deformation (not shown).

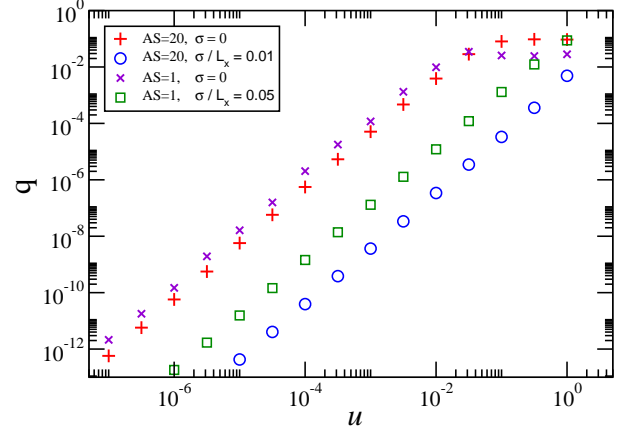


Fig. 3: *Upper panel:* The sparsity parameter q is plotted versus the strength u of the deformation potential for cavities with aspect ratios $AS = 1$ and $AS = 20$. We see that for large aspect ratio q has some sensitivity to σ . As explained in the text G_{SLRT}/G_{LRT} is correlated with q , but for large aspect ratio it is even more sensitive to σ due to the emergence of textures whose presence is *not* reflected by the value of q .

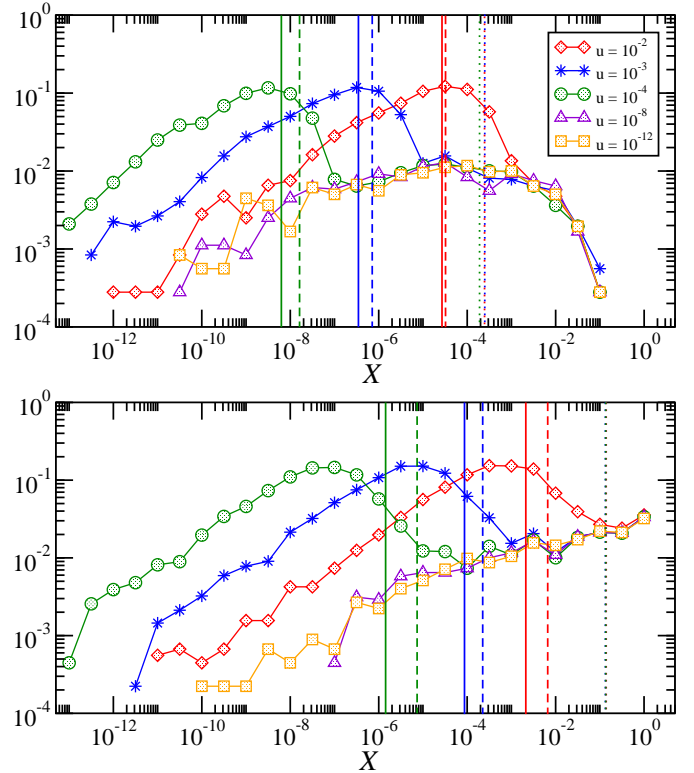


Fig. 4: Histograms of matrix elements for different values of u for $AS = 1$ (upper) and $AS = 20$ (lower). Here we assume a $\sigma = 0$ scatterer. The vertical lines for $u = 10^{-2}, 10^{-3}, 10^{-4}$ indicate the $\langle\langle x \rangle\rangle$ obtained from the LRT algebraic average (3 dotted lines that are barely resolved), from the SLRT resistor network calculation (solid lines), and from the untextured calculation (dashed lines). The geometric mean approximately coincides with the peaks, and underestimates the SLRT value for the larger AS where the sparsity is much larger.

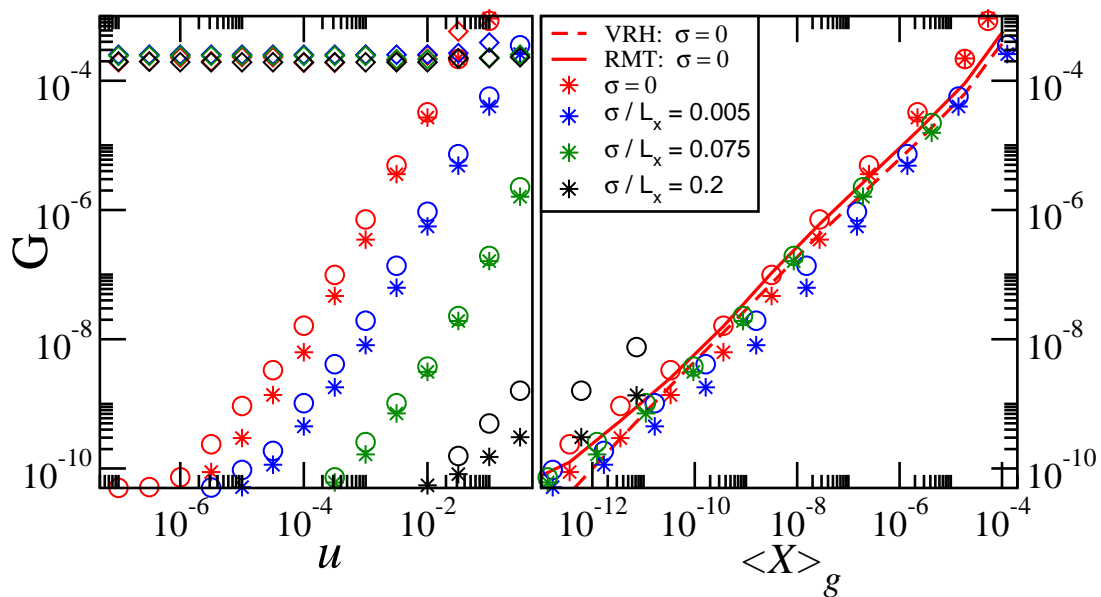


Fig. 5: *Left panel:* The scaled $\tilde{G} \equiv \langle\langle x \rangle\rangle$ in the LRT and in the SLRT case as a function of u for $AS = 1$ and different smoothness of the deformation. The stars are for the physical matrices, while the circles are for their untextured versions (see text). The diamonds are for the LRT case. *Right panel:* The SLRT result $\langle\langle x \rangle\rangle$ versus the geometric average $\langle\langle x \rangle\rangle_g$. These are compared with RMT based results, and with the associated analytical estimate of Eq.(17). We see the agreement is very good.

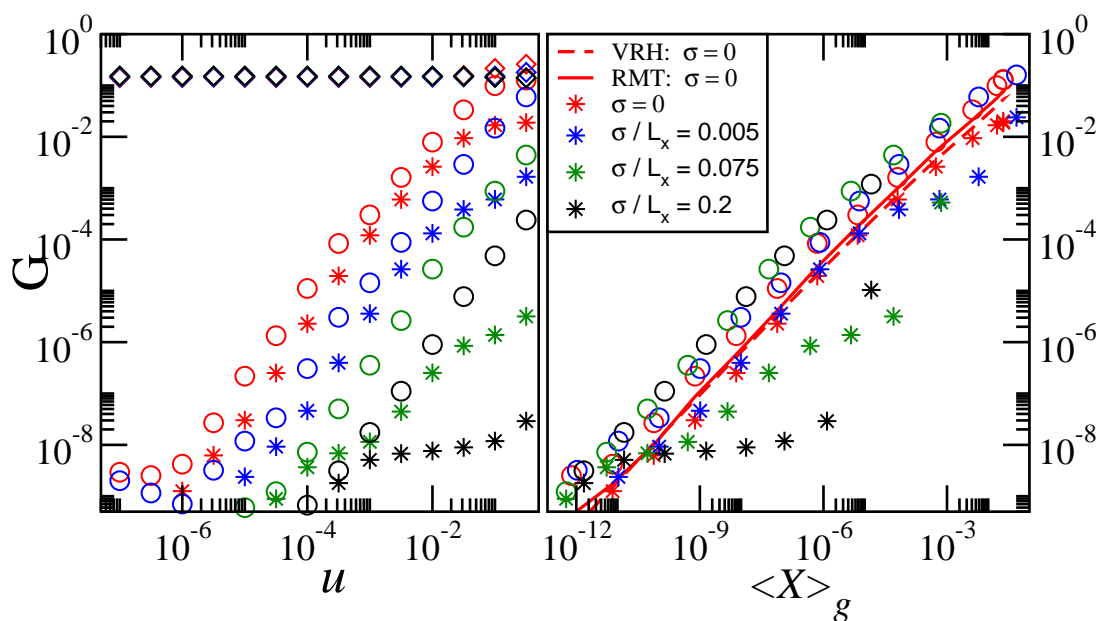


Fig. 6: The same set of plots as in Fig.5 but for $AS = 20$. In the right panel we clearly see the departure of the physical result from the untextured and RMT results, and hence from the analytical estimate of Eq.(17).