

# Multiple Antenna Cognitive Receivers and Signal Detection

Romain Couillet  
NXP Semiconductors, Supelec  
505 Route des Lucioles  
06560 Sophia Antipolis, France  
Email: romain.couillet@nxp.com

Mérouane Debbah  
Alcatel-Lucent Chair, Supelec  
Plateau de Moulon, 3 rue Joliot-Curie  
91192 Gif sur Yvette, France  
Email: merouane.debbah@supelec.fr

## Abstract

A Bayesian inference learning process for cognitive receivers is provided in this paper. We focus on the particular case of signal detection as an explanatory example to the learning framework. Under any prior state of knowledge on the communication channel, an information theoretic criterion is presented to decide on the presence of informative data in a noisy wireless MIMO communication. We detail the particular cases of knowledge, or absence of knowledge at the receiver, of the number of transmit antennas and noise power. The provided method is instrumental to provide intelligence to the receiver and gives birth to a novel Bayesian signal detector. The detector is compared to the classical power detector and provides detection performance upper bounds. Simulations corroborate the theoretical results and quantify the gain achieved using the proposed Bayesian framework.

## I. INTRODUCTION

Since a few years, the idea of smart receiving devices has made its way through the general framework of cognitive radio [2]. The general idea of an ideal cognitive receiver is a device that is capable of inferring on any information it is given to discover by itself the surrounding environment [10]. Such a device should be first able to turn prior information on the transmission channel into a mathematically tractable form. This allows then the terminal to take optimal instantaneous decisions in terms of information to feed back, bandwidth to occupy, transmission power to use etc. It should also be capable of updating its knowledge to continuously adapt to the dynamics of the environment.

In particular, one of the key features of cognitive receivers is their ability to *sense* free spectrum. Indeed, when the cognitive device is switched on, its prior knowledge is very limited but still it is required to *decide* whether it receives informative data or pure noise due to interfering background electromagnetic fields, on different frequency bands: this is called the *signal detection* procedure.

In the SISO (single input antenna, single output antenna) scenario, the study of the optimal signal detector from the Bayesian viewpoint dates back to the work of Urkowitz [1] on AWGN (additive white Gaussian noise) channels. It was later extended to more realistic channel models [3]-[4]. By *optimal signal detector*, Urkowitz means the process that enjoys the maximum *correct detection rate* (i.e. the odds for an informative signal to be detected as such) for a given low *false alarm rate* (i.e. the odds for a pure noise input to be wrongly declared an informative signal). To the authors' knowledge, the MIMO extension has not been studied, because of the almost prohibitive mathematical complexity of the problem. In tacit accordance among the scientific community, the usual power detection technique from Urkowitz was then simply adapted to the MIMO scenario, e.g. [5]. The latter consists in summing up all the individual powers received at each antenna and declaring that the incoming signal carries relevant information if the total power exceeds a given threshold; otherwise the signal is declared pure noise. Therefore this technique does not capitalize on the knowledge of whatever prior information the receiver might be aware of, apart from an approximate estimation of the SNR (signal to noise ratio) required to preset the decision threshold.

This raises the interest for new techniques such as cooperative spectrum sensing using multiple antennas [5]. Those techniques propose to improve the signal detection method of Urkowitz by using extra system dimensions (space dimension through cooperation among terminals for example). Unfortunately, the approaches used are highly dependent on the initial assumptions made and have led to many different contributions. For instance, some insightful work emerged which uses eigenspectrum analysis of the received sampled signals [12]-[13]. Those might provide interesting results in their simplicity and their limited need for prior system knowledge; however, the space over which those techniques are valuable is usually difficult to determine (this space can be seen as a multidimensional field spanning from 0 to infinite SNR, from pure void to heavily loaded environment etc.). This commonly leads those techniques to have corner-cases for which they do not perform well, e.g. for low SNR conditions, in long delay channels etc.

In this work, we introduce a general Bayesian framework providing a sound basis for signal detection using information theoretic tools. The methodology is based on a *consistent*<sup>1</sup> approach to deal with prior information. This approach follows the work of E. T. Jaynes [9] on *probability theory seen as an extension of logic*. This theory originates from the pioneering

<sup>1</sup>by *consistent* we mean that two problems defined with the same amount of prior information should lead to the same final solution.

work of Cox [8] who defines probabilities as a mathematical tool to deal with *incomplete information*. In this theory, the set of information on the environment parameters is encoded into probability assignments using jointly the *maximum entropy principle* [15] and Bayes' rule. All along this work we make many references to those probability and incomplete information concepts which are essential to the understanding of our cognitive radio framework.

This paper is structured as follows: In Section II we formulate the signal detection model. Then in Section III, the optimal Bayesian signal detectors are computed for different levels of knowledge on the system model. Simulations are then presented in Section IV. Finally, after a short discussion in Section V on the general framework and its limitations, we provide our conclusions.

*Notations:* In the following, boldface lowercase and uppercase characters are used for vectors and matrices, respectively. We note  $(\cdot)^H$  the Hermitian transpose,  $\text{tr}(\cdot)$  denotes the matrix trace.  $\mathcal{M}(\mathcal{A}, N, M)$  is the set of matrices of size  $N \times M$  over the algebra  $\mathcal{A}$ .  $\mathcal{U}(N)$  is the set of unitary square matrices of size  $N$ . The notation  $P_X(Y)$  denotes the probability density function of the variable  $X$  evaluated in the vicinity of  $Y$ . The notation  $(x)_+$  equals  $x$  if  $x > 0$  and 0 otherwise.

## II. SIGNAL MODEL

### A. Prior information

We consider a MIMO communication system for which the receiver may have different levels of knowledge. We first define hereafter the minimum channel state of knowledge available to the receiving device:

- S-i) the receiver has  $N$  antennas.
- S-ii) the receiver samples as many as  $L$  times the input from the RF interface.
- S-iii) naming  $T_s$  the sampling period,  $LT_s$  is supposed less than the channel coherence time. This assumption is effectively very strong and can be relaxed in further study.
- S-iv) the signal sent by the transmitter has a constant unit mean power. It is also quite important to note that this hypothesis is very light and should be made more accurate for communications schemes that are known only to use either QPSK, 16-QAM, 64-QAM modulations.
- S-v) the MIMO channel has a constant mean power.
- S-vi) the receiver sampling period is larger or equal than the transmitter sampling period so that consecutively received data arise from different transmitted data. This is an obvious hypothesis in current distributed systems but further studies could be handled by relaxing this hypothesis, which might better suit future wireless systems such as cognitive radios that are not aware of the technologies used in the transmitting entities and therefore not aware of the sampling frequency.

We similarly define additional information the receiver may be aware of:

- V-i) the transmitter possesses (and uses)  $M$  antennas.
- V-ii) the noise power  $\sigma^2$  is known.

This list could of course be extended (e.g. knowledge of the transmit signal constellation, number of interferers, channel length...) but our present work shall only treat the enumerated cases.

### B. Model

Given a certain amount of sampled signals, the objective of the signal detection methods is to be able to optimally infer on the following hypothesis:

- $\mathcal{H}_0$ . Only background noise is received.
- $\mathcal{H}_1$ . Informative data added to background noise is received.

Given hypothesis S-iv), the only information on the transmitted signal (under  $\mathcal{H}_1$ ) is their unit variance. The maximum entropy principle claims that, under this limited state of knowledge, the transmitted data must be modeled as i.i.d. Gaussian [9]. The data vector, at time  $l \in \{1, \dots, L\}$ , is denoted  $\mathbf{s}^{(l)} = (s_1^{(l)}, \dots, s_M^{(l)})^T \in \mathbb{C}^M$ . The data vectors are stacked into the receive matrix  $\mathbf{S} = [\mathbf{s}^{(1)}, \dots, \mathbf{s}^{(L)}]$ .

If the noise level  $\sigma^2$  is known, then either under  $\mathcal{H}_0$  or  $\mathcal{H}_1$ , the background noise must be represented, thanks to the same maximum entropy argument as before, by a *complex standard Gaussian matrix*  $\Theta \in \mathcal{M}(\mathbb{C}, N, L)$  (i.e. a matrix with i.i.d. standard complex Gaussian entries  $\theta_{ij}$ ) [6]. Under  $\mathcal{H}_1$ , the channel matrix (constant over the  $LT_s$  duration) is denoted  $\mathbf{H} \in \mathcal{M}(\mathbb{C}, N, M)$  with entries  $h_{ij}$  being the link between the  $j^{\text{th}}$  transmitting antenna and the  $i^{\text{th}}$  receiving antenna. The model for  $\mathbf{H}$  is only described in the following sections since modeling  $\mathbf{H}$  is one of the key points in our derivation. The received data at sampling time  $l$  are given by the  $N \times 1$  vector  $\mathbf{y}^{(l)}$  that we stack, over the  $L$  sampling periods, into the matrix  $\mathbf{Y} = [\mathbf{y}^{(1)}, \dots, \mathbf{y}^{(L)}] \in \mathcal{M}(\mathbb{C}, N, L)$ .

This leads for  $\mathcal{H}_0$  to the model,

$$\mathbf{Y} = \sigma \begin{pmatrix} \theta_{11} & \cdots & \theta_{1L} \\ \vdots & \ddots & \vdots \\ \theta_{N1} & \cdots & \theta_{NL} \end{pmatrix} \quad (1)$$

with  $\mathbf{Y}$  and  $\Theta$  of size  $N \times L$ .

And for  $\mathcal{H}_1$  to

$$\mathbf{Y} = \begin{pmatrix} h_{11} & \dots & h_{1M} & \sigma & \dots & 0 \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ h_{N1} & \dots & h_{NM} & 0 & \dots & \sigma \end{pmatrix} \begin{pmatrix} s_1^{(1)} & \dots & \dots & s_1^{(L)} \\ \vdots & \vdots & \vdots & \vdots \\ s_M^{(1)} & \dots & \dots & s_M^{(L)} \\ \theta_{11} & \dots & \dots & \theta_{1L} \\ \vdots & \vdots & \vdots & \vdots \\ \theta_{N1} & \dots & \dots & \theta_{NL} \end{pmatrix} \quad (2)$$

with  $\mathbf{Y}$  of size  $N \times L$ . We also denote by  $\Sigma$  the autocovariance matrix:

$$\Sigma = \mathbb{E}[\mathbf{Y}\mathbf{Y}^H] \quad (3)$$

$$= L(\mathbf{H}\mathbf{H}^H + \sigma^2\mathbf{I}_N) \quad (4)$$

$$= \mathbf{U}(L\Lambda)\mathbf{U}^H \quad (5)$$

where  $\Lambda = \text{diag}(\nu_1 + \sigma^2, \dots, \nu_N + \sigma^2)$ , with  $\{\nu_i, i \in \{1, \dots, N\}\}$  the eigenvalues of  $\mathbf{H}\mathbf{H}^H$  and  $\mathbf{U}$  a certain unitary matrix.

Our intention is to make a decision on whether, given the received data matrix  $\mathbf{Y}$ , the probability for  $\mathcal{H}_1$  is greater than the probability for  $\mathcal{H}_0$ . This problem is usually referred to as *hypothesis testing* [9]. The decision criterion is based on the ratio

$$C(\mathbf{Y}) = \frac{P_{\mathcal{H}_1|\mathbf{Y}}(\mathbf{Y})}{P_{\mathcal{H}_0|\mathbf{Y}}(\mathbf{Y})} \quad (6)$$

Thanks to Bayes' rule [8], this derives into

$$C(\mathbf{Y}) = \frac{P_{\mathcal{H}_1} \cdot P_{\mathbf{Y}|\mathcal{H}_1}(\mathbf{Y})}{P_{\mathcal{H}_0} \cdot P_{\mathbf{Y}|\mathcal{H}_0}(\mathbf{Y})} \quad (7)$$

Checking our list of prior information, nothing tells us whether  $\mathcal{H}_1$  is more or less probable than  $\mathcal{H}_0$ . Using the maximum entropy principle on this rather obvious example, we must set  $P_{\mathcal{H}_1} = P_{\mathcal{H}_0} = \frac{1}{2}$ , and then

$$C(\mathbf{Y}) = \frac{P_{\mathbf{Y}|\mathcal{H}_1}(\mathbf{Y})}{P_{\mathbf{Y}|\mathcal{H}_0}(\mathbf{Y})} \quad (8)$$

reduces to a maximum likelihood criterion. Let us raise here that maximum likelihood criterion is *not* in general to be considered an optimality criterion. Prior information is never to be ignored; otherwise one would head against the *honesty* desideratum of the Bayesian theory [9], which demands that every parameter must be assigned a probability distribution accordingly to one's prior knowledge (which does not necessarily lead to a uniform distribution). For instance, if experience shows that  $\mathcal{H}_0$  is on average more likely than  $\mathcal{H}_1$ , this should update the prior information on  $\mathcal{H}_0$  and  $\mathcal{H}_1$ .

### III. OPTIMAL SIGNAL DETECTION

#### A. Complete set of knowledge

1) *Derivation of  $P_{\mathbf{Y}|\mathcal{H}_i}$  in SIMO case:* Let us analyze the situation when the noise level  $\sigma^2$  (hypothesis V-ii) and the number  $M$  of transmit antennas are known to the receiver (hypothesis V-i) and let us assume in this first scenario that  $M = 1$ . Consider also the case when  $L > N$  (this is a commonly an obvious assumption that the quantity of sampled periods is large compared to any problem dimension).

a) *Pure noise likelihood  $P_{\mathbf{Y}|\mathcal{H}_0}$ :* In this first scenario,  $\Theta$  is a Gaussian matrix with independent entries. The distribution for  $\mathbf{Y}$ , that can be seen as a random vector with  $NL$  entries, is then  $NL$  multivariate uncorrelated complex Gaussian with covariance  $\sigma^2\mathbf{I}_{NL}$ ,

$$P_{\mathbf{Y}|\mathcal{H}_0}(\mathbf{Y}) = \frac{1}{(\pi\sigma^2)^{NL}} e^{-\frac{1}{\sigma^2}\text{tr}\mathbf{Y}\mathbf{Y}^H} \quad (9)$$

$$(10)$$

by denoting  $\mathbf{x} = (x_1, \dots, x_N)^\top$  the eigenvalue distribution of  $\mathbf{Y}\mathbf{Y}^H$ , (11) only depends on  $\sum_{i=1}^N x_i$ ,

$$P_{\mathbf{Y}|\mathcal{H}_0}(\mathbf{x}) = \frac{1}{(\pi\sigma^2)^{NL}} e^{-\frac{1}{\sigma^2}\sum_{i=1}^N x_i} \quad (11)$$

b) *Informative data likelihood*  $P_{\mathbf{Y}|\mathcal{H}_1}$ : In scenario  $\mathcal{H}_1$ , the problem is more involved. The maximum entropy principle shows that our best guess is for  $\mathbf{H}$  to be jointly uncorrelated Gaussian distributed [7]. Up to a scaling factor at the signal reception, the noise level knowledge allows us to constrain the rows of  $\mathbf{H}$  to be of unit mean power (i.e.  $\forall i, j E[|h_{ij}|^2] = 1/M$ ). Therefore, since  $M = 1$ ,  $\mathbf{H} \in \mathbb{C}^{N \times 1}$  and  $\mathbf{\Sigma} = \mathbf{H}\mathbf{H}^H + \sigma^2\mathbf{I}_N$  has  $N - 1$  eigenvalues equal to  $\sigma^2$  and another distinct eigenvalue  $\lambda_1 = \nu_1 + \sigma^2 = (\sum_{i=1}^N |h_{i1}|^2) + \sigma^2$ . The density of  $\lambda_1 - \sigma^2$  is a complex  $\chi_N^2$  distribution (which is, up to a scaling factor 2, equivalent to a real  $\chi_{2N}^2$  distribution). Hence the *unordered* eigenvalue distribution of  $\mathbf{\Sigma}$  [20]

$$P_{\Lambda}(\mathbf{\Lambda})d\mathbf{\Lambda} = \frac{1}{N}(\lambda_1 - \sigma^2)_+^{N-1} \frac{e^{-(\lambda_1 - \sigma^2)}}{(N-1)!} \prod_{i=2}^N \delta(\lambda_i - \sigma^2) d\lambda_1 \dots d\lambda_N \quad (12)$$

Given model (2), for a fixed  $\mathbf{H}$  channel,  $\mathbf{Y}$  is distributed as a correlated Gaussian matrix,

$$P_{\mathbf{Y}|\Sigma I_1}(\mathbf{Y}, \mathbf{U}, L\mathbf{\Lambda}) = \frac{1}{\pi^{LN} \det(\mathbf{\Lambda})^L} e^{-\text{tr}(\mathbf{Y}\mathbf{Y}^H \mathbf{U}\mathbf{\Lambda}^{-1} \mathbf{U}^H)} \quad (13)$$

where  $I_k$  denotes the prior information “ $\mathcal{H}_1$  and  $M = k$ ”.

Since the channel  $\mathbf{H}$  is unknown, we need to integrate out all possible channels of the model (2) over the probability space of  $N \times M$  matrices with Gaussian i.i.d. distribution. This is equivalent to integrating out all possible covariance matrices  $\mathbf{\Sigma}$  over the space of such covariance matrices

$$P_{\mathbf{Y}|\mathcal{H}_1}(\mathbf{Y}) = \int_{\Sigma} P_{\mathbf{Y}|\Sigma \mathcal{H}_1}(\mathbf{Y}, \mathbf{\Sigma}) P_{\Sigma}(\mathbf{\Sigma}) d\mathbf{\Sigma} \quad (14)$$

Using the eigenvalue factorization (5), one can move from the space of covariance matrices  $\mathbf{\Sigma}$  to the space of diagonal matrices  $\mathbf{\Lambda}$ , which is isomorphic to the real positive half-line that carries  $\lambda_1$ . Also, for any unitary matrix  $\mathbf{U}$  and any standard i.i.d. Gaussian vector  $\mathbf{h}$ , the product  $\mathbf{U}[\mathbf{h}, \sigma^2\mathbf{I}_N]$  results in another matrix  $[\mathbf{h}', \sigma^2\mathbf{I}_N]$  with  $\mathbf{h}'$  standard Gaussian thanks to the unitary linear product. More generally, for any zero mean i.i.d. Gaussian vector  $\mathbf{h}$ , the set  $\{\mathbf{U}\mathbf{h}, \mathbf{U} \in \mathcal{U}(N)\}$  is uniformly distributed on the ensemble of zero mean i.i.d. Gaussian vectors and of variance  $\mathbf{h}^H\mathbf{h}$ . This property leads to the independence of the respective distributions of  $\mathbf{U}$  and  $\mathbf{\Lambda}$  in (3), which implies

$$P_{\mathbf{Y}|\mathcal{H}_1}(\mathbf{Y}) = \int_{\Sigma} P_{\mathbf{Y}|\Sigma \mathcal{H}_1}(\mathbf{Y}, \mathbf{\Sigma}) P_{\Sigma}(\mathbf{\Sigma}) d\mathbf{\Sigma} \quad (15)$$

$$= \int_{\mathcal{U}(N) \times \mathbb{R}^{+N}} P_{\mathbf{Y}|\Sigma \mathcal{H}_1}(\mathbf{Y}, \mathbf{U}, L\mathbf{\Lambda}) P_{L\mathbf{\Lambda}}(L\mathbf{\Lambda}) d\mathbf{U} d(L\mathbf{\Lambda}) \quad (16)$$

$$= \int_{\mathcal{U}(N) \times \mathbb{R}^{+N}} P_{\mathbf{Y}|\Sigma \mathcal{H}_1}(\mathbf{Y}, \mathbf{U}, L\mathbf{\Lambda}) P_{\Lambda}(\mathbf{\Lambda}) d\mathbf{U} d\mathbf{\Lambda} \quad (17)$$

For a precise demonstration of how this is obtained, refer to [7].

Equation (17) leads then to

$$P_{\mathbf{Y}|I_1}(\mathbf{Y}) = \int_{\mathcal{U}(N) \times \mathbb{R}^{+N}} \frac{1}{\pi^{NL} \det(\mathbf{\Lambda})^L} e^{-\text{tr}(\mathbf{Y}\mathbf{Y}^H \mathbf{U}\mathbf{\Lambda}^{-1} \mathbf{U}^H)} (\lambda_1 - \sigma^2)_+^{N-1} \frac{e^{-(\lambda_1 - \sigma^2)}}{N!} \prod_{i=2}^N \delta(\lambda_i - \sigma^2) d\mathbf{U} d\lambda_1 \dots d\lambda_N \quad (18)$$

To go further, we utilize the Harish-Chandra identity [16]

$$\int_{\mathcal{U}(N)} e^{\kappa \text{tr}(\mathbf{A}\mathbf{U}\mathbf{B}\mathbf{U}^H)} d\mathbf{U} = \left( \prod_{n=1}^{N-1} n! \right) \kappa^{N(N-1)/2} \frac{\det \left( \left\{ e^{-A_i B_j} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{A})\Delta(\mathbf{B})} \quad (19)$$

in which, for a matrix  $\mathbf{X}$  with eigenvalues  $X_1, \dots, X_N$ ,  $\Delta(\mathbf{X})$  indicates the Vandermonde determinant

$$\Delta(\mathbf{X}) = \prod_{i>j} (X_i - X_j) \quad (20)$$

And then  $P_{\mathbf{Y}|I_1}(\mathbf{Y})$  further develops as

$$P_{\mathbf{Y}|I_1}(\mathbf{Y}) = \lim_{\lambda_2, \dots, \lambda_N \rightarrow \sigma^2} \frac{e^{\sigma^2} (-1)^{\frac{N(N-1)}{2}} \prod_{j=1}^{N-1} j!}{\pi^{LN} \sigma^{2L(N-1)} N!} \int_{\sigma^2}^{+\infty} \frac{1}{\lambda_1^L} (\lambda_1 - \sigma^2)^{N-1} e^{-\lambda_1} \frac{\det \left( \left\{ e^{-\frac{x_i}{\lambda_j}} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda}^{-1})} d\lambda_1 \quad (21)$$

$$= \lim_{\lambda_2, \dots, \lambda_N \rightarrow \sigma^2} \frac{e^{\sigma^2} \prod_{j=1}^{N-1} j!}{\pi^{LN} \sigma^{2L(N-1)} N!} \int_{\sigma^2}^{+\infty} \frac{1}{\lambda_1^L} (\lambda_1 - \sigma^2)^{N-1} e^{-\lambda_1} \det(\mathbf{\Lambda}^{N-1}) \frac{\det \left( \left\{ e^{-\frac{x_i}{\lambda_j}} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda})} d\lambda_1 \quad (22)$$

$$= \lim_{\lambda_2, \dots, \lambda_N \rightarrow \sigma^2} \frac{e^{\sigma^2} \sigma^{2(N-1)(N-L-1)} \prod_{j=1}^{N-1} j!}{\pi^{LN} N!} \int_{\sigma^2}^{+\infty} \lambda_1^{N-L-1} (\lambda_1 - \sigma^2)^{N-1} e^{-\lambda_1} \frac{\det \left( \left\{ e^{-\frac{x_i}{\lambda_j}} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda})} d\lambda_1 \quad (23)$$

in which  $\mathbf{X}$  and  $x_1, \dots, x_N$  respectively correspond to  $\mathbf{Y}\mathbf{Y}^H$  and its eigenvalues.

The equality (22) comes from the fact that  $\Delta(\mathbf{\Lambda}^{-1}) = (-1)^{N(N+3)/2} \frac{\Delta(\mathbf{\Lambda})}{\det(\mathbf{\Lambda})^{N-1}}$ .

By denoting  $\mathbf{y} = (y_1, \dots, y_{N-1}, y_N) = (\lambda_2, \dots, \lambda_N, \lambda_1)$  and the functions,

$$f(x_i, y_j) = e^{-\frac{x_i}{y_j}} \quad (24)$$

$$f_i(y_j) = f(x_i, y_j) \quad (25)$$

we can use the derivation in [11], to obtain

$$\lim_{\lambda_2, \dots, \lambda_N \rightarrow \sigma^2} \frac{\det \left( \left\{ e^{-\frac{x_i}{\lambda_j}} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda})} = \lim_{\substack{y_1, \dots, y_{N-1} \rightarrow \sigma^2 \\ y_N \rightarrow \lambda_1}} (-1)^{N-1} \frac{\det \left( \{f_i(x_j)\}_{i,j} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda})} \quad (26)$$

$$= (-1)^{N-1} \frac{\det [f_i(\sigma^2), f'_i(\sigma^2), \dots, f^{(N-2)}(\sigma^2), f_i(\lambda_1)]}{\prod_{i < j} (x_i - x_j) (\lambda_1 - \sigma^2)^{N-1} \prod_{j=1}^{N-2} j!} \quad (27)$$

The change of variables led to a switch of one column and explains the  $(-1)^{N-1}$  factor when computing the resulting determinant.

The partial derivatives of  $f$  along the second variable is

$$\left( \frac{\partial}{\partial y^k} f \right)_{k \geq 1} (a, b) = \sum_{m=1}^k \frac{(-1)^{k+m}}{b^{m+k}} C_k^m \frac{(k-1)!}{(m-1)!} a^m e^{-\frac{a}{b}} \quad (28)$$

$$= \kappa_k(a, b) \quad (29)$$

Back to the full expression of  $P_{\mathbf{Y}|I_1}(\mathbf{Y})$ , we then have

$$P_{\mathbf{Y}|I_1}(\mathbf{Y}) = \frac{e^{\sigma^2} \sigma^{2(N-1)(N-L-1)}}{N \pi^{LN}} \int_{\sigma^2}^{+\infty} (-1)^{N-1} \lambda_1^{N-L-1} e^{-\lambda_1} \frac{\det [f_i(\sigma^2), f'_i(\sigma^2), \dots, f^{(N-2)}(\sigma^2), f_i(\lambda_1)]}{\prod_{i < j} (x_i - x_j)} d\lambda_1 \quad (30)$$

$$= \frac{e^{\sigma^2} \sigma^{2(N-1)(N-L-1)}}{N \pi^{LN} \prod_{i < j} (x_i - x_j)} \int_{\sigma^2}^{+\infty} (-1)^{N-1} \lambda_1^{N-L-1} e^{-\lambda_1} \det \begin{bmatrix} e^{-\frac{x_1}{\sigma^2}} & \vdots & \vdots & e^{-\frac{x_1}{\lambda_1}} \\ \vdots & \kappa_j(x_i, \sigma^2) & \vdots & \vdots \\ e^{-\frac{x_N}{\sigma^2}} & \vdots & \vdots & e^{-\frac{x_N}{\lambda_1}} \end{bmatrix} d\lambda_1 \quad (31)$$

By factorizing every row of the matrix by  $e^{-\frac{x_i}{\sigma^2}}$  and developing on the last column, one obtains

$$P_{\mathbf{Y}|I_1}(\mathbf{Y}) = \frac{e^{\sigma^2} \sigma^{2(N-1)(N-L-1)}}{N\pi^{LN} \prod_{i<j} (x_i - x_j)} \int_{\sigma^2}^{+\infty} \lambda_1^{N-L-1} e^{-\lambda_1} e^{-\frac{\sum_{i=1}^N x_i}{\sigma^2}} (-1)^{N-1} \sum_{l=1}^N (-1)^{N+l} \frac{e^{-x_l(\frac{1}{\lambda_1} - \frac{1}{\sigma^2})}}{\sigma^{2(N-1)(N-2)}} \prod_{\substack{i<j \\ i \neq l \\ j \neq l}} (x_i - x_j) \quad (32)$$

$$= \frac{e^{\sigma^2 - \frac{1}{\sigma^2} \sum_{i=1}^N x_i}}{N\pi^{LN} \sigma^{2(N-1)(L-1)}} \sum_{l=1}^N (-1)^{l-1} \int_{\sigma^2}^{+\infty} \lambda_1^{N-L-1} e^{-\lambda_1} \frac{e^{-x_l(\frac{1}{\lambda_1} - \frac{1}{\sigma^2})}}{\prod_{i<l} (x_i - x_l) \prod_{i>l} (x_l - x_i)} d\lambda_1 \quad (33)$$

$$= \frac{e^{\sigma^2 - \frac{1}{\sigma^2} \sum_{i=1}^N x_i}}{N\pi^{LN} \sigma^{2(N-1)(L-1)}} \sum_{l=1}^N \frac{e^{\frac{x_l}{\sigma^2}}}{\prod_{\substack{i=1 \\ i \neq l}}^N (x_l - x_i)} \int_{\sigma^2}^{+\infty} \lambda_1^{N-L-1} e^{-(\lambda_1 + \frac{x_l}{\lambda_1})} d\lambda_1 \quad (34)$$

$$(35)$$

which finally gives

$$P_{\mathbf{Y}|I_1}(\mathbf{Y}) = \frac{e^{\sigma^2 - \frac{1}{\sigma^2} \sum_{i=1}^N x_i}}{N\pi^{LN} \sigma^{2(N-1)(L-1)}} \sum_{l=1}^N \frac{e^{\frac{x_l}{\sigma^2}}}{\prod_{\substack{i=1 \\ i \neq l}}^N (x_l - x_i)} J_{N-L-1}(\sigma^2, x_l) \quad (36)$$

with

$$J_k(x, y) = \int_x^{+\infty} t^k e^{-t - \frac{y}{t}} dt \quad (37)$$

for which close-formulae have never been derived when  $x \neq 0$ .

2) *Derivation of  $P_{\mathbf{Y}|\mathcal{G}_{C_i}}$  in MIMO case:* In the MIMO configuration,  $P_{\mathbf{Y}|\mathcal{G}_{C_0}}$  remains unchanged and equation (11) is still correct. For the subsequent derivations, we only treat the situation when  $M \leq N$  but the case  $M > N$  is a trivial extension.

In this scenario,  $\mathbf{H} \in \mathcal{M}(\mathbb{C}, N, M)$  is, as already mentioned, distributed as a Gaussian i.i.d. matrix according to the maximum entropy principle. The mean variance of every row is  $\mathbb{E}[\sum_{j=1}^M |h_{ij}|^2] = 1$ . Therefore  $M\mathbf{H}\mathbf{H}^H$  is distributed as a standard Wishart matrix [6]. Hence, observing that  $\mathbf{\Sigma} - \sigma^2\mathbf{I}_N$  is the diagonal matrix of eigenvalues of  $\mathbf{H}\mathbf{H}^H$ ,

$$\mathbf{\Sigma} = \mathbf{U} \cdot \text{diag}(\nu_1 + \sigma^2, \dots, \nu_M + \sigma^2, \sigma^2, \dots, \sigma^2) \cdot \mathbf{U}^H \quad (38)$$

the *unordered* eigenvalue distribution of  $\mathbf{\Lambda}$  can be derived [6]

$$P_{\mathbf{\Lambda}}(\lambda_1, \dots, \lambda_M) d\mathbf{\Lambda} = d\lambda_1 \dots d\lambda_M \frac{(N-M)! M^{MN}}{N!} \prod_{i=1}^M e^{-M \sum_{i=1}^M (\lambda_i - \sigma^2)} \frac{(\lambda_i - \sigma^2)^{N-M}}{(M-i)!(N-i)!} \prod_{i<j} (\lambda_i - \lambda_j)^2 \quad (39)$$

This further develops into

$$P_{\mathbf{Y}|I_M}(\mathbf{Y}) = \lim_{\lambda_{M+1}, \dots, \lambda_N \rightarrow \sigma^2} \frac{(N-M)! M^{MN} e^{M^2 \sigma^2} \sigma^{2(N-M)(N-L-1)} \prod_{j=1}^{N-1-M} j!}{N! \pi^{NL} \prod_{j=1}^{M-1} j!} \times \int_{\sigma^2}^{+\infty} \dots \int_{\sigma^2}^{+\infty} \prod_{i=1}^M \lambda_i^{N-L-1} (\lambda_i - \sigma^2)^{N-M} \prod_{i<j} (\lambda_i - \lambda_j)^2 e^{-M \sum_{i=1}^M \lambda_i} \frac{\det \left( \left\{ e^{-\frac{x_i}{\lambda_j}} \right\}_{\substack{1 \leq i \leq N \\ 1 \leq j \leq N}} \right)}{\Delta(\mathbf{X}) \Delta(\mathbf{\Lambda})} d\lambda_1 \dots d\lambda_M \quad (40)$$

$$= \frac{(N-M)! M^{MN} e^{M^2 \sigma^2} \sigma^{2(N-M)(N-L-1)} (-1)^{MN - \frac{M(M+1)}{2}}}{N! \pi^{NL} \prod_{j=1}^{M-1} j!} \times \int_{\sigma^2}^{+\infty} \dots \int_{\sigma^2}^{+\infty} \prod_{i=1}^M \lambda_i^{N-L-1} \frac{\prod_{i<j}^M (\lambda_i - \lambda_j)}{\prod_{i<j}^N (x_i - x_j)} e^{-M \sum_{i=1}^M \lambda_i} \det \begin{bmatrix} e^{-\frac{x_1}{\sigma^2}} & \vdots & e^{-\frac{x_1}{\lambda_M}} & \dots & e^{-\frac{x_1}{\lambda_1}} \\ \vdots & \ddots & \vdots & \dots & \vdots \\ e^{-\frac{x_N}{\sigma^2}} & \vdots & e^{-\frac{x_N}{\lambda_M}} & \dots & e^{-\frac{x_N}{\lambda_1}} \end{bmatrix} \kappa_j(x_i, \sigma^2) \quad (41)$$

in which the term  $(-1)^{MN - \frac{M(M+1)}{2}}$  originates from the  $M$  exchanges between the  $k^{\text{th}}$  column and the  $(N-k+1)^{\text{th}}$  column,  $k \in [1, M]$ .

By factorizing the determinant by  $e^{-\frac{1}{\sigma^2} \sum_{i=1}^N x_i}$  and developing along the  $M$  last columns, we have

$$\det \begin{bmatrix} e^{-\frac{x_1}{\sigma^2}} & \vdots & e^{-\frac{x_1}{\lambda_M}} & \dots & e^{-\frac{x_1}{\lambda_1}} \\ \vdots & \kappa_j(x_i, \sigma^2) & \vdots & \dots & \vdots \\ e^{-\frac{x_N}{\sigma^2}} & \vdots & e^{-\frac{x_N}{\lambda_M}} & \dots & e^{-\frac{x_N}{\lambda_1}} \end{bmatrix} \quad (42)$$

$$= e^{-\frac{\sum_{i=1}^N x_i}{\sigma^2}} \sum_{a_1 \in [1, N]} (-1)^{[N+a_1]} e^{-x_{a_1} \left( \frac{1}{\lambda_1} - \frac{1}{\sigma^2} \right)} \dots \times \sum_{\substack{a_M \neq a_1 \\ \dots \\ a_M \neq a_{M-1}}}^N (-1)^{[N-M+1+a_M - \sum_{i < M} \delta(a_i < a_M)]} \frac{e^{-x_{a_M} \left( \frac{1}{\lambda_M} - \frac{1}{\sigma^2} \right)}}{\sigma^{2(N-M-1)(N-M)}} \prod_{\substack{i < j \\ i, j \neq a_1 \\ \dots \\ i, j \neq a_M}} (x_i - x_j) \quad (43)$$

$$= e^{-\frac{\sum_{i=1}^N x_i}{\sigma^2}} \sum_{\mathbf{a} \subset [1, N]} (-1)^{[MN - \frac{M(M+1)}{2} + \sum_{i=1}^M a_i + \sum_{i < j} \delta(a_i < a_j)]} e^{-\sum_{i=1}^M x_{a_i} \left( \frac{1}{\lambda_i} - \frac{1}{\sigma^2} \right)} \prod_{\substack{i < j \\ i, j \neq a_1 \\ \dots \\ i, j \neq a_M}} (x_i - x_j) \quad (44)$$

$$= e^{-\frac{\sum_{i=1}^N x_i}{\sigma^2}} \sum_{\mathbf{a} \subset [1, N]} (-1)^{[MN - \frac{M(M+1)}{2} + \sum_{i=1}^M a_i + \frac{M(M-1)}{2}]} \frac{e^{-\sum_{i=1}^M x_{a_i} \left( \frac{1}{\lambda_i} - \frac{1}{\sigma^2} \right)}}{\sigma^{2(N-M-1)(N-M)}} \frac{(-1)^{(\sum_{i=1}^M a_i) - M} \prod_{i < j}^N (x_i - x_j)}{\prod_{a_i} \prod_{j \notin [a_1, \dots, a_i]} (x_{a_i} - x_j)} \quad (45)$$

$$= e^{-\frac{\sum_{i=1}^N x_i}{\sigma^2}} \sum_{\mathbf{a} \subset [1, N]} \frac{e^{-\sum_{i=1}^M x_{a_i} \left( \frac{1}{\lambda_i} - \frac{1}{\sigma^2} \right)}}{\sigma^{2(N-M-1)(N-M)}} \frac{\prod_{i < j}^N (x_i - x_j)}{\prod_{a_i} \prod_{j \notin [a_1, \dots, a_i]} (x_{a_i} - x_j)} \quad (46)$$

Together, this becomes,

$$P_{\mathbf{Y}|I_M}(\mathbf{Y}) = \frac{M^{MN} (N-M)! e^{M^2 \sigma^2 - \frac{\sum_{i=1}^N x_i}{\sigma^2}}}{N! \pi^{NL} \sigma^{2(N-M)(L-M)} \prod_{j=1}^{M-1} j!} \times \int_{\sigma^2}^{+\infty} \dots \int_{\sigma^2}^{+\infty} \prod_{i=1}^M \lambda_i^{N-L-1} \prod_{i < j}^M (\lambda_i - \lambda_j) e^{-M \sum_{i=1}^M \lambda_i} \sum_{\mathbf{a} \subset [1, N]} \frac{e^{-\sum_{i=1}^M x_{a_i} \left( \frac{1}{\lambda_i} - \frac{1}{\sigma^2} \right)}}{\prod_{a_i} \prod_{j \notin [a_1, \dots, a_i]} (x_{a_i} - x_j)} d\lambda_1 \dots d\lambda_M \quad (47)$$

$$= \frac{(N-M)! e^{M^2 \sigma^2 - \frac{\sum_{i=1}^N x_i}{\sigma^2}}}{N! M^{(M-2L-1)M/2} \pi^{NL} \sigma^{2(N-M)(L-M)} \prod_{j=1}^{M-1} j!} \times \sum_{\mathbf{a} \subset [1, N]} \frac{e^{\frac{\sum_{i=1}^M x_{a_i}}{\sigma^2}}}{\prod_{a_i} \prod_{j \notin [a_1, \dots, a_i]} (x_{a_i} - x_j)} \int_{M\sigma^2}^{+\infty} \dots \int_{M\sigma^2}^{+\infty} e^{-\sum_{i=1}^M \left( \lambda_i + \frac{M x_{a_i}}{\lambda_i} \right)} \prod_{i=1}^M \lambda_i^{N-L-1} \prod_{i < j}^M (\lambda_i - \lambda_j) d\lambda_1 \dots d\lambda_M \quad (48)$$

Reasoning recursively on  $M$ , we show finally

$$P_{\mathbf{Y}|I_M}(\mathbf{Y}) = \frac{(N-M)! M^{(2L-M+1)M/2} e^{M^2 \sigma^2 - \frac{\sum_{i=1}^N x_i}{\sigma^2}}}{N! \pi^{NL} \sigma^{2(N-M)(L-M)} \prod_{j=1}^{M-1} j!} \times \sum_{\mathbf{a} \subset [1, N]} \frac{e^{\frac{\sum_{i=1}^M x_{a_i}}{\sigma^2}}}{\prod_{a_i} \prod_{\substack{j \neq a_1 \\ \dots \\ j \neq a_i}} (x_{a_i} - x_j)} \sum_{\mathbf{b} \in \mathcal{P}(M)} (-1)^{\text{sgn}(\mathbf{b})+1} \prod_{l=1}^M J_{N-L-2+b_l}(M\sigma^2, Mx_{a_i}) \quad (49)$$

with  $\mathcal{P}(k)$  the ensemble of permutations of  $k$  and  $\text{sgn}(\mathbf{b})$  the sign of the permutation  $\mathbf{b}$ .

For instance, when  $M = 2$ , we have

$$P_{\mathbf{Y}|I_2}(\mathbf{Y}) = \frac{2^{2L-1} e^{4\sigma^2 - \frac{1}{\sigma^2} \sum_{i=1}^N x_i}}{N(N-1)\sigma^{2(N-2)(L-2)} \pi^{NL}} \sum_{\mathbf{a} \subset [1, N]} \frac{e^{\frac{x_{a_1} + x_{a_2}}{\sigma^2}}}{\prod_{j \neq a_1} (x_{a_1} - x_j) \prod_{\substack{j \neq a_1 \\ j \neq a_2}} (x_{a_2} - x_j)} \left( J_{N-L}^{(a_1)} J_{N-L-1}^{(a_2)} - J_{N-L-1}^{(a_1)} J_{N-L}^{(a_2)} \right) \quad (50)$$

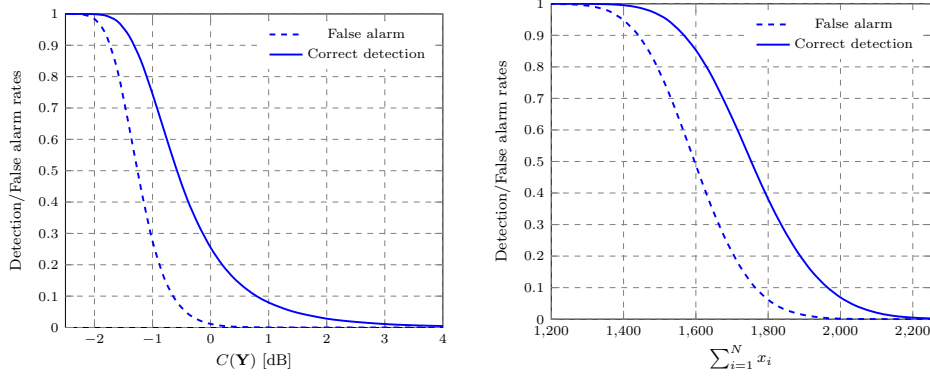


Fig. 1. Power detection performance in SIMO -  $M = 1$ ,  $N = 8$ ,  $L = 20$ ,  $\text{SNR} = -10$  dB

in which  $J_k^{(x)} = J_k(2\sigma^2, 2x)$ .

Decisions regarding the signal detection are then carried out by computing the ratio  $C(\mathbf{Y})$  between equation (49) and equation (11).

### B. Incomplete set of knowledge

1) *Unknown SNR*: Efficient signal detection when the noise level is unknown is highly desirable. Indeed, if the noise level were exactly known, some prior noise detection mechanism would be required. The difficulty here is handily avoided thanks to *ad-hoc* methods that are asymptotically independent of the noise level [12]-[13]. Instead, we shall consider some prior information about the noise level. Establishing prior information of variables defined in a continuum is still a controverted debate of the maximum entropy theory. However, a few solutions are classically considered that are based on *desirable* properties. Those are successively detailed in the following.

Two classical cases are usually encountered,

- the noise level is known to belong to a continuum  $[\sigma_-^2, \sigma_+^2]$ . If no more information is known, then it is desirable to take a uniform prior for  $\sigma^2$  and then

$$P_{\sigma^2|I_M}(\sigma^2)d\sigma^2 = \frac{1}{\sigma_+^2 - \sigma_-^2}d\sigma^2 \quad (51)$$

However, a questionable issue of invariance to variable change arises. Indeed, if  $P_{\sigma^2|I_M}$  is uniform, the distribution associated to the variable  $\sigma = \sqrt{\sigma^2}$  is then non-uniform. This old problem is partially answered by Jeffreys [14] who suggests that an *uninformative prior* should be any distribution that does not add information to the posterior distribution  $P_{\sigma^2|\mathbf{Y}, I_M}$  (for recent developments, see also [18]). However, in our problem, the uninformative prior is rather involved so we only consider uniform prior distribution (51) for  $\sigma^2$  (we denote  $I'_M = \mathcal{H}_1, \sigma^2 \in [\sigma_-^2, \sigma_+^2]$ ) and therefore

$$P_{\mathbf{Y}|I'_M} = \frac{1}{\sigma_+^2 - \sigma_-^2} \int_{\sigma_-^2}^{\sigma_+^2} P_{\mathbf{Y}|\sigma^2, I'_M}(\mathbf{Y}, \sigma^2)d\sigma^2 \quad (52)$$

- one has no information concerning the noise power. The only information about  $\sigma^2$  is  $\sigma^2 > 0$ . Again, we might want to subjugate  $\sigma^2$  to Jeffreys' *uninformative prior*. However, computing this prior is again rather involved. The other alternative is to take the limit of (52) when  $\sigma_-$  tends to zero and  $\sigma_+$  tends to infinity. This limiting process produces an improper integral form. This would be, with  $I''_M$  the updated background information,

$$P_{\mathbf{Y}|I''_M} = \lim_{x \rightarrow \infty} \frac{1}{x - \frac{1}{x}} \int_{\frac{1}{x}}^x P_{\mathbf{Y}|\sigma^2}(\mathbf{Y}, \sigma^2)d\sigma^2 \quad (53)$$

The computational difficulty raised by the integrals  $J_k(x, y)$  does not allow for any satisfying closed-form formulas for (52) and (53). In the following, we only consider the bounded continuum scenario.

### C. Unknown $M$

In practical cases, the number of transmitting antennas is known to be finite. If only an upper bound value  $M_{max}$  for  $M$  is known, a uniform prior for  $M$  is brought by the maximum entropy principle and the probability distribution of  $\mathbf{Y}$  under



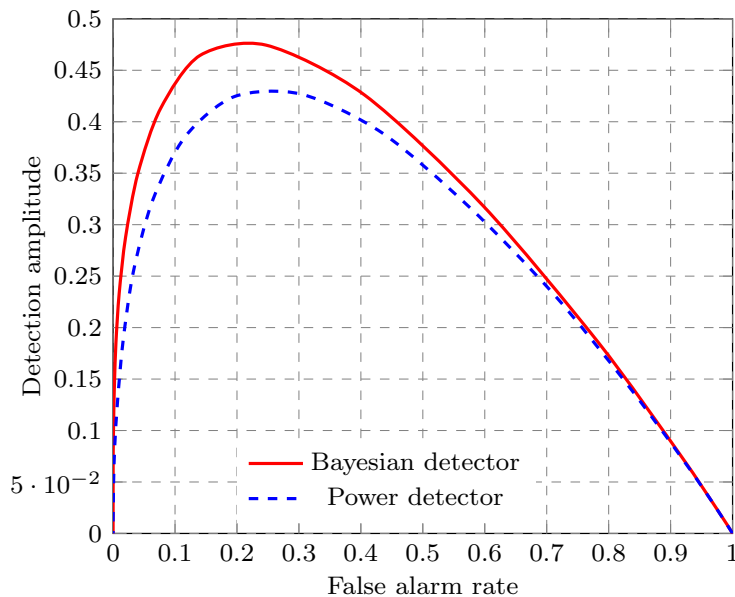


Fig. 2. Detection amplitude comparison in SIMO -  $M = 1$ ,  $N = 8$ ,  $L = 20$ ,  $\text{SNR} = -10$  dB

hypothesis  $I_0$  which gathers all the system prior information (under  $\mathcal{H}_0$  or  $\mathcal{H}_1$ ), excluding the knowledge of  $M$ , reads

$$P(\mathbf{Y}|I_0) = \sum_{i=1}^{M_{max}} P(\mathbf{Y}|"M = i", I_0) \cdot P("M = i"|I_0) \quad (54)$$

$$= \frac{1}{M_{max}} \sum_{i=1}^{M_{max}} P(\mathbf{Y}|"M = i", I_0) \quad (55)$$

which does not meet any computational difficulty.

#### IV. SIMULATION AND RESULTS

In the following, we present results obtained for the aforementioned SIMO and MIMO scenarios, using formulas (36) and (49) respectively. In the simulations, the hypothesis concerning incoming data, channel aspect and noise figure are those presented in the model of Section II. The reader might object that the amount of knowledge the receiver is provided with does not obviously fit the reality of the present environment. Particular care has indeed to be taken with simulations. If one wants to simulate the very first signal detection carried out by the receiver, then the prior on the channel  $\mathbf{H}$  is all included in  $I$ . But the channel realization can effectively be anything, so that the detector accuracy cannot be evaluated at all (or one would need to integrate over all the possible channels that the receiver would possibly face). The interest of the Bayesian approach lies in the long term process; while first decision can effectively be very inaccurate, the subsequent detection processes are based on the updated channel prior  $P_{\mathbf{H}|\mathbf{Y},I}$ . Unfortunately the mathematical derivations of those detection processes are prohibitive and only numerical results can be generated. As a consequence, in our simulations, since we provide the receiver with Gaussian i.i.d. channels, the information on  $\mathbf{H}$  carried by  $(\mathbf{Y}, I)$  should not be more informative than the information carried by  $I$  alone. Therefore optimal successive decisions can be carried out. Deeper studies on *updated probabilities* thanks to an extension of the maximum entropy principle (the *ME principle*), are currently carried out [17].

As a first example, we consider a SIMO channel with  $N = 8$  antennas at the receiver,  $L = 20$  sampling periods and a signal to noise ratio  $\text{SNR} = -10$  dB. For fair comparison with classical signal detection algorithms, we stick to the *false alarm rate* (FAR) against *correct detection rate* (CDR) performance evaluation. Figure 1 presents the respective FAR and CDR for the classical power detector and for the novel Bayesian estimator, obtained on 50,000 channel realizations. The decision threshold for the power detector is somewhere around the total mean cumulated power over the antenna array while the threshold for the Bayesian approach is somewhere around  $C(\mathbf{Y}) = 0$  dB. Since both algorithms scale very differently, fair comparison is obtained by plotting the *CDR minus FAR* gap (which is an objective performance criterion and that we call *detection amplitude*) against the FAR. This is depicted in Figure 2. A significant performance gain is observed in this single transmit antenna scenario. This seems to imply that second order statistics of the incoming signal are far from bringing sufficient statistics to represent the complete information status  $I_1$ . This also demonstrates that the power detector is not in

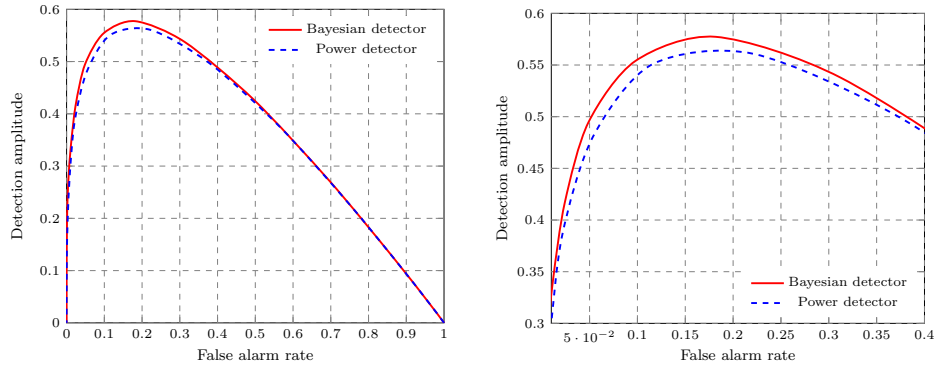


Fig. 3. Detection amplitude comparison in MIMO -  $M = 2$ ,  $N = 8$ ,  $L = 10$ ,  $SNR = -10$ dB

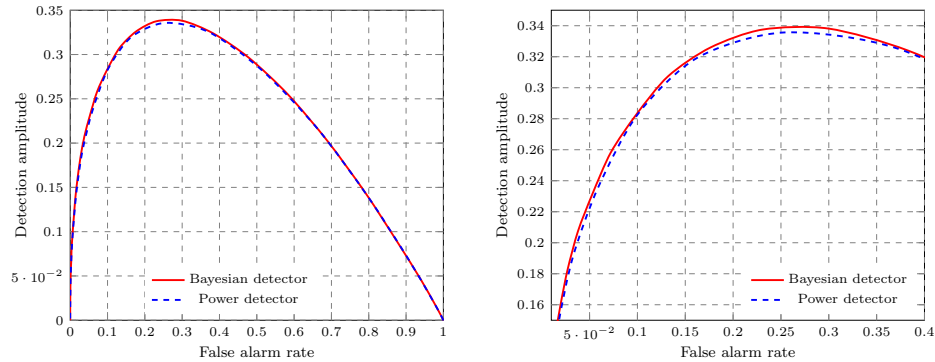


Fig. 4. Detection amplitude comparison in MIMO -  $M = 2$ ,  $N = 2$ ,  $L = 6$ ,  $SNR = -5$  dB

fact “optimal” in our Bayesian information-theoretic framework since the power detector is provided with no less information than the Bayesian detector but performs worse.

In Figure 3, we took  $M = 2$ ,  $N = 8$ ,  $L = 10$  and  $SNR = -10$  dB, using then formula (49). In this scenario the classical power detector closes in the gap with the Bayesian detector, compared to the SIMO situation. This is explained by the *channel hardening* effect [19] of multiple antenna systems that leaves little probability to deep fading channels. Those deep fades, which are seen as absence of informative signal from the classical power detector can be correctly interpreted by the Bayesian detector. Therefore, for a given SNR, the more antennas are added to the system, the closer to optimal the power detector. This confirms our conclusions in the SIMO scenario, since now the channel hardening allows the power detector not to suffer so much from rarer channel outage. Other simulations show that, when  $N$  is decreased down to 2, the performance gap almost collapses so that almost no difference in performance is observable between the Bayesian and the energy detectors. For instance, Figure 4 depicts a situation with  $N = 2$ ,  $M = 2$ ,  $L = 6$ ,  $SNR = -3$  dB, for which both Bayesian and classical algorithms show similar performance.

Consider now the scenario when the noise variance  $\sigma^2$  is only known to belong to the interval  $[\sigma_-^2, \sigma_+^2]$ . The two-dimensional integration of equation (51) is prohibitive for producing numerical results. Nonetheless, the continuum  $[\sigma_-^2, \sigma_+^2]$  can be broken down in a finite number of  $K$  subsets  $[\sigma_-^2 + k\Delta(\sigma^2), \sigma_-^2 + (k+1)\Delta(\sigma^2)]$ , for  $k \in \{0, \dots, K-1\}$  and  $\Delta(\sigma^2) = (\sigma_+^2 - \sigma_-^2)/K$ . If  $\Delta(\sigma^2)$  is chosen small enough, this should produce a rather good approximation of (51). This is experimented in Figure 5 which demonstrates the effect of an inaccurate knowledge of the noise power in terms of CDR and FAR. In this simulation,  $M = 1$ ,  $N = 8$ ,  $L = 10$  and  $SNR = 2.5$  dB. Comparison is made between the cases of exact SNR knowledge, short SNR range  $[\sigma_-^2, \sigma_+^2] = [-1.25, 6.75]$  dB discretized as a set  $\{0, 2.5, 5\}$  dB and large SNR range  $[\sigma_-^2, \sigma_+^2] = [-6.75, 6.75]$  dB discretized as a set  $\{-5, -2.5, 0, 2.5, 5\}$  dB. While the short SNR range provides slightly poorer detection abilities than the perfect scenario, the large SNR range shows performance impairment. This suggests that, if the SNR boundaries are totally unknown from the start, the first signal detection process (i.e. before information update [17] and then additional knowledge on the SNR) does not lead to any valuable inference.

## V. DISCUSSION

In the previous framework, we extensively used the maximum entropy principle and Bayes’ rule in order to perform adequate signal detection. The provided Bayesian solutions, derived from the channel state of knowledge available at the receiver, are

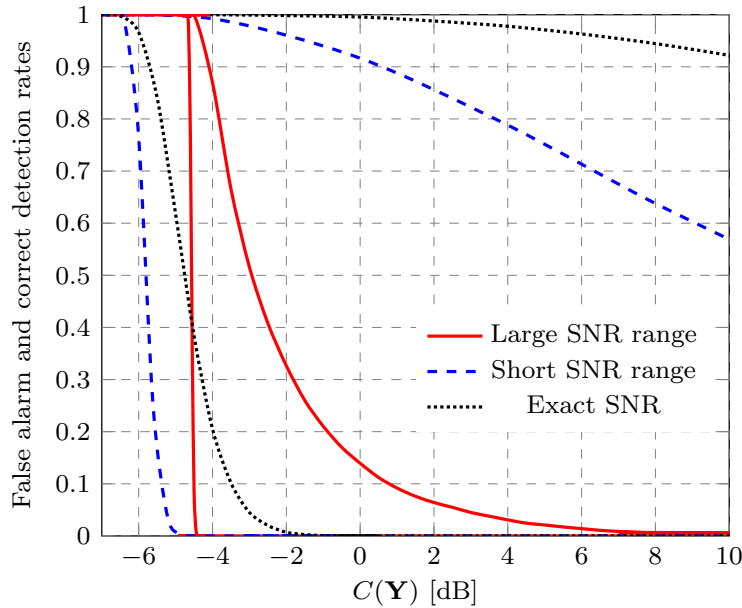


Fig. 5. False alarm (FA) and correct detection (CD) rates for exact, short discrete range ( $\{0, 2.5, 5\}$ ) and large discrete range ( $\{-5, -2.5, 0, 2.5, 5\}$ ) SNR -  $M = 1$ ,  $N = 8$ ,  $L = 10$ , SNR = 2.5 dB

optimal in the proposed probability framework. However, some limitations can be raised.

First, as stated in III-B.1, uninformative priors modeling is still an incomplete and controversial theory. When one faces parameters about which no information is known, one might come up with *ad-hoc* priors. However, if the quantity of data provided to the receiver is sufficient enough, then the effect of an approximate prior usually fades out. Also, the mathematical tools to derive maximum entropy distributions (such as Lagrangian multipliers) only cope with statistical knowledge and never deterministic knowledge. One must wait for future tools to be able to model, for instance, the deterministic knowledge of the presence of scatterers in the environment.

Also, it was noticed, already in this simple situation, that the marginalisation computation can easily turn out mathematically prohibitive. Especially, since random matrix theory is not a mature theory yet, multi-dimensional problems still lead to a high computational complexity. The obvious solution to counter this limitation and come up with numerical evaluations is to approximate integrals by discrete sums over thin-sliced sets.

However, the utmost advantage of Jaynes' probability theory lies in that it allows for an easily extensible and optimal framework in an information theoretic viewpoint. For instance, if interferers had to be taken into account in a more general model, then our previous derivations consist in the particular case of interferers of null power ( $P_{int} = 0$ ). Integrating out the new variable  $P_{int}$  allows for the introduction of interfering sources in the model. This again increases the modeling complexity but provides at least some upper bound on the achievable performance of suboptimal methods.

Also, the present probability framework only allows to gather a fixed amount of information from which inference is performed to assign static probabilities. Dynamics in the system model are not easy to capture. Nonetheless, updating Bayesian probabilities given dynamic knowledge at the receiver is a recent and active research topic [17]; this would be appropriate for the cognitive receiver to assign time-varying probabilities. This is envisioned as one of the next fundamental steps in the characterization of cognitive receivers.

## VI. CONCLUSION

In this work, we introduced a general Bayesian framework for learning in cognitive receivers. This framework is based on a consistent treatment of the available system information. Signal detection is treated as an explanatory case of this framework. The performance of the novel Bayesian signal detector in SIMO and MIMO systems are derived and are shown to outperform the classical detection techniques. We observed in particular that in a MIMO system with many antennas the classical energy detector performs close-to-optimally, while in SIMO setups, significant gain is provided by the Bayesian detector. Extensions to other frameworks than signal detection are being conducted.

## REFERENCES

- [1] H. Urkowitz, "Energy detection of unknown deterministic signals," Proc. of the IEEE, vol. 55, no. 4, pp. 523-531, Apr. 1967

- [2] Mitola III, J., and Maguire Jr, GQ, "Cognitive radio: making software radios more personal", *Personal Communications, IEEE [see also IEEE Wireless Communications]* 6(4), 13-18, 1999.
- [3] V. I. Kostylev, "Energy detection of a signal with Random Amplitude", *Proc IEEE Int. Conf. on Communications (ICC'02)*. New York City, pp. 1606-1610, May 2002.
- [4] Simon, M.K., F. F. Digham, M.-S. Alouini, "On the Energy Detection of Unknown Signals over Fading Channels," *ICC 2003 Conference Record*, Anchorage, Alaska, May 11-15, 2003.
- [5] Z. Quan, S. Cui, A. H. Sayed, and H. V. Poor, "Spatial-spectral joint detection for wideband spectrum sensing in cognitive radio networks," *Proc. ICASSP*, Las Vegas, April 2008.
- [6] A. M. Tulino, S. Verdú, "Random Matrix Theory and Wireless Communications", Now Publishers, vol. 1, Issue 1, 2004.
- [7] M. Guillaud, M. Debbah, A. L. Moustakas, "Maximum Entropy MIMO Wireless Channel Models", Submitted to *IEEE Trans. Information Theory* Dec. 2006, <http://arxiv.org/abs/cs.IT/0612101>
- [8] R. T. Cox, "Probability, frequency and reasonable expectation", *American journal of physics*, vol. 14 (1946), pp. 1-13.
- [9] E. T. Jaynes, "Probability Theory: The Logic of Science", Cambridge University Press, June 2003.
- [10] S. Haykin, "Cognitive Radio: Brain-Empowered Wireless Communications", *IEEE Journal on Selected areas in Comm.*, vol 23., no. 2, Feb 2005.
- [11] S.H. Simon, A.L. Moustakas, L. Marinelli, "Capacity and character expansions: Moment generating function and other exact results for MIMO correlated channels", *IEEE Transactions on Information Theory*, vol. 52, no. 12, pp. 5336-5351, Dec. 2006.
- [12] L. S. Cardoso, M. Debbah, P. Bianchi, J. Najim, "Cooperative Spectrum Sensing Using Random Matrix Theory", *International Symposium on Wireless Pervasive Computing 2008*, Santorini, Greece.
- [13] Y. Zeng, Y.-Ch. Liang, "Eigenvalue based Spectrum Sensing Algorithms for Cognitive Radio", arXiv:0804.2960
- [14] H. Jeffreys, "An Invariant Form for the Prior Probability in Estimation Problems", *Proceedings of the Royal Society of London. Series A, Mathematical and Physical Sciences* 186 (1007): 453-461, 1946.
- [15] E. T. Jaynes, "On the rationale of maximum-entropy methods", *Proc. IEEE*, vol. 70, no. 9, pp. 939-952, 1982.
- [16] A. B. Balantekin, "Character expansions, Itzykson-Zuber integrals, and the QCD partition function", *Phys. Rev. D*, vol. 62, no. 8, Oct. 2000.
- [17] A. Caticha, "Lectures on Probability, Entropy and Statistical Physics", arXiv:0808.0012v1 [physics.data-an], 2008.
- [18] A. Caticha, "Maximum Entropy, fluctuations and priors", A.C., in *Maximum Entropy and Bayesian Methods in Science and Engineering*, ed. by A. Mohammad-Djafari, A.I.P. Vol. 568, 94 (2001); arXiv.org/abs/math-ph/0008017.
- [19] B. Hochwald, T. Marzetta, V. Tarokh, "Multiple-Antenna Channel Hardening and Its Implications for Rate Feedback and Scheduling", *IEEE Trans. on Information Theory*, vol. 50, no. 9, pp. 1893-1909, 2004.
- [20] M. Mehta, "Random Matrices", Academic Press, 2004.