

Input-to-state stabilization of 1-D parabolic equations with Dirichlet boundary disturbances under boundary fixed-time control

Jun Zheng^{1,2,*}, Guchuan Zhu²

¹*School of Mathematics, Southwest Jiaotong University, Chengdu, Sichuan 611756, P. R. of China*

²*Department of Electrical Engineering, Polytechnique Montréal, P.O. Box 6079, Station Centre-Ville, Montreal, QC, Canada H3T 1J4*

Abstract

This paper addresses the problem of stabilization of 1-D parabolic equations with destabilizing terms and Dirichlet boundary disturbances. By using the method of backstepping and the technique of splitting, a boundary feedback controller is designed to ensure the input-to-state stability (ISS) of the closed-loop system with Dirichlet boundary disturbances, while preserving fixed-time stability (FTS) of the corresponding disturbance-free system, for which the fixed time is either determined by the Riemann zeta function or freely prescribed. To overcome the difficulty brought by Dirichlet boundary disturbances, the ISS and FTS properties of the involved systems are assessed by applying the generalized Lyapunov method. Numerical simulations are conducted to illustrate the effectiveness of the proposed scheme of control design.

Key words: Finite-time stability, fixed-time stability, prescribed-time stability, input-to-state stability, Dirichlet boundary disturbance, parabolic equation

1 Introduction

It is well-known that the backstepping method (see [19]) is effective for designing boundary controllers to stabilize partial differential equations (PDEs) with destabilizing terms; see, e.g., [2, 4, 9, 15, 22, 25, 32, 33] for PDEs with different types of coefficients, and [1, 6, 10, 11, 17, 18, 27] for coupled PDEs, respectively. In addition, under the framework of input-to-state stability (ISS) theory of PDEs, in [16, 26, 41], the method of backstepping was used to design boundary controllers to ensure the ISS of parabolic PDEs with destabilizing terms when boundary disturbances are involved.

It is worth mentioning that a notable feature in the problem of input-to-state stabilization is that the disturbance-free system in closed loop is asymptotically stable under the designed controller. However, many control systems exhibit a property stronger than the asymptotic stability, that is the finite-time stability, which requires the state of the disturbance-free system to reach equilibrium within a finite time [12, 14, 20, 21, 23, 24, 32, 34, 40].

In the past few years, the problem of finite-time stabilization of PDEs has attracted much attention and significant results have been obtained [3, 5, 7, 13, 28–31, 35–39]. Notably, by using backstepping, the authors of [5] designed boundary controllers to achieve finite-time stability of parabolic PDEs in the absence of external disturbances, while the authors of [13] designed state-dependent switching control laws to ensure the so-called dual properties of the heat equation in closed loop, namely, the heat equation is finite-time stable in the absence of external disturbances, while preserving the ISS in the presence of distributed in-domain disturbances. Nevertheless, for parabolic PDEs with destabilizing terms and boundary disturbances, the so-called dual properties of the closed-loop system have not been studied under the backstepping control.

In this paper, we study the stabilization problem of 1-D linear parabolic equations involving not only distributed in-domain but also Dirichlet boundary disturbances. Moreover, unlike [13], the open-loop system considered in this paper is allowed to be unstable. Based on the technique of splitting and the method applied in [5], a boundary controller is designed by means of backstepping to simultaneously ensure the ISS of the closed-loop system and the finite-time stability of the disturbance-free closed-loop system. In particular, the finite time is independent of initial data.

It should be noted that, compared to [13], the control design scheme proposed in this paper is much easier while Dirichlet boundary disturbances present more challenges in the stability analysis due to the fact that the classical Lyapunov method is not suitable in the appearance of Dirichlet boundary disturbances. To avoid using state-dependent switching control laws presented in [13], we apply the technique of splitting in the control design via backstepping, while, to overcome the difficulty in the

* Corresponding author

Email addresses: zhengjun2014@aliyun.com (Jun Zheng^{1,2,*}), guchuan.zhu@polymtl.ca (Guchuan Zhu²).

stability analysis, we handle the terms of Dirichlet boundary disturbances by using the generalized Lyapunov method, which was proposed in [42, Remark 4.1] recently. More specifically, we split first the considered system into two sub-systems, among which one is a disturbed sub-system with zero initial datum while another one is a disturbance-free sub-system with non-zero initial datum. Then, for the disturbed sub-system, by using backstepping, we design a boundary controller via a time-invariant kernel function. By using the generalized Lyapunov method proposed in [42], we prove that the boundedness of the solution to this subsystem is determined only by the external disturbances. For the disturbance-free sub-system, following [5], we design fixed-time boundary controllers over different time intervals, and derive sufficient conditions for time segments to ensure the fixed-time stability of the sub-system. In particular, the fixed time is either chosen based on the Riemann zeta function or freely prescribed. Finally, by using controllers of the two sub-systems, we design a boundary controller for the original system with distributed in-domain and Dirichlet boundary disturbances to simultaneously ensure the ISS of the closed-loop system and the fixed-time stability of the corresponding disturbance-free system.

The main contribution of this paper lies in the design of a boundary controller, which ensures that the parabolic equation in closed loop is ISS with respect to (w.r.t.) Dirichlet boundary disturbances and fixed-time stable in the absence of external disturbances.

In the rest of the paper, we present first some basic notations. In Section 2, we introduce the problem formulation and provide some preliminaries on kernel functions. In Section 3, we design boundary controllers and state main results in two cases, where the finite time is determined by the Riemann zeta function and freely prescribed, respectively. In Section 4, we assess stability for the closed-loop system under the designed boundary control. Numerical simulations are provided in Section 5 to illustrate the effectiveness of the proposed scheme. Some concluding remarks are given in Section 6.

Notation. Let \mathbb{N} and \mathbb{N}_+ be the sets of non-negative and positive integers, respectively. Let $\mathbb{R} := (-\infty, +\infty)$, $\mathbb{R}_{\geq 0} := [0, +\infty)$, $\mathbb{R}_{> 0} := (0, +\infty)$, and $\mathbb{R}_{\leq 0} := (-\infty, 0]$.

For $\tau \in \mathbb{R}_{> 0}$, let $Q_\tau := (0, 1) \times (0, \tau)$. Let $Q_\infty := (0, 1) \times (0, +\infty)$ and $\overline{Q}_\infty := [0, 1] \times [0, +\infty)$. For $v : D \rightarrow \mathbb{R}$ with $D \subset \overline{Q}_\infty$, the notation $v[t]$ (or $v[y]$) denotes the profile at certain $t \in \mathbb{R}_{\geq 0}$, i.e., $v[t](y) = v(y, t)$.

Throughout this paper, all the functional spaces, as well as the norms in normed linear spaces, are defined in the standard way as in, e.g., [8].

For classes of comparison functions, let

$$\begin{aligned} \mathcal{P} &:= \{\gamma \in C(\mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0}) \mid \gamma(0) = 0, \gamma(s) > 0, \forall s \in \mathbb{R}_{> 0}\}, \\ \mathcal{K} &:= \{\gamma \in \mathcal{P} \mid \gamma \text{ is strictly increasing}\}, \\ \mathcal{L} &:= \{\gamma \in C(\mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0}) \mid \gamma \text{ is strictly decreasing with } \lim_{s \rightarrow +\infty} \gamma(s) = 0\}, \\ \mathcal{KL} &:= \{\beta \in C(\mathbb{R}_{\geq 0} \times \mathbb{R}_{\geq 0}; \mathbb{R}_{\geq 0}) \mid \beta(\cdot, t) \in \mathcal{K}, \forall t \in \mathbb{R}_{\geq 0}; \beta(s, \cdot) \in \mathcal{L}, \forall s \in \mathbb{R}_{> 0}\}. \end{aligned}$$

2 Problem setting and preliminaries

In this section, we present the problem formulation and provide some preliminaries.

2.1 Problem setting

For certain fixed time $T_0 > 0$, we consider the problem of input-to-state stabilization for the following 1-D parabolic equation:

$$u_t(x, t) = (a(x)u_x(x, t))_x + c(x)u(x, t) + f(x, t), (x, t) \in Q_{T_0}, \quad (1a)$$

$$u(0, t) = d_0(t), t \in (0, T_0), \quad (1b)$$

$$u(1, t) = U(t) + d_1(t), t \in (0, T_0), \quad (1c)$$

$$u(x, 0) = u_0(x), x \in (0, 1), \quad (1d)$$

where u_0 is the initial datum, f represents the in-domain disturbance, d_0, d_1 represent Dirichlet boundary disturbances, and $U(t)$ is the control input, which will be designed later.

Throughout this paper, we assume that $a \in H^2(0, 1)$ and there exists a constant $\Lambda \geq 1$ such that

$$\frac{1}{\Lambda} \leq a(x) \leq \Lambda, \forall x \in (0, 1).$$

We assume that $c \in H^1(0, 1)$, $f \in C((0, 1) \times \mathbb{R}_{\geq 0})$, $d_0, d_1 \in C(\mathbb{R}_{\geq 0})$, and the initial datum $u_0 \in L^2(0, 1)$.

The goal of this paper is to design a boundary control law $U(t)$ by using backstepping such that the following so-called dual properties, which was proposed in [13], hold true simultaneously, i.e.,

- (i) the disturbed system (1), i.e., system (1) with $f^2 + d_0^2 + d_1^2 \not\equiv 0$, is input-to-state stable in the spatial L^2 -norm w.r.t. in-domain and boundary disturbances, namely, there exist functions $\beta \in \mathcal{KL}$ and $\gamma, \gamma_0, \gamma_1 \in \mathcal{K}$ such that

$$\|u[t]\|_{L^2(0,1)} \leq \beta(\|u_0\|_{L^2(0,1)}, t) + \gamma(\|f\|_{L^\infty(Q_t)}) + \gamma_0(\|d_0\|_{L^\infty(0,t)}) + \gamma_1(\|d_1\|_{L^\infty(0,t)}), \forall t \in (0, T_0);$$

- (ii) the disturbance-free system (1), i.e., system (1) with $f \equiv d_0 \equiv d_1 \equiv 0$, is fixed-time stable in the spatial L^2 -norm in time $T_0 > 0$, i.e., $\|u[t]\|_{L^2(0,1)} \rightarrow 0$ as $t \rightarrow T_0^-$, where the time T_0 is determined by the Riemann zeta function or freely prescribed.

2.2 Preliminaries

Throughout this paper, let $\lambda_0 > 0$ be a fixed constant, and define $D := \{(x, y) \in [0, 1] \times [0, 1] | y \leq x\}$ and

$$\frac{d}{dx}g(x, x) := g_x(x, x) + g_y(x, x), \forall g \in H^1(D).$$

We present some results on the existence and *a priori* estimates of kernel functions, which will be used in the control design.

Lemma 1 ([5, Corollary 1]) *For every $\lambda \geq \lambda_0$, the kernel equation*

$$(a(x)k_x(x, y))_x - (a(y)k_y(x, y))_y = (\lambda + c(y))k(x, y), \forall (x, y) \in D, \quad (2a)$$

$$2a(x)\frac{d}{dx}k(x, x) + a_x(x)k(x, x) = -(\lambda + c(x)), \forall x \in [0, 1], \quad (2b)$$

$$k(x, 0) = 0, \forall x \in [0, 1], \quad (2c)$$

admits a unique solution $k \in H^1(D)$ having the estimate

$$\|k\|_{H^1(D)} \leq e^{C\sqrt{\lambda}}$$

for some positive constant C independent of $\lambda \in [\lambda_0, +\infty)$.

Lemma 2 ([5, Corollary 2]) *For every $\lambda \geq \lambda_0$, the kernel equation*

$$(a(x)l_x(x, y))_x - (a(y)l_y(x, y))_y = -(\lambda + c(y))l(x, y), \forall (x, y) \in D, \quad (3a)$$

$$2a(x)\frac{d}{dx}l(x, x) + a_x(x)l(x, x) = -(\lambda + c(x)), \forall x \in [0, 1], \quad (3b)$$

$$l(x, 0) = 0, \forall x \in [0, 1], \quad (3c)$$

admits a unique solution $l \in H^1(D)$ having the estimate

$$\|l\|_{H^1(D)} \leq C\lambda^2$$

for some positive constant C independent of $\lambda \in [\lambda_0, +\infty)$.

Lemma 3 ([5, Lemma 4]) *Let $k \in H^1(D)$ and $l \in H^1(D)$ be the unique solution to (2) and (3) with $\lambda \geq \lambda_0$, respectively. Let $h \in L^2(0, 1)$, and for almost every $x \in [0, 1]$ define*

$$\tilde{h}(x) := h(x) - \int_0^x k(x, y)h(y)dy.$$

Then, it holds for almost every $x \in [0, 1]$ that

$$h(x) := \tilde{h}(x) + \int_0^x l(x, y)\tilde{h}(y)dy.$$

Remark 1 *As indicated in [19, Chapter 4], for general functions a and c depending on the spatial variable, there is no a closed-form solution k (or l) to the kernel equation (2) (or (3)). However, for positive constants a and c , it can be proved that (see [19, Chapter 4])*

$$k(x, y) = -\frac{\lambda + c}{a}y \frac{I_1\left(\sqrt{\frac{\lambda+c}{a}(x^2 - y^2)}\right)}{\sqrt{\frac{\lambda+c}{a}(x^2 - y^2)}},$$

$$l(x, y) = -\frac{\lambda + c}{a}y \frac{J_1\left(\sqrt{\frac{\lambda+c}{a}(x^2 - y^2)}\right)}{\sqrt{\frac{\lambda+c}{a}(x^2 - y^2)}},$$

where I_1 is the first-order modified Bessel function given by

$$I_1(x) := \sum_{m=0}^{\infty} \frac{\left(\frac{x}{2}\right)^{2m+1}}{m!(m+1)!},$$

and J_1 is the first-order Bessel function given by

$$J_1(x) := \sum_{m=0}^{\infty} \frac{(-1)^m \left(\frac{x}{2}\right)^{2m+1}}{m!(m+1)!}.$$

3 Control design

In this section, we design boundary controllers in two cases:

Case I the fixed time T_0 is determined by the Riemann zeta function;

Case II the fixed time T_0 is freely prescribed.

The main method adopted in the control design is backstepping applied in [5] and the technique of splitting, for which we consider u as $u := v + w$ with v and w being the solutions of a disturbance-free system and a disturbed system under different boundary controls, respectively.

3.1 A lemma on fixed-time stability of disturbance-free system

Throughout this paper, let $\{t_n\}_{n \in \mathbb{N}}$ be a strictly increasing sequence of real numbers such that $t_0 = 0$. For given constants $\lambda_n \geq \lambda_0$, let $k_n \in H^1(D)$ be the unique solution to the kernel equation corresponding to $n \in \mathbb{N}$:

$$\begin{aligned} (a(x)k_{n,x}(x, y))_x - (a(y)k_{n,y}(x, y))_y &= (\lambda_n + c(y))k_n(x, y), \forall (x, y) \in D, \\ 2a(x) \frac{d}{dx} k_n(x, x) + a_x(x)k_n(x, x) &= -(\lambda_n + c(x)), \forall x \in [0, 1], \\ k_n(x, 0) &= 0, \forall x \in [0, 1]. \end{aligned}$$

Motivated by [5], we consider the disturbance-free system:

$$v_t(x, t) = (a(x)v_x(x, t))_x + c(x)v(x, t), (x, t) \in [0, 1] \times (t_n, t_{n+1}), \quad (4a)$$

$$v(0, t) = 0, t \in (t_n, t_{n+1}), \quad (4b)$$

$$v(1, t) = V(t), t \in (t_n, t_{n+1}), \quad (4c)$$

with boundary control law

$$V(t) := \int_0^1 k_n(1, y)v(y, t) dy, \forall t \in (t_n, t_{n+1}), \quad (5)$$

and initial condition

$$v(x, t_0) := u_0(x), \forall x \in (0, 1).$$

Set $s_0 := 0$ and

$$s_n := \sum_{j=0}^{n-1} \lambda_j (t_{j+1} - t_j), n \in \mathbb{N}_+. \quad (6)$$

In [5], it was proved the following stability result, which indicates rapid convergence of solutions to disturbance-free systems, as well as their fixed-time stability when $n \rightarrow +\infty$.

Lemma 4 ([5, Proposition 1]) *For system (4) under the control law (5), there exists a positive constant γ_0 depending only on a and c , such that if, for large n ,*

$$(t_{n+1} - t_n)\lambda_n \geq \gamma_0 \sqrt{\lambda_{n+1}},$$

then, for $t \in (t_n, t_{n+1})$,

$$\|v[t]\|_{L^2(0,1)} \leq C e^{-\frac{s_n-1}{4} + C(n-1)} \|u_0\|_{L^2(0,1)}, \quad (7a)$$

$$|V(t)| \leq C e^{-\frac{s_n-1}{4} + C(n-1) + C\sqrt{\lambda_n}} \|u_0\|_{L^2(0,1)}, \quad (7b)$$

where C is a positive constant independent of n and u_0 .

In particular, if, in addition,

$$\lim_{n \rightarrow +\infty} \frac{s_n}{n + \sqrt{\lambda_{n+1}}} = +\infty, \quad (8)$$

and $T := \lim_{n \rightarrow \infty} t_n$ exists, then, it holds that

$$\lim_{t \rightarrow T^-} \|v[t]\|_{L^2(0,1)} = 0 \quad \text{and} \quad \lim_{t \rightarrow T^-} V(t) = 0, \quad (9)$$

which give the fixed-time stability of system (4) in the fixed time T .

It is worth noting that, under the transformation

$$\tilde{v}(x, t) := v(x, t) - \int_0^x k_n(x, y)v(y, t) dy,$$

system (4) is converted into (see [5])

$$\tilde{v}_t(x, t) = (a(x)\tilde{v}_x(x, t))_x - \lambda_n\tilde{v}(x, t), (x, t) \in [0, 1] \times (t_n, t_{n+1}), \quad (10a)$$

$$\tilde{v}(0, t) = 0, t \in (t_n, t_{n+1}), \quad (10b)$$

$$\tilde{v}(1, t) = 0, t \in (t_n, t_{n+1}), \quad (10c)$$

with $\tilde{v}(x, t_0) := u_0(x) - \int_0^x k_n(x, y)u_0(y) dy$. Since system (10) admits a unique (weak) solution, which is defined in the sense of [5, (4.3) and (4.4)] and belongs to $C([t_n, t_{n+1}]; L^2(0, 1)) \cap C^1((t_n, t_{n+1}); L^2(0, 1))$, by virtue of Lemma 3, system (4) also admits a unique (weak) solution belonging to $C([t_n, t_{n+1}]; L^2(0, 1)) \cap C^1((t_n, t_{n+1}); L^2(0, 1))$.

3.2 Control design in Case I

First, recall that the Riemann zeta function $\zeta(s)$ is given by (in the field of real numbers)

$$\zeta(s) := \sum_{i=1}^{\infty} \frac{1}{i^s}, \forall s > 1,$$

which converges for any fixed $s > 1$.

By virtue of Lemma 4 and the definition of Riemann zeta function, we set

$$p > 1, \quad (11a)$$

$$t_0 := 0, \quad (11b)$$

$$t_{n+1} - t_n := \frac{1}{(n+1)^p}, n \in \mathbb{N}, \quad (11c)$$

$$\lambda_n := n^{2(p+1)} + \lambda_0, n \in \mathbb{N}. \quad (11d)$$

It is clear that

$$\begin{aligned} \frac{s_n}{n + \sqrt{\lambda_{n+1}}} &\geq \frac{\lambda_{n-1}(t_n - t_{n-1})}{n + \sqrt{\lambda_{n+1}}} \\ &\geq \frac{(n-1)^{2(p+1)}}{n^p} \\ &\geq \frac{n^p}{n + \sqrt{2}(n+1)^{p+1}} \\ &\geq \frac{(n-1)^{2(p+1)}}{2\sqrt{2}(n+1)^{2p+1}}, \forall n \geq \max\{1, \lambda_0\}, \end{aligned}$$

which implies that the condition (8) is fulfilled.

For $p > 1$, it holds that

$$T_0 := t_0 + \sum_{i=0}^{\infty} (t_{i+1} - t_i) = \sum_{i=0}^{\infty} \frac{1}{(i+1)^p} = \zeta(p).$$

For any constant $\sigma > 0$, let k be the unique solution to the kernel equation (2) with

$$\lambda := \sigma.$$

Consider the disturbed system with zero initial datum

$$w_t(x, t) = (a(x)w_x(x, t))_x + c(x)w(x, t) + f(x, t), (x, t) \in Q_{T_0}, \quad (12a)$$

$$w(0, t) = d_0(t), t \in (0, T_0), \quad (12b)$$

$$w(1, t) = W(t) + d_1(t), t \in (0, T_0), \quad (12c)$$

$$w(x, 0) = 0, x \in (0, 1), \quad (12d)$$

where

$$W(t) := \int_0^1 k(1, y)w(y, t) dy, \forall t \in (0, T_0). \quad (13)$$

To stabilize system (1) in the fixed time T_0 , we define the control law:

$$U(t) := V(t) + W(t), \forall t \in (t_n, t_{n+1}), \forall n \in \mathbb{N}, \quad (14)$$

where $V(t)$ and $W(t)$ are determined by (5) and (13), respectively.

We state the following theorem, which is the first main result obtained in this paper, and its proof is provided in Section 4.

Theorem 1 *Let p , $\{t_n\}$, and $\{\lambda_n\}$ be determined by (11). Under the control law (14), system (1) admits the following properties:*

(i) *the disturbance-free system (1), i.e., system (1) with $f \equiv d_0 \equiv d_1 \equiv 0$, is fixed-time stable in the time $T_0 := \zeta(p)$, i.e.,*

$$\lim_{t \rightarrow T_0^-} \|u[t]\|_{L^2(0,1)} = 0;$$

(ii) *the disturbed system (1), i.e., system (1) with $f^2 + d_0^2 + d_1^2 \neq 0$, is ISS, having the following estimate:*

$$\|u[t]\|_{L^2(0,1)} \leq C_0 e^{-t} \|u_0\|_{L^2(0,1)} + C_1 (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}), \forall t \in (0, T_0),$$

where C_0 and C_1 are positive constants independent of n , u_0 , f , d_0 , and d_1 .

It is worth noting that, under the transformation

$$\tilde{w}(x, t) := w(x, t) - \int_0^x k(x, y) w(y, t) dy,$$

system (12) is converted into

$$\tilde{w}_t(x, t) = (a(x)\tilde{w}_x(x, t))_x - \sigma\tilde{w}(x, t) + \tilde{f}(x, t), (x, t) \in Q_{T_0}, \quad (15a)$$

$$\tilde{w}(0, t) = d_0(t), t \in (0, T_0), \quad (15b)$$

$$\tilde{w}(1, t) = d_1(t), t \in (0, T_0), \quad (15c)$$

$$\tilde{w}(x, 0) = 0, x \in (0, 1), \quad (15d)$$

where $\tilde{f}(x, t) := f(x, t) - \int_0^x k(x, y) f(y, t) dy$. Since system (15) admits a unique (weak) solution, which is defined in the sense of [5, (4.3) and (4.4)] and belongs to $C([0, T_0]; L^2(0, 1)) \cap C^1((0, T_0); L^2(0, 1))$, by virtue of Lemma 3, system (12) also admits a unique (weak) solution belonging to $C([0, T_0]; L^2(0, 1)) \cap C^1((0, T_0); L^2(0, 1))$. Therefore, the disturbed system (1) in closed loop admits a unique (weak) solution belonging to $C([0, T_0]; L^2(0, 1))$ with $u_t[t] \in L^2(0, 1)$ for any fixed $t \in (t_n, t_{n+1})$, $n \in \mathbb{N}$.

It is also worth mentioning that the regularity (in the spatial variable) of the solution to system (1) can not be improved due to the fact that the initial datum of system (10) (or system (4)) is only in L^2 -space. However, the regularity of the solution to system (12) (or system (15)) can be improved due to the fact that its initial datum and external disturbances are all continuous. For instance, by taking spatial H^1 -approximations of external disturbances, it can be shown that the solutions to system (15) and system (12) belong to $C([0, T_0]; L^\infty(0, 1))$.

3.3 Control design in Case II

In this section, we design a boundary controller to stabilize system (1) in arbitrarily given time. For this, we let $T_0 > 0$ be freely prescribed and independent of initial conditions. By virtue of Lemma 4, we set

$$t_n := T_0 - \frac{T_0}{n+1}, n \in \mathbb{N}, \quad (16a)$$

$$\lambda_n := n^6 + \lambda_0, n \in \mathbb{N}. \quad (16b)$$

Consider (4) and (12) with $V(t)$ and $W(t)$ being determined by (5) and (13), respectively. To stabilize system (1) in the freely prescribed finite time T_0 , we define the control law by (14).

Note that for $n \geq \max\{1, \lambda_0\}$ we have

$$\frac{s_n}{n + \sqrt{\lambda_{n+1}}} \geq \frac{\lambda_{n-1}(t_n - t_{n-1})}{n + \sqrt{\lambda_{n+1}}} \geq \frac{T(n-1)^6}{2\sqrt{2}(n+1)^5}.$$

Thus, the condition (8) is fulfilled and hence (9) holds true.

Analogous to Theorem 1, we have the following result, which can be proved in the same way as Theorem 1, and its proof is given in Section 4.

Theorem 2 *Let $\{t_n\}$ and $\{\lambda_n\}$ be determined by (16). Under the control law (14), system (1) admits the following properties:*

(i) *the disturbance-free system (1), i.e., system (1) with $f \equiv d_0 \equiv d_1 \equiv 0$, is fixed-time stable in the freely prescribed finite time T_0 ;*

(ii) *the disturbed system (1), i.e., system (1) with $f^2 + d_0^2 + d_1^2 \neq 0$, is ISS.*

Remark 2 *Although Theorem 1 and Theorem 2 theoretically guarantee the fixed-time stability of the disturbance-free system, as well as the ISS of the disturbed system, it is not feasible for practical problems to stabilize the system by designing controllers over infinite time intervals. Nevertheless, within an allowable error of fixed-time decay estimate, the convergence estimates presented in (7) can provide a numeric computation scheme to implement the boundary controller over finite time intervals.*

4 Stability assessment

In order to prove Theorem 1 and Theorem 2, we present a result on the L^∞ -estimate of the solution to system (15), which plays a crucial role in establishing the ISS w.r.t. Dirichlet boundary disturbances for the original system (1) in closed loop.

Lemma 5 *The solution of system (15) admits the following estimate:*

$$\|\tilde{w}[t]\|_{L^\infty(0,1)} \leq \frac{1}{\sigma} \|\tilde{f}\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}, \forall t \in (0, T_0). \quad (17)$$

Proof. To deal with boundary terms in the Lyapunov arguments, following [42], we use the generalized Lyapunov method to prove the L^∞ -estimate of the solution. We first define Stampacchia's truncation functions:

$$g(s) := \begin{cases} \ln(1 + s^2), & s \in \mathbf{R}_{>0}, \\ 0, & s \in \mathbf{R}_{\leq 0}, \end{cases}$$

$$G(s) := \int_0^s g(\tau) d\tau, \forall s \in \mathbf{R}.$$

It is easy to see that

$$0 \leq g(s) \leq 2|s|, \forall s \in \mathbf{R}, \quad (18a)$$

$$g'(s) \geq 0, G(s) \geq 0, \forall s \in \mathbf{R}, \quad (18b)$$

$$g(s) = G(s) = 0, \forall s \in \mathbf{R}_{\leq 0}. \quad (18c)$$

For any $T \in (0, T_0)$, let

$$\Omega := \max \left\{ \frac{1}{\sigma} \|\tilde{f}\|_{L^\infty(Q_T)}, \|d_0\|_{L^\infty(0,T)}, \|d_1\|_{L^\infty(0,T)} \right\}.$$

In the generalized Lyapunov arguments, we shall derive $\frac{d}{dt} \int_0^1 G(\tilde{w} - \Omega) dx$ and $\frac{d}{dt} \int_0^1 G(-\tilde{w} - \Omega) dx$, respectively. Indeed, the boundary and initial conditions, the definition of Ω , and (18c) imply that

$$g(\tilde{w}(0,t) - \Omega) = g(\tilde{w}(1,t) - \Omega) = 0, \forall t \in [0, T]. \quad (19)$$

Note that the following implication holds true for all $t \in (0, T)$:

$$\tilde{w}(\cdot, t) - \Omega \geq 0 \Rightarrow \sigma \tilde{w}(\cdot, t) \geq \|\tilde{f}\|_{L^\infty(Q_T)} \geq \tilde{f}(\cdot, t).$$

Therefore, it holds that

$$\int_0^1 g(\tilde{w} - \Omega) (\tilde{f} - \sigma \tilde{w}) dx \leq 0, \forall t \in (0, T). \quad (20)$$

Then, we deduce by (18b), (19), and (20) that

$$\begin{aligned} \frac{d}{dt} \int_0^1 G(\tilde{w} - \Omega) dx &= \int_0^1 g(\tilde{w} - \Omega) \tilde{w}_t dx \\ &= \int_0^1 g(\tilde{w} - \Omega) \left((a\tilde{w}_x)_x - \sigma \tilde{w} + \tilde{f} \right) dx \\ &= - \int_0^1 a g'(\tilde{w} - \Omega) \tilde{w}_x^2 dx + \int_0^1 g(\tilde{w} - \Omega) (\tilde{f} - \sigma \tilde{w}) dx \\ &\leq 0, \forall t \in (0, T), \end{aligned}$$

which implies that

$$\int_0^1 G(\tilde{w}(x,t) - \Omega) dx \leq \int_0^1 G(\tilde{w}(x,0) - \Omega) dx \leq 0, \forall t \in (0, T).$$

Therefore, $G(\tilde{w} - \Omega) \equiv 0$ in Q_T and thus, for every $t \in (0, T)$, we have

$$\tilde{w}(\cdot, t) \leq \Omega \text{ a.e. in } (0, 1).$$

Applying similar arguments, we obtain

$$\frac{d}{dt} \int_0^1 G(-\tilde{w} - \Omega) dx \leq 0, \forall t \in (0, T).$$

Furthermore, for every $t \in (0, T)$, we have

$$-\tilde{w}(\cdot, t) \leq \Omega \text{ a.e. in } (0, 1).$$

Finally, for every $t \in (0, T)$, we conclude that

$$|\tilde{w}(\cdot, t)| \leq \Omega \text{ a.e. in } (0, 1),$$

which along with the arbitrariness of t and T implies (17). Ξ

Proof of Theorem 1 and Theorem 2. The statements of Theorem 1(i) and Theorem 2(i) are guaranteed by Lemma 4. Therefore, it suffices to prove the statements of Theorem 1(ii) and Theorem 2(ii), which can be proceeded in a unified way.

Let T_0 be determined by the Riemann zeta function in Theorem 1, or freely prescribed in Theorem 2. In the sequel, denoted by C (or C') a positive constant, which may be different from each other when appearing in different places. In view of Lemma 5 and Lemma 1, we have

$$\begin{aligned} \|\tilde{w}[t]\|_{L^2(0,1)} &\leq \|\tilde{w}[t]\|_{L^\infty(0,1)} \\ &\leq \frac{1}{\sigma} \|\tilde{f}\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)} \\ &\leq \frac{1}{\sigma} \left(1 + e^{C\sqrt{\sigma}}\right) \|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}, \forall t \in (0, T_0). \end{aligned} \quad (21)$$

By (21), and applying Lemma 2 and Lemma 3 with $\lambda := \sigma$, we deduce that

$$\begin{aligned} \|w[t]\|_{L^2(0,1)} &\leq (1 + \|l\|_{L^\infty(D)}) \|\tilde{w}[t]\|_{L^2(0,1)} \\ &\leq (1 + \|l\|_{H^1(D)}) \|\tilde{w}[t]\|_{L^2(0,1)} \\ &\leq (1 + C\sigma^2) \|\tilde{w}[t]\|_{L^2(0,1)} \\ &\leq C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}), \forall t \in (0, T_0), \end{aligned} \quad (22)$$

where C and C' are positive constants independent of n , u_0 , f , d_0 , and d_1 .

We infer from $u = v + w$, (22), and Lemma 4 that

$$\begin{aligned} \|u[t]\|_{L^2(0,1)} &\leq \|v[t]\|_{L^2(0,1)} + \|w[t]\|_{L^2(0,1)} \\ &\leq C e^{-\frac{s_{n-1}}{4} + C(n-1)} \|u_0\|_{L^2(0,1)} + C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}), \forall t \in (t_n, t_{n+1}), \end{aligned} \quad (23)$$

where $\{s_n\}$ is defined by (6), and C, C' are positive constants independent of n , u_0 , f , d_0 , and d_1 .

In view of (8), there exists a sufficiently large integer $N_0 \in \mathbb{N}_+$ such that

$$\frac{s_{n-1}}{4} - C(n-1) > T_0, \forall n > N_0. \quad (24)$$

Moreover, for any $t \in (0, T_0)$, there exists a positive integer n_0 such that $t \in (t_{n_0}, t_{n_0+1})$ with either $n_0 > N_0$ or $n_0 + 1 \leq N_0$. If $n_0 > N_0$, we deduce by (23) and (24) that

$$\begin{aligned} \|u[t]\|_{L^2(0,1)} &\leq C e^{-T} \|u_0\|_{L^2(0,1)} + C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}) \\ &\leq C e^{-t} \|u_0\|_{L^2(0,1)} + C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}), \end{aligned} \quad (25)$$

where C and C' are positive constants independent of n , u_0 , f , d_0 , and d_1 .

If $n_0 + 1 \leq N_0$, we infer from (23) that there exists a positive constant C'' depending only on N_0 such that

$$\begin{aligned} \|u[t]\|_{L^2(0,1)} &\leq C'' \|u_0\|_{L^2(0,1)} + C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}) \\ &\leq C'' e^{t N_0 + 1} e^{-t} \|u_0\|_{L^2(0,1)} + C' (\|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}), \end{aligned} \quad (26)$$

where C' is positive constant independent of n , u_0 , f , d_0 , and d_1 .

Combining (25) and (26), we conclude that disturbed system in closed loop is ISS, having the estimate for all $t \in (0, T_0)$:

$$\|u[t]\|_{L^2(0,1)} \leq C (e^{-t} \|u_0\|_{L^2(0,1)} + \|f\|_{L^\infty(Q_t)} + \|d_0\|_{L^\infty(0,t)} + \|d_1\|_{L^\infty(0,t)}),$$

where C is a positive constant independent of n , u_0 , f , d_0 , and d_1 . Ξ

5 Numerical example

We consider the following system

$$u_t(x, t) = u_{xx}(x, t) + cu(x, t), (x, t) \in Q_{T_0}, \quad (27a)$$

$$u(0, t) = 0, t \in (0, T_0), \quad (27b)$$

$$u(1, t) = U(t) + d_1(t), t \in (0, T_0), \quad (27c)$$

with $c = 24$, $d_1(t) = A \sin(30t)$, and $A \in \{0, 1, 2\}$, where A is used to describe the amplitude of different Dirichlet boundary disturbances.

The initial condition is given by

$$u(x, 0) = u_0(x), x \in (0, 1),$$

or,

$$u(x, 0) = 10u_0(x), x \in (0, 1),$$

where $u_0(x) := -4 \sin(15(x - 0.5))$.

It is known that the disturbance-free system (27) in open loop is unstable due to the fact that $c > \pi^2$; see also Fig. 1

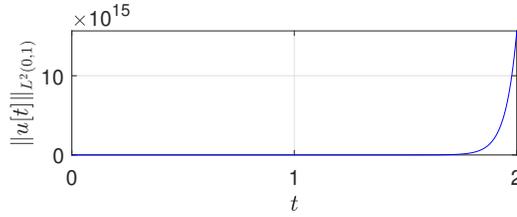


Fig. 1. L^2 -norm of solution to the open-loop system (27) with $d_1 \equiv 0$ and initial datum $u_0(x)$

In order to input-to-state stabilize system (27), we split it into two subsystems:

$$v_t(x, t) = v_{xx}(x, t) + cv(x, t), (x, t) \in (0, 1) \times (t_n, t_{n+1}),$$

$$v(0, t) = 0, t \in (t_n, t_{n+1}),$$

$$v(1, t) = V(t), t \in (t_n, t_{n+1}),$$

$$v(x, t_0) = u(x, 0), x \in (0, 1),$$

and

$$w_t(x, t) = w_{xx}(x, t) + cw(x, t), (x, t) \in Q_{T_0},$$

$$w(0, t) = 0, t \in (0, T_0),$$

$$w(1, t) = W(t) + d_1(t), t \in (0, T_0),$$

$$w(x, 0) = 0, x \in (0, 1),$$

where

$$V(t) = \int_0^1 k_n(1, y)v(y, t) dy, \forall t \in (t_n, t_{n+1}),$$

$$W(t) = \int_0^1 k(1, y)w(y, t) dy, \forall t \in (0, T_0).$$

According to Remark 1, the kernel functions are given by

$$k_n(1, y) = -(\lambda_n + c)y \frac{I_1\left(\sqrt{(\lambda_n + c)(1 - y^2)}\right)}{\sqrt{(\lambda_n + c)(1 - y^2)}},$$

$$k(1, y) = -(\sigma + c)y \frac{I_1\left(\sqrt{(\sigma + c)(1 - y^2)}\right)}{\sqrt{(\sigma + c)(1 - y^2)}}.$$

According to Theorem 1 and Theorem 2, the following control law

$$U(t) := V(t) + W(t), \forall t \in (t_n, t_{n+1}) \quad (28)$$

can be used to input-to-state stabilize system (27) after choosing appropriate $t_n, \lambda_n \geq \lambda_0$, and σ . In simulations, we always choose

$$\lambda_0 := 3.5 \quad \text{and} \quad \sigma = 1.$$

Numerical results in Case I. In this case, we choose $p = 1.9$, then the fixed time is given by

$$T_0 = \zeta(p) = 1.7497,$$

and t_n, λ_n are given by

$$\begin{aligned} t_0 &:= 0, \\ t_{n+1} &= t_n + \frac{1}{(n+1)^p}, n \in \mathbb{N}_+, \\ \lambda_n &= n^{2(p+1)} + \lambda_0, n \in \mathbb{N}. \end{aligned}$$

By virtue of Remark 2, for numeric computations, we consider $n = 0, 1, 2$. Thus, the time interval $(0, T_0)$ is divided into


$$\begin{aligned} (t_0, t_1) &= (0, 1), \\ (t_1, t_2) &= (1, 1.2679), \\ (t_2, t_3) &= (1.2679, 1.7497), \end{aligned}$$

for which $\{\lambda_n\}$ is given by


$$\lambda_0 = 3.5, \quad \lambda_1 = 4.5, \quad \text{and} \quad \lambda_2 = 58.2152,$$

respectively.

Figure 2 (a) shows that system (27) with initial datum u_0 is fixed-time stable in L^2 -norm in the time $T_0 = 1.7497$, while Fig. 2 (b) shows that the system is still fixed-time stable in the same time T_0 when the initial datum is increased to be $10u_0$. Under the same initial condition, Fig. 2 (a) and Fig. 3 show that the L^2 -norms of the solutions to system (27) with different boundary disturbances remains bounded due to the facts that the disturbances are bounded. However, the norms are more influenced by disturbances with large amplitudes. This reflects well the ISS property of the system in the closed loop.

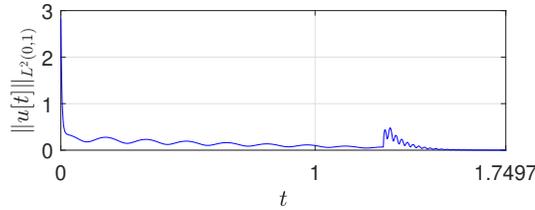

(a) $u(x, 0) = u_0(x), A = 0$

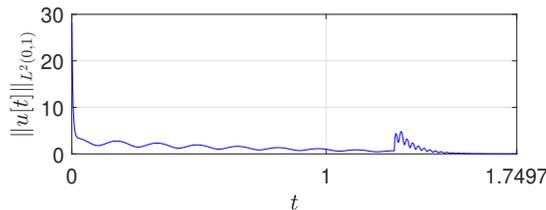

(b) $u(x, 0) = 10u_0(x), A = 0$


Fig. 2. L^2 -norms of the solutions to the disturbance-free closed-loop system with different initial data under the control law (28) in Case I

Numerical results in Case II. In this case, we freely prescribe the finite time to be


$$T_0 = 1.5.$$

Then, t_n, λ_n are given by

$$\begin{aligned} t_0 &= 0, \\ t_n &= T_0 - \frac{T_0}{n+1}, n \in \mathbb{N}_+, \\ \lambda_n &= n^6 + \lambda_0, n \in \mathbb{N}. \end{aligned}$$

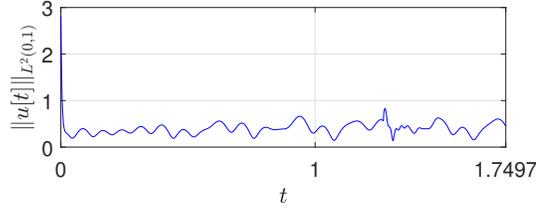

(a) $u(x, 0) = u_0(x), A = 1$

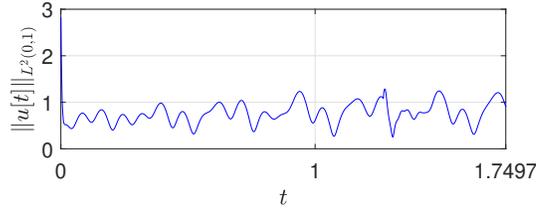

(b) $u(x, 0) = u_0(x), A = 2$

Fig. 3. L^2 -norms of the solutions to the closed-loop system (27) with different disturbances under the control law (28) in Case I

By virtue of Remark 2, for numeric computations, we consider $n = 0, 1, 2$. Thus, the time interval $(0, T_0)$ is divided into


$$\begin{aligned} (t_0, t_1) &= (0, 0.75), \\ (t_1, t_2) &= (0.75, 1), \\ (t_2, t_3) &= (1, 1.5), \end{aligned}$$

associated with


$$\lambda_0 = 3.5, \quad \lambda_1 = 4.5, \quad \text{and} \quad \lambda_2 = 67.5,$$

respectively.

Figure 4 (a) shows that system (27) with initial datum u_0 is fixed-time stable in L^2 -norm in the time $T_0 = 1.5$, while fig. 4 (b) shows that the system is still fixed-time stable in the same time T_0 when the initial datum is increased to be $10u_0$. As in Fig. 2 (a) and Fig. 3, under the same initial condition, Fig. 4 (a) and Fig. 5 also reflect well the ISS property of the system in the closed loop.

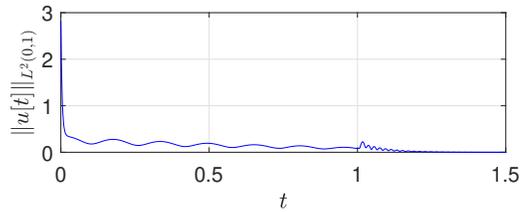

(a) $u(x, 0) = u_0(x), A = 0$

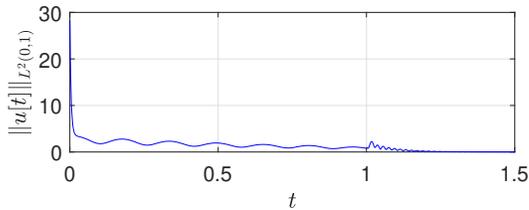

(b) $u(x, 0) = 10u_0(x), A = 0$

Fig. 4. L^2 -norms of the solutions to the disturbance-free closed-loop system (27) with different initial data under the control law (28) in Case II

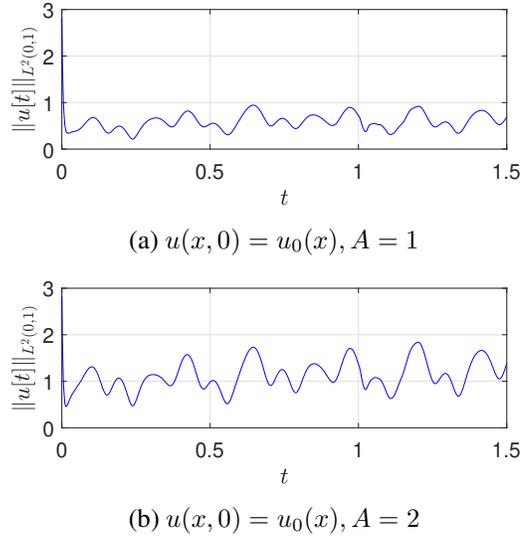


Fig. 5. L^2 -norms of the solutions to the closed-loop system (27) with different disturbances under the control law (28) in Case II

6 Conclusion

This paper addressed the problem of input-to-state stabilization for 1-D parabolic equations in the presence of distributed in-domain and Dirichlet boundary disturbances while ensuring the fixed-time stability of the corresponding disturbance-free system. A boundary controller was designed by using backstepping based on the technique of splitting, and the stability was assessed by using the generalized Lyapunov method, which can be used to deal with boundary terms easily. Numerical simulations were conducted, and the results confirmed the ISS properties of the considered system with in-domain and Dirichlet boundary disturbances, as well as the fixed-time stability of the associated disturbance-free system.

It is worth mentioning that the proposed scheme is suitable for input-to-state stabilization of 1-D linear parabolic equations with Robin or Neumann boundary disturbances, as well as for fixed-time stabilization of the corresponding disturbance-free system, for which the classical Lyapunov method remains valid for stability analysis. However, it is still challenging to directly apply the proposed method to fixed-time input-to-state stabilization of the system with Dirichlet boundary disturbances due to the fact that the fixed-time ISS is a much stronger property than the ISS. This problem will be addressed in our future work.

References

- [1] A. Baccoli, A. Pisano, and Y. Orlov. Boundary control of coupled reaction-diffusion processes with constant parameters. *Automatica*, 54:80–90, 2015.
- [2] A. Balogh and M. Krstic. Infinite dimensional backstepping-style feedback transformations for a heat equation with an arbitrary level of instability. *Eur. J. Control*, 8(2):165–175, 2002.
- [3] C. Bao, B. Cui, X. Lou, W. Wu, and B. Zhuang. Fixed-time stabilization of parabolic distributed parameter systems with spatially and temporally varying reactivity. *Eur. J. Control*, 63:253–269, 2022.
- [4] D. M. Boskovic, M. Krstic, and W. Liu. Boundary control of an unstable heat equation via measurement of domain-averaged temperature. *IEEE Trans. Autom. Control*, 46(12):2022–2028, 2001.
- [5] J. M. Coron and H. M. Nguyen. Null controllability and finite time stabilization for the heat equations with variable coefficients in space in one dimension via backstepping approach. *Arch. Rational Mech. Anal.*, 225(3):993–1023, 2017.
- [6] J. Deutscher and S. Kerschbaum. Backstepping control of coupled linear parabolic PIDEs with spatially varying coefficients. *IEEE Trans. Autom. Control*, 63(12):4218–4233, 2018.
- [7] N. Espitia, A. Polyakov, D. Efimov, and W. Perruquetti. Boundary time-varying feedbacks for fixed-time stabilization of constant-parameter reaction-diffusion systems. *Automatica*, 103:398–407, 2019.
- [8] L. C. Evans. *Partial Differential Equations*. American Mathematical Soc., Providence, Rhode Island, 2010.
- [9] Y. Feng, Y. Wang, J. Wang, and H. Li. Backstepping-based distributed abnormality localization for linear parabolic distributed parameter systems. *Automatica*, 135:109930, 2022.
- [10] F. Ge and H. Zhou. Event-triggered boundary stabilization for coupled semilinear reaction-diffusion systems with spatially varying coefficients. *Nonlinear Anal. Hybrid Syst.*, 45:101194, 2022.
- [11] N. Ghaderi and M. Keyanpour. Backstepping design for a class of coupled parabolic PDEs with spatially varying coefficient. *Asian J. Control*, 22(5):2017–2028, 2020.
- [12] V. T. Haimo. Finite time controller. *SIAM J. Control Optim.*, 24(4):760–770, 1986.
- [13] X. X. Han, D. Efimov, A. Polyakov, and K. N. Wu. Input-to-state stability analysis of heat equation with boundary finite-time control. *Automatica*, 160:111443, 2024.

- [14] J. Holloway and M. Krstic. Prescribed-time observers for linear systems in observer canonical form. *IEEE Trans. Autom. Control*, 64(9):3905–3912, 2019.
- [15] I. Karafyllis, N. Espitia, and M. Krstic. Event-triggered gain scheduling of reaction-diffusion PDEs. *SIAM J. Control Optim.*, 59(3):2047–2067, 2021.
- [16] I. Karafyllis and M. Krstic. ISS with respect to boundary disturbances for 1-D parabolic PDEs. *IEEE Trans. Autom. Control*, 61(12):3712–3724, Dec. 2016.
- [17] S. Kerschbaum and J. Deutscher. Backstepping control of coupled linear parabolic PDEs with space and time dependent coefficients. *IEEE Trans. Autom. Control*, 65(7):3060–3067, 2020.
- [18] S. Kerschbaum and J. Deutscher. Bilateral backstepping control of coupled linear parabolic PDEs with spatially varying coefficients. *Automatica*, 135(7):109923, 2022.
- [19] M. Krstic and A. Smyshlyaev. *Boundary Control of PDEs: A Course on Backstepping Designs*. SIAM, 2008.
- [20] B. Li, K. Qin, B. Xiao, and Y. Yang. Finite-time extended state observer based fault tolerant output feedback control for attitude stabilization. *ISA Trans.*, 91:11–20, 2019.
- [21] T. Li and H. Zhao. Global finite-time adaptive control for uncalibrated robot manipulator based on visual servoing. *ISA Trans.*, 68:402–411, 2017.
- [22] W. Liu. Boundary feedback stabilization of an unstable heat equation. *SIAM J. Control Optim.*, 42(3):1033–1043, 2003.
- [23] M. Golestani and S. M. Esmailzadeha and S. Mobayen. Fixed-time control for high-precision attitude stabilization of flexiblespacecraft. *Eur. J. Control*, 57:222–231, 2021.
- [24] T. Meurer and M. Krstic. Finite-time multi-agent deployment: A nonlinear PDE motion planning approach. *Automatica*, 47(11):2534–2542, 2011.
- [25] T. Meurer and A. Kugi. Tracking control for boundary controlled parabolic PDEs with varying parameters: Combining backstepping and differential flatness. *Automatica*, 45(5):1182–1194, 2009.
- [26] A. Mironchenko, I. Karafyllis, and M. Krstic. Monotonicity methods for input-to-state stability of nonlinear parabolic PDEs with boundary disturbances. *SIAM J. Control Optim.*, 57(1):510–532, 2019.
- [27] Y. Orlov, A. Pisano, A. Pilloni, and E. Usai. Output feedback stabilization of coupled reaction-diffusion processes with constant parameters. *SIAM J. Control Optim.*, 55(6):4112–4155, 2017.
- [28] M. Ouzahra. Finite-time control for the bilinear heat equation. *Eur. J. Control*, 57:284–293, 2021.
- [29] V. Perrollaz and L. Rosier. Finite-time stabilization of 2×2 hyperbolic systems on tree-shaped networks. *SIAM J. Control Optim.*, 52(1):143–163, 2014.
- [30] A. Polyakov, J. M. Coron, and L. Rosier. On boundary finite-time feedback control for heat equation. *IFAC-PapersOnLine*, 51(1):671–676, 2017.
- [31] A. Polyakov, J. M. Coron, and L. Rosier. On homogeneous finite-time control for linear evolution equation in Hilbert space. *IEEE Trans. Autom. Control*, 63(9):3143–3150, 2017.
- [32] A. Smyshlyaev and M. Krstic. Closed-form boundary state feedbacks for a class of 1-D partial integro-differential equations. *IEEE Trans. Autom. Control*, 34(12):435–443, 2004.
- [33] A. Smyshlyaev and M. Krstic. On control design for PDEs with space-dependent diffusivity or time-dependent reactivity. *Automatica*, 41(9):1601–1608, 2005.
- [34] Y. Song, Y. Wang, J. Holloway, and M. Krstic. Time-varying feedback for regulation of normal-form nonlinear systems in prescribed finite time. *Automatica*, 83:243–251, 2017.
- [35] D. Steeves, M. Krstic, and R. Vazquez. Prescribed-time h^1 -stabilization of reaction-diffusion equations by means of output feedback. In *2019 18th European Control Conference*, pages 1932–1937, Naples, Italy, Jun. 2019.
- [36] D. Steeves, M. Krstic, and R. Vazquez. Prescribed-time estimation and output regulation of the linearized Schrödinger equation by backstepping. *Eur. J. Control*, 55:3–13, 2020.
- [37] C. Wei and J. Li. Prescribed-time stabilization of semi-linear parabolic equations subject to distributed disturbance. *ISA Trans.*, 128(Part B):355–366, 2022.
- [38] C. Wei and J. Li. Prescribed-time stabilization of uncertain heat equation via boundary time-varying feedback and disturbance estimator. *Syst. Control Lett.*, 171(105):419, 2023.
- [39] Y. Xiao, X. Xu, and S. Džurđević. Prescribed-time constrained tracking control of a class of 2×2 hyperbolic PDE systems with actuator dynamics. *Int. J. Robust Nonlinear Control*, 34(9):6118–6141, 2024.
- [40] P. Zarchan. *Tactical and strategic missile guidance*. AIAA, Reston, Virginia, 2012.
- [41] J. Zheng and G. Zhu. A De Giorgi iteration-based approach for the establishment of ISS properties for Burgers’ equation with boundary and in-domain disturbances. *IEEE Trans. Autom. Control*, 64(8):3476–3483, 2019.
- [42] J. Zheng and G. Zhu. Global ISS for the viscous Burgers’ equation with Dirichlet boundary disturbances. *IEEE Trans. Autom. Control*, 2024. DOI: 10.1109/TAC.2024.3393850.