

Physics-informed Gaussian Processes as Linear Model Predictive Controller

Jörn Tebbe

Andreas Besginow

Markus Lange-Hegermann

JOERN.TEBBE@TH-OWL.DE

ANDREAS.BESGINOW@TH-OWL.DE

MARKUS.LANGE-HEGERMANN@TH-OWL.DE

Institute Industrial IT - inIT, OWL University of Applied Sciences and Arts Lemgo, Germany

Abstract

We introduce a novel algorithm for controlling linear time invariant systems in a tracking problem. The controller is based on a Gaussian Process (GP) whose realizations satisfy a system of linear ordinary differential equations with constant coefficients. Control inputs for tracking are determined by conditioning the prior GP on the setpoints, i.e. control as inference. The resulting Model Predictive Control scheme incorporates pointwise soft constraints by introducing virtual setpoints to the posterior Gaussian process. We show theoretically that our controller satisfies asymptotical stability for the optimal control problem by leveraging general results from Bayesian inference and demonstrate this result in a numerical example.

Keywords: Linear Model Predictive Control, Constrained Gaussian Processes, Control as Inference

1. Introduction

Controlling industrial applications requires precise modeling and good control algorithms, which is often addressed via Model Predictive Control (MPC) (Tebbe et al., 2023; Rawlings et al., 2017). MPC consists of a predictive model and a control strategy. The predictive model simulates the future system behaviour for given control inputs and the optimization strategy produces the optimal input with respect to the given objective function and constraints.

Predictive models are usually *first principle based* and/or *data-driven*. For example, Gaussian Processes (GPs) have emerged as a commonly applied data-driven method due to their excellent handling of both few datapoints and uncertainty quantification (Berkenkamp and Schoellig, 2015; Hewing et al., 2018; Maiworm et al., 2021). The objective function may be of economic type (Bradford and Imsland, 2018) or quadratic type (Qin and Badgwell, 2003). Linear MPC for tracking defines the special case where the predictive model is linear and the objective is the squared Euclidean distance of the state to a desired setpoint and therefore quadratic (Limón et al., 2008).

The resulting optimization problem is a Quadratic Program (QP) whose solution is easily obtained. A problem of this constrained optimization problem is, that it might be infeasible due to the initial point not satisfying the constraints (Kerrigan and Maciejowski, 2000; Krupa et al., 2024). A remedy to this is soft constrained MPC where the optimization problem has no hard state and control constraints, but contains these constraints in its objective function. Several works addressed this research path, including (Zeilinger et al., 2014; Wabersich et al., 2021; Gracia et al., 2024).

In this work we present a novel approach for such problems with input and state constraints. We expand the recently introduced class of Linear Ordinary Differential Equation Gaussian Processes (LODE-GPs) (Besginow and Lange-Hegermann, 2022), a class of GPs strictly satisfying given linear Ordinary Differential Equation (ODE) systems to an MPC scheme. We solve the optimal control

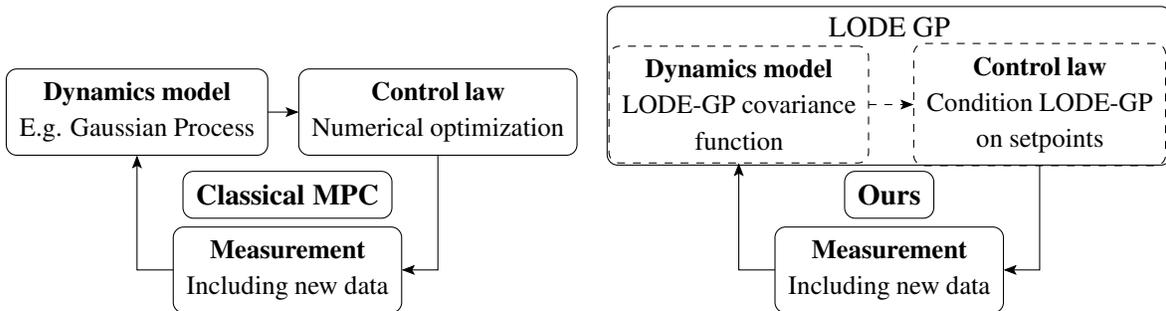


Figure 1: Similarities between classical MPC and our proposed method. While in classical MPC (Left) a GP or different surrogate model is only used for the dynamics, our approach (Right) applies also the synthesis of the control law *directly in the GP*.

problem by using the current state and constraints as training data for the LODE-GP and obtaining the control law directly from its posterior predictive distribution. By using smooth kernel functions in our GP, our method also produces smooth control functions, but other choices of kernels would be possible (Duvenaud, 2014). Our approach differs from classical tracking MPC by considering *the union of dynamics and control law in one model*. This reduces a complex control task to simple posterior inference of a GP, as we illustrate in Figure 1. This approach, also known as Control as Inference (CAI), has already been used in stochastic optimal control problems and reinforcement learning (Levine, 2018). Our approach is furthermore based on the behavioral approach to control (Willems and Polderman, 1997), which does not necessarily distinguish inputs, state, and outputs and instead takes an intrinsic approach. This point of view allows to apply computer algebra (Oberst, 1990; Pommaret and Quadrat, 1999; Zerz, 2000; Chyzak et al., 2005; Lange-Hegermann and Robertz, 2013, 2020), which was also the motivation of the LODE-GP. In this paper, we endow the behavior, i.e. the set of admissible trajectories, with a probability distribution via the LODE-GPs and use the marginalization of this probability distribution for control. This probabilistic behavioral approach allows to restrict our system by any form of data, e.g. at any time, masked data, noisy data, average values, or most importantly by requirements of future states. We exploit the kernelized structure of the GP to provide asymptotic stability to the controlled system. This results from the fact that a GP posterior converges to its prior in the absence of correlated training data. Moreover, we connect GPs with MPC via CAI. This connection may open the field of control for MPC for the vast methods of GPs or other kernel based methods including variational approaches for non-Gaussian likelihoods (Titsias, 2009).

Notation: We denote the concatenation of state $x \in \mathbb{R}^{n_x}$ and control $u \in \mathbb{R}^{n_u}$ as $z \in \mathbb{R}^{n_z}$. We use \dot{x} as the derivative of $x(t)$ with respect to t , $x \leq y$ for vectors denotes $x_i \leq y_i$ in each entry, $\mathbb{1}_A$ is the indicator function for $x \in A$, $\delta(x, x')$ denotes the Kronecker function and $\text{diag}(x_1, \dots, x_n)$ is a diagonal matrix containing x_1, \dots, x_n on the diagonal.

We organize the remainder of this work as follows: Section 2 presents the considered control problem. In Section 3 we give information about GPs and LODE-GPs, from which our LODE-GP based MPC is formulated in Section 4. Section 5 presents simulation results from a spring-mass-damper system and a conclusion is drawn in Section 6.

2. Problem formulation

Consider the controllable linear ODE based system with state $x \in \mathbb{R}^{n_x}$, control input $u \in \mathbb{R}^{n_u}$ and output $y \in \mathbb{R}^{n_y}$ given by

$$\dot{x} = Ax + Bu \quad (1)$$

$$y = Cx \quad (2)$$

where $A \in \mathbb{R}^{n_x \times n_x}$, $B \in \mathbb{R}^{n_x \times n_u}$, $C \in \mathbb{R}^{n_y \times n_x}$ are system, control and output matrices respectively (Rawlings et al., 2017). For the sake of simplicity, we assume that the full state is measured, i.e. $C = I$. The system state and control input are subject to constraints

$$x_{\min} \leq x(t) \leq x_{\max} \quad (3)$$

$$u_{\min} \leq u(t) \leq u_{\max} \quad (4)$$

for $t \in [t_0, t_T]$. The general tracking control task is the minimization of a norm of the difference between a given reference $x_{\text{ref}} \in \mathbb{R}^{n_x}$ and states x over a given time horizon $[t_0, t_T]$

$$\min_{u(t)} \int_{t_0}^{t_T} \|x_{\text{ref}} - x(t)\| dt \quad (5)$$

with the constraints (1), (3), (4) and given initial point $x(t_0) = x_0$. The tracking control task at discrete timesteps is an approximation of (5) and minimizes the distance of state x_{ref} and state $x(t)$ to find the minimal error control solution of

$$\min_{u(t)} \sum_{i=0}^T \|x_{\text{ref}} - x(t_i)\| + \|u\| \quad (6a)$$

$$\text{s.t. } \dot{x} = Ax + Bu, \quad (6b)$$

$$x(t_0) = x_0, \quad (6c)$$

$$x_{\min} \leq x(t) \leq x_{\max} \quad \forall t \in [t_0, t_T], \quad (6d)$$

$$u_{\min} \leq u(t) \leq u_{\max} \quad \forall t \in [t_0, t_T]. \quad (6e)$$

We will present an approach in this paper which will approximate the solution of this optimization problem by giving a reference point x_{ref} and forcing the resulting solution $x(t)$ and $u(t)$ to provide smooth behaviour. Note that the constraints (6b) and (6c) must be considered as hard constraints, while the remaining can be incorporated as soft constraints in order to guarantee feasibility of the optimization problem.

3. Preliminaries

3.1. Gaussian Processes

A Gaussian Process (GP) (Rasmussen et al., 2006) $g(t) \sim \mathcal{GP}(\mu(t), k(t, t'))$ is a stochastic process with the property that all $g(t_1), \dots, g(t_n)$ are jointly Gaussian. Such a GP is fully characterized by its mean $\mu(t)$ and covariance function $k(t, t')$. By conditioning a GP on a noisy dataset $\mathcal{D} = \{(t_1, z_1), \dots, (t_n, z_n)\}$ we have the posterior GP defined as

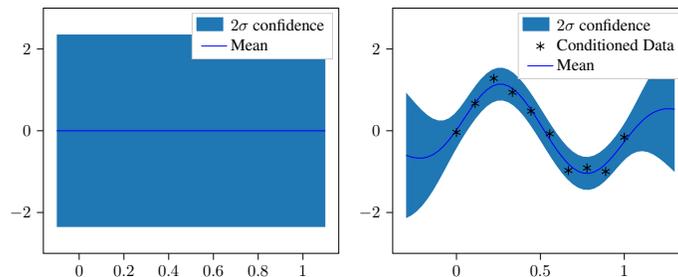


Figure 2: (Left) A GP prior with zero mean and SE covariance function. (Right) The same GP, but conditioned on datapoints (black asterisk). The blue line is its mean and the blue area is two times its standard deviation (2σ).

$$\begin{aligned}\mu^* &= \mu(t^*) + K_*^T (K + \sigma_n^2 I)^{-1} z \\ k^* &= K_{**} - K_*^T (K + \sigma_n^2 I)^{-1} K_*\end{aligned}\tag{7}$$

with covariance matrices $K = (k(t_i, t_j))_{i,j} \in \mathbb{R}^{n \times n}$, $K_* = (k(t_i, t_j^*))_{i,j} \in \mathbb{R}^{n \times m}$ and $K_{**} = (k(t_i^*, t_j^*))_{i,j} \in \mathbb{R}^{m \times m}$ for predictive positions $t^* \in \mathbb{R}^m$ with noise variance σ_n^2 . This is the most common way of applying GPs in control theory for regression analysis on time series data.

Additionally, GPs can be parameterized in terms of hyperparameters θ , which include the noise variance σ_n^2 . The noise variance does not have to be constant (homoscedastic), but can be input dependent (heteroscedastic), i.e. $\sigma_n^2(t) \in \mathbb{R}^{n_z}$. The noise variance describes the noise we expect on a given datapoint (t_i, z_i) . Additional hyperparameters are commonly introduced via its covariance function, for example the Squared Exponential (SE) covariance function often includes signal variance σ_f^2 and smoothness parameter ℓ^2 :

$$k_{\text{SE}}(t, t') = \sigma_f^2 \exp\left(-\frac{(t - t')^2}{2\ell^2}\right)\tag{8}$$

These hyperparameters are trained by maximizing the GPs Marginal Log Likelihood (MLL):

$$\log p(z|t) = -\frac{1}{2} z^T (K + \sigma_n^2 I)^{-1} z - \frac{1}{2} \log (\det (K + \sigma_n^2 I))\tag{9}$$

where I is the identity and constant terms are omitted. We obtain a quadratic type error term combined with a regularization term based on the determinant of the regularized kernel matrix.

3.2. Linear Ordinary Differential Equation GPs

The class of GPs is closed under linear operations¹, i.e. applying a linear operator \mathcal{L} to a GP g as $\mathcal{L}g$ is again a GP. This ensures that realizations of the GP $\mathcal{L}g$ lie in the image of the linear operator \mathcal{L} , in addition to the GP g (Jidling et al., 2017; Lange-Hegermann, 2018).

We demonstrate the procedure from (Besginow and Lange-Hegermann, 2022) for constructing so-called LODE-GPs — GPs that strictly satisfy the underlying system of linear homogenous

1. This holds true for almost all relevant cases in control theory. For more details see (Harkonen et al., 2023; Matsumoto and Sullivan, 2024).

ordinary differential equations — using the following unstable system, with two integrators of the control function.

$$\dot{x} = \begin{pmatrix} 0 & 1 \\ 1 & 1 \end{pmatrix} x + \begin{pmatrix} 0 \\ 1 \end{pmatrix} u \quad (10)$$

We subtract $\dot{x}I$ and combine state x and input u by stacking it in one variable z to reformulate the system as:

$$0 = H \cdot z = \begin{pmatrix} -\partial_t & 1 & 0 \\ 1 & 1 - \partial_t & 1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \\ u \end{pmatrix} \quad (11)$$

We can algorithmically factor H into three matrices such that $Q \cdot H \cdot V = D$, with $D \in \mathbb{R}[\partial_t]^{n_x \times n_z}$ the Smith Normal Form and $Q \in \mathbb{R}[\partial_t]^{n_x \times n_x}$, $V \in \mathbb{R}[\partial_t]^{n_z \times n_z}$ invertible (Smith, 1862; Newman, 1997). All matrices belong to the polynomial ring $\mathbb{R}[\partial_t]$ i.e. containing polynomials of ∂_t . For the system in Equation (11) the application of an algorithm to find the Smith Normal Form results in the following D , Q and V :

$$D = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{pmatrix}, Q = \begin{pmatrix} 0 & 1 \\ -1 & -\partial_t \end{pmatrix}, V = \begin{pmatrix} 1 & 0 & 1 \\ 0 & -1 & \partial_t \\ 0 & -\partial_t - 1 & \partial_t^2 + \partial_t - 1 \end{pmatrix} \quad (12)$$

We then construct a prior latent GP \tilde{g} using simple construction rules based on the diagonal entries of D , which are 0 or 1 for controllable systems. In the case of the system in Equation (11), we construct the latent GP \tilde{g} :

$$\tilde{g} = \mathcal{GP}\left(\begin{pmatrix} 0 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & k_{\text{SE}} \end{pmatrix}\right) \quad (13)$$

which we simplify to $g = \mathcal{GP}((0), (k_{\text{SE}}))$ by removing the uninformative zero-entries in the covariance function of \tilde{g} , which deterministically produce zero behaviour, through the Gaussian marginalization property. We simplify V similarly by omitting the first two columns, which correspond to the zeroes in \tilde{g} . By applying the linear operator V to this *latent* GP g , the realizations of the resulting LODE-GP Vg in Equation (14) *strictly* satisfy the system in Equation (11), as detailed in Besginow and Lange-Hegermann (2022). By doing so we guarantee that the LODE-GP Vg spans the nullspace of H , which is equivalent to saying that Vg produces only solutions to the original homogenous system $H \cdot z = \mathbf{0}$.

$$Vg = \mathcal{GP}\left(\mathbf{0}, V \cdot (k_{\text{SE}}) \cdot \hat{V}^T\right) \quad (14)$$

where \hat{V} is the operator V applied to the second argument (t') of the SE covariance function k_{SE} (cf. Equation (8)).

The LODE-GP in Equation (14) can be trained and conditioned on datapoints, same as the regular GP in Figure 3.1, which we exploit for our control algorithm. We illustrate samples drawn from the LODE-GP in Equation (14), after conditioning it on varying numbers of setpoints, in Figure 3.

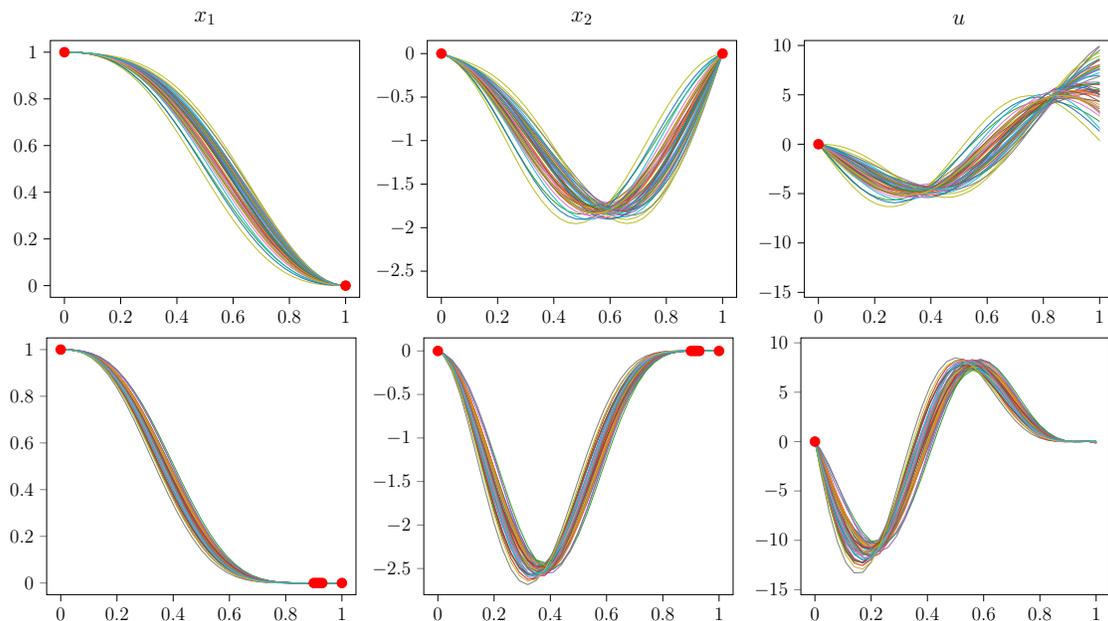


Figure 3: We see 50 samples drawn from a trained LODE-GP for the spring-mass system in Equation 11. Each sample is a multivariate time series that spans across all three columns, depicting the distinct channels of the system, and is guaranteed to satisfy the ODEs. Set-points are shown in red and the x-axis and y-axis are shared across rows. (Upper) Only the initial state x_0 and the desired state x_T are given. (Lower) In addition to the initial state and desired state, some intermediate states are given.

4. LODE-GP Model Predictive Control

This section describes how to apply our LODE-GP based MPC to generate the control input using GP conditioning. We assume a LODE-GP as described in Section 3.2 for a system of linear ODEs. As we have seen in the previous section, the LODE-GP posterior mean yields smooth functions which satisfy (6b). In the following we will show how the remaining constraints (6c) - (6e) can be enforced as hard and soft constraints respectively by specific constructions of the conditioned dataset \mathcal{D} and obtain optimality as in (6a).

4.1. Controller formulation

We have to respect the initial point constraint (6c) as hard constraint in timestep i . We translate this to the LODE-GP as using (t_i, z_i) in the conditioned dataset \mathcal{D} with noise variance $\sigma_n^2(t_i) = 0 \in \mathbb{R}^{n_z}$ with $n_z = n_x + n_u$. Due to numerical issues, we have to set a numerical jitter of 10^{-8} as the noise variance. This forces the LODE-GP posterior mean to satisfy $\mu^*(t_i) = z_i$ up to numerical precision. We define this dataset as $\mathcal{D}_{\text{init}} = \{(t_i, z_i)\}$ in timestep i . In order to track the constant reference point x_{ref} , we choose a constant z_{ref} such that Equation (11) is satisfied, which is always possible for controllable systems. This allows to set the LODE-GP prior mean $\mu(t) = z_{\text{ref}}$. The posterior

mean $\mu^*(t)$ then yields a function which satisfies $\mu^*(t_0) = z_0$ and converges to z_{ref} for $t \rightarrow \infty$. As a model predictive control scheme, we update the dataset in each timestep as the new initial point.

4.2. Asymptotic stability

The controller defined by the LODE-GP and a single reference point yields uniformly asymptotic stability to the prior mean of the LODE-GP. This results from a property of Bayesian models in general which converge to their prior in the absence of correlated datapoints. This is stated in the following theorem.

Theorem 1 *The posterior mean $\mu^*(t)$ of a LODE-GP with $\mathcal{D} = \{(t_0, z_0)\}$ converges to its prior for $t \rightarrow \pm\infty$.*

Proof W.l.o.g, $t_0 = 0$. We have to proof, that $\lim_{t \rightarrow \pm\infty} \mu^*(t) = \mu(t)$, which means $K_* K^{-1} z \rightarrow 0$. $K^{-1} z$ is independent of t , therefore it can be considered as constant. Since

$$K_* = k(t, 0) = \sigma_f^2 p(t) \cdot \exp\left(-\frac{t^2}{2\ell^2}\right)$$

for a polynomial p and the exponential function dominates the polynomial for $t \rightarrow \pm\infty$, we obtain $K_* \rightarrow 0$, which proves the claim. \blacksquare

Remark 2 *The proof of theorem 1 provides the convergence rate, which is dependent on the chosen kernel. For the squared exponential kernel we obtain squared exponential decay.*

Remark 3 *This result can be easily extended both for more than one point in dataset \mathcal{D} and for stationary kernels which tend to 0 for $t - t' \rightarrow \infty$.*

This theorem imposes, that it is theoretically sufficient to use $\mathcal{D} = \mathcal{D}_{\text{init}}$ and use the reference z_{ref} as constant prior $\mu(t)$ to obtain a working controller. Unfortunately, the thereby generated solution $\mu^*(t)$ is not optimized on controller performance and will not respect state and control constraints.

4.3. Soft constraints

In order to fulfill the constraints for state (6d) and control (6e), we encode pointwise soft constraints at time t_i in the dataset

$$\mathcal{D}_{\text{con}} = \{(t_{i+1}, z_{\text{con}}), \dots, (t_{i+m_e}, z_{\text{con}})\}, \quad (15)$$

$$\text{with } z_{\text{con}} = \frac{(z_{\text{max}} + z_{\text{min}})}{2} \quad (16)$$

$$\text{and } \sigma_n^2 = \frac{(z_{\text{max}} - z_{\text{min}})}{2} \quad (17)$$

as constraint noise variance. Note that $\sigma_n^2 \in \mathbb{R}_{\geq 0}^{n_z}$ allows for different noise levels on each state and control dimension. For a point in \mathcal{D}_{con} we expect that $z(t_i) = \epsilon_i$ with $\epsilon_i \sim \mathcal{N}(z_{\text{con}}, \sigma_n^2)$. The incorporation of \mathcal{D} imposes soft constraints in the likelihood (9) of the LODE-GP and therefore also in the posterior mean $\mu^*(t)$. Note that in timestep t_i we only have constraints on future states.

Algorithm 1 LODE-GP based MPC**Input:** Initial state x_{t_0} and control u_{t_0} , reference z_{ref} , constraints \mathcal{D}_{con} with σ_n^2 **Output:** Simulation/Control path $\{(x_{t_i}, u_{t_i}) | t_i \in [t_0, t_T]\}$ Set prior $\mu(t) = z_{\text{ref}}$ Hyperparameter optimization of ℓ^2 and σ_f^2 using $\mathcal{D} = \mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}}$ **for** $t_i = t_0, \dots, t_T$ **do**observe current state x_{t_i} generate predictive posterior GP $(x_{t_{i+1}}^*, u_{t_{i+1}}^*) = Vg(t_{i+1} | \mathcal{D})$ set control input for next time step: $u(t_{i+1}) = u_{t_{i+1}}^*$ **end****return** $\{x_{t_i}, u_{t_i} | t_i \in [t_0, t_T]\}$ **4.4. Optimality in a Reproducing Kernel Hilbert Space**

Conditioning the GP on $\mathcal{D} = \mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}}$ yields a posterior mean function $\mu^*(t)$ which satisfies (6b) and (6c) as hard constraints and (6d) and (6e) as soft constraints. The mean function is optimal in the norm of an abstract space closely related to the covariance function of the GP which is called the Reproducing Kernel Hilbert Space (RKHS) (Berlinet and Thomas-Agnan, 2011). This space is the closure of all possible posterior mean functions with the chosen covariance kernel with respect to its induced norm. For further literature on the connection between GPs and RKHSs, see (Kanagawa et al., 2018). The following theorem states this result based on the representer theorem (Schölkopf et al., 2001).

Theorem 4 *The posterior mean function as stated in Equation (7) with noise variance σ_n^2 for the constraints yields an optimal control minimizing the RKHS norm given by the kernel of the LODE-GP.*

Proof In order to use the representer theorem in (Schölkopf et al., 2001), we have to provide a positive definite kernel. We use

$$k(t, t') = V \cdot k_{\text{SE}}(t, t') \cdot \hat{V}^T + \sigma_n^2 \mathbb{1}_{\{t > t_0\}} \cdot \delta(t, t') \cdot \mathbb{1}_{\{t' > t_0\}}$$

which results in a kernel matrix $K + \text{diag}(\sigma_n^2(t_0), \dots, \sigma_n^2(t_{m_c}))$. Since the LODE-GP kernel is positive definite, the sum is either which proves the claim. \blacksquare

This result corresponds to the objective (6a) and provides the optimality of our proposed controller. This completes the translation of the optimization problem described in chapter 2 to a problem solved by inference of a LODE-GP with a specific training dataset.

4.5. Heuristic improvements: Artificial references

In order to improve the control performance, we propose two heuristic additions to the dataset \mathcal{D} . We propose to extend the conditioned dataset \mathcal{D} with past observed data

$$\mathcal{D}_{\text{past}} = \{(t_{i-1}, z_{i-1}, \sigma_n^2(t_{i-1})), \dots, (t_{i-m_p}, z_{i-m_p}, \sigma_n^2(t_{i-m_p}))\} \quad (18)$$

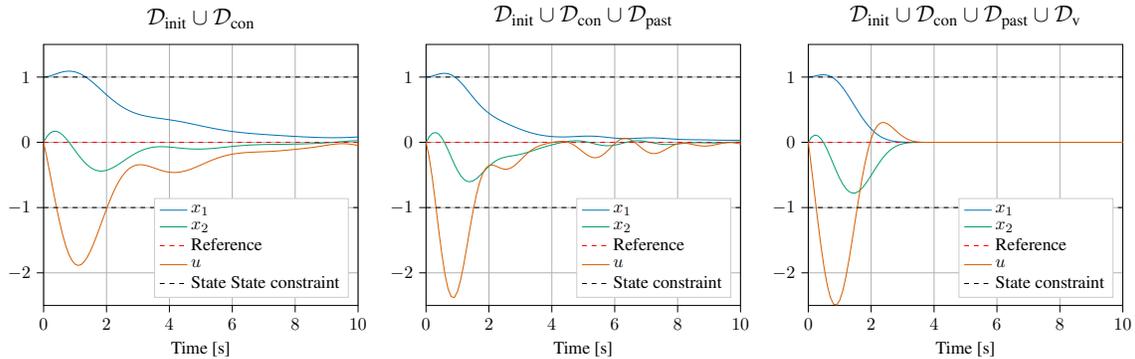


Figure 4: Comparison of our approach (left) with the two extended models. Each model satisfies the control constraints and the performance improves with a larger conditioned dataset \mathcal{D} .

which supports the controller in providing smooth behavior. For more information, see Section 5. Additionally, we suggest virtual reference points to encode hard constraints for the future behavior

$$\mathcal{D}_v = \{(t_{j+1}, z_{j+1}, 0), \dots, (t_{m_v}, z_{m_v}, 0)\}.$$

Recall that all additional points impose soft constraints in the likelihood of the LODE-GP (9) when conditioning on $\mathcal{D} = \mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}} \cup \mathcal{D}_v$. Note that setpoints may contain masked channels for specific time steps, i.e. some x_i or u_i can be missing for timestep t_i .

Figure 3 illustrates how the space of functions is constrained by just conditioning the LODE-GP on the initial state x_0 and the desired state x_T or by conditioning it on additional setpoints. By adding the additional points x_r , as in the lower row of Figure 3, we reduce the space of realizations. This demonstrates, that the dataset \mathcal{D}_v has to be chosen heuristically with prior knowledge, since virtual datapoints may lead the model to constraint violations and unstable numerical behavior. This can be seen in this example, as the control amplitude rises when the state x_1 should be regulated faster.

5. Evaluation

In this section we present the results of our approach and the proposed extensions on the unstable system introduced in Section 3.2. We investigate the mean constraint violation

$$\frac{1}{T} \sum_{i=1}^T \max\{z(t_i) - z_{\max}, 0\} + \max\{z_{\min} - z(t_i), 0\} \quad (19)$$

in order to proof whether our approach can handle the imposed constraints. Moreover, we investigate the mean control error defined as

$$\frac{1}{T} \sum_{i=1}^T (x(t_i) - x_{\text{ref}})^2 \quad (20)$$

in order to compare the control performance of our approach and its extensions. We compare three different models:

Table 1: Results for regulation task.

Training dataset	$\mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}}$	$\mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}} \cup \mathcal{D}_{\text{past}}$	$\mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}} \cup \mathcal{D}_{\text{past}} \cup \mathcal{D}_{\text{v}}$
Constraint error (19)	0.0023	0.0010	0.0008
Control error (20)	0.1460	0.1066	0.1060

The first model is our approach introduced in 4.1 – 4.4 which uses $\mathcal{D} = \mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}}$. The second model is the extension using past data, i.e. $\mathcal{D} = \mathcal{D}_{\text{init}} \cup \mathcal{D}_{\text{con}} \cup \mathcal{D}_{\text{past}}$. The third model uses additional artificial references as hard constraints. The hyperparameters are optimized offline in advance using \mathcal{D} . The hyperparameters for model 2 and 3 are thus the same, since the dataset at t_0 is identical. The other models have different initial training datasets and thus different hyperparameters. We investigate a regulation control task, where the state is steered towards the origin from the initial point $x_0 = (1, 0)^T$ and $u = 0$ from $t_0 = 0$ to $t_T = 10$. Note that for our problem formulation the initial control is of importance since the control function has to be smooth on $[t_0, t_T]$. We use $x \in [-1, 1]^2$ and $u \in [-2.5, 2.5]$ as soft constraints. For \mathcal{D}_{con} we use 100 equidistant points from $t_1 = 0.1$ to $t_{100} = 10$ with $z_i = 0$ and $\sigma_n^2 = (1, 1, 2.5)^T$. For $\mathcal{D}_{\text{past}}$ we use the last 20 datapoints. For \mathcal{D}_{v} we use the same points as in \mathcal{D}_{con} with $t > 4$.

The results of our experiments are shown in Table 1 and Figure 4. They verify, that our controller regulates the unstable system and yields smooth behavior. We observe, that each model stabilizes the state. The more datapoints are used in \mathcal{D} , the faster the system stabilizes, while both extended models have similar constraint and control error. Although our approach and the extended model using past observed data have the same hyperparameters, the controller performance is significantly better while adhering to the constraints. Comparing the solution of the initial optimal control problem for $t = t_0$, both models propose the final solution of the model which is extended with past observations. This means, that providing no past measurements changes the behaviour of our LODE-GP based controller. Our explanation for this is, that providing no constraints for the past, results in the posterior mean which is most likely to come from the reference z_{ref} at $t \rightarrow -\infty$. Since the initial point z_i converges towards this point in positive time, the posterior mean changes in each iteration for both $t < t_i$ and $t > t_i$, which results in slower convergence. Constraining the past to observed values by hard therefore keeps the controller on track of the solution proposed in the first optimal control problem.

6. Conclusion

We have introduced a novel approach for MPC with GPs acting not as the dynamics model by conditioning on only past data, but as the control policy by conditioning on the initial point and constraints. We have shown the asymptotic stability of our controller both theoretically and practically and gave different extensions for the improvement of the control performance. Our controller defined by a LODE-GP posterior mean yields optimal functions in the norm of the corresponding RKHS, therefore reducing an optimal control problem to an inference problem. We showed in the last section, that our method solves continuous tracking control problems. The implementation of a discrete LODE-GP is straightforward and the construction of a corresponding Linear MPC is analogous and left for future work. Further research will contain different control strategies given the LODE-GP’s distribution of solutions. This includes sampling for safe control paths as done in (Tebbe et al., 2024).

Acknowledgements

Andreas Besginow is supported by the research training group “Dateninja” (Trustworthy AI for Seamless Problem Solving: Next Generation Intelligence Joins Robust Data Analysis) funded by the German federal state of North Rhine-Westphalia. Jörn Tebbe and Andreas Besginow are supported by the SAIL project which is funded by the Ministry of Culture and Science of the State of North Rhine-Westphalia under the grant no NW21-059C.

References

- Felix Berkenkamp and Angela P Schoellig. Safe and robust learning control with gaussian processes. In *2015 European Control Conference (ECC)*, pages 2496–2501. IEEE, 2015.
- Alain Berlinet and Christine Thomas-Agnan. *Reproducing kernel Hilbert spaces in probability and statistics*. Springer Science & Business Media, 2011.
- Andreas Besginow and Markus Lange-Hegermann. Constraining Gaussian processes to systems of linear ordinary differential equations. In *Advances in Neural Information Processing Systems*, volume 35, pages 29386–29399, 2022.
- Eric Bradford and Lars Imsland. Economic stochastic model predictive control using the unscented kalman filter. *IFAC-PapersOnLine*, 51(18):417–422, 2018.
- Frédéric Chyzak, Alban Quadrat, and Daniel Robertz. Effective algorithms for parametrizing linear control systems over ore algebras. *Applicable Algebra in Engineering, Communication and Computing*, 16:319–376, 2005.
- David Duvenaud. *Automatic model construction with Gaussian processes*. PhD thesis, University of Cambridge, 2014.
- Victor Gracia, Pablo Krupa, Daniel Limon, and Teodoro Alamo. Implementation of soft-constrained mpc for tracking using its semi-banded problem structure. *IEEE Control Systems Letters*, 2024.
- Marc Harkonen, Markus Lange-Hegermann, and Bogdan Raita. Gaussian process priors for systems of linear partial differential equations with constant coefficients. In *International conference on machine learning*, pages 12587–12615. PMLR, 2023.
- Lukas Hewing, Alexander Liniger, and Melanie N Zeilinger. Cautious nmmpc with gaussian process dynamics for autonomous miniature race cars. In *2018 European Control Conference (ECC)*, pages 1341–1348. IEEE, 2018.
- Carl Jidling, Niklas Wahlström, Adrian Wills, and Thomas B Schön. Linearly constrained gaussian processes. *Advances in neural information processing systems*, 30, 2017.
- Motonobu Kanagawa, Philipp Hennig, Dino Sejdinovic, and Bharath K Sriperumbudur. Gaussian processes and kernel methods: A review on connections and equivalences. *arXiv preprint arXiv:1807.02582*, 2018.
- Eric C Kerrigan and Jan M Maciejowski. Soft constraints and exact penalty functions in model predictive control. In *Control 2000 Conference, Cambridge*, pages 2319–2327, 2000.

- Pablo Krupa, Johannes Köhler, Antonio Ferramosca, Ignacio Alvarado, Melanie N Zeilinger, Teodoro Alamo, and Daniel Limon. Model predictive control for tracking using artificial references: Fundamentals, recent results and practical implementation. *arXiv preprint arXiv:2406.06157*, 2024.
- Markus Lange-Hegermann. Algorithmic linearly constrained Gaussian processes. In *Advances in Neural Information Processing Systems*, volume 31, pages 2141–2152, 2018.
- Markus Lange-Hegermann and Daniel Robertz. Thomas decompositions of parametric nonlinear control systems. *IFAC Proceedings Volumes*, 46(2):296–301, 2013.
- Markus Lange-Hegermann and Daniel Robertz. Thomas decomposition and nonlinear control systems. *Algebraic and Symbolic Computation Methods in Dynamical Systems*, pages 117–146, 2020.
- Sergey Levine. Reinforcement learning and control as probabilistic inference: Tutorial and review. *arXiv preprint arXiv:1805.00909*, 2018.
- Daniel Limón, Ignacio Alvarado, Teodoro Alamo, and Eduardo F Camacho. Mpc for tracking piecewise constant references for constrained linear systems. *Automatica*, 44(9):2382–2387, 2008.
- Michael Maiworm, Daniel Limon, and Rolf Findeisen. Online learning-based model predictive control with gaussian process models and stability guarantees. *International Journal of Robust and Nonlinear Control*, 31(18):8785–8812, 2021.
- Tadashi Matsumoto and TJ Sullivan. Images of gaussian and other stochastic processes under closed, densely-defined, unbounded linear operators. *Analysis and Applications*, 22(03):619–633, 2024.
- Morris Newman. The Smith normal form. *Linear algebra and its applications*, 254(1-3):367–381, 1997.
- Ulrich Oberst. Multidimensional constant linear systems. *Acta Applicandae Mathematica*, 20(1):1–175, 1990.
- JF Pommaret and A Quadrat. Algebraic analysis of linear multidimensional control systems. *IMA Journal of Mathematical control and Information*, 16(3):275–297, 1999.
- S Joe Qin and Thomas A Badgwell. A survey of industrial model predictive control technology. *Control engineering practice*, 11(7):733–764, 2003.
- Carl Edward Rasmussen, Christopher KI Williams, et al. *Gaussian processes for machine learning*, volume 1. Springer, 2006.
- James Blake Rawlings, David Q Mayne, and Moritz Diehl. *Model predictive control: theory, computation, and design*, volume 2. Nob Hill Publishing Madison, WI, 2017.
- Bernhard Schölkopf, Ralf Herbrich, and Alex J Smola. A generalized representer theorem. In *International conference on computational learning theory*, pages 416–426. Springer, 2001.

- Henry John Stephen Smith. I. on systems of linear indeterminate equations and congruences. *Proceedings of the Royal Society of London*, (11):86–89, 1862.
- Jörn Tebbe, Thomas Pawlik, Marc Trilling, Jannis Löbner, Markus Lange-Hegermann, and Jan Schneider. Holistic optimization of a dynamic cross-flow filtration process towards a cyber-physical system. In *2023 IEEE 21st International Conference on Industrial Informatics (INDIN)*, pages 1–7. IEEE, 2023.
- Jörn Tebbe, Christoph Zimmer, Ansgar Steland, Markus Lange-Hegermann, and Fabian Mies. Efficiently computable safety bounds for gaussian processes in active learning. In *International Conference on Artificial Intelligence and Statistics*, pages 1333–1341. PMLR, 2024.
- Michalis Titsias. Variational learning of inducing variables in sparse gaussian processes. In *Artificial intelligence and statistics*, pages 567–574. PMLR, 2009.
- Kim P Wabersich, Raamadaas Krishnadas, and Melanie N Zeilinger. A soft constrained mpc formulation enabling learning from trajectories with constraint violations. *IEEE Control Systems Letters*, 6:980–985, 2021.
- Jan C Willems and Jan W Polderman. *Introduction to mathematical systems theory: a behavioral approach*, volume 26. Springer Science & Business Media, 1997.
- Melanie N Zeilinger, Manfred Morari, and Colin N Jones. Soft constrained model predictive control with robust stability guarantees. *IEEE Transactions on Automatic Control*, 59(5):1190–1202, 2014.
- Eva Zerz. *Topics in multidimensional linear systems theory*, volume 256. Springer Science & Business Media, 2000.