

# Rydberg Atomic Receiver: Next Frontier of Wireless Communications

Mingyao Cui, Qunsong Zeng, and Kaibin Huang, *Fellow, IEEE*

**Abstract**—The advancement of Rydberg Atomic REceiver (RARE) is driving a paradigm shift in electromagnetic (EM) wave measurement. RAREs utilize the electron transition phenomenon of highly-excited atoms to interact with EM waves, thereby enabling wireless signal detection. Operating at the quantum scale, such new receivers have the potential to breakthrough the sensitivity limit of classical receivers, sparking a revolution in physical-layer wireless communications. The objective of this paper is to offer insights into RARE-aided communication systems. We first provide a comprehensive introduction to the fundamental principles of RAREs. Then, a thorough comparison between RAREs and classical receivers is conducted in terms of the antenna size, sensitivity, coverage, and bandwidth. Subsequently, we overview the state-of-the-art design in RARE-aided wireless communications, exploring the latest progresses in frequency-division multiplexing, multiple-input-multiple-output, wireless sensing, and quantum many-body techniques. Finally, we highlight several wireless-communication related open problems as important research directions.

**Index Terms**—Rydberg atomic receivers, wireless communications, quantum sensing.

## I. INTRODUCTION

The six-generation (6G) communication networks will leverage all available resources to support the explosive growth of global mobile services [1]. To achieve seamless coverage, 6G will expand beyond terrestrial networks in 1G–5G to space–air–ground integrated networks (SAGINs) [1]. Furthermore, the full spectrum, including sub-6GHz, millimeter-wave (mmWave), and terahertz (THz) bands, will be explored for attaining high-rate and multi-modal connections. These ambitious long-range and full-frequency communication visions require the next-generation receiver to exhibit exceptional sensitivity to electromagnetic (EM) waves across a wide spectrum.

Since Hertz validated the existence of EM waves, classical receivers detect wireless signals primarily by using an antenna to transform incident EM waves into informative electric currents [2]. This mechanism, however, presents insurmountable limitations to physical-layer (PHY) wireless communications. Specifically, the front-end circuits of a receiver, such as amplifiers and mixers, introduce thermal noise into data currents. The noise power,  $-174$  dBm/Hz, restricts the receiver’s sensitivity limit. In addition, an ideal dipole antenna typically has a half-wavelength size, which constrains its operating bandwidth to a narrow range around the center carrier frequency [1]. To detect signals across the sub-6GHz, mmWave, and THz bands, the receiver has to equip an array

of bulky antennas and front-end circuits, each dedicated to a specific band. Consequently, these challenges constrain the ultimate performance of wireless communications.

Recently, at the intersection of quantum sensing and wireless communication, the *Rydberg Atomic REceiver (RARE)* has emerged as a radical solution to overcome these limitations [3]. Rydberg atoms are highly-excited atoms with outer electrons far from the nucleus. Due to the large electric dipole moments, Rydberg atoms can strongly interact with incident EM waves, triggering electron transitions between resonate energy levels. As a result, RAREs can accurately detect wireless signals by monitoring changes on the atoms’ quantum states resulting from electron transitions [4]. Representing a paradigm shift in receiver architecture to embrace quantum sensing, RAREs are gaining increasing attentions due to their quantum advantages. For instance, a RARE is immune to thermal noise as it involves no front-end circuits. Hence, its sensitivity limit can far exceed those of classical counterparts [5]. Moreover, a single RARE is able to resonate with a large number of frequencies ranging from MHz to THz band because of the abundant energy levels in Rydberg atoms [6]. These quantum advantages make RAREs a promising technology to revolutionize PHY communications in diverse applications, such as weak signal detection, coverage enhancement, power saving, and full-frequency sensing.

The objective of this paper is to offer a beginner’s guide to the next-generation wireless communications aided by RAREs. To this end, we first comprehensively introduce the fundamental features of Rydberg atoms and the key modules of a RARE. Then, the performance of RAREs is compared with classical receivers in antenna size, sensitivity, coverage, and bandwidth. Subsequently, we overview the state-of-the-art RARE techniques for wireless communications. The latest progresses in four important directions are covered: frequency-division-multiplexing (FDM), multiple-input-multiple-output (MIMO), wireless sensing, and quantum many-body techniques. Last, we highlight several wireless-communication related open problems as important future directions to conduct research on RAREs.

## II. FUNDAMENTALS OF RYDBERG ATOMIC RECEIVERS

We commence by introducing the fundamentals of RAREs, ranging from the preliminary of Rydberg atom to the key modules of a RARE.

### A. Preliminary of Rydberg Atom

1) *Definition of Rydberg atom*: An atom consists of a positively charged nucleus orbited by negatively charged electrons.

The authors are with the Department of Electrical and Electronic Engineering, The University of Hong Kong, Hong Kong. Corresponding author: K. Huang (Email: huangk@eee.hku.hk).

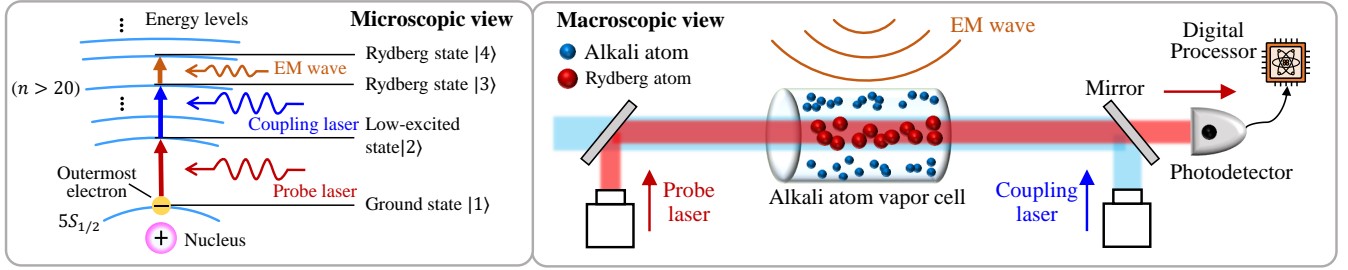


Figure 1. Framework of RARE-enabled wireless communications. The “Microscopic view” adopts the structure of Rb atom as an example.

According to the Bohr model, electrons in these orbits have unique quantum states and quantized energy levels. Each orbit is labeled by three quantum numbers  $n\ell_j$ , (e.g.,  $n\ell_j = 5S_{1/2}$ ), including a principal quantum number ( $n = 1, 2, 3, \dots$ ), an azimuthal quantum number ( $\ell = S, P, D, \dots$ ), and a total angular momentum quantum number ( $j = \frac{1}{2}, \frac{3}{2}, \frac{5}{2}, \dots$ ). While the latter two numbers,  $\ell$  and  $j$ , determine the angular momentum and orbital shape, the principal quantum number,  $n$ , affects the orbital radius and energy. For a higher value of  $n$ , the electron is farther from the nucleus and has higher energy (see Fig. 1). Then, *Rydberg atom* is defined as a highly-excited atom with one or more electrons that have a large principal quantum number, i.e.,  $n > 20$  [4].

2) *Electron transition for preparing Rydberg atom*: Electrons can transit between energy levels by either absorbing or emitting photons from EM waves (or lasers) [5]. This electron-transition process occurs when the photon’s frequency resonates (or nearly resonates) with the *transition frequency between energy levels*, which is defined as the ratio between the energy-level spacing and Plank constant. *The process facilitates the creation of Rydberg atoms via the excitation of electrons to high energy levels*. This is typically accomplished by counter-propagating two lasers, namely a probe laser and a coupling laser, through a vapor cell filled with Alkali atoms (e.g., Rb and Cs), as shown in Fig. 1 [3]. The probe laser excites the outermost electrons from the ground state to a lowly-excited energy level, (e.g.,  $5S_{1/2} \rightarrow 5P_{3/2}$ ). The coupling beam further triggers the electron transition to a Rydberg state, (e.g.  $5P_{3/2} \rightarrow 47S_{5/2}$ ), thereby creating Rydberg atoms. Customarily, the three involved energy levels, (e.g.,  $5S_{1/2}$ ,  $5P_{3/2}$ ,  $47S_{5/2}$ ), are denoted as |1>, |2>, and |3> [4].

3) *Properties of Rydberg atom*: Given the high principal quantum number  $n$ , Rydberg atoms exhibit useful properties for sensing EM waves. First, the radius of an Rydberg atom is large due to its dependence on  $n^2$  [4]. For instance, the atomic radius grows from  $150a_0$  to  $10^4a_0$  as  $n$  increases from 10 to 100, with  $a_0 = 5.29 \times 10^{-11}\text{m}$  being the Bohr radius. The substantial increase in radius endows the Rydberg atom with a large electric dipole moment, thus making it very sensitive to external EM wave. Second, the transition frequency between adjacent Rydberg states is abundant as the energy level spacing scales as  $n^{-3}$  [3]. For low energy levels ( $n < 20$ ), the transition frequency can reach the visible light frequency ( $> 100$  THz). While for Rydberg states ( $n > 20$ ), the transition frequencies fall within the range of MHz to THz [5], exactly covering all the typical frequency bands used in PHY communications.

## B. Key Modules of RAREs

The extreme sensitivity of Rydberg atoms to EM waves ranging from MHz to THz motivates the development of RAREs for EM-wave measurement. A RARE typically comprises three key modules: electron-transition based antennas, *Electromagnetically-Induced-Transparency (EIT)* based quantum measurement, and receive signal processing.

1) *Electron-transition based antennas*: The electron transitions induced by probe/coupling lasers and incident EM waves, provides the fundamental mechanism of RARE. Rydberg atoms, created by the probe/coupling lasers, are stored in a vapor cell to serve as a receive antenna (see Fig. 1). The incident EM wave,  $\text{Re}\{\mathbf{E}(t)e^{j2\pi ft}\}$ , interacts with these atoms and excite their electrons to transit from the initial Rydberg state |3> to a new Rydberg state |4>, where the transition frequency  $f_{|3\rangle \rightarrow |4\rangle}$  is properly selected to nearly resonates with the radio frequency  $f$ . During this process, the information carried by the EM wave is transduced into the quantum states of atoms.

To be more precise, the quantum state of this four-level system (|1>  $\sim$  |4>) is represented by a  $4 \times 4$  *density matrix*  $\rho$ . The electron transition drives  $\rho$  to evolve according to the *Lindblad master equation* [7], i.e., Schrödinger equation in open quantum systems. When the system becomes steady, *the EM wave will affect the final quantum state*  $\rho(\Omega(t))$  *via a physical parameter*  $\Omega(t)$  *called Rabi frequency* [4]. Rabi frequency characterizes the interaction strength between the electric dipole moment  $\boldsymbol{\mu}$  and EM wave, which is expressed as  $\Omega(t) = \frac{1}{\hbar} \sqrt{|\boldsymbol{\mu}^T \mathbf{E}(t)|^2 + \hbar^2 \delta^2}$  [8], where  $\hbar$  denotes the reduced Plank constant and  $\delta$  the detuning of radio frequency  $f$  from the transition frequency  $f_{|3\rangle \rightarrow |4\rangle}$ . Two crucial conclusions can be drawn from the expression of  $\Omega(t)$ . First, Rydberg atoms act as both an antenna and a down-converter, as the resonate electron transition,  $|3\rangle \leftrightarrow |4\rangle$ , inherently down-converts the EM wave,  $\text{Re}\{\mathbf{E}(t)e^{j2\pi ft}\}$ , to the baseband signal,  $\mathbf{E}(t)$ . Second, the signal,  $\mathbf{E}(t)$ , is amplified by the electric dipole moment,  $\boldsymbol{\mu}$ . Therefore, a higher Rydberg state will contribute to an increased sensitivity to EM waves [3].

2) *EIT based quantum measurement*: To retrieve the wireless signal, it is essential to accurately readout the value of Rabi frequency. The standard measurement scheme is the EIT spectroscopy, developed based on the following two observations [9].

- The (1,2)-th element of the final quantum state,  $\rho_{12}$ , determines the rate at which Rydberg atoms absorb photons from the probe laser. The absorption loss of the probe-laser scales exponentially with  $\rho_{12}$  [7]. Thereby,

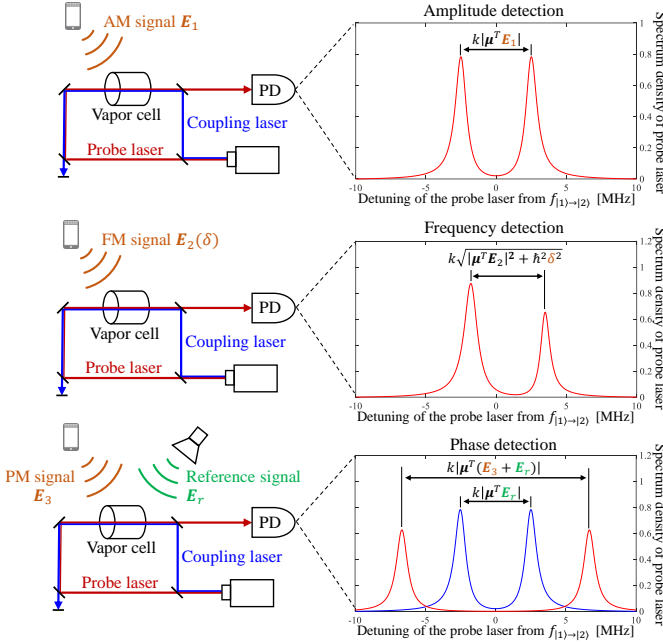


Figure 2. EIT for measuring AM/FM/PM signals. For AM and PM detection, the detuning  $\delta$  is zero, while for FM detection, the detuning  $\delta$  is nonzero.

it is feasible to deduce the value of  $\rho_{12}$  by measuring the output power of the probe laser using a photodetector (PD), as depicted in Fig. 1.

- The quantum state,  $\rho_{12}$ , has a one-to-one mapping with the Rabi frequency. Specifically,  $\rho_{12}$  displays two near-zero points at two specific probe-laser frequencies situated around the transition frequency  $f_{|1\rangle\rightarrow|2\rangle}$ . The interval of these two frequencies is shown to be linearly proportional to the Rabi frequency  $\Omega(t)$  [3].

These two observations suggest that by sweeping the probe-laser frequency around  $f_{|1\rangle\rightarrow|2\rangle}$ , two peaks can appear in the spectrum of the output probe laser, as depicted in Fig. 2. This allows the Rabi frequency to be measured from the peak interval, which is the principle of EIT-based quantum measurement.

3) *Receive signal processing*: After obtaining the value of Rabi frequency, the information modulated on  $\mathbf{E}(t)$  can be recovered via customized signal processing implemented on traditional digital processors. As in Fig. 2, both amplitude-modulated (AM) and frequency-modulated (FM) symbols can be illustrated directly using the maximum likelihood method due to the dependence of Rabi frequency on  $|\boldsymbol{\mu}^T \mathbf{E}(t)|$  and  $\delta$ . For the detection of phase-modulated (PM) symbols, a EIT-heterodyne scheme was developed in [7], which originates from the holographic-phase sensing technique in optics imaging. It introduces an auxiliary source to produce a *known reference signal*,  $\mathbf{E}_r(t)$ , which interferes with the unknown data signal,  $\mathbf{E}(t)$ , over the air. Their radio frequencies can be either identical or a few kHz apart. Consequently, the measured Rabi frequency changes from  $|\boldsymbol{\mu}^T \mathbf{E}(t)|$  to  $|\boldsymbol{\mu}^T \mathbf{E}(t) + \boldsymbol{\mu}^T \mathbf{E}_r(t)|$  (see the bottom-subfigure in Fig. 2). Accordingly, the information modulated on the global phase of  $\mathbf{E}(t)$  can be extracted from the relative phase between  $\mathbf{E}(t)$  and  $\mathbf{E}_r(t)$  using spectrum

analysis methods or phase retrieval algorithms [8].

So far, we have discussed the mechanism of detecting AM/FM/PM wireless signals using RAREs. Recent studies have also reported the detection of multi-frequency signals [10], multi-user signals [8], and target vibrations [5], all based on the principles we have covered and will be elaborated in Section IV.

### III. RYDBERG ATOMIC RECEIVER VS. CLASSICAL RECEIVER

The RARE technique represents a paradigm shift in wireless signal detection from using electronic circuits to embracing quantum sensing. This gives rise to a range of unique features for RARE-enabled PHY communications, which are introduced in this section.

#### A. Antenna Size

According to the Chu limit, a lossless dipole antenna in a classical receiver (CR) has a size of half-wavelength,  $\frac{\lambda}{2}$ . This wavelength-dependent size leads to bulky receivers at low frequencies, e.g., exceeding 10 cm when  $f < 1$  GHz. In contrast, the vapor cells (i.e., antennas of RAREs) have wavelength-independent sizes, e.g., typically fixed as 1 cm in diameter [7]. Consequently, RAREs can have electrically small antennas, offering significant advantages especially for low-frequency applications.

#### B. Sensitivity Limit

The sensitivity of a receiver,  $E_{\min}$ , defined as the minimum detectable field strength per square root of averaging time (unit: V/m/ $\sqrt{\text{Hz}}$ ), is fundamentally limited by the internal noise generated by the receiver itself. For an ideal  $\frac{\lambda}{2}$  dipole antenna of a CR, its internal noise stems from the *thermal noise* generated by front-end circuits, such as amplifiers and mixers. The corresponding sensitivity limit is expressed as  $E_{\min} = \sqrt{\frac{P_N Z_0}{A_e}}$ , where  $P_N = -174$  dBm/Hz denotes the room-temperature thermal-noise power,  $Z_0$  the free-space impedance, and  $A_e$  the effective area. On the contrary, since a RARE contains no front-end circuits, its thermal noise is significantly weaker than a CR [5]. Its major internal noise is the *quantum shot noise (QSN)* resulting from the randomness when observing quantum states [2]. According to the quantum sensing theory, the QSN power is inversely proportional to the electric dipole moment,  $\boldsymbol{\mu}$ , the number of participating atoms,  $N_a$ , and the coherence time,  $T_r$  of the EIT process. The theoretical sensitivity limit of a RARE, also called Standard Quantum Limit (SQL), is calculated as  $E_{\min} = \frac{\hbar}{|\boldsymbol{\mu}| \sqrt{N_a T_r}}$  [2].

Fig. 3 compares the sensitivity of RAREs with CRs. Representative values  $T_r = 225 \mu\text{s}$  and  $N_a = 5 \times 10^5$  as in [3] are utilized. The dipole moment,  $\boldsymbol{\mu}$ , is selected from the electron transition  $nD_{5/2} \leftrightarrow (n+1)P_{3/2}$  that resonates with each frequency. For a fair comparison, we also plot the sensitivity limit of a 1-cm dipole antenna calculated in [2] as it has a similar size with a vapor cell. Fig. 3 illustrates that the SQL can surpass the sensitivity limit of  $\frac{\lambda}{2}$  dipole antennas by orders of magnitude. This is attributed to the large

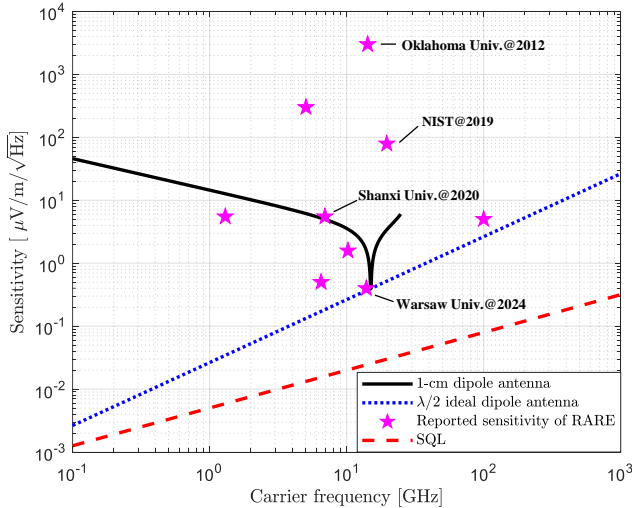


Figure 3. Sensitivity comparison between RAREs and CRs.

electric dipole moment of Rydberg atoms. Moreover, since the early exploitation of RARE in [9] (Oklahoma Univ.@2012), the RARE’s sensitivity has been improved by  $10^4$  times. Recently developed RAREs have outperformed similarly sized dipole antennas and achieved sensitivities comparable to ideal  $\frac{\lambda}{2}$  counterparts. The state-of-the-art design in [11] (Warsaw Univ.@2024) pushes the sensitivity down to  $0.4\mu\text{V}/\text{m}/\sqrt{\text{Hz}}$  at 13.9 GHz by using six-wave-mixing techniques to remove background noises. It is anticipated that in the near future, RAREs will surpass the ideal  $\frac{\lambda}{2}$  dipole antenna and approach SQL, with multi-wave-mixing emerging as a promising approach for performance improvement.

### C. Long Coverage Range or Low Transmission Power

Given the extreme sensitivity promised by SQL, RAREs can theoretically detect much weaker signals than CRs, making it possible to significantly expand communication coverage. To see it more clearly, we plot Fig. 4 to illustrate the feasible communication distance,  $d$ , with respect to (w.r.t) the transmit power,  $P_t$ , for both RAREs and CRs in space-ground communication scenarios. The receive *signal-to-noise ratio* (SNR) is required to be greater than 10 dB, which is calculated by the link budget equation:  $\text{SNR} = \frac{P_t G L}{P_N}$ . The antenna gain  $G$  is set as 30 dBi, and the path loss  $L$  scales as  $d^{-2.3}$  according to the typical space-ground channel model. The noise power,  $P_N$ , is proportional to the square of receiver sensitivity limit,  $E_{\min}^2$ . The frequency is fixed as 6 GHz by the electron transition  $70D_{5/2} \leftrightarrow 71P_{3/2}$ . Fig. 4 presents the coverage-expansion capability of a SQL-approaching RARE. When  $P_t = 5 \times 10^5$  mW and the bandwidth is 100 kHz, the coverage range can be extended from the medium-earth-orbit ( $d \approx 7000$  km) up to the geostationary orbit ( $d \approx 36000$  km). Moreover, it is clear from Fig. 4 that a RARE can save a large amount of transmit power for fixed coverage. If the coverage range is fixed at the medium-earth-orbit ( $d = 5000$  km) with a bandwidth of 1 MHz, the transmit power can be reduced from 450 W down to 40 W. This reveals the appealing applications of RAREs in long-range communications, like the SAGIN.

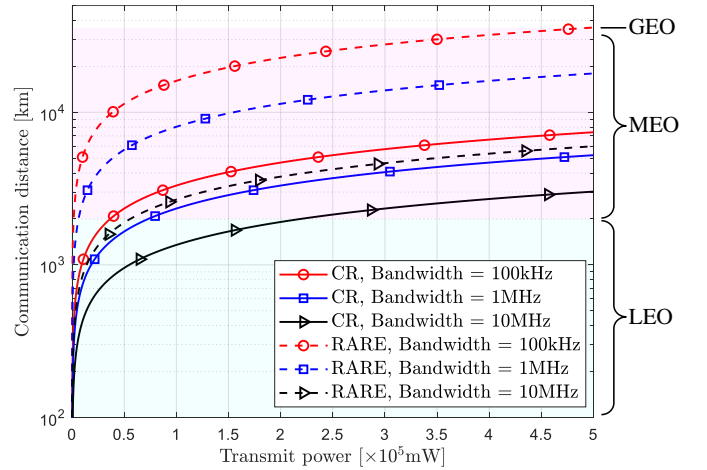


Figure 4. Comparison of feasible communication distance between RAREs and CRs. LEO, MEO, and GEO refer to the heights of low-earth-orbit, medium-earth-orbit, and geostationary satellites.

### D. Bandwidth

In current RARE-related experiments, the terminology “bandwidth” is abused into two concepts. First, the term “operating bandwidth” refers to the range of frequency that a receiver can listen to. Second, the concept of “instantaneous bandwidth” characterizes the highest wireless communication rate that a receiver can support, which follows the standard definition of “bandwidth” in the communication community.

1) *Operating bandwidth*: The broad operating bandwidth is one advantage of RAREs. Specifically, the operating bandwidth of conventional dipole antennas is limited to several GHz due to their wavelength-dependent sizes. For example, a wideband dipole antenna centered at 10 GHz typically has an operating bandwidth of no more than 2.5 GHz. In contrast, Rydberg atoms possess abundant energy levels, allowing electrons to interact with various radio frequencies via the transition between different energy levels. For instance, the electron transitions  $56D_{5/2} \leftrightarrow 57P_{3/2}$  and  $56D_{5/2} \leftrightarrow 52F_{3/2}$  can resonate with the radio frequencies 12.01 GHz and 116.05 GHz, respectively. It has been calculated that a single RARE is capable of sensing a broad spectrum, ranging from MHz to THz bands [4].

2) *Instantaneous bandwidth*: The communication rate of a RARE is restricted by several factors, such as the response time for a EIT process to become steady. As reported by exciting studies, the typical instantaneous bandwidth of a RARE is around 10 MHz [4], comparable to the bandwidth of 4G LTE (i.e., 1~20 MHz). Some recent efforts are endeavored to increase the RARE’s bandwidth. For example, researchers have proposed a spatiotemporal multiplexing technique of probe lasers to decrease the EIT response time [12]. This technique expands the RARE’s bandwidth to 100 MHz, approaching the bandwidth of sub-6GHz systems specified by 5G standards (i.e., 20~100 MHz). To date, continuously improving RARE’s instantaneous bandwidth remains a hot topic.

## IV. RECENT PROGRESS IN RARE TECHNIQUES

Recently, there have been studies to develop advanced RARE techniques to enhance the communication and sensing

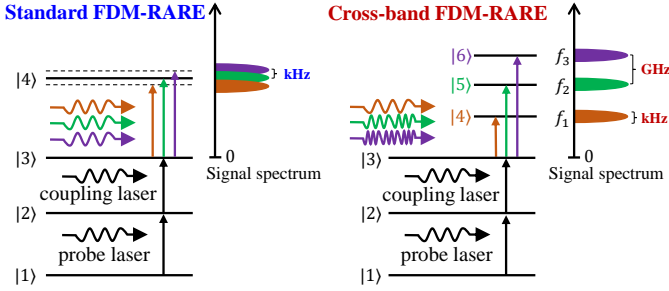


Figure 5. Standard and cross-band FDM-RAREs.

performance. This section provides an overview of the state-of-the-art designs.

### A. Frequency-division-Multiplexed RAREs

The FDM technology plays a crucial role in 5G wide-band systems for mitigating multi-path interference and efficient utilization of spectrum resources. The advancement of FDM-RARE is thus regarded as the key enabler of RARE-empowered wideband communications. The state-of-the-art FDM-RAREs can be separated into two categories: *standard* and *cross-band* FDM-RAREs.

1) *Standard FDM-RARE*: As illustrated in Fig. 5, a standard FDM-RARE aims to detect standard FDM signals, where all sub-carrier frequencies lie within a bandwidth of several MHz with a *kHz-level* frequency spacing. In this context, a uniform electron transition  $|3\rangle \leftrightarrow |4\rangle$  is sufficient to down-convert all sub-carrier signals into the Rabi frequency. The major challenge in facilitating standard FDM-RAREs is that the nonlinearity of Rabi frequency,  $\Omega(t)$ , w.r.t the EM wave destroys the orthogonality among different sub-carriers, resulting in significant intercarrier crosstalk. To address this issue, a deep learning model was trained in [10] to directly infer FDM symbols from the received probe-laser power. The experiment therein considered four subcarriers with a frequency spacing of 2 kHz in line-of-sight environment. It was shown that the learning approach can demodulate binary phase-shift keying symbols with over 99% accuracy.

2) *Cross-band FDM-RARE*: The cross-band FDM-RARE leverages the broad operating bandwidth of RAREs to serve as an integrated full-frequency communication platform. On this platform, signal frequencies can be distributed across distinct frequency bands, with band spacing ranging from GHz to THz, as presented in Fig. 5. To enable signal detection, the RARE needs to couple each band to a unique energy-level pair, denoted as  $|3\rangle \leftrightarrow |n\rangle$ ,  $n \in \{4, 5, \dots, N\}$ . The electron transition between each energy-level pair down-converts the coupled band by its respective transition frequency  $f_{|3\rangle \rightarrow |n\rangle}$ , thereby simultaneously converting the entire cross-band RF signal to the baseband. Utilizing this principle, researchers have demonstrated the co-detection of cross-band signals over 5 separate bands (1.72, 12.11, 27.42, 65.11, and 115.75 GHz) with a 3-dB instantaneous bandwidth of 6 MHz, verifying RARE's full-frequency sensing capability [6].

### B. Atomic-MIMO Communications

As a core technology in 5G and Beyond, MIMO communications can greatly enhance the spectral efficiency through the diversity and multiplexing gains. This motivates the research on atomic-MIMO communications, which utilizes an array of RAREs for receiving wireless data to boost both the sensitivity and channel capacity of RAREs.

In the literature, a simpler atomic *single-input-multiple-output* (SIMO) system was developed in [13] for the first time to explore the diversity gain, wherein four RAREs were used to jointly recover AM symbols from a single-antenna user. Experiments validated that the receive SNR scales linearly with the number of RAREs, as in traditional systems. To further reap the multiplexing gain, the current authors have investigated the multi-user signal detection capability in atomic-MIMO systems [8], where the EIT-heterodyne scheme was adopted to retrieve Quadrature-Amplitude-Modulated (QAM) symbols. It was proved that atomic-MIMO exhibits a non-linear *phase-retrieval* transmission model, based on which an expectation-maximization algorithm was designed to accurately recover multi-user signals, demonstrating the feasibility of atomic-MIMO communications. In a followup work, the optimal MIMO precoding has been designed to achieve the channel capacity of atomic-MIMO [14]. It made the assumption to the EIT-heterodyne scheme that the reference signal shares the same frequency with the data signal and is much stronger. It was shown that the optimal precoder should process the *I/Q* baseband symbols independently, and the channel capacity scales as  $\min(N_r/2, N_t) \log \text{SNR}$  for  $N_r$  atomic receive antennas and  $N_t$  classic transmit antennas. The discount factor  $\frac{1}{2}$  imposed on  $N_r$  arises because the Rabi frequency,  $\Omega(t)$ , only captures the magnitude of EM waves.

### C. RARE-empowered Wireless Sensing

Given that a RARE is capable of detecting extremely weak signals, it can be deployed in wireless sensing systems to refine the sensing accuracy by orders of magnitude. Specifically, one existing prototype senses a target's vibration from both WiFi (2.4 GHz) and mmWave (28 GHz) signals [5]. Therein, the EIT-heterodyne scheme, as illustrated in Fig. 2, was used to recover the phase of an EM wave,  $\mathbf{E}(t)$ , and then retrieve the vibration information. Experiment results show that the RARE can increase the sensing accuracy by more than 10 times w.r.t conventional receivers implemented on the USRP, LimdSDR, and Intel 5300 WiFi card. In addition to vibration sensing, RARE can also be used to sense the angle-of-arrival (AoA) for the purpose of localization. By measuring the signal phases at two different locations via the EIT-heterodyne scheme, the AoA of the signal can be obtained with a precision of  $2.1^\circ$  [4].

### D. Quantum Many-body RAREs for External-noise Mitigation

A RARE is characterized by low internal noise, as previously discussed. However, it is still affected by external noises resulting from the inter-user and inter-cell interferences. This problem introduces an obstacle to the sensitivity advantage of RAREs. In recent years, several studies have been carried out to mitigate the external noise.

One intriguing approach leverages the quantum many-body effect of Rydberg atoms to counterintuitively convert the power of external noise into that of wireless signal, achieving a *noise-enhanced RARE* [15]. In the approach, a collection of Rydberg atoms are interacted with each other. This many-body interaction transforms the original *linear* Schrödinger equation into a *nonlinear* one, which is shown to exhibit a bistability behavior. The incoming wireless signal could stimulate the system to switch between the two stable states. Then, by introducing a certain amount of external noise into the receiver, the switching magnitude can be amplified such that the output SNR is drastically improved. Experiment results demonstrate that the noise-enhanced RARE can surpass the sensitivity of traditional RAREs by 6.6 dB in the presence of external noise. This work opens a new promising direction for advancing RARE: the detrimental impact of external noise can be turned to a beneficial effect through the nonlinear many-body interactions in Rydberg atoms.

## V. FUTURE DIRECTIONS

Despite the rapid development of RARE in recent years, its integration with practical communication systems remains at a nascent stage. Numerous wireless-communication related open problems should be addressed to unleash the full potential of RAREs. A few are discussed as follows.

### A. Generalized FDM-RARE Techniques

While initial solutions [6], [10] exist for both standard and cross-band FDM-RAREs, the systematic design of FDM-RARE technology, involving channel estimation, signal detection, and synchronization, remains an unaddressed and crucial challenge. For standard FDM-RAREs, generalizing the learning method in [10] to accommodate hundreds of subcarriers in a multi-path environment is difficult due to the unexplainability of neural networks. Regarding cross-band FDM-RAREs, it is noteworthy that the quantum system has evolved from a four-level system to an  $N$ -level system [6]. However, at the time of writing, a comprehensive transmission model for this new  $N$ -level system has yet to be developed, and the potential crosstalk between cross-band signals remains unexplored. To address the above issues, it is essential to start from first principles and systematically develop transmission methods tailored for FDM-RAREs by thoroughly investigating their nonlinear transmission models.

### B. Enhanced Atomic-MIMO Communications

The research on atomic-MIMO communication is still at its early stage. Numerous signal processing techniques at both the transmitter (Tx) and receiver (Rx) sides can be investigated to improve the communication performance, as shown in Fig. 6.

First, consider the Rx side. Recall that a RARE might be vulnerable to external interference. Apart from the aforementioned quantum many-body method, the development of signal combining algorithms tailored for atomic-MIMO presents a viable approach to mitigating inter-user interference. Furthermore, using RAREs for precise estimation of far-field

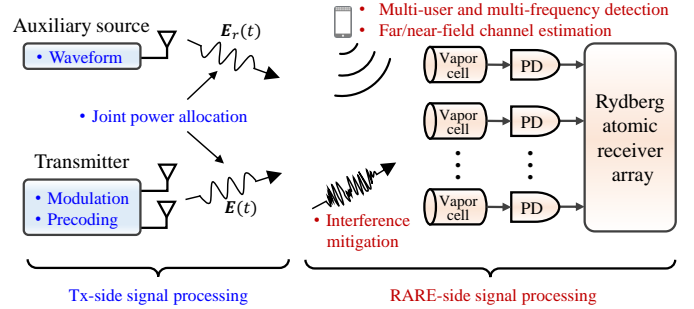


Figure 6. Enhanced atomic-MIMO communications.

and near-field channels is crucial for effective atomic-MIMO communications, but remains an uncharted area. Lastly, investigating the integration of atomic-MIMO and FDM-RARE techniques could unlock RARE's capability of full multi-user and multi-frequency signal detection.

Next, developing Tx-side signal processing methods optimized for RAREs can also significantly improve the communication performance. To this end, one could relax some restrictive assumptions made in the MIMO precoding study in [14] we discussed earlier and explore the general EIT-heterodyne scheme, where the reference signal can have a different frequency and comparable strength to the user signal. Within this framework, optimizing the joint power allocation among the unknown user signal,  $\mathbf{E}(t)$ , and known reference signal,  $\mathbf{E}_r(t)$ , designing precoding for  $\mathbf{E}(t)$ , and refining the waveform of  $\mathbf{E}_r(t)$ , are all potential approaches for capacity enhancement. Moreover, it is promising to introduce diverse beamforming technologies to cooperate with RAREs, such as fluid-antenna, reconfigurable-intelligent-surface, and continuous-aperture-array empowered beamforming.

### C. Atomic Integrated Communication and Sensing

The extreme sensitivity of RAREs to both communication and sensing signals can facilitate the exciting application of atomic Integrated Communication and Sensing (ISAC). To advance this direction, the signal waveform utilized in conventional ISAC systems, like the orthogonal-chirp-division-multiplexing signal, need to be adjusted to align with the nonlinear transmission model revealed by Rabi frequency. Additionally, it is promising to exploit the cross-band response capability of Rydberg atoms in atomic-ISAC systems. By exciting electrons to proper energy levels, it becomes feasible to simultaneously utilize sub-6GHz signals to ensure communication coverage and high-frequency signals to refine sensing accuracy.

### D. Advancing Quantum Many-body RAREs

A more thorough exploration of the quantum many-body effects of Rydberg atoms is essential for mitigating external noises. The preliminary study in [15] focused on *periodic sinusoidal signals* and *white external noise*, with the evaluation metric limited to *SNR*. Holistic theories are required to investigate the characteristics of this quantum many-body RARE under the influence of *aperiodic communication signals* (such

as QAM signals and FDM signals), and thereby quantitatively analyze the reduction of practical *color external noise* (such as inter-user interference). In addition, analysis of the *input-output mutual information* should be carried out to unveil the communication gain brought by the many-body effect, rather than solely relying on the SNR. Last, it is intractable to derive an analytical transmission model from the nonlinear Schrödinger equation. Thereafter, it might be necessary to use artificial intelligence technologies, such as physics-informed neural networks, to develop signal detection and channel estimation algorithms for quantum many-body RAREs.

## VI. CONCLUSIONS

This article provides an overview of the fundamentals, advantages, progresses, and future directions for RARE-aided wireless communications. Representing a paradigm shift in receiver architecture, RAREs detect classical EM signals via quantum phenomena, contributing to improved sensitivity, enhanced coverage, and broadened operating bandwidth. RAREs can seamlessly integrate with both classical techniques, such as FDM and MIMO, as well as quantum techniques, like the many-body effect, to enhance communication performance. However, the advancement of RAREs requires more efforts from the communication community to systematically develop mature transmission models, theoretical analysis frameworks, and efficient communications algorithms, making RARE a practically useful technology for future wireless networks.

## REFERENCES

- [1] W. Jiang, B. Han, M. A. Habibi, and H. D. Schotten, "The road towards 6G: A comprehensive survey," *IEEE Open J. Commun. Soc.*, vol. 2, pp. 334–366, Feb. 2021.
- [2] D. H. Meyer, Z. A. Castillo, K. C. Cox, and P. D. Kunz, "Assessment of Rydberg atoms for wideband electric field sensing," *J. Phys. B: At. Mol. Opt. Phys.*, vol. 53, no. 3, p. 034001, Feb. 2020.
- [3] H. Fan, S. Kumar, J. Sedlacek, H. Kübler, S. Karimkashi, and J. P. Shaffer, "Atom based RF electric field sensing," *J. Phys. B: At. Mol. Opt. Phys.*, vol. 48, no. 20, p. 202001, Sep. 2015.
- [4] B. Liu, L. Zhang, Z. Liu, Z. Deng, D. Ding, B. Shi, and G. Guo, "Electric field measurement and application based on Rydberg atoms," *Electromagn. Sci.*, vol. 1, no. 2, pp. 1–16, Jun. 2023.
- [5] F. Zhang, B. Jin, Z. Lan, Z. Chang, D. Zhang, Y. Jiao, M. Shi, and J. Xiong, "Quantum wireless sensing: Principle, design and implementation," in *Proc. Annu. Int. Conf. Mobile Comput. Netw. (ACM MobiCom'23)*, Oct. 2023, pp. 1–15.
- [6] D. H. Meyer, J. C. Hill, P. D. Kunz, and K. C. Cox, "Simultaneous multiband demodulation using a Rydberg atomic sensor," *Phys. Rev. Appl.*, vol. 19, p. 014025, Jan. 2023.
- [7] M. Jing, Y. H. Hu, J. Ma, H. Zhang, L. Zhang, L. Xiao, and S. Jia, "Atomic superheterodyne receiver based on microwave-dressed Rydberg spectroscopy," *Nat. Phys.*, vol. 1, pp. 911–915, Jun. 2020.
- [8] M. Cui, Q. Zeng, and K. Huang, "Towards atomic MIMO receivers," *IEEE J. Sel. Areas Commun.*, 2024.
- [9] J. A. Sedlacek, A. Schwettmann, H. Kübler, R. Löw, T. Pfau, and J. P. Shaffer, "Microwave electrometry with Rydberg atoms in a vapour cell using bright atomic resonances," *Nat. Phys.*, vol. 8, no. 11, pp. 819–824, Nov. 2012.
- [10] Z. Liu, L. Zhang, B. Liu, Z. Zhang, G. Guo, D. Ding, and B. Shi, "Deep learning enhanced Rydberg multifrequency microwave recognition," *Nat. Commun.*, vol. 13, no. 1, p. 1997, Apr. 2022.
- [11] S. Borówka, U. Pylypenko, M. Mazelanik, and M. Parniak, "Continuous wideband microwave-to-optical converter based on room-temperature Rydberg atoms," *Nat. Photon.*, vol. 18, pp. 32–38, Jun. 2024.
- [12] S. H. Knarr, V. G. Bucklew, J. Langston, K. C. Cox, J. C. Hill, D. H. Meyer, and J. A. Drakes, "Spatiotemporal multiplexed Rydberg receiver," *IEEE Trans. Quantum Eng.*, vol. 4, pp. 1–8, 2023.

- [13] J. S. Otto, M. K. Hunter, N. Kjærgaard, and A. B. Deb, "Data capacity scaling of a distributed Rydberg atomic receiver array," *J. Appl. Phys.*, vol. 129, no. 15, p. 154503, Apr. 2021.
- [14] M. Cui, Q. Zeng, and K. Huang, "MIMO precoding for Rydberg atomic receivers," *arXiv preprint arXiv:2408.14366*, Aug. 2024.
- [15] K. Wu, C. Xie, C. Li, G. Guo, C. Zou, and G. Xiang, "Nonlinearity-enhanced continuous microwave detection based on stochastic resonance," *Sci. Adv.*, vol. 10, no. 41, Oct. 2024.

## BIOGRAPHIES

**Mingyao Cui** is a PhD student at The University of Hong Kong, Hong Kong.

**Qunsong Zeng** is a research assistant professor with The University of Hong Kong, Hong Kong.

**Kaibin Huang** is a professor with The University of Hong Kong, Hong Kong.