

---

# GENERALIZED SCATTERING MATRIX FORMULATION AND ITS RELATIONSHIP WITH TARC AND MAXIMUM POWER TRANSFER THEOREM

---

**Majid Manteghi**  
Virginia Tech  
Blacksburg, VA 2061  
manteghi@vt.edu

## ABSTRACT

In this paper, we present a rigorous framework for analyzing arbitrary passive matching networks using a generalized Thevenin-Helmholtz equivalent circuit. Unlike prior formulations, which often impose restrictive assumptions such as diagonal matching impedance matrices, our approach accommodates fully passive and interconnected multiport matching networks in their most general form.

We first establish the mathematical conditions that any Linear Time Invariant, LTI, passive matching network must satisfy, starting from a  $N \times N$  impedance matrix and continuing to  $2N \times 2N$  and modified to follow the Thevenin-Helmholtz equivalent network. Using the Maximum Power Transfer Theorem (MPTT), we derive the scattering matrix  $\mathbf{S}$  explicitly, showing its general applicability to arbitrary impedance configurations. Furthermore, we demonstrate the connection between the Total Active Reflection Coefficient (TARC) and the MPTT, proving that the TARC is inherently tied to the power conservation principle of the MPTT.

This formulation not only unifies existing approaches, but also broadens the scope of applicability to encompass arbitrary physical passive systems. The equations and relationships derived provide a robust mathematical foundation for analyzing complex multiport systems, including interconnected phased arrays and passive antenna networks.

**Keywords** First keyword · Second keyword · More

## 1 Introduction

The ability to rigorously analyze and design matching networks for multiport systems is fundamental to a broad range of applications, including phased arrays, multiple inputs, multiple outputs, MIMO systems, and microwave circuits. A central point in this analysis lies in bridging the mathematical foundations of power transfer and power wave scattering with physical realizations of passive matching networks. This paper addresses this gap by presenting a unified framework that not only generalizes the scattering matrix formulation, but also establishes its direct connection to the Maximum Power Transfer Theorem (MPTT). Our approach accommodates arbitrary passive multiport networks without imposing extra restrictive assumptions, thereby providing new insights into the interplay between scattering-matrix properties and power transfer efficiency.

The scattering matrix has been a cornerstone of network analysis since its introduction in the seminal work of K. Kurokawa in 1965 [1]. In his paper 'Power waves and the scattering matrix', Kurokawa defined the scattering matrix in terms of diagonal source impedance matrices, a formulation widely adopted in the analysis of independent matching circuits. However, this definition does not account for interconnected or arbitrary impedance configurations. C. Desoer proved the Maximum Power Transfer Theorem [2] for  $N$ -port networks. Despite their foundational importance, the relationship between the scattering matrix and MPTT has remained largely unexplored, particularly in the context of arbitrary passive matching networks.

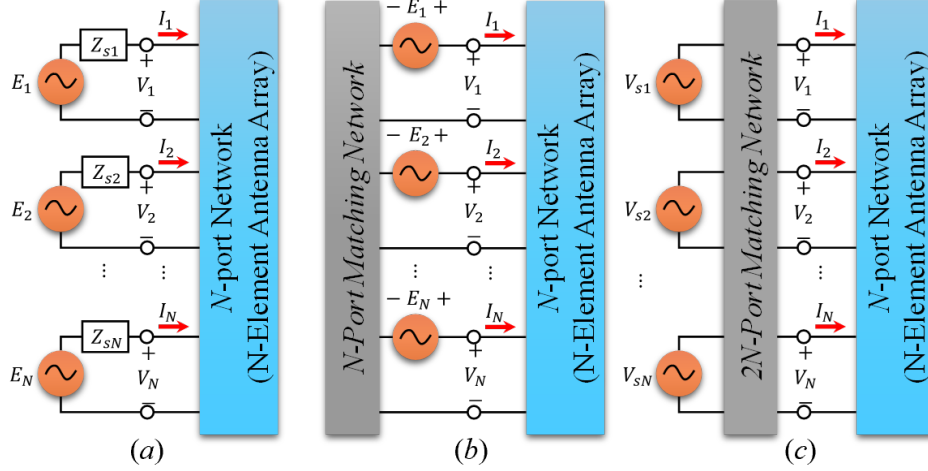


Figure 1: a) Classical phased array with separated transmitters. b) a phased array with interconnected matching circuitry, c) sources are extracted from the interconnected matching circuit, resulting in a  $2N$  port matching network.

The purpose of this paper is two-fold. First, we generalize the scattering matrix formulation for arbitrary passive matching networks, accommodating multiport systems with non-diagonal or interconnected source impedance matrices. Second, we draw a rigorous mathematical connection between the scattering matrix and the MPTT, demonstrating that the Total Active Reflection Coefficient (TARC), derived from the scattering matrix, inherently reflects the power transfer efficiency described by the MPTT. This unification highlights the physical significance of the scattering matrix beyond its traditional interpretations.

In this work, we begin by defining the most general form of a passive matching network using an  $N \times N$  and then a  $2N \times 2N$  impedance matrices modified to follow the Thevenin-Helmholtz equivalent circuit. Then, we prove the connection between TARC and MPTT, showcasing their application to arbitrary physical systems. The paper is organized as follows. Section 2 derives the scattering matrix explicitly. Section 3 demonstrates the relationship between TARC and MPTT. Section 4 concludes the paper with discussions on the implications of this work and potential extensions.

## 2 Derivation of the Scattering Matrix from MPTT

We consider the equivalent Thevenin-Helmholtz model for a  $N$ -port network, characterized by the impedance matrix  $\mathbf{Z}$  and the source impedance matrix  $\mathbf{Z}_s$  as shown in Figure 1 (a) and (b). The relationship between the port voltages  $\mathbf{V}$ , the network currents  $\mathbf{I}$ , and the source excitation  $\mathbf{E}$  is given by:

$$\mathbf{I} = (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{E} \quad \text{and} \quad \mathbf{V} = \mathbf{Z}(\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{E} \quad (1)$$

The generalized scattering matrix framework is applicable to all multiport networks, including those with interconnected matching circuits, as shown in Figure 1. The Thevenin-Helmholtz equivalent network of case (c) is calculated by partitioning its  $\mathbf{Z}_{2N \times 2N}$  in four  $N \times N$  metrics as:

$$\mathbf{Z}_{2N} = \begin{bmatrix} \mathbf{Z}_{in} & \mathbf{Z}_{io} \\ \mathbf{Z}_{oi} & \mathbf{Z}_{out} \end{bmatrix}_{2N \times 2N} \Rightarrow \begin{cases} \mathbf{Z}_s = \mathbf{Z}_{out} - \mathbf{Z}_{oi} \mathbf{Z}_{in}^{-1} \mathbf{Z}_{io} \\ \mathbf{E} = \mathbf{Z}_{oi} \mathbf{Z}_{in}^{-1} \mathbf{V}_s \end{cases} \quad (2)$$

Equation (2) gives the equivalent source impedance  $\mathbf{Z}_s$  and equivalent excitation vector  $\mathbf{E}$  as functions of different partitions of  $\mathbf{Z}_{2N}$  and  $\mathbf{V}_s$ . According to the Maximum Power Transfer Theorem (MPTT), the forward power wave is derived based on the condition that the load impedance is conjugately matched to the source impedance (this formulation is valid for any LTI source-load network while  $\mathbf{R}_s = \text{Re}(\mathbf{Z}_s)$  and  $\mathbf{Z} + \mathbf{Z}_s$  are invertible). The forward wave  $\mathbf{V}^+$  is defined as:

$$\mathbf{V}^+ = \mathbf{Z}_s^H (\mathbf{Z}_s^H + \mathbf{Z}_s)^{-1} \mathbf{E} \quad \Rightarrow \quad \mathbf{V}^+ = \frac{1}{2} \mathbf{Z}_s^H \mathbf{R}_s^{-1} \mathbf{E} \quad (3)$$

We define the vector of the reflected voltages as follows.

$$\mathbf{V}^- = \mathbf{V} - \mathbf{V}^+ \quad (4)$$

Substituting (1) and (3) into (4) we have the following.

$$\mathbf{V}^- = \mathbf{Z}(\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s\mathbf{E} \quad (5)$$

$$\mathbf{V}^- = \left[ \mathbf{Z}(\mathbf{Z} + \mathbf{Z}_s)^{-1} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s \right] \mathbf{E} \quad (6)$$

We multiply the second term in the bracket on the right side by  $\mathbf{U}$  (unity matrix), which is the multiplication of a matrix to its inverse as:

$$\mathbf{V}^- = \left[ \mathbf{Z}(\mathbf{Z} + \mathbf{Z}_s)^{-1} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}(\mathbf{Z} + \mathbf{Z}_s)(\mathbf{Z} + \mathbf{Z}_s)^{-1} \right] \mathbf{E} \quad (7)$$

Factoring from the right side the common term, we have:

$$\mathbf{V}^- = \left[ \mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}(\mathbf{Z} + \mathbf{Z}_s) \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (8)$$

Multiplying the first term by  $\mathbf{U}$  we have the following:

$$\mathbf{V}^- = \left[ \mathbf{R}_s(\mathbf{Z}_s^H)^{-1}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (9)$$

Factoring the common terms from the left and replacing  $\mathbf{U}$  by a matrix multiplied by its inverse, we have:

$$\mathbf{V}^- = \left[ (2\mathbf{R}_s(\mathbf{Z}_s^H)^{-1} - \mathbf{U})\frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (10)$$

$$\mathbf{V}^- = \left[ \left( 2\mathbf{R}_s(\mathbf{Z}_s^H)^{-1} - \mathbf{Z}_s^H(\mathbf{Z}_s^H)^{-1} \right) \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (11)$$

Simplifying the expression inside the parentheses, we have:

$$\mathbf{V}^- = \left[ (2\mathbf{R}_s - \mathbf{Z}_s^H)\frac{1}{2}\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (12)$$

$$\mathbf{V}^- = \left[ \mathbf{Z}_s\frac{1}{2}\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (13)$$

The term  $\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s$  is a real matrix because its Hermitian is equal to it. It can be easily shown that:

$$\mathbf{Z}_s^H\mathbf{R}_s^{-1}\mathbf{Z}_s = \mathbf{Z}_s\mathbf{R}_s^{-1}\mathbf{Z}_s^H \quad (14)$$

Now we can factor in common terms such as:

$$\mathbf{V}^- = \left[ \mathbf{Z}_s\frac{1}{2}\mathbf{R}_s^{-1}\mathbf{Z} - \frac{1}{2}\mathbf{Z}_s\mathbf{R}_s^{-1}\mathbf{Z}_s^H \right] (\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (15)$$

This is the simplified equation to relate  $\mathbf{V}^-$  to  $\mathbf{E}$ :

$$\mathbf{V}^- = \frac{1}{2}\mathbf{Z}_s\mathbf{R}_s^{-1}(\mathbf{Z} - \mathbf{Z}_s^H)(\mathbf{Z} + \mathbf{Z}_s)^{-1}\mathbf{E} \quad (16)$$

Use equation (3) to replace  $\mathbf{E}$  as:

$$\mathbf{V}^- = \mathbf{Z}_s \mathbf{R}_s^{-1} (\mathbf{Z} - \mathbf{Z}_s^H) (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{R}_s (\mathbf{Z}_s^H)^{-1} \mathbf{V}^+ \quad (17)$$

$$\mathbf{R}_s \mathbf{Z}_s^{-1} \mathbf{V}^- = (\mathbf{Z} - \mathbf{Z}_s^H) (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{R}_s (\mathbf{Z}_s^H)^{-1} \mathbf{V}^+ \quad (18)$$

After simple manipulation of (18) we have:

$$\mathbf{R}_s^{1/2} \mathbf{Z}_s^{-1} \mathbf{V}^- = \mathbf{R}_s^{-1/2} (\mathbf{Z} - \mathbf{Z}_s^H) (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{R}_s^{1/2} \mathbf{R}_s^{1/2} (\mathbf{Z}_s^H)^{-1} \mathbf{V}^+ \quad (19)$$

Let us define:

$$\mathbf{b} = \mathbf{R}_s^{1/2} \mathbf{Z}_s^{-1} \mathbf{V}^-, \quad \mathbf{a} = \mathbf{R}_s^{1/2} (\mathbf{Z}_s^H)^{-1} \mathbf{V}^+ \Rightarrow \mathbf{a} = \frac{1}{2} \mathbf{R}_s^{-1/2} \mathbf{E} \quad (20)$$

Then, for  $\mathbf{R}_s = \text{Re}(\mathbf{Z}_s)$ , the scattering matrix is defined as:

$$\mathbf{S} = \mathbf{R}_s^{-1/2} (\mathbf{Z} - \mathbf{Z}_s^H) (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{R}_s^{1/2} \quad (21)$$

This generalized scattering matrix is derived directly from the Maximum Power Transfer Theorem (MPTT). The equation is valid for the most general form of multiport passive and linear time-invariant (LTI) load and source impedances.

Furthermore, the scattering matrix  $\mathbf{S}$  can be further manipulated as:

$$\mathbf{S} = \mathbf{R}_s^{-1/2} (\mathbf{Z} - \mathbf{Z}_s^H) \mathbf{R}_s^{-1/2} \mathbf{R}_s^{1/2} (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{R}_s^{1/2} \quad (22)$$

We define the normalized impedance matrix of the antenna array and its source impedance as:

$$\mathbf{z} = \mathbf{R}_s^{-1/2} \mathbf{Z} \mathbf{R}_s^{-1/2}, \quad \mathbf{z}_s = \mathbf{R}_s^{-1/2} \mathbf{Z}_s \mathbf{R}_s^{-1/2} \quad (23)$$

The scattering matrix, expressed as a function of these dimensionless normalized impedance matrices, is given by:

$$\mathbf{S} = (\mathbf{z} - \mathbf{z}_s^H) (\mathbf{z} + \mathbf{z}_s)^{-1} \quad (24)$$

### 3 Relationship Between TARC and MPTT

The relationship between the Total Active Reflection Coefficient (TARC) [3, 4] and the Maximum Power Transfer Theorem (MPTT) is established as follows:

$$\Gamma = \text{TARC} = \sqrt{\frac{\mathbf{b}^H \mathbf{b}}{\mathbf{a}^H \mathbf{a}}} = \sqrt{\frac{\mathbf{a}^H \mathbf{S}^H \mathbf{S} \mathbf{a}}{\mathbf{a}^H \mathbf{a}}} \Rightarrow 1 - |\Gamma|^2 = 1 - \frac{\mathbf{a}^H \mathbf{S}^H \mathbf{S} \mathbf{a}}{\mathbf{a}^H \mathbf{a}} = \frac{\mathbf{a}^H (\mathbf{U} - \mathbf{S}^H \mathbf{S}) \mathbf{a}}{\mathbf{a}^H \mathbf{a}} = \eta \quad (25)$$

Here  $\eta$  is defined as the ratio of the power delivered to the available power:

$$1 - |\Gamma|^2 = \frac{\mathbf{E}^H (\mathbf{Z}^H + \mathbf{Z}_s^H)^{-1} (\mathbf{Z}^H + \mathbf{Z}) (\mathbf{Z} + \mathbf{Z}_s)^{-1} \mathbf{E}}{\mathbf{E}^H \text{Re}(\mathbf{Z}_s) \mathbf{E}} = \eta. \quad (26)$$

Detailed proofs of these equations for the general case are presented in [5], where a comprehensive framework is introduced for analyzing multiport networks using generalized scattering matrix formulations. Specifically, a novel method is proposed to match antenna arrays by minimizing the maximum eigenvalue of  $\mathbf{S}\mathbf{S}^H$ , which is equivalent to reducing the worst-case power reflection. This approach ensures robust performance across a wide range of operating conditions, making it particularly effective in scenarios where strong coupling between array elements threatens efficiency.

The detailed proofs of these equations for the general case are presented in [5], where a comprehensive framework is provided to analyze multiport networks using generalized scattering matrix formulations. In particular, a novel method is introduced to match an antenna array by minimizing the maximum eigenvalue of  $\mathbf{SS}^H$ , which is equivalent to minimizing the worst-case scenario for power reflection. This approach ensures robust performance under a wide range of operating conditions, making it especially suitable for systems where strong coupling between array elements can degrade efficiency.

Additionally, the interplay between the Array Coupling Index (ACI) and TARC has been explored in detail. In [6], the ACI is introduced as a metric to quantify the degree of coupling between elements in an antenna array. In [7] it was demonstrated that there is a trade-off between TARC and ACI: By allowing degradation in TARC, it is possible to achieve reduction in ACI. This trade-off is particularly relevant in the design of antenna arrays, where the coupling reduction is often critical to achieving desired radiation patterns and reducing mutual interference.

These findings highlight the importance of balancing multiple performance metrics when designing multiport systems, emphasizing that improvements in one parameter, such as TARC, may come at the expense of others, such as ACI. The insights gained from these analyses offer practical guidelines for optimizing multiport networks in complex environments.

## 4 Conclusion

This paper presents a rigorous and comprehensive framework that generalizes the scattering matrix formulation and establishes its direct connection to the Maximum Power Transfer Theorem (MPTT) for arbitrary passive multiport networks. Starting from a generalized Thevenin-Helmholtz equivalent circuit, we derived the mathematical conditions that any physical passive matching network must satisfy. By rigorously extracting the scattering matrix from the MPTT, we demonstrated that these equations are universally valid for any passive network configuration, including systems with interconnected matching circuits and nondiagonal source impedance matrices.

A key contribution of this work is the proof that the Total Active Reflection Coefficient (TARC), defined in terms of the scattering matrix, inherently reflects the power transfer efficiency described by MPTT. This unification extends the scope of the scattering matrix beyond its classical interpretations, providing a robust foundation for analyzing arbitrary passive networks, such as multiport antenna arrays and phased array systems.

The implications of this work are significant for both theoretical and practical applications. By relaxing traditional constraints on impedance configurations, the generalized formulations presented here enable more flexible and accurate analyses of modern multiport systems. Furthermore, the demonstrated relationship between TARC and MPTT provides new insights into the role of scattering parameters in characterizing power efficiency.

## References

- [1] K. Kurokawa. Power waves and the scattering matrix. *IEEE Transactions on Microwave Theory and Techniques*, 13(2):194–202, 1965.
- [2] C. Desoer. The maximum power transfer theorem for n-ports. *IEEE Transactions on Circuit Theory*, 20(3):328–330, 1973.
- [3] M. Manteghi and Y. Rahmat-Samii. Broadband characterization of the total active reflection coefficient of multiport antennas. In *IEEE Antennas and Propagation Society International Symposium. Digest. Held in conjunction with: USNC/CNC/URSI North American Radio Sci. Meeting (Cat. No.03CH37450)*, volume 3, pages 20–23 vol.3, 2003.
- [4] M. Manteghi and Y. Rahmat-Samii. Multiport characteristics of a wide-band cavity backed annular patch antenna for multipolarization operations. *IEEE Transactions on Antennas and Propagation*, 53(1):466–474, 2005.
- [5] Majid Manteghi. Comments on “transducer and radiation efficiency figures of a multiport antenna array”. *IEEE Transactions on Antennas and Propagation*, 72(1):1075–1077, 2024.
- [6] Majid Manteghi. Singular metric for antenna array mutual coupling: Unveiling the array coupling index (aci). In *2024 United States National Committee of URSI National Radio Science Meeting (USNC-URSI NRSM)*, pages 63–64, 2024.
- [7] Majid Manteghi. Tarc, mutual coupling, impedance matching, and coupling compensation matrix in phased arrays. In *2024 IEEE International Symposium on Antennas and Propagation and INC/USNC-URSI Radio Science Meeting (AP-S/INC-USNC-URSI)*, pages 749–750, 2024.