

# Rotatable and Movable Antenna-Enabled Near-Field Integrated Sensing and Communication

Yunan Sun

**Abstract**—Integrated sensing and communication (ISAC) is regarded as a promising technology for next-generation communication networks. As the demand for communication performance significantly increases, extremely large-scale antenna arrays and tremendously high-frequency bands get widely applied in communication systems, leading to the expansion of the near-field region. Therefore, it is necessary to reevaluate the performance of ISAC in the near-field, especially considering the spherical wave near-field channel with effective aperture loss. On a parallel track, movable antennas (MAs) and six-dimensional MAs (6DMAs) are proposed as emerging technologies to improve the performance of communication and sensing. Based on such a background, this paper investigates the performance of ISAC systems in the near-field region, focusing on a novel system architecture that employs rotatable MAs (RMAs). The proposed RMA-enabled near-field ISAC system utilizes two rotatable antenna planes at the base station (BS) for both transmission and reception, allowing dynamic adjustment of antenna positions and rotations to enhance both communication and sensing capabilities. Additionally, a spherical wave near-field channel model with respect to RMAs' rotations and positions is derived by considering the effective aperture loss. Two designs are explored: a sensing-centric design that minimizes the Cramér-Rao bound (CRB) with signal-to-interference-plus-noise ratio (SINR) constraints, and a communication-centric design that maximizes the sum-rate with a CRB constraint. To solve the formulated optimization problems, the paper proposes two alternating optimization (AO) based algorithms composed of the semidefinite relaxation (SDR) method and the particle swarm optimization (PSO) method. Numerical results demonstrate the convergence and effectiveness of the proposed algorithms and the superiority of the proposed setups for both sensing and communication performance compared to traditional fixed antenna systems, highlighting the potential of RMAs to enhance ISAC systems in near-field scenarios.

**Index Terms**—Rotatable and movable antenna (RMA), integrated sensing and communications (ISAC), near-field, particle swarm optimization (PSO).

## I. INTRODUCTION

The rapid advancement of communication technologies and the increasing demand for seamless connectivity have given rise to new paradigms in wireless networks. One such emerging concept is Integrated Sensing and Communication (ISAC), which converges the traditionally separate domains of communication and sensing into a unified framework [1]. ISAC stands out due to its ability to efficiently allocate time, frequency, power, and hardware resources for simultaneous communication and sensing tasks [2]. This capability is expected to optimize spectrum utilization and improve the performance of next-generation wireless systems. Furthermore,

ISAC can be combined with other emerging technologies, such as reconfigurable intelligent surfaces (RIS) [3], [4] and fluid antenna [5], [6] to further enhance the performance of sensing and communication. As a result, ISAC presents significant research potential.

In light of recent advancements in wireless communication and sensing technologies, there is an increasing demand to meet the challenging requirements of next-generation wireless networks [7]. This typically necessitates the application of extremely large-scale antenna arrays and tremendously high-frequency bands. As a result, the Rayleigh distance  $\frac{2D^2}{\lambda}$  with  $D$  denoting the antenna aperture and  $\lambda$  denoting the wavelength, is predicted to significantly increase, which means that the near-field region will correspondingly expand, encompassing distances of several hundred meters. When the user terminals (UTs) or the sensing targets are located in the near-field region, the propagation of electromagnetic waves requires a more accurate wave modeling approach, which differs from the conventional planar wave modeling adopted in far-field scenarios [8]. In addition to using spherical wave modeling, the effective antenna aperture loss should also be considered in the near-field channel model, otherwise, it may lead to unreasonable inaccuracies [7], [9]. Therefore, it is essential to reevaluate the performance of ISAC with appropriate channel modeling for near-field scenarios.

In conventional multiple-input multiple-output (MIMO) systems, fixed-position antennas (FPAs) are widely configured and employed both for sensing and communication. Such fixed deployment of antennas limits the diversity and spatial multiplexing performance of MIMO systems because the channel variation in the spatial field is not fully utilized [10]. To overcome the inherent limitations of FPAs, movable antennas (MAs) and six-dimensional MAs (6DMAs) are introduced to wireless networks, which can fully exploit the spatial degrees of freedom (DoFs) of antenna arrays in communication or sensing scenarios [11]–[14]. Compared to FPAs, transceivers equipped with movable antennas (MAs) can dynamically adjust the positions of antenna elements based on channel state information (CSI), thereby reshaping the channel conditions to boost communication performance, or reconfiguring the geometric properties of the antenna arrays to enhance sensing capability [15]. Building upon MAs, 6DMA leverages the DoFs in both the three-dimensional (3D) positioning and rotation of antenna planar. This enables adaptive antenna resource allocation based on long-term or statistical user distribution, ultimately boosting network capacity. Due to the advantageous properties of MA and 6DMA, there has recently been extensive research on various wireless sensing and ISAC systems aided by these technologies [15]–[20]. The authors

Y. Sun is with the School of Information and Communication Engineering, Beijing University of Posts and Telecommunications, Beijing, 100876, China (e-mail: sunyunan@bupt.edu.cn).

in [15] investigated a MA-aided ISAC system with RIS and maximized the minimum beam pattern gain by jointly optimizing the transmit beamforming, the positions of MAs, and the phase shifts of RIS. In addition, the authors in [16] studied the CRB-minimization problem for a MA-aided ISAC system. Based on existing research on the use of movable antennas (MA) in ISAC systems considering far-field channel models [17], [18], the authors in [19] investigated the application of MAs in a dual-functional full-duplex ISAC system with near-field channel model. Moreover, the authors in [20] proposed a wireless sensing system aided by 6DMA and minimized the Cramér-Rao bound (CRB) for estimating the directions of arrival by jointly optimizing the 6DMAs' positions and rotations at the base station (BS), comparing it with MAs for directive and isotropic antenna radiation patterns. However, it is worth noting that the performance of the MA planes' rotations in near-field ISAC remains unexplored, especially considering that the existing literature has employed a spherical wave model, which fails to account for the loss in channel gain resulting from the effective antenna aperture [21], [22]. On the other hand, although 6DMA can achieve significant gains in both communication and sensing performance, its multiple rotatable surfaces require high hardware costs. Therefore, in this paper, we propose a rotatable MAs (RMAs) enabled near-field ISAC system, which can be regarded as a 6DMA-aided system with only two antenna surfaces and movable elements. The main contributions of this paper are summarized as follows:

- 1) We propose an RMA-enabled near-field ISAC system and employ a spherical wave channel model considering the effective antenna aperture loss. In the proposed scenario, the BS is equipped with two rotatable MA planes for transmission and reception respectively and all the MAs can move in large-size regions, serving multiple downlink UTs as well as performing sensing on one target.
- 2) We investigate the near-field ISAC performance by considering the sensing-centric design and the communication-centric design. For the sensing-centric design, we formulate a CRB minimization problem with signal-to-interference-plus-noise (SINR) constraints. And for the communication-centric design, we formulate a sum-rate maximization problem with SINR constraints and a CRB constraint.
- 3) We propose two AO-based algorithms to solve the formulated problems. Specifically, we optimize the transmit beamforming and the RMAs' positions and rotations by leveraging the semidefinite relaxation (SDR) method and the particle swarm optimization (PSO) method for the sensing-centric problem. Additionally, we derive a more trackable form of the communication-centric problem by utilizing the quadratic transform and optimize the transmit beamforming and RMAs' positions and rotations by adopting similar methods for the sensing-centric problem.
- 4) Numerical results are present to demonstrate the convergence and effectiveness of the proposed algorithms. We also compare the performance of different setups for antennas at BS to study the individual effect and synergy

of RMAs' rotations and element position movement. Moreover, the simulation results of discrete rotations are shown to analyze the performance loss with a given number of quantization bits.

The rest of this paper is organized as follows. In Section II, our proposed conceptual framework of the RMA-enabled near-field ISAC system model is described by sequentially introducing the RMA model at BS with its constraints, the near-field channel model considering the effective aperture loss, the transmit ISAC signal model, and the adopted performance metrics. In Section III, a CRB minimization problem for sensing-centric design is formulated, and an AO-based algorithm is proposed to solve it. In Section IV, a sum-rate maximization problem for communication-centric design is characterized, and the corresponding AO-based algorithm is proposed. Numerical results are provided to verify the effectiveness of the proposed framework and algorithms in Section V, and a concise conclusion is provided in Section VI.

*Notations:* Throughout this paper, scalars, vectors, and matrices are denoted by non-bold, bold lower-case, and bold upper-case letters, respectively. For the vector  $\mathbf{a}$ ,  $[\mathbf{a}]_i$ ,  $\mathbf{a}^\top$ ,  $\mathbf{a}^*$ , and  $\mathbf{a}^H$  denote the  $i$ -th entry, transpose, conjugate, and conjugate transpose of  $\mathbf{a}$ , respectively. The notations  $|\mathbf{a}|$  and  $\|\mathbf{a}\|$  denote the magnitude and norm of scalar  $\mathbf{a}$  and vector  $\mathbf{a}$ , respectively.  $\mathbf{A} \succeq \mathbf{0}$  means that matrix  $\mathbf{A}$  is positive semidefinite;  $\mathbf{A} \succeq \mathbf{B}$  means that  $\mathbf{A} - \mathbf{B} \succeq \mathbf{0}$ ;  $\text{rank}(\mathbf{A})$  and  $\text{tr}(\mathbf{A})$  denote the rank and trace of matrix  $\mathbf{A}$ , respectively;  $\Re\{\cdot\}$  and  $\Im\{\cdot\}$  denote the real and imaginary component of a complex number, respectively. The  $N \times N$  identity matrix is denoted by  $\mathbf{I}_N$ . The set  $\mathbb{C}^{N \times M}$  and  $\mathbb{R}^{N \times M}$  stands for the space of  $N \times M$  complex and real matrices, respectively. Finally,  $\mathcal{CN}(\mu, \mathbf{X})$  is used to denote the circularly symmetric complex Gaussian distribution with mean  $\mu$  and covariance matrix  $\mathbf{X}$ .

## II. SYSTEM MODEL

### A. RMA-BS Model

In this paper, we consider an RMA-enabled near-field ISAC system, where a monostatic BS with RMAs communicates with  $K$  single-FPA UTs and concurrently performs sensing on one target. As depicted in Fig. 1, we assume that the BS is equipped with  $N_t$  transmit MAs and  $N_r$  receive MAs. The transmit and receive MAs can move in two 2D planes, respectively, namely the transmit plane (TP) and the receive plane (RP). Without loss of generality, we assume that the MAs move within the  $y$ - $z$  plane of the local Cartesian coordinate system defined by the center of the corresponding plane, and the local positions of the  $n_t$ -th transmit MA and the  $n_r$ -th receive MA can be respectively represented as

$$\mathbf{q}_{n_t}^t = [0, y_{n_t}^t, z_{n_t}^t]^\top \in \mathcal{C}^t, \quad (1)$$

$$\mathbf{q}_{n_r}^r = [0, y_{n_r}^r, z_{n_r}^r]^\top \in \mathcal{C}^r, \quad (2)$$

where  $\mathcal{C}^t$  and  $\mathcal{C}^r$  are the square moving regions of size  $D \times D$  with the center points at the origin of corresponding local coordinates.

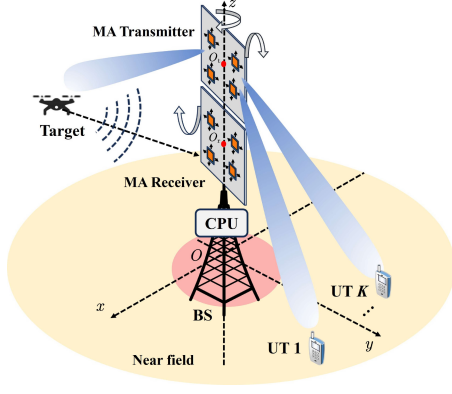


Fig. 1: RMA aided near-field ISAC system.

Both the TP and the RP are connected to the CPU via rotatable rods embedded with flexible wires, and thus can execute 3D rotations. The rotations of TP and RP can be respectively characterized by

$$\boldsymbol{\omega}^t = [\alpha^t, \beta^t, \gamma^t]^T, \quad (3)$$

$$\boldsymbol{\omega}^r = [\alpha^r, \beta^r, \gamma^r]^T, \quad (4)$$

where  $\alpha^p \in [0, 2\pi)$ ,  $\beta^p \in [0, 2\pi)$ , and  $\gamma^p \in [0, 2\pi)$  denote the rotation angles with respect to (w.r.t.) the  $x$ -axis,  $y$ -axis, and  $z$ -axis, respectively, with  $p \in \{t, r\}$ .

Given  $\boldsymbol{\omega}^t$  and  $\boldsymbol{\omega}^r$ , the rotation matrix can be defined as [13]

$$\mathbf{F}(\boldsymbol{\omega}^p) = \begin{bmatrix} \cos \alpha^p \cos \gamma^p & \cos \alpha^p \sin \gamma^p & -\sin \alpha^p \\ F_{21}(\boldsymbol{\omega}^p) & F_{22}(\boldsymbol{\omega}^p) & \cos \alpha^p \sin \beta^p \\ F_{31}(\boldsymbol{\omega}^p) & F_{32}(\boldsymbol{\omega}^p) & \cos \alpha^p \cos \beta^p \end{bmatrix},$$

where  $F_{21}(\boldsymbol{\omega}^p) = \sin \beta^p \sin \alpha^p \cos \gamma^p - \cos \beta^p \sin \gamma^p$ ,  $F_{22}(\boldsymbol{\omega}^p) = \sin \beta^p \sin \alpha^p \sin \gamma^p + \cos \beta^p \cos \gamma^p$ ,  $F_{31}(\boldsymbol{\omega}^p) = \cos \beta^p \sin \alpha^p \cos \gamma^p + \sin \beta^p \sin \gamma^p$ , and  $F_{32}(\boldsymbol{\omega}^p) = \cos \beta^p \sin \alpha^p \sin \gamma^p - \sin \beta^p \cos \gamma^p$ . Then the positions of the  $n_t$ -th transmit MA and the  $n_r$ -th receive MA in the global Cartesian coordinate system can be expressed as

$$\mathbf{t}_{n_t} = \mathbf{F}^t \mathbf{q}_{n_t}^t + \mathbf{C}^t, \quad (5)$$

$$\mathbf{r}_{n_r} = \mathbf{F}^r \mathbf{q}_{n_r}^r + \mathbf{C}^r, \quad (6)$$

where  $\mathbf{F}^p = \mathbf{F}(\boldsymbol{\omega}^p)$ ,  $\mathbf{C}^t$  and  $\mathbf{C}^r$  denote the centers' positions of TP and RP, respectively.

Additionally, we consider two practical constraints on RMA.

1) *Rotation Constraints to Avoid Signal Reflection*: As [13], the TP and RP must meet some rotation constraints to avoid mutual signal reflections between them, which can be expressed as

$$\mathbf{u}^t (\mathbf{r}_{n_r} - \mathbf{C}^t) \leq 0, \forall n_r \in [1, N_r], \quad (7)$$

$$\mathbf{u}^r (\mathbf{t}_{n_t} - \mathbf{C}^r) \leq 0, \forall n_t \in [1, N_t], \quad (8)$$

with  $\mathbf{u}^p = \mathbf{F}^p [1, 0, 0]^T$  denoting the outward normal vector of the TP or RP, which ensures that all the antennas are positioned within the halfspace that consists of vectors forming obtuse angles with the normal vector of another plane.

2) *Minimum-Distance Constraint*: To avoid potential electrical coupling between MAs, a minimum inter-MA distance  $d_{\min}$  is required among MAs [23], i.e.,

$$\|\mathbf{t}_{n_t} - \mathbf{t}_{n'_t}\| \geq d_{\min}, n_t \neq n'_t, n_t, n'_t \in [1, N_t], \quad (9)$$

$$\|\mathbf{t}_{n_r} - \mathbf{t}_{n'_r}\| \geq d_{\min}, n_r \neq n'_r, n_r, n'_r \in [1, N_r]. \quad (10)$$

## B. Channel Model

In this paper, we investigate downlink multiuser transmission with a quasi-static channel model and assume that the UTs and the sensing target are located in the near-field region of the BS. The positions of the UT/target are given by  $\mathbf{p}_k = [d_k \sin \theta_k \cos \phi_k, d_k \sin \theta_k \sin \phi_k, d_k \cos \theta_k]^T$ , with  $d_k$  denoting the distance between the UT/target and the global origin,  $\theta_k \in [0, \pi]$  denoting the elevation angle, and  $\phi_k \in [-\frac{\pi}{2}, \frac{\pi}{2}]$  denoting the azimuth angle, where  $k \in [0, K]$  with  $k = 0$  representing the sensing target and  $k \in [1, K]$  representing the  $k$ -th UT. Then the distance from the  $k$ -th UT/target to the  $n_t$  transmit antenna and the  $n_r$  receive antenna can be respectively calculated by  $\Delta_{k, n_t}^t = \|\mathbf{p}_k - \mathbf{t}_{n_t}\|$  and  $\Delta_{k, n_r}^r = \|\mathbf{p}_k - \mathbf{r}_{n_r}\|$ .

Since the signals are observed by the receivers from distinct angles, the resultant effective antenna aperture varies w.r.t the positions of the antennas. The effective antenna aperture is determined by the product of the maximum value of the effective area and the projection of the array normal to the direction of the signal, with the resultant loss in channel power gain referred to as effective aperture loss [21]. Consequently, under free-space line-of-sight propagation, the channel power gain between the  $n_p$ -th antenna and the  $k$ -th UT/target is given by [9]

$$|h_{n_p, k}^p|^2 = \int_{\mathcal{S}_{n_p}} \mathcal{L}^p(\mathbf{p}_k, \mathbf{s}) \mathcal{G}^p(\mathbf{p}_k, \mathbf{s}) d\mathbf{s}, \quad (11)$$

where  $\mathcal{S}_{n_p}$  denotes the region of  $n_p$  antenna with size of  $\sqrt{A} \times \sqrt{A}$ , and

$$\mathcal{L}^p(\mathbf{p}_k, \mathbf{s}) = \frac{1}{4\pi \|\mathbf{p}_k - \mathbf{s}\|^2}, \quad (12)$$

$$\mathcal{G}^p(\mathbf{p}_k, \mathbf{s}) = \frac{(\mathbf{p}_k - \mathbf{s})^T \mathbf{u}^p \delta(\mathbf{p}_k, \mathbf{s}, \mathbf{u}^p)}{\|\mathbf{p}_k - \mathbf{s}\|}, \quad (13)$$

denotes the free-space path loss and the effective aperture loss, respectively, with  $\delta(\mathbf{p}_k, \mathbf{s}, \mathbf{u}^p)$  representing the sign function w.r.t.  $(\mathbf{p}_k - \mathbf{s})^T \mathbf{u}^p$  for guaranteeing non-negativity of the projection. Given that the size of each antenna is significantly smaller than the propagation distance, i.e.,  $d_k \gg \sqrt{A}, \forall k \in [0, K]$ , the variation of the channel among different points  $\mathbf{s} \in \mathcal{S}_{n_p}$  is negligible. Therefore, (11) can be approximately rewritten as

$$|h_{n_t, k}^t| = \sqrt{A \mathcal{L}^t(\mathbf{p}_k, \mathbf{t}_{n_t}) \mathcal{G}^t(\mathbf{p}_k, \mathbf{t}_{n_t})}, \quad (14)$$

$$|h_{n_r, k}^r| = \sqrt{A \mathcal{L}^r(\mathbf{p}_k, \mathbf{r}_{n_r}) \mathcal{G}^r(\mathbf{p}_k, \mathbf{r}_{n_r})}, \quad (15)$$

for  $p = t$  and  $r$ , respectively. As a result, the near-field channel between the  $k$ -th UT/target and the  $n_p$  antenna can be derived as

$$h_{n_p, k}^p = |h_{n_p, k}^p| e^{-j \frac{2\pi}{\lambda} \Delta_{k, n_p}^p}, \quad (16)$$

where  $\lambda = \frac{c}{f_c}$  is the signal wavelength with  $f_c$  denoting the carrier frequency and  $c$  denoting the speed of propagation.

### C. Signal Model

We consider a coherent time block of  $T$ , during which the parameters for communication and sensing remain constant. The transmitted signal from the BS at time  $t \in [1, T]$  can be modeled as

$$\mathbf{x}(t) = \mathbf{W}\mathbf{s}[t] + \mathbf{x}_0(t) = \sum_{k=1}^K \mathbf{w}_k s_k(t) + \mathbf{x}_0(t), \quad (17)$$

where  $\mathbf{W} = [\mathbf{w}_1, \dots, \mathbf{w}_K] \in \mathbb{C}^{N_t \times K}$  denotes the digital beamformer for conveying the information symbol  $\mathbf{s}(t) = [s_1(t), \dots, s_K(t)]^T \in \mathbb{C}^{K \times 1}$  to the UTs and  $\mathbf{x}_0(t) \in \mathbb{C}^{N_t \times 1}$  denotes the dedicate sensing signal to achieve the full DoFs for target sensing [24]. The multiple beam transmission is also exploited by the dedicated sensing signal, hence its covariance matrix  $\mathbf{R}_0 = \mathbb{E}[\mathbf{x}_0(t)\mathbf{x}_0^H(t)]$  is of a general rank. Moreover, the information symbols are modeled as independent Gaussian random variables with zero mean and unit power while the dedicated sensing signal is generated by pseudo-random coding, so that  $\mathbb{E}[\mathbf{s}(t)\mathbf{s}^H(t)] = \mathbf{I}_K$  and  $\mathbb{E}[\mathbf{s}(t)\mathbf{x}_0^H(t)] = \mathbf{0}_{K \times N_t}$ . Thus the covariance matrix of the transmit signal  $\mathbf{x}(t)$  is given by

$$\mathbf{R}_x = \mathbb{E}[\mathbf{x}(t)\mathbf{x}^H(t)] = \mathbf{W}\mathbf{W}^H + \mathbf{R}_0. \quad (18)$$

It is worth noting that  $\mathbf{R}_x$  can be approximately calculated by

$$\mathbf{R}_x \approx \frac{1}{T} \mathbf{X}\mathbf{X}^H, \quad (19)$$

where  $\mathbf{X} = [\mathbf{x}(1), \dots, \mathbf{x}(T)]$ . This approximation is accurate when  $T$  is large enough. In this paper, we assume that (19) holds accurate equal.

Based on the aforementioned channel and transmitted signal model, the received signal at the  $k$ -th UT for communication is given by

$$y_k(t) = \sum_{i=1}^K \mathbf{h}_k^T \mathbf{w}_i s_i(t) + \mathbf{h}_k^T \mathbf{x}_0(t) + n_k(t), \quad (20)$$

where  $\mathbf{h}_k = [h_{1,k}^t; \dots, h_{N_t,k}^t]^T$  and  $n_k(t) \sim \mathcal{CN}(0, \sigma_k^2)$  denotes the additive Gaussian white noise (AWGN) with  $\sigma_k^2$  representing the noise power. And the received echo signal at the BS for target sensing is given by

$$\mathbf{y}_0(t) = \mathbf{G}\mathbf{x}(t) + \mathbf{n}_0(t), \quad (21)$$

where  $\mathbf{G} = \eta \mathbf{g}_0 \mathbf{h}_0^T$  with  $\eta$  denoting the complex channel gain of the sensing target,  $\mathbf{g}_k = [h_{1,k}^r; \dots, h_{N_r,k}^r]^T$ , and  $\mathbf{n}_0(t) \sim \mathcal{CN}(\mathbf{0}_{N_r}, \sigma_0^2 \mathbf{I}_{N_r})$  denotes the AWGN.

### D. Sensing Performance Metric: CRB

CRB is a common metric for assessing sensing performance, which delineates a lower bound on the variance of unbiased estimators [25]. In this paper, we resort to the CRB as the performance metric for the estimation of the target's positional information, i.e., the distance  $d_0$ , elevation angle  $\theta_0$ , and azimuth angle  $\phi_0$ . Denote  $\boldsymbol{\zeta} = [d_0, \theta_0, \phi_0, \eta^r, \eta^i]$  as the vector

of unknown parameters, where  $\eta^r = \Re\{\eta\}$  and  $\eta^i = \Im\{\eta\}$ . Then the Fisher information matrix (FIM) for estimating  $\boldsymbol{\zeta}$  can be partitioned as

$$\mathbf{J}_{\boldsymbol{\zeta}} = \begin{bmatrix} \mathbf{J}_{11} & \mathbf{J}_{12} \\ \mathbf{J}_{12}^T & \mathbf{J}_{22} \end{bmatrix}, \quad (22)$$

where  $\mathbf{J}_{11} \in \mathbb{C}^{3 \times 3}$  denotes the partition merely about  $d_0, \theta_0$ , and  $\phi_0$ ;  $\mathbf{J}_{22} \in \mathbb{C}^{2 \times 2}$  denotes the partition merely about  $\eta$ ; and  $\mathbf{J}_{12} \in \mathbb{C}^{3 \times 2}$  denotes the partition about the mutual information between the position information and  $\eta$ . The detailed expressions of  $\mathbf{J}_{11}$ ,  $\mathbf{J}_{22}$ , and  $\mathbf{J}_{12}$  are derived in Appendix A. According to Woodbury matrix identity [26], the CRB matrix for estimating  $d_0, \theta_0$ , and  $\phi_0$  is given by

$$\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2) = (\mathbf{J}_{11} - \mathbf{J}_{12} \mathbf{J}_{22}^{-1} \mathbf{J}_{12}^T)^{-1}. \quad (23)$$

### E. Communication Performance Metric: Communication Rate

In this paper, we assume that the perfect channel state information (CSI) of communication channels is perfectly known at the BS via a proper channel estimation mechanism. From (20), the received SINR at the  $k$ -th UT can be expressed as

$$\Gamma_k = \frac{|\mathbf{h}_k^T \mathbf{w}_k|^2}{\sum_{i \neq k} |\mathbf{h}_k^T \mathbf{w}_i|^2 + \mathbf{h}_k^T \mathbf{R}_0 \mathbf{h}_k^* + \sigma_k^2}. \quad (24)$$

Thereby, the downlink communication rate of  $k$ -th user is given by

$$R_k(\mathbf{W}, \mathbf{R}_0, \mathbf{H}) = \log_2(1 + \Gamma_k), \quad (25)$$

where  $\mathbf{H} = [\mathbf{h}_1, \dots, \mathbf{h}_K]$ . Then the downlink sum-rate is given by

$$R(\mathbf{W}, \mathbf{R}_0, \mathbf{H}) = \sum_{k=1}^K R_k(\mathbf{W}, \mathbf{R}_0, \mathbf{H}). \quad (26)$$

## III. SENSING-CENTRIC DESIGN

### A. Problem Formulation

In this section, we consider a sensing-centric design by optimizing the sensing performance and holding a certain communication performance, which can be modeled as a CRB-minimization problem with communication rate constraints. Due to the monotonic increment of logarithmic function, the communication rate constraint for each user can be considered as a SINR constraint. Consequently, the corresponding SINR-constrained CRB-minimization problem is formulated as

$$\mathcal{P}_1 : \min_{\mathbf{W}, \mathbf{R}_0, \mathbf{Q}^r, \mathbf{Q}^i, \boldsymbol{\omega}^r, \boldsymbol{\omega}^i} \text{tr}(\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2)) \quad (27a)$$

$$\text{s.t. } \text{tr}(\mathbf{R}_x) \leq P_{\max}, \quad (27b)$$

$$\mathbf{R}_x - \sum_{k=1}^K \mathbf{w}_k \mathbf{w}_k^H \succeq \mathbf{0}, \quad (27c)$$

$$\Gamma_k \geq \Gamma_{\min}, \forall k \in [1, K], \quad (27d)$$

$$\mathbf{q}_{n_t}^t \in \mathcal{C}^t, \forall n_t \in [1, N_t], \quad (27e)$$

$$\mathbf{q}_{n_r}^r \in \mathcal{C}^r, \forall n_r \in [1, N_r], \quad (27f)$$

$$(7), (8), (9), (10),$$

where  $\mathbf{Q}^p = [\mathbf{q}_1, \dots, \mathbf{q}_{N_p}]$ ;  $P_{\max} \geq 0$  is the total transmit power budget; and  $\Gamma_{\min} \geq 0$  represents the minimum SINR for the  $k$ -th user. Since  $\mathcal{P}_1$  is non-convex and the variables are highly coupled, we adopt an AO-based framework to optimize the covariance matrix of the ISAC signal  $\mathbf{R}_x$  as well as the RMAs' positions and rotations in the following.

### B. Optimization of Transmit Beamforming

In this subsection, we optimize the covariance matrix of the transmit ISAC signal at BS, i.e.,  $\mathbf{R}_x$ , with the positions and rotation of RMAs fixed. Due to the complexity of the objective function in CRB form, we first transform the original problem into the following equivalent but more tractable form according to the Schur complement condition [34]:

$$\mathcal{P}_2 : \min_{\mathbf{w}, \mathbf{R}_0, \mathbf{U}} \text{tr}(\mathbf{U}^{-1}) \quad (28a)$$

$$\text{s.t.} \quad \begin{bmatrix} \mathbf{J}_{11} - \mathbf{U} & \mathbf{J}_{12} \\ \mathbf{J}_{12}^T & \mathbf{J}_{22} \end{bmatrix} \succeq \mathbf{0}, \quad (28b)$$

(27b) – (27d),

where  $\mathbf{U} \in \mathbb{C}^{3 \times 3}$  is an auxiliary matrix. By this way, we transform the non-convex objective function into the convex constraint (28b). Moreover, we adopt the SDR method to deal with the non-convex constraints (27c) and (27d). Specifically, we define  $\mathbf{\Omega}_k = \mathbf{w}_k \mathbf{w}_k^H$ , which is a semidefinite matrix and has a rank of 1. Then (27c) can be written in the following convex form:

$$\mathbf{R}_x \succeq \sum_{k=1}^K \mathbf{\Omega}_k. \quad (29)$$

Similarly, (27d) can be transformed into a convex form as:

$$\frac{1 + \Gamma_{\min}}{\Gamma_{\min}} \mathbf{h}_k^T \mathbf{\Omega}_k \mathbf{h}_k^* \geq \mathbf{h}_k^T \mathbf{R}_x \mathbf{h}_k^* + \sigma_k^2. \quad (30)$$

Through omitting the rank-one constraint of  $\mathbf{\Omega}_k$ , we can formulate the SDR problem as:

$$\mathcal{P}_3 : \min_{\mathbf{\Omega}_k \succeq \mathbf{0}, \mathbf{R}_x \succeq \mathbf{0}, \mathbf{U} \succeq \mathbf{0}} \text{tr}(\mathbf{U}^{-1}) \quad (31a)$$

s.t. (27b), (28b), (29), (30).

Note that  $\mathcal{P}_3$  is a convex semidefinite programming (SDP) problem, the global optimum of which can be obtained by the existing convex optimization solvers such as CVX and MOSEK. Although we omit the rank-one constraint of  $\mathbf{\Omega}_k$ , the rank-one global optimal  $\mathbf{w}_k$  and corresponding  $\mathbf{R}_x$  of  $\mathcal{P}_2$  can always be constructed from an arbitrary global optimal solution of  $\mathcal{P}_3$  by [24]:

$$\mathbf{w}_k^\circ = \left( \mathbf{h}_k^T \tilde{\mathbf{\Omega}}_k \mathbf{h}_k^* \right)^{-\frac{1}{2}} \tilde{\mathbf{\Omega}}_k \mathbf{h}_k^*, \quad (32)$$

$$\mathbf{R}_x^\circ = \tilde{\mathbf{R}}_x, \quad (33)$$

where  $\tilde{\mathbf{\Omega}}_k$  and  $\tilde{\mathbf{R}}_x$  are the optimal solution of  $\mathcal{P}_3$  and optimal  $\mathbf{R}_0$  can be obtained by  $\mathbf{R}_0^\circ = \mathbf{R}_x^\circ - \sum_{k=1}^K \mathbf{w}_k^\circ (\mathbf{w}_k^\circ)^H$ .

### C. Optimization of RMAs' Positions and Rotations

In this subsection, we optimize the RMAs' positions and rotations, i.e.,  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$ , with  $\mathbf{R}_x$  fixed. Since the objective function is highly non-convex and the solution space is large in general, it is difficult to obtain a local optimal solution. To efficiently address this challenge, PSO is introduced as an effective approach [27], [28]. In the PSO-based approach, we first initialize  $M$  particles as

$$\boldsymbol{\xi}_m^{(0)} = [y_{m,1}^{t(0)}, z_{m,1}^{t(0)}, \dots, y_{m,N_t}^{t(0)}, z_{m,N_t}^{t(0)}, \alpha_m^{t(0)}, \beta_m^{t(0)}, \gamma_m^{t(0)}, y_{m,1}^{r(0)}, z_{m,1}^{r(0)}, \dots, y_{m,N_r}^{r(0)}, z_{m,N_r}^{r(0)}, \alpha_m^{r(0)}, \beta_m^{r(0)}, \gamma_m^{r(0)}]^T, \quad (34)$$

where  $y_{m,n_p}^{p(0)}, z_{m,n_p}^{p(0)} \sim \mathcal{U}(-\frac{D}{2}, \frac{D}{2})$ ;  $\alpha_m^{p(0)}, \beta_m^{p(0)}, \gamma_m^{p(0)} \sim \mathcal{U}(0, 2\pi)$  for  $m \in [1, M]$ ,  $n_p \in [1, N_p]$ . Then we randomly initialize each particle's velocity vector  $\mathbf{v}_m^{(0)} \in \mathbb{R}^{(2N_t+2N_r+6) \times 1}$  and define  $\boldsymbol{\Xi}^{(0)} = \{\boldsymbol{\xi}_1^{(0)}, \dots, \boldsymbol{\xi}_M^{(0)}\}$ ,  $\mathbf{V}^{(0)} = \{\mathbf{v}_1^{(0)}, \dots, \mathbf{v}_M^{(0)}\}$ . Subsequently, we set the initial local best position of  $M$  particles as  $\boldsymbol{\xi}_{m,best} = \boldsymbol{\xi}_m^{(0)}$  and select the particle with the best fitness as the global particle  $\boldsymbol{\xi}_{gbest}$  of the swarm. The fitness of the particles is defined in the subsequent text.

Next, we update each particle according to its individual experience and the swarm experience, which can be described by the current local best particle  $\boldsymbol{\xi}_{m,best}$  and the current global best particle  $\boldsymbol{\xi}_{gbest}$ . For the  $\tau$ -th iteration, the  $m$ -th particle is updated as:

$$\mathbf{v}_m^{(\tau+1)} = \omega \mathbf{v}_m^{(\tau)} + a_1 b_1 \left( \boldsymbol{\xi}_{m,best} - \boldsymbol{\xi}_m^{(\tau)} \right) + a_2 b_2 \left( \boldsymbol{\xi}_{gbest} - \boldsymbol{\xi}_m^{(\tau)} \right), \quad (35)$$

$$\boldsymbol{\xi}_m^{(\tau+1)} = \mathcal{B} \left( \boldsymbol{\xi}_m^{(\tau)} + \mathbf{v}_m^{(\tau+1)} \right), \quad (36)$$

where  $a_1$  and  $a_2$  are the individual and global learning factors, which represent the step size of each particle moving toward the best position;  $b_1, b_2 \sim \mathcal{U}(0, 1)$  are two random parameters for enhancing the randomness of the search in order to escape from local optimum;  $\omega$  is the parameter for maintaining the inertia of each particle's movement. Specifically, we update  $\omega$  by

$$\omega = \omega_{\max} - \frac{(\omega_{\max} - \omega_{\min})\tau}{\tau_{\max}}, \quad (37)$$

where  $\omega_{\max}$  and  $\omega_{\min}$  are the maximum and minimum values of  $\omega$ , respectively, with  $\tau_{\max}$  denoting the maximum iteration number of PSO. Due to the fact that the particle may move out of the feasible region, we employ a projection function to process the updated particles in (36) as

$$[\mathcal{B}(\boldsymbol{\xi})]_i = \begin{cases} -\frac{D}{2}, & \text{if } [\boldsymbol{\xi}]_i < -\frac{D}{2}, i \in \mathcal{Q} \\ \frac{D}{2}, & \text{if } [\boldsymbol{\xi}]_i > \frac{D}{2}, i \in \mathcal{Q} \\ [\boldsymbol{\xi}]_i, & \text{otherwise,} \end{cases} \quad (38)$$

where  $\mathcal{Q} = [1, 2N_t] \cup [2N_t + 4, 2N_t + 2N_r + 3]$  represents the set of indices corresponding to the antenna positions within the particles. By utilizing  $\mathcal{B}(\boldsymbol{\xi})$ , constraints (27e) and (27f) are guaranteed to be satisfied. However, (7),(8),(9),(10), and (27d) remain to be taken into consideration. To address this,

we define a fitness function by introducing three penalty terms into the objective function of the original problem as follows:

$$\mathcal{F}(\boldsymbol{\xi}_m^{(\tau)}) = \text{tr}(\text{CRB}(\boldsymbol{\xi}_m^{(\tau)})) + \mu_1 |\mathcal{S}(\boldsymbol{\xi}_m^{(\tau)})| \quad (39)$$

$$+ \mu_2 |\mathcal{J}(\boldsymbol{\xi}_m^{(\tau)})| + \mu_3 \mathcal{H}(\boldsymbol{\xi}_m^{(\tau)}), \quad (40)$$

where  $\text{CRB}(\boldsymbol{\xi}_m^{(\tau)})$  denotes the CRB calculated by setting RMAs' positions and rotations according to  $\boldsymbol{\xi}_m^{(\tau)}$ ;  $\mu_1, \mu_2$ , and  $\mu_3$  are the positive penalty parameters which are large enough;  $\mathcal{S}(\boldsymbol{\xi})$  is a set composed of the position pairs of MAs that violate the minimum-distance constraint. Therefore,  $\mathcal{S}(\boldsymbol{\xi})$  is defined as

$$\mathcal{S}(\boldsymbol{\xi}) = \{([\boldsymbol{\xi}]_n, [\boldsymbol{\xi}]_{n'}) \mid \|\boldsymbol{\xi}_n - \boldsymbol{\xi}_{n'}\| < d_{\min}, n \neq n', n, n' \in \mathcal{Q}\}. \quad (41)$$

Similarly,  $\mathcal{J}(\boldsymbol{\xi}_m^{(\tau)})$  is a set corresponding to the rotation constraints (7) and (8), which is defined as

$$\begin{aligned} \mathcal{J}(\boldsymbol{\xi}_m^{(\tau)}) = & \left\{ n_r | \mathbf{u}^t(\boldsymbol{\xi}^{(\tau)}) \left( \mathbf{r}_{n_r}(\boldsymbol{\xi}^{(\tau)}) - \mathbf{C}^t \right) > 0, n_r \in [1, N_r] \right\} \\ & \cup \left\{ n_t | \mathbf{u}^r(\boldsymbol{\xi}^{(\tau)}) \left( \mathbf{t}_{n_t}(\boldsymbol{\xi}^{(\tau)}) - \mathbf{C}^r \right) > 0, n_t \in [1, N_t] \right\}, \end{aligned} \quad (42)$$

where  $\mathbf{u}^p(\boldsymbol{\xi}^{(\tau)})$ ,  $\mathbf{t}_{n_t}(\boldsymbol{\xi}^{(\tau)})$ , and  $\mathbf{r}_{n_r}(\boldsymbol{\xi}^{(\tau)})$  represent the normal vector of the TP or RP, the  $n_t$ -th transmit MA's position, and the  $n_r$ -th receive MA's position calculated based on  $\boldsymbol{\xi}^{(\tau)}$ . Hence  $|\mathcal{S}(\boldsymbol{\xi})|$  and  $|\mathcal{J}(\boldsymbol{\xi}_m^{(\tau)})|$  are two adaptive penalty terms [29]. And  $\mathcal{H}(\boldsymbol{\xi}_m^{(\tau)})$  is a brick wall penalty term corresponding to the SINR constraint (27d), which is defined as

$$\mathcal{H}(\boldsymbol{\xi}_m^{(\tau)}) = \sum_{k=1}^K \left( \max \left\{ 0, \Gamma_{\min} - \Gamma_k(\boldsymbol{\xi}_m^{(\tau)}) \right\} \right)^2, \quad (43)$$

where  $\Gamma_k(\boldsymbol{\xi}_m^{(\tau)})$  represent the  $k$ -th UT's SINR calculated based on  $\boldsymbol{\xi}^{(\tau)}$ . Since the values of  $\mu_1, \mu_2$ , and  $\mu_3$  are large enough, the penalty terms drive the particles to move to the positions where (7),(8),(9),(10), and (27d) are satisfied. Thus,  $|\mathcal{S}(\boldsymbol{\xi}_{\text{gbest}})|$ ,  $|\mathcal{J}(\boldsymbol{\xi}_{\text{gbest}})|$ , and  $\mathcal{H}(\boldsymbol{\xi}_{\text{gbest}})$  will approach zero during the iterations so that the constraints are resultantly satisfied. By continuously selecting particles corresponding to smaller values of the fitness function, the local and global optimal particles are improved until convergence. Then a suboptimal solution for the positions and rotations of RMAs is obtained.

The detailed AO-based overall algorithm for solving  $\mathcal{P}_1$  is summarized in Algorithm 1. In line 1,  $\mathbf{W}$  and  $\mathbf{R}_0$  are initialized by considering the constraint (27b) while  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$  are randomly initialized by considering the constraint (7), (8), (9), (10), (27e), and (27f). Then the transmit beamforming is optimized by the SDR method in line 4. Subsequently, the positions and rotations of RMAs are optimized by the PSO method in lines 6-22.

#### D. Convergence and Complexity Analysis

In Algorithm 1, the transmit beamforming, the positions and rotations of RMAs are alternatively optimized. Note that the value of the objective function is non-increasing over the iterations. Since the trace of CRB is lower-bounded with

---

#### Algorithm 1 AO-based algorithm for solving $\mathcal{P}_1$

---

- 1: Initialize  $i = 0, \mathbf{W}, \mathbf{R}_0, \mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$ .
  - 2: **repeat**
  - 3:   Calculate  $\mathbf{H}$  and  $\mathbf{G}$  with current  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$ .
  - 4:   Solve  $\mathcal{P}_3$  and update  $\mathbf{W}$  and  $\mathbf{R}_0$  by (32) and (33)
  - 5:   Calculate  $f_0 = \text{tr}(\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2))$  by (23).
  - 6:   Initialize the  $M$  particles with positions  $\boldsymbol{\Xi}^{(0)}$  and velocity  $\mathbf{V}^{(0)}$ .
  - 7:   Set the local best positions  $\boldsymbol{\xi}_{m,\text{lbest}} = \boldsymbol{\xi}_m^{(0)}$  for  $m \in [1, M]$  and the global best positions  $\boldsymbol{\xi}_{\text{gbest}} = \text{argmin}_{\boldsymbol{\xi}_m^{(0)}} \{\mathcal{F}(\boldsymbol{\xi}_1^{(0)}), \dots, \mathcal{F}(\boldsymbol{\xi}_M^{(0)})\}$
  - 8:   **for**  $\tau = 1$  to  $\tau_{\max}$  **do**
  - 9:     Update the inertia parameter  $\omega$  according to (37).
  - 10:    **for**  $m = 1$  to  $M$  **do**
  - 11:     Update the velocity and position of the  $m$ -th particle according to (35) and (36), respectively.
  - 12:     Calculate the fitness value of the  $m$ -th particle, i.e.,  $\mathcal{F}(\boldsymbol{\xi}_m^{(\tau)})$ , according to (40).
  - 13:     **if**  $\mathcal{F}(\boldsymbol{\xi}_m^{(\tau)}) < \mathcal{F}(\boldsymbol{\xi}_{m,\text{lbest}})$  **then**
  - 14:       Update  $\boldsymbol{\xi}_{m,\text{lbest}} = \boldsymbol{\xi}_m^{(\tau)}$ .
  - 15:     **end if**
  - 16:     **if**  $\mathcal{F}(\boldsymbol{\xi}_m^{(\tau)}) < \mathcal{F}(\boldsymbol{\xi}_{\text{gbest}})$  **then**
  - 17:       Update  $\boldsymbol{\xi}_{\text{gbest}} = \boldsymbol{\xi}_m^{(\tau)}$ .
  - 18:     **end if**
  - 19:    **end for**
  - 20:    **end for**
  - 21:    **if**  $\mathcal{F}(\boldsymbol{\xi}_{\text{gbest}}) < f_0$  **then**
  - 22:      Update  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$  according to  $\boldsymbol{\xi}_{\text{gbest}}$ .
  - 23:    **end if**
  - 24:    Set  $i = i + 1$ .
  - 25: **until** Convergence or  $i > I_{\max}$
- 

the given transmit power, the convergence of Algorithm 1 is ensured.

Then we analyze the computational complexity of the proposed algorithm. For each iteration, the complexity for updating  $\mathbf{W}$  and  $\mathbf{R}_0$  via the interior method is in order of  $\mathcal{O}(K^{6.5} M^{6.5} \log \epsilon^{-1})$  with the given solution accuracy  $\epsilon$  [30]. And the complexity for updating  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$  via the PSO method is in order of  $\mathcal{O}(\tau_{\max} M (2N_t + 2N_r + 6 + \log M))$ . Therefore, the total computational complexity of Algorithm 1 is  $\mathcal{O}(I_{\text{AO}}(K^{6.5} M^{6.5} \log \epsilon^{-1} + \tau_{\max} M (2N_t + 2N_r + 6 + \log M)))$ , with  $I_{\text{AO}}$  denoting the resultant iteration number of the AO-based algorithm.

## IV. COMMUNICATION-CENTRIC DESIGN

### A. Problem Formulation

In this section, we consider a communication-centric design by optimizing the communication performance and holding a certain sensing performance, which can be modeled as a sum-rate-maximization problem with CRB con-

straint. Specifically, the corresponding CRB-constraint sum-rate-maximization problem is formulated as

$$\mathcal{P}_4 : \max_{\mathbf{W}, \mathbf{R}_0, \mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t, \boldsymbol{\varpi}^r} R(\mathbf{W}, \mathbf{R}_0, \mathbf{H}) \quad (44a)$$

$$\text{s.t. } \text{tr}(\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2)) \leq C_{\max}, \quad (44b)$$

$$(7) - (10), (27b) - (27f),$$

where  $C_{\max}$  denotes the maximum tolerable value of the trace of the CRB for the sensing target's position information. It can be seen that  $\mathcal{P}_4$  is also a non-convex problem with highly coupled variables. To address this challenge, we first transform it into a more tractable form and then utilize the AO-based framework to optimize the variables.

### B. Problem Reformulation

Apart from the CRB constraint (44b),  $\mathcal{P}_4$  is a classic down-link sum-rate maximization problem, which can be equivalently transformed into a more tractable form by introducing the auxiliary variables  $\rho_k$  for  $k \in [1, K]$  as follows: [31]

$$\mathcal{P}_5 : \max_{\mathbf{W}, \mathbf{R}_0, \mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t, \boldsymbol{\varpi}^r, \boldsymbol{\rho}} f_1(\mathbf{W}, \mathbf{R}_0, \mathbf{H}, \boldsymbol{\rho}) \quad (45)$$

$$\text{s.t. } (7) - (10), (27b) - (27f), (44b),$$

where  $\boldsymbol{\rho} = [\rho_1, \dots, \rho_K]^T$  and  $f_1(\mathbf{W}, \mathbf{R}_0, \mathbf{H}, \boldsymbol{\rho}) = \sum_k^K \log_2(1 + \rho_k) - \rho_k + \frac{(1 + \rho_k)|\mathbf{h}_k^T \mathbf{w}_k|^2}{\sum_{i=1}^K |\mathbf{h}_i^T \mathbf{w}_i|^2 + \mathbf{h}_k^T \mathbf{R}_0 \mathbf{h}_k + \sigma_k^2}$ . It is obvious that  $\mathcal{P}_5$  is a convex problem w.r.t.  $\rho_k$ . Hence, by checking the first-order optimality condition, the optimal  $\rho_k$  can be obtained as follows:

$$\rho_k^\circ = \Gamma_k. \quad (46)$$

Consequently, the original problem is rewritten into the form of sum-of-ratio with  $\boldsymbol{\rho}$  fixed.

Furthermore, we rewrite the current sum-of-ratio maximization problem by employing the quadratic transform proposed in [32] as follows:

$$\mathcal{P}_6 : \max_{\mathbf{W}, \mathbf{R}_0, \mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t, \boldsymbol{\varpi}^r, \boldsymbol{\nu}} f_2(\mathbf{W}, \mathbf{R}_0, \mathbf{H}, \boldsymbol{\rho}, \boldsymbol{\nu}) \quad (47)$$

$$\text{s.t. } (7) - (10), (27b) - (27f), (44b),$$

where  $\boldsymbol{\nu} = [\nu_1, \dots, \nu_K]^T$  denotes the auxiliary variables and  $f_2(\mathbf{W}, \mathbf{R}_0, \mathbf{H}, \boldsymbol{\rho}, \boldsymbol{\nu}) = \sum_{k=1}^K 2(1 + \rho_k)\nu_k \sqrt{|\mathbf{h}_k^T \mathbf{w}_k|^2} - (1 + \rho_k)\nu_k^2(\mathbf{h}_k^T \mathbf{R}_x \mathbf{h}_k + \sigma_k^2)$ . Similarly, the optimal  $\nu_k$  can be obtained by checking the first-order optimality condition as

$$\nu_k^\circ = \frac{\sqrt{|\mathbf{h}_k^T \mathbf{w}_k|^2}}{\mathbf{h}_k^T \mathbf{R}_x \mathbf{h}_k + \sigma_k^2}. \quad (48)$$

Thus, the original problem is reformulated as:

$$\mathcal{P}_7 : \max_{\mathbf{W}, \mathbf{R}_0, \mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t, \boldsymbol{\varpi}^r} \sum_{k=1}^K 2(1 + \rho_k)\nu_k \sqrt{\mathbf{h}_k^T \mathbf{w}_k \mathbf{w}_k^H \mathbf{h}_k^*} - (1 + \rho_k)\nu_k^2(\mathbf{h}_k^T \mathbf{R}_x \mathbf{h}_k + \sigma_k^2) \quad (49)$$

$$\text{s.t. } (7) - (10), (27b) - (27f), (44b).$$

### C. Optimization of Transmit Beamforming

In this subsection, we optimize  $\mathbf{R}_x$  with  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$  fixed. Similar to the sensing-centric scenario, we propose to adopt the SDR method to optimize the transmit beamforming. However, (44b) is a complex non-convex constraint, which hinders us from directly using the SDR method to transform the original problem into a convex form. Fortunately, we can rewrite (44b) into a simpler generalized inequality form via the Schur complement condition as we do in the second subsection of Section III. To this end, we derive the following Proposition.

**Proposition 1.** The inequality  $\text{tr}(\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2)) \leq C_{\max}$  has a sufficient condition as the following generalized inequality:

$$\begin{bmatrix} \mathbf{J}_{11} - \frac{3}{C_{\max}} \mathbf{I}_3 & \mathbf{J}_{12} \\ \mathbf{J}_{12}^T & \mathbf{J}_{22} \end{bmatrix} \succeq \mathbf{0}. \quad (50)$$

*Proof:* By the Schur complement condition, we can derive the following generalized inequality from (50):

$$\mathbf{J}_{11} - \mathbf{J}_{12} \mathbf{J}_{22}^{-1} \mathbf{J}_{12}^T \succeq \frac{3}{C_{\max}} \mathbf{I}_3, \quad (51)$$

with  $\mathbf{J}_{22} \succeq \mathbf{0}$ . According to [35], the function  $\text{tr}(\mathbf{A}^{-1})$  is matrix decreasing on the positive semidefinite matrix space. Therefore, we can derive the following inequality:

$$\text{tr}((\mathbf{J}_{11} - \mathbf{J}_{12} \mathbf{J}_{22}^{-1} \mathbf{J}_{12}^T)^{-1}) \leq \text{tr}(\frac{C_{\max}}{3} \mathbf{I}_3) = C_{\max}, \quad (52)$$

which is equivalent to (44b). ■

Based on Proposition 1, we formulate the SDR problem similarly to the second subsection of Section III as:

$$\mathcal{P}_8 : \max_{\boldsymbol{\Omega}_k \succeq \mathbf{0}, \mathbf{R}_x \succeq \mathbf{0}} \sum_{k=1}^K 2(1 + \rho_k)\nu_k \sqrt{\mathbf{h}_k^T \boldsymbol{\Omega}_k \mathbf{h}_k^*} - (1 + \rho_k)\nu_k^2(\mathbf{h}_k^T \mathbf{R}_x \mathbf{h}_k + \sigma_k^2) \quad (53)$$

$$(27b), (29), (30), (50).$$

Also,  $\mathcal{P}_8$  is a convex SDP problem, which can be solved by the existing convex optimization solvers. The corresponding optimal  $\mathbf{w}_k^\circ$  and  $\mathbf{R}_0^\circ$  can be obtained by (32) and (33), respectively.

### D. Optimization of RMAs' Positions and Rotations

In this subsection, we optimize  $\mathbf{Q}^t, \mathbf{Q}^r, \boldsymbol{\varpi}^t$ , and  $\boldsymbol{\varpi}^r$ , with  $\mathbf{R}_x$  fixed. Since the constraint (44b) is highly non-convex and the solution space is generally large, it is difficult to obtain a local optimal solution. Similar to the third subsection of Section III, we propose to leverage the PSO-based approach.

We generate  $M$  particles and their velocity vectors according to (34) and initialize the local best positions  $\boldsymbol{\xi}_{m, \text{best}}$  as well as the global best position  $\boldsymbol{\xi}_{\text{gbest}}$ . Additionally, we calculate the inertia of each particle's movement for each iteration by (37) and update each particle's velocity vector by (35). Due to the fact that the particle may move out of the feasible region, we still need to employ the projection function to make sure that (27e) and (27f) are satisfied. Then each particle is updated by (36).

Particularly, we define a fitness function by introducing four penalty terms into the objective function of the original problem as follows:

$$\begin{aligned} \mathcal{E}(\boldsymbol{\xi}_m^{(\tau)}) = & f_3(\boldsymbol{\xi}_m^{(\tau)}) - \mu_1 |\mathcal{S}(\boldsymbol{\xi}_m^{(\tau)})| - \mu_2 |\mathcal{J}(\boldsymbol{\xi}_m^{(\tau)})| \\ & - \mu_3 \mathcal{H}(\boldsymbol{\xi}_m^{(\tau)}) - \mu_4 \mathcal{T}(\boldsymbol{\xi}_m^{(\tau)}), \end{aligned} \quad (54)$$

where  $f_3(\boldsymbol{\xi}_m^{(\tau)}) = \sum_{k=1}^K 2(1 + \rho_k) \nu_k \sqrt{|\mathbf{h}_k(\boldsymbol{\xi}_m^{(\tau)})^\top \mathbf{w}_k|^2} - (1 + \rho_k) \nu_k^2 (\mathbf{h}_k(\boldsymbol{\xi}_m^{(\tau)})^\top \mathbf{R}_x \mathbf{h}_k(\boldsymbol{\xi}_m^{(\tau)})^* + \sigma_k^2)$  with  $\mathbf{h}_k(\boldsymbol{\xi}_m^{(\tau)})$  denoting the channel from BS to the  $k$ -th UT  $\mathbf{h}_k$  calculated according to the current particle position  $\boldsymbol{\xi}_m^{(\tau)}$ ;  $\mathcal{T}(\boldsymbol{\xi}_m^{(\tau)})$  is a brick wall penalty term corresponding to the CRB constraint (44b), which is defined as

$$\mathcal{T}(\boldsymbol{\xi}_m^{(\tau)}) = \left( \max \left\{ 0, \text{tr} \left( \text{CRB}(\boldsymbol{\xi}_m^{(\tau)}) \right) - C_{\max} \right\} \right)^2. \quad (55)$$

Moreover, since the value of  $\mathcal{T}(\boldsymbol{\xi}_m^{(\tau)})$  is often numerically much smaller than  $f_3(\boldsymbol{\xi}_m^{(\tau)})$ , we set an adaptive penalty parameter  $\mu_4$  as

$$\mu_4 = \frac{\mu_0}{\text{tr}(\text{CRB}(\mathbf{R}_x, \mathbf{G}, \sigma_0^2))^2}, \quad (56)$$

where  $\mu_0$  is a positive standard penalty parameter comparable to other penalty parameters. It means that we dynamically adjust  $\mu_4$  based on the value of the CRB's trace computed by the updated transmit beamforming. Then all the penalty parameters are large enough. Hence,  $|\mathcal{S}(\boldsymbol{\xi}_{\text{gbest}})|$ ,  $|\mathcal{J}(\boldsymbol{\xi}_{\text{gbest}})|$ ,  $\mathcal{H}(\boldsymbol{\xi}_{\text{gbest}})$ , and  $\mathcal{T}(\boldsymbol{\xi}_{\text{gbest}})$  will approach zero during the iterations so that (7),(8),(9),(10), (27d), and (44b) are guaranteed to be satisfied. By continuously selecting particles corresponding to larger values of the fitness function, the local and global optimal particles are improved until convergence. Then a suboptimal solution for the positions and rotations of RMAs is obtained.

The detailed AO-based overall algorithm for solving  $\mathcal{P}_4$  is summarized in Algorithm 2. In line 1,  $\mathbf{W}$  and  $\mathbf{R}_0$  are initialized by considering the constraint (27b) while  $\mathbf{Q}^l$ ,  $\mathbf{Q}^r$ ,  $\boldsymbol{\varpi}^l$ , and  $\boldsymbol{\varpi}^r$  are randomly initialized by considering the constraint (7), (8), (9), (10), (27e), and (27f). The auxiliary variables are updated in line 4. Then the transmit beamforming is optimized by the SDR method in line 5. Subsequently, the positions and rotations of RMAs are optimized by the PSO method in lines 7-25.

### E. Convergence and Complexity Analysis

In Algorithm 2, the transmit beamforming, the positions and rotations of RMAs are alternatively optimized. The value of sum-rate is non-decreasing over the iterations. Due to the equivalent objective property of the two transforms in problem reformulation, the introduction of auxiliary variables does not change the non-decreasing trend of the objective functions. Since the sum-rate is upper-bounded with a given transmit power budget  $P_{\max}$ , Algorithm 2 is ensured to converge.

Next, we analyze the computational complexity of the proposed algorithm. For each iteration, the complexity of updating  $\boldsymbol{\rho}$  and  $\boldsymbol{\nu}$  are  $\mathcal{O}(K)$ . And as calculated in the last subsection of Section III, the complexity for updating  $\mathbf{W}$  and  $\mathbf{R}_0$  via the interior method is in order of  $\mathcal{O}(K^{6.5} M^{6.5} \log \epsilon^{-1})$

---

### Algorithm 2 AO-based algorithm for solving $\mathcal{P}_4$

---

- 1: Initialize  $i = 0, \mathbf{W}, \mathbf{R}_0, \mathbf{Q}^l, \mathbf{Q}^r, \boldsymbol{\varpi}^l$ , and  $\boldsymbol{\varpi}^r$ .
  - 2: **repeat**
  - 3:   Calculate  $\mathbf{H}$  and  $\mathbf{G}$  with current  $\mathbf{Q}^l, \mathbf{Q}^r, \boldsymbol{\varpi}^l$ , and  $\boldsymbol{\varpi}^r$ .
  - 4:   Update  $\boldsymbol{\rho}$  and  $\boldsymbol{\nu}$  by (46) and (48), respectively.
  - 5:   Solve  $\mathcal{P}_8$  and update  $\mathbf{W}$  and  $\mathbf{R}_0$  by (32) and (33).
  - 6:   Calculate  $e_0 = f_2(\mathbf{W}, \mathbf{R}_0, \mathbf{H}, \boldsymbol{\rho}, \boldsymbol{\nu})$ .
  - 7:   Initialize the  $M$  particles with positions  $\boldsymbol{\Xi}^{(0)}$  and velocity  $\mathbf{V}^{(0)}$ .
  - 8:   Update  $\mu_4$  by (56).
  - 9:   Set the local best positions  $\boldsymbol{\xi}_{m,\text{lbest}} = \boldsymbol{\xi}_m^{(0)}$  for  $m \in [1, M]$  and the global best positions  $\boldsymbol{\xi}_{\text{gbest}} = \text{argmax}_{\boldsymbol{\xi}_m^{(0)}} \{\mathcal{E}(\boldsymbol{\xi}_1^{(0)}), \dots, \mathcal{E}(\boldsymbol{\xi}_M^{(0)})\}$
  - 10:   **for**  $\tau_m = 1$  to  $\tau_{\max}$  **do**
  - 11:     Update the inertia parameter  $\omega$  according to (37).
  - 12:     **for**  $m = 1$  to  $M$  **do**
  - 13:       Update the velocity and position of the  $m$ -th particle according to (35) and (36), respectively.
  - 14:       Calculate the fitness value of the  $m$ -th particle, i.e.,  $\mathcal{E}(\boldsymbol{\xi}_m^{(\tau)})$ , according to (54).
  - 15:       **if**  $\mathcal{E}(\boldsymbol{\xi}_m^{(\tau)}) > \mathcal{E}(\boldsymbol{\xi}_{m,\text{lbest}})$  **then**
  - 16:         Update  $\boldsymbol{\xi}_{m,\text{lbest}} = \boldsymbol{\xi}_m^{(\tau)}$ .
  - 17:       **end if**
  - 18:       **if**  $\mathcal{E}(\boldsymbol{\xi}_m^{(\tau)}) > \mathcal{E}(\boldsymbol{\xi}_{\text{gbest}})$  **then**
  - 19:         Update  $\boldsymbol{\xi}_{\text{gbest}} = \boldsymbol{\xi}_m^{(\tau)}$ .
  - 20:       **end if**
  - 21:     **end for**
  - 22:   **end for**
  - 23:   **if**  $\mathcal{E}(\boldsymbol{\xi}_{\text{gbest}}) > e_0$  **then**
  - 24:     Update  $\mathbf{Q}^l, \mathbf{Q}^r, \boldsymbol{\varpi}^l$ , and  $\boldsymbol{\varpi}^r$  according to  $\boldsymbol{\xi}_{\text{gbest}}$ .
  - 25:   **end if**
  - 26:   Set  $i = i + 1$ .
  - 27: **until** Convergence or  $i > I_{\max}$
- 

with the given solution accuracy  $\epsilon$ . The complexity for updating  $\mathbf{Q}^l, \mathbf{Q}^r, \boldsymbol{\varpi}^l$ , and  $\boldsymbol{\varpi}^r$  via the PSO method is in order of  $\mathcal{O}(\tau_{\max} M (2N_t + 2N_r + 6 + \log M))$ . Therefore, the total computational complexity of Algorithm 2 is  $\mathcal{O}(I_{\text{AO}}(2K + K^{6.5} M^{6.5} \log \epsilon^{-1} + \tau_{\max} M (2N_t + 2N_r + 6 + \log M)))$ , with  $I_{\text{AO}}$  denoting the resultant iteration number of the AO-based algorithm.

## V. NUMERICAL RESULTS

In this section, we evaluate the two designs in Section III and Section IV and demonstrate the effectiveness of our proposed algorithms for sensing and communication performance optimization.

### A. Simulation Setup

We consider a global Cartesian coordinate system with the origin located at the BS. The center of TP and RP are set as  $\mathcal{C}^t = [0, 0, 5 + D/2]^\top$  and  $\mathcal{C}^r = [0, 0, 5 - D/2]^\top$ , respectively. The MAs at the BS are confined to a square moving region, which is modeled as a rectangle within the planar local Cartesian coordinate system relative to the center of TP/RP, with



TABLE I: Simulation Parameters

Parameter	Description	Value
$K$	Number of users	4
$N_t$	Number of transmit MAs	9
$N_r$	Number of receive MAs	9
$f_c$	Carrier frequency	24G
$d_{\min}$	Minimum inter-MA distance	$\lambda/2$
$D$	Length of MAs' moving region	$80\lambda$
$A$	Size of MA elements	$\frac{\lambda^2}{4\pi}$
$P_{\max}$	Transmit power budget	40dB
$\sigma_k^2, \sigma_0^2$	Noise power of users& target	-110dBm
$I_{\max}$	Maximum iteration number in Algorithm 1 and Algorithm 2	20
$M$	Number of particles in Algorithm 1 and Algorithm 2	200
$\tau_{\max}$	Maximum PSO iteration in Algorithm 1 and Algorithm 2	100
$a_1$	Individual learning factor in Algorithm 1 and Algorithm 2	1.4
$a_2$	Global learning factor in Algorithm 1 and Algorithm 2	1.4
$\omega_{\min}$	Minimum inertial weight in Algorithm 1 and Algorithm 2	0.4
$\omega_{\max}$	Maximum inertial weight in Algorithm 1 and Algorithm 2	0.9
$\mu_0$	Standard penalty parameter in Algorithm 2	1000
$\mu_1$	Penalty parameter in Algorithm 1 and Algorithm 2	1000
$\mu_2$	Penalty parameter in Algorithm 1 and Algorithm 2	1000
$\mu_3$	Penalty parameter in Algorithm 1 and Algorithm 2	1000

local coordinates ranging from  $[-D/2, D/2] \times [-D/2, D/2]$ . The communication users are assumed to be randomly distributed in the  $x - y$  plane, specifically  $d_k \sim \mathcal{U}(15, 25)$ ,  $\theta_k = \frac{\pi}{2}$ , and  $\phi_k \sim \mathcal{U}(-\frac{\pi}{2}, \frac{\pi}{2})$  for  $k = [1, K]$ . The sensing target's position is set as  $d_0 = 10$ ,  $\theta_0 = \frac{\pi}{3}$ , and  $\phi_0 = \frac{\pi}{4}$ . The simulation parameters are detailed in Table I, unless stated otherwise.

### B. Convergence Performance

Fig. 2 presents the convergence performance of the proposed AO-based algorithms for the sensing-centric and communication-centric designs in the RMA-aided near-field ISAC system. In Fig. 2, we set the minimum SINR for each UT as  $\Gamma_{\min} = 6\text{dB}$  and the maximum trace of CRB for the sensing target as  $C_{\max} = 1 \times 10^{-6}$ . As depicted in Fig. 2a-2c, Algorithm 1 converges within about 20 iterations for solving the sensing-centric problem. The root CRB (RCRB) of the distance information  $d_0$  decreases from  $8.2 \times 10^{-4}$  to  $5.7 \times 10^{-4}$ ; the RCRB of the elevation angle information  $\theta_0$  from  $3.1 \times 10^{-4}$  to  $9.0 \times 10^{-5}$ ; the RCRB of the azimuth angle information  $\phi_0$  from  $4.2 \times 10^{-4}$  to  $1.2 \times 10^{-4}$ , which confirms the effectiveness of our proposed algorithm for obtaining feasible solutions and improving sensing performance. Note that in the first iteration, Algorithm 1 optimizes the transmit beamforming as well as the positions and rotations of RMAs, satisfying the minimum SINR constraints. In Fig. 2d, Algorithm 2 converges within about 10 iterations for solving the

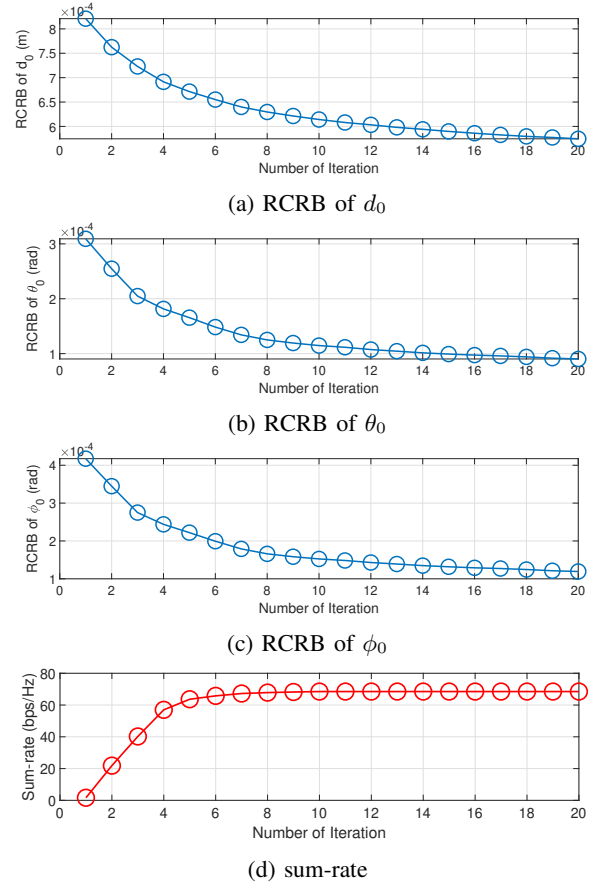


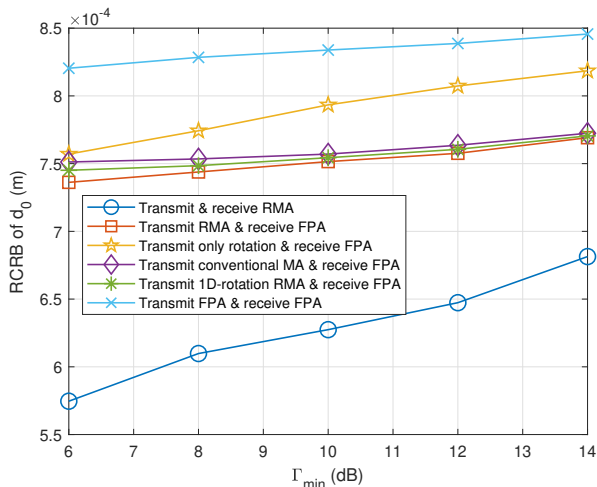
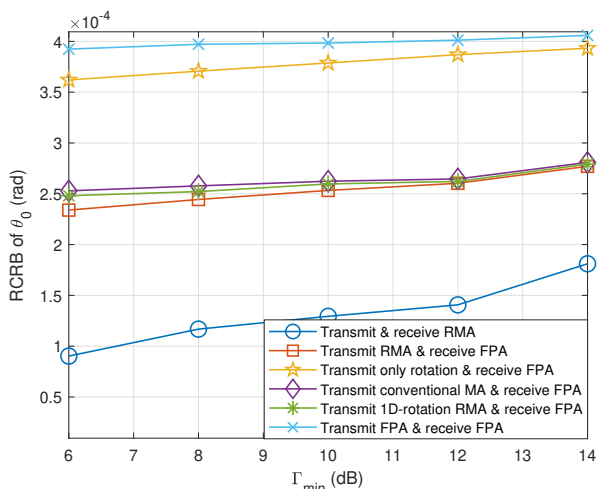
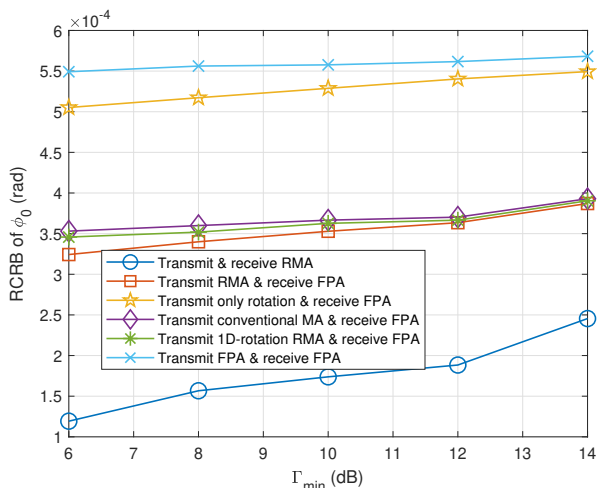
Fig. 2: Performance versus the iteration number

communication-centric problem. The sum-rate increases from 1.63 bps/Hz to 68.49 bps/Hz, which shows the effectiveness and the great improvement in the communication performance of our proposed algorithm.

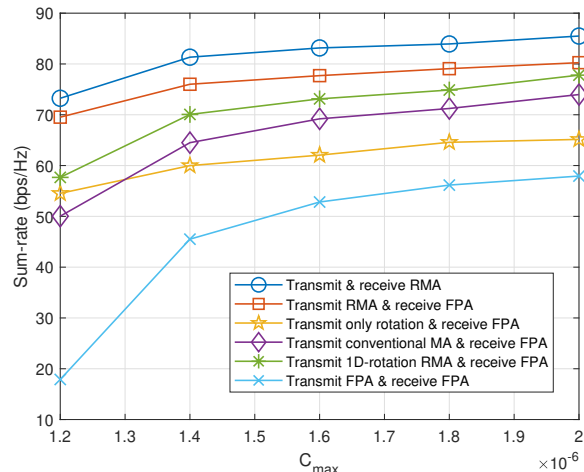
### C. Performance Comparison for Different Setups

To demonstrate the individual effect and synergy of RMAs' rotations and element position movement, we introduce six different setups for the antennas at BS, namely "Transmit & receive RMA", "Transmit RMA & receive FPA", "Transmit only rotation & receive FPA", "Transmit conventional MA & receive FPA", "Transmit 1D-rotation RMA & receive FPA", and "Transmit FPA & receive FPA", respectively.

- Transmit & receive RMA: Both the TP and RP can execute 3D rotations while all the transmit and receive antennas can move in the 2D planes.
- Transmit RMA & receive FPA: The TP can execute 3D rotations while the transmit antennas can move in TP. The rotation angles of RP and the positions of receive antennas are fixed.
- Transmit only rotation & receive FPA: The TP can execute 3D rotations. The rotation angles of RP, the positions of transmit and receive antennas are fixed.
- Transmit conventional MA & receive FPA: The transmit antennas can move in TP. The rotation angles of TP and RP, the positions of receive antennas are fixed.

(a) RCRB of  $d_0$ (b) RCRB of  $\theta_0$ (c) RCRB of  $\phi_0$ Fig. 3: RCRB versus  $\Gamma_{\min}$ 

- Transmit 1D-rotation RMA & receive FPA: The TP can execute 1D rotations, i.e.,  $\alpha^t$ , while the transmit antennas can move in TP. The rotation angles of RP and the

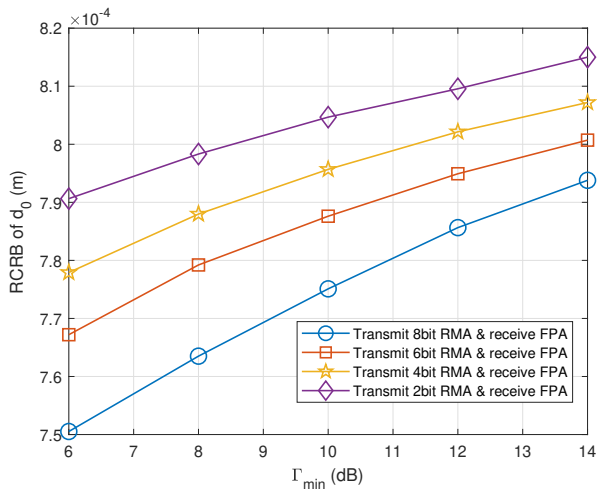
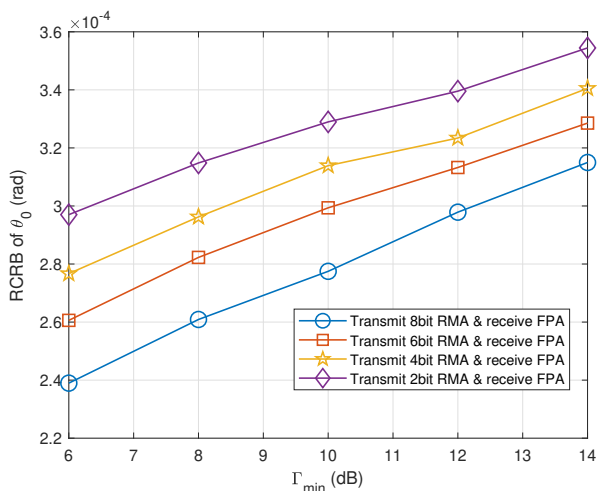
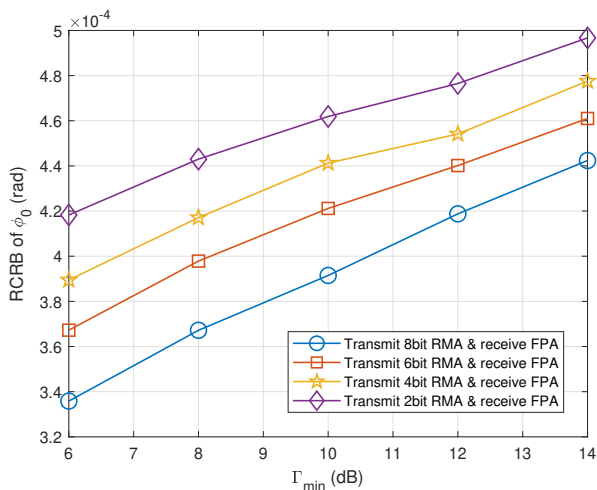
Fig. 4: Sum-rate versus  $C_{\max}$ 

positions of receive antennas are fixed.

- Transmit FPA & receive FPA: The rotation angles of TP and RP as well as the positions of transmit and receive antennas are fixed.

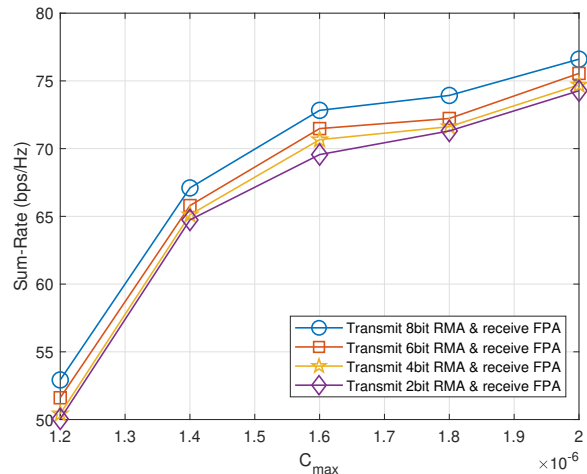
Fig. 3 shows the sensing performance comparison for different  $\Gamma_{\min}$ . As can be observed, the RCRBs of  $d_0$ ,  $\theta_0$ , and  $\phi_0$  increase as increment of  $\Gamma_{\min}$ . When  $\Gamma_{\min}$  increases, higher power is required in the beams serving communication users due to stricter SINR constraints and the RMAs also move and rotate accordingly to the positions and angles that are more inclined towards ensuring communication performance. Compared to other setups, the setup with transmit & receive RMA significantly achieves the best sensing performance, which indicates a synergy between transmit and receive RMAs. The setups with transmit RMA & receive FPA, transmit conventional MA & receive FPA, and transmit 1D-rotation RMA & receive FPA achieve comparable sensing performance. It implies that the sensing performance gain from rotations is relatively limited in this context. Comparing the performance of the setups with transmit only rotation & receive FPA and transmit FPA & receive FPA, we can find that the rotations of RMA perform a higher gain for RCRB of  $d_0$ , since the rotations allow for a more noticeable difference in the distance between the antennas at BS and the sensing target.

Fig. 4 shows the communication performance comparison for different  $C_{\max}$  with  $\Gamma_{\min} = 6$  dB. As shown, the downlink sum-rate increases as the increment of  $C_{\max}$  and gradually slows down, which can be regarded as a manifestation of the CRB-rate boundary [33]. In Fig. 4, the performance gain from rotations is more significant compared to the sensing-centric design because the effective aperture loss is mitigated by the rotations of TP and RP. The downlink sum-rate of the setup with transmit & receive RMA is substantially higher than transmit FPA & receive FPA. At  $C_{\max} = 1.4 \times 10^{-6}$ , the former achieves 78.7% performance improvement over the latter. This indicates that the proposed BS design and algorithm are desirable and appealing when the ISAC network is heavily loaded.

(a) RCRB of  $d_0$ (b) RCRB of  $\theta_0$ (c) RCRB of  $\phi_0$ Fig. 5: RCRB versus  $\Gamma_{\min}$  with discrete rotations

#### D. Performance for Discrete Rotations

In practical deployment, continuous rotation of RMAs is difficult to realize since RMAs need to be mechanically moved

Fig. 6: Sum-rate versus  $C_{\max}$  with discrete rotations

by physical devices, such as a stepper motor that can only adjust the rotations of each RMA in discrete steps, which are usually specified by the motor used [14]. As such, we employ discrete rotations for the transmit RMA & receive FPA setup in Fig. 5 and Fig. 6. Specifically, we uniformly quantize the rotation angles with 2 to 8 bits by quantizing the initial rotation angles and the corresponding element of the particles in Algorithm 1 and Algorithm 2. From Fig. 5a-5c, it is obvious that quantization reduces the sensing performance to a certain extent. As shown in Fig. 6, quantization has a more significant impact on the reduction of communication performance. As the number of quantization bits gets reduced, the downlink sum-rate gradually decreases, even falling below the setup with transmit 1D continuous rotation RMA & receive FPA. It indicates that the quantization level of RMA discrete rotation should be chosen based on the communication rate requirement and hardware conditions in practical deployment.

## VI. CONCLUSION

In this paper, we investigated the RMA-enabled near-field ISAC system. We derived an accurate near-field channel model by introducing the effective aperture loss to the conventional spherical wave model and formulated two optimization problems for the sensing-centric and communication-centric designs, respectively. To solve the non-convex sensing-centric problem, we proposed an AO-based algorithm with the SDR method for optimizing the transmit beamforming and the PSO method for optimizing RMAs' rotations and positions. Moving on to the communication-centric problem, we first rewrote it into a more tractable form and then proposed a similar algorithm to optimize the transmit beamforming and RMAs' rotations and positions. Numerical results verified the effectiveness of the proposed algorithms and the advantages of the considered RMA-enabled ISAC network compared to conventional FPA-based systems. The proposed RMA-enabled near-field ISAC system is expected to perform a more accurate sensing and higher downlink communication rate by optimally designing the transmit beamforming and the RMAs' positions and rotations.

## APPENDIX

## A. Fisher Information Matrices for Near-Filed ISAC

For a given  $\mathbf{G} = \eta \mathbf{g}_0 \mathbf{h}_0^\top$ , the unknown parameters are denoted by  $\boldsymbol{\zeta} = [d_0, \theta_0, \phi_0, \eta^r, \eta^i]$ . The covariance matrix of the received ISAC signal is represented by  $\mathbf{R}_x$ . Define  $\mathbf{Y}_0 = [\mathbf{y}_0(1), \dots, \mathbf{y}_0(T)] \in \mathbb{C}^{N_r \times T}$  and  $\mathbf{u}_0 = \text{vec}(\mathbf{Y}_0)$ . Then, according to [25], the FIM for estimating  $\boldsymbol{\zeta}$  can be partitioned as

$$\mathbf{J}_{\boldsymbol{\zeta}} = \frac{2}{\sigma_0^2} \Re \left\{ \frac{\partial \mathbf{u}_0^H}{\partial \boldsymbol{\zeta}} \frac{\partial \mathbf{u}_0}{\partial \boldsymbol{\zeta}} \right\} = \begin{bmatrix} \mathbf{J}_{11} & \mathbf{J}_{12} \\ \mathbf{J}_{12}^T & \mathbf{J}_{22} \end{bmatrix}, \quad (57)$$

where  $\mathbf{J}_{11} = \begin{bmatrix} \mathbf{J}_{d_0 d_0} & \mathbf{J}_{d_0 \theta_0} & \mathbf{J}_{d_0 \phi_0} \\ \mathbf{J}_{\theta_0 d_0} & \mathbf{J}_{\theta_0 \theta_0} & \mathbf{J}_{\theta_0 \phi_0} \\ \mathbf{J}_{\phi_0 d_0} & \mathbf{J}_{\phi_0 \theta_0} & \mathbf{J}_{\phi_0 \phi_0} \end{bmatrix}$ ,  $\mathbf{J}_{12} = \begin{bmatrix} \mathbf{J}_{d_0 \eta^r} & \mathbf{J}_{d_0 \eta^i} \\ \mathbf{J}_{\theta_0 \eta^r} & \mathbf{J}_{\theta_0 \eta^i} \\ \mathbf{J}_{\phi_0 \eta^r} & \mathbf{J}_{\phi_0 \eta^i} \end{bmatrix}$ , and  $\mathbf{J}_{22} = \begin{bmatrix} \mathbf{J}_{\eta^r \eta^r} & 0 \\ 0 & \mathbf{J}_{\eta^i \eta^i} \end{bmatrix}$ . For  $a, b \in \{d_0, \theta_0, \phi_0, \eta^r, \eta^i\}$ , the value of each entry is given by

$$\mathbf{J}_{ab} = \frac{2}{\sigma_0^2} \Re \left\{ \frac{\partial \mathbf{u}_0^H}{\partial a} \frac{\partial \mathbf{u}_0}{\partial b} \right\}. \quad (58)$$

By exploiting the approximation  $\mathbf{R}_x \approx \frac{1}{T} \mathbf{X} \mathbf{X}^H$ , we have

$$\mathbf{J}_{pq} = \frac{2|\eta|^2 T}{\sigma_0^2} \Re \left\{ \text{tr} \left( \frac{\partial \mathbf{g}_0 \mathbf{h}_0^\top}{\partial q} \mathbf{R}_x \frac{\partial \mathbf{h}_0^* \mathbf{g}_0^H}{\partial p} \right) \right\}, \quad (59)$$

$$\mathbf{J}_{p\eta^r} = \frac{2T}{\sigma_0^2} \Re \left\{ \eta^* \text{tr} \left( \mathbf{g}_0 \mathbf{h}_0^\top \mathbf{R}_x \frac{\partial \mathbf{h}_0^* \mathbf{g}_0^H}{\partial p} \right) \right\}, \quad (60)$$

$$\mathbf{J}_{p\eta^i} = \frac{2T}{\sigma_0^2} \Re \left\{ j\eta^* \text{tr} \left( \mathbf{g}_0 \mathbf{h}_0^\top \mathbf{R}_x \frac{\partial \mathbf{h}_0^* \mathbf{g}_0^H}{\partial p} \right) \right\}, \quad (61)$$

$$\mathbf{J}_{\eta^r \eta^r} = \mathbf{J}_{\eta^i \eta^i} = \frac{2T}{\sigma_0^2} \Re \left\{ \text{tr} \left( \mathbf{g}_0 \mathbf{h}_0^\top \mathbf{R}_x \mathbf{h}_0^* \mathbf{g}_0^H \right) \right\}, \quad (62)$$

for  $p, q \in \{d_0, \theta_0, \phi_0\}$ .

## REFERENCES

- [1] J. A. Zhang *et al.*, "An overview of signal processing techniques for joint communication and radar sensing," *IEEE J. Sel. Topics Signal Process.*, vol. 15, no. 6, pp. 1295–1315, Nov. 2021.
- [2] F. Liu *et al.*, "Integrated sensing and communications: Toward dual-functional wireless networks for 6G and beyond," *IEEE J. Sel. Areas Commun.*, vol. 40, no. 6, pp. 1728–1767, Jun. 2022.
- [3] J. Zhou *et al.*, "Near-field extremely large-scale STAR-RIS enabled integrated sensing and communications," *IEEE Trans. Green Commun. Netw.*, Early Access, 2024.
- [4] H. Luo *et al.*, "Joint beamforming design for RIS-assisted integrated sensing and communication systems," *IEEE Trans. Veh. Technol.*, vol. 71, no. 12, pp. 13393–13397, Dec. 2022.
- [5] L. Zhou *et al.*, "Fluid antenna-assisted ISAC systems," *IEEE Wireless Commun. Lett.*, vol. 13, no. 12, pp. 3533–3537, Dec. 2024.
- [6] Q. Zhang *et al.*, "An efficient sum-rate maximization algorithm for fluid antenna-assisted ISAC system," *IEEE Commun. Lett.*, Early Access, 2024.
- [7] B. Zhao *et al.*, "Modeling and analysis of near-field ISAC," *IEEE J. Sel. Topics Signal Process.*, vol. 18, no. 4, pp. 678–693, May 2024.
- [8] Y. Liu *et al.*, "Near-field communications: A tutorial review," *IEEE Open J. Commun. Soc.*, vol. 4, pp. 1999–2049, 2023.
- [9] B. Zhao *et al.*, "Near-field ISAC: Performance analysis and rate region characterization," in *2024 IEEE 13th Sensor Array and Multichannel Signal Processing Workshop (SAM)*, Corvallis, OR, USA, 2024, pp. 1–5.
- [10] L. Zhu *et al.*, "Movable-antenna enhanced multiuser communication via antenna position optimization," *IEEE Trans. Wireless Commun.*, vol. 23, no. 7, pp. 7214–7229, Jul. 2024.
- [11] L. Zhu, W. Ma, and R. Zhang, "Modeling and performance analysis for movable antenna enabled wireless communications," *IEEE Trans. Wireless Commun.*, vol. 23, no. 6, pp. 6234–6250, Jun. 2024.
- [12] L. Zhu, W. Ma, and R. Zhang, "Movable antennas for wireless communication: Opportunities and challenges," *IEEE Commun. Mag.*, vol. 62, no. 6, pp. 114–120, Jun. 2024.
- [13] X. Shao, Q. Jiang, and R. Zhang, "6D movable antenna based on user distribution: Modeling and optimization," *arXiv:2403.08123*, 2024.
- [14] X. Shao *et al.*, "6D movable antenna enhanced wireless network via discrete position and rotation optimization," *arXiv:2403.17122*, 2024.
- [15] H. Wu *et al.*, "Movable antenna-enabled RIS-aided integrated sensing and communication," *arXiv:2407.03228*, 2024.
- [16] H. Qin *et al.*, "Cramér-Rao bound minimization for movable antenna-assisted multiuser integrated sensing and communications," *IEEE Wireless Commun. Lett.*, vol. 13, no. 12, pp. 3404–3408, Dec. 2024.
- [17] W. Xiang *et al.*, "Joint antenna position and transmit signal optimization for ISAC system with movable antenna array," in *2024 IEEE 35th Int. Symp. Personal, Indoor and Mobile Radio Commun. (PIMRC)*, Valencia, Spain, 2024, pp. 1–6.
- [18] Z. Kuang *et al.*, "Movable-antenna array empowered ISAC systems for low-altitude economy," in *2024 IEEE/CIC Int. Conf. Commun. China (ICCC Workshops)*, Hangzhou, China, 2024, pp. 776–781.
- [19] J. Ding *et al.*, "Movable antenna-aided near-field integrated sensing and communication," *arXiv:2412.19470*, 2024.
- [20] X. Shao, R. Zhang, and R. Schober, "Exploiting six-dimensional movable antenna for wireless sensing," *IEEE Wireless Commun. Lett.*, early access, 2024.
- [21] H. Lu and Y. Zeng, "Communicating with extremely large-scale array/surface: Unified modeling and performance analysis," *IEEE Trans. Wireless Commun.*, vol. 21, no. 6, pp. 4039–4053, Jun. 2022.
- [22] D. Dardari, "Communicating with large intelligent surfaces: Fundamental limits and models," *IEEE J. Sel. Areas Commun.*, vol. 38, no. 11, pp. 2526–2537, Nov. 2020.
- [23] L. Zhu, W. Ma, and R. Zhang, "Movable-antenna array enhanced beamforming: Achieving full array gain with null steering," *IEEE Commun. Lett.*, vol. 27, no. 12, pp. 3340–3344, Dec. 2023.
- [24] X. Liu *et al.*, "Joint transmit beamforming for multiuser MIMO communications and MIMO radar," *IEEE Trans. Signal Process.*, vol. 68, pp. 3929–3944, 2020.
- [25] S. M. Kay, *Fundamentals of Statistical Signal Processing: Estimation Theory*, Englewood Cliffs, NJ, USA: Prentice-Hall, 1993.
- [26] M. A. Woodbury, "Inverting modified matrices," *Numerische Mathematik*, vol. 8, no. 1, pp. 105–119, 1967.
- [27] J. Robinson and Y. Rahmat-Samii, "Particle swarm optimization in electromagnetics," *IEEE Trans. Antennas Propagat.*, vol. 52, no. 2, pp. 397–407, Feb. 2004.
- [28] L. Zhu *et al.*, "Joint Tx-Rx beamforming and power allocation for 5G millimeter-wave non-orthogonal multiple access networks," *IEEE Trans. Commun.*, vol. 67, no. 7, pp. 5114–5125, Jul. 2019.
- [29] S. Das and P. N. Suganthan, "Differential Evolution: A Survey of the State-of-the-Art," *IEEE Trans. Evol. Comput.*, vol. 15, no. 1, pp. 4–31, Feb. 2011.
- [30] X. Liu *et al.*, "Joint Transmit Beamforming for Multiuser MIMO Communications and MIMO Radar," *IEEE Trans. Signal Process.*, vol. 68, pp. 3929–3944, 2020.
- [31] K. Shen and W. Yu, "Fractional Programming for Communication Systems—Part I: Power Control and Beamforming," *IEEE Trans. Signal Process.*, vol. 66, no. 10, pp. 2616–2630, May 2018.
- [32] K. Shen and W. Yu, "Fractional programming for communication systems—Part II: Uplink scheduling via matching," *IEEE Trans. Signal Process.*, vol. 66, no. 10, pp. 2631–2644, May 2018.
- [33] Y. Xiong, F. Liu, Y. Cui, W. Yuan and T. X. Han, "Flowing the Information from Shannon to Fisher: Towards the Fundamental Tradeoff in ISAC," in *GLOBECOM 2022 - 2022 IEEE Global Communications Conference*, Rio de Janeiro, Brazil, 2022, pp. 5601–5606.
- [34] Z. Wang, X. Mu, and Y. Liu, "STARS Enabled Integrated Sensing and Communications," *IEEE Trans. Wireless Commun.*, vol. 22, no. 10, pp. 6750–6765, Oct. 2023.
- [35] S. Boyd, S. P. Boyd, and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge Univ. Press, 2004.