

RIS Meets O-RAN: A Practical Demonstration of Multi-user RIS Optimization through RIC

Ali Fuat Şahin^{*†}, Onur Salan^{*}, Ibrahim Hokelek^{*}, Ali Gorcin^{*†}

^{*}Communications and Signal Processing Research (HISAR) Lab, TUBITAK BILGEM, Kocaeli, Türkiye

[†]Faculty of Electrical and Electronics Engineering, Istanbul Technical University, Istanbul, Türkiye

Email: {ali.sahin, onur.salan, ibrahim.hokelek, ali.gorcin}@tubitak.gov.tr

Abstract—Open Radio Access Network (O-RAN) along with artificial intelligence, machine learning, cloud and edge networking, and virtualization are important enablers for designing flexible and software-driven programmable wireless networks. In addition, Reconfigurable Intelligent Surfaces (RIS) represent an innovative technology to direct incoming radio signals toward desired locations by software-controlled passive reflecting antenna elements. Despite their distinctive potential, there has been limited exploration of integrating RIS with the O-RAN framework, an area that holds promise for enhancing next-generation wireless systems. This paper addresses this gap by designing and developing the RIS optimization xApps within an O-RAN-based real-time 5G environment. We perform extensive measurement experiments using an end-to-end 5G testbed including the RIS prototype in a multi-user scenario. The results demonstrate that the RIS can be utilized either to boost the performance of the selected user or to provide the fairness among the users or to balance the tradeoff between the performance and fairness.

Index Terms—O-RAN, OAI, RIC, xApp, reconfigurable intelligent surface, software-defined radio.

I. INTRODUCTION

One of the most popular concepts in cellular mobile wireless systems is Open Radio Access Network (O-RAN) [1], where well-defined open interfaces are utilized to further promote disaggregation and softwarization of the RAN functions. Instead of developing monolithic structures that only major companies are among the players, the disaggregation of the RAN into smaller components and their operation in the cloud platforms are expected to boost innovations from small and medium enterprises, and hence higher availability of competitive solutions will reduce the CAPEX and OPEX of the operators. However, this new paradigm provides new challenges to all operators and vendors worldwide. The RAN Intelligent Controller (RIC) is an important enabler in the O-RAN standards, where the AI/ML-based intelligent service and management orchestration (SMO) framework is the key innovation avenue for providing resource optimization of various RAN components using the near-real time and non-real-time RIC concepts.

Innovative applications such as holographic telepresence, massive twinning, industrial automation, and autonomous vehicles will be built on the next-generation cellular networks. These envisioned applications require the co-existence of 6G advanced radio access network (RAN) technologies such as reconfigurable intelligent surfaces, cell-free massive MIMO, and integrated sensing and communication for higher data

rates, improved coverage, and enhanced energy efficiency. Reconfigurable Intelligent Surfaces (RIS) represent a pioneering technology, where the wireless propagation environment is exploited by collectively adjusting the phases of incident signals with low-cost and low-energy elements [2]. It is an attractive technology since encoding and decoding operations are not needed, and only minimal extra energy is used for soft programming of passive reflecting elements to determine the phase of the reflected signal. A RIS can be an effective tool to cope with high path loss and blockage problems, especially at higher frequencies. The integration of RIS into real-world cellular networks presents significant challenges as the high number of antenna elements may need to be re-configured as the network conditions change. Although there are many studies proposing RIS usage for next-generation cellular networks, our work specifically focuses on the integration of RIS within a multi-user O-RAN network in a realistic testbed environment including open-source 5G emulators, software defined radios, and real RIS prototype. The literature includes studies for multi-user RIS [3], [4] and real-life measurements of RIS-aided systems [5], [6]; however, they lack the O-RAN integration aspect.

In this paper, we propose an O-RAN based service and management orchestration framework to exploit the capabilities of the RIS beyond the state of the art. The phase shift optimization task of the RISs, which includes assigning phase shift values of the RIS antenna elements according to the network operator specified policies, is smoothly accomplished with the O-RAN approach which provides flexible, well-defined, and open interfaces. In addition, the O-RAN provides the flexibility for reconfiguring the RIS elements using the channel information as the channel monitoring xApp continuously obtains wireless channel measurements from the network. The contributions of this paper include the development of novel xApps tailored for RIS in an O-RAN environment, providing a detailed analysis of their impact on network performance, and showcasing a practical implementation that bridges the gap between theoretical RIS benefits and real-world O-RAN applications. A multi-user RIS optimization algorithm is developed to maximize the weighted sum of the user reference signal received power (RSRP) values. The user weights in the RIS optimization algorithm can be configured either to provide the fairness among the users or to boost the performance of the selected user. The extensive measurement experiments using

the RIS-assisted end-to-end 5G testbed show that the RIS can be effectively managed to balance the tradeoff between the performance and the fairness among the users according to the operator specified policies.

The rest of the paper is organized as follows. Section II presents information about O-RAN 5G system architecture along with the RIC platform. The system model of the RIS-assisted end-to-end 5G network is provided in Section III. The multi-user RIS optimization algorithm is described in Section IV. Section V presents the experiment results. Finally, the paper is concluded in Section VI.

II. RAN INTELLIGENT CONTROLLER IN O-RAN

To overcome the disadvantages of the advanced functionalities within a monolithic base station architecture, the 3GPP promotes the disaggregation through three distinct gNodeB functions starting from Release 15: Central Unit (CU), Distributed Unit (DU), and Radio Unit (RU) [7]. 3GPP proposes Split 2 while Split 7.2 is the most preferred architecture defined by O-RAN Alliance. Split 2 proposes the segregation of CU from DU while Split 7.2 separates DU from RU.

The RAN Intelligent Controller (RIC) concept [8], which enables software-based intelligent and flexible control of network resources, is an important innovation. The AI/ML-based management of limited radio resources can be performed using third party applications such as dApps for real-time RIC, xApps for near-real time RIC, and rApps for non-real-time RIC. The near-RT RIC is responsible for managing critical latency requirements, ranging from 10 ms to 1s. The E2 interface facilitates communication between the near-RT RIC and RAN components (i.e., E2 nodes). Additionally, the E2 is also used for either periodically or trigger-based data collection from the E2 nodes to the near-RT RIC. The E2 interface utilizes two protocols, namely E2 Application Protocol (E2AP) and E2 Service Model (E2SM). The E2AP protocol is responsible for establishing the logical communication between the near-RT RIC and the E2 nodes while the E2SM protocol provides basic service types such as control, policy, report, and insert. The O-RAN Alliance has developed various E2SM service models including Key Performance Measurements (KPM), RAN Control (RC), and others [1]. These models provide a foundation for xApps which are micro-services designed to perform radio resource management by utilizing the E2AP and E2SM.

The main advantage of xApps is the flexibility to apply any custom logic as needed. The only constraint for xApps is that any xApp must be defined by a software image and a descriptor. The descriptor includes essential information for the corresponding xApp such as inputs, policies, and such. Additionally, the descriptor includes the capabilities of the corresponding application. Furthermore, the near-RT RIC includes other elements such as internal messaging infrastructure, conflict mitigation, subscription manager, and more. While all these elements have distinct responsibilities, the main objective is to provide reliable and effective management of xApps within the near-RT RIC.

III. RIS-ASSISTED E2E 5G SYSTEM MODEL

In this section, the proposed system model along with the hardware and software components will be described. Fig. 1 shows the RIS-assisted wireless communication system model, where an end-to-end 5G system consists of a core network (CN), gNodeB (gNB), and two user equipments (UEs). It should be noted that there is no direct Line-of-Sight (LoS) communication between the gNB and two UEs. Therefore, a RIS is strategically placed to establish a wireless communication link. For the software component of the system, OpenAirInterface (OAI) from the OpenAirInterface Software Alliance (OSA) has been deployed to emulate the end-to-end 5G standalone (SA) system [9]. The OAI base station emulation software runs on a COTS computer, which is connected to USRP B210 software defined radio (SDR), to emulate the gNB functionality. For the OAI emulation parameters, the NR band 79, which is located under FR1, is selected with the carrier frequency of 4.9 GHz. Note that the NR band 79 operates in Time-Division Duplexing (TDD) mode which uses the same frequency range for both downlink and uplink communication. Furthermore, a subcarrier spacing of 15 kHz is employed, and each user in the network is allocated 20 MHz of bandwidth. The OAI UE emulation software runs on a COTS computer, which is connected to USRP B210 SDR, to emulate the UE functionality. The OAI CN software is utilized to generate an end-to-end 5G standalone (SA) system.

In this study, together with the OAI, we utilize the open-source FlexRIC software developed by OAI community as the near-RT RIC platform to develop two novel xApps, the first one for wireless channel monitoring and the second one for RIS phase shift optimization [10]. The data communication between two xApps is implemented through a zero message queue (ZMQ) interface since the RIS Optimization xApp needs to receive the performance measurements after reconfiguring the phases of the RIS antenna elements through the USB interface.

The RIS prototype from Greenerwave focuses transmitted signals in desired directions using software-controlled phase shifts and operates with a 1 GHz bandwidth at 5.2 GHz center frequency [11]. The RIS has a total of 76 reflecting elements with adjustable reflection coefficients via PIN diodes, which configure phase shifts to either 0° or 180° . Each element has two PIN diodes for horizontal and vertical polarization, allowing four possible states per element. Horn antennas are deployed for RIS to seamlessly operate as the transmitter for the gNB and as the receiver for the UEs. Additionally, omnidirectional antennas are utilized as the opposite. Furthermore, USRP B210s are used as RF counterparts for both the gNB and the UEs.

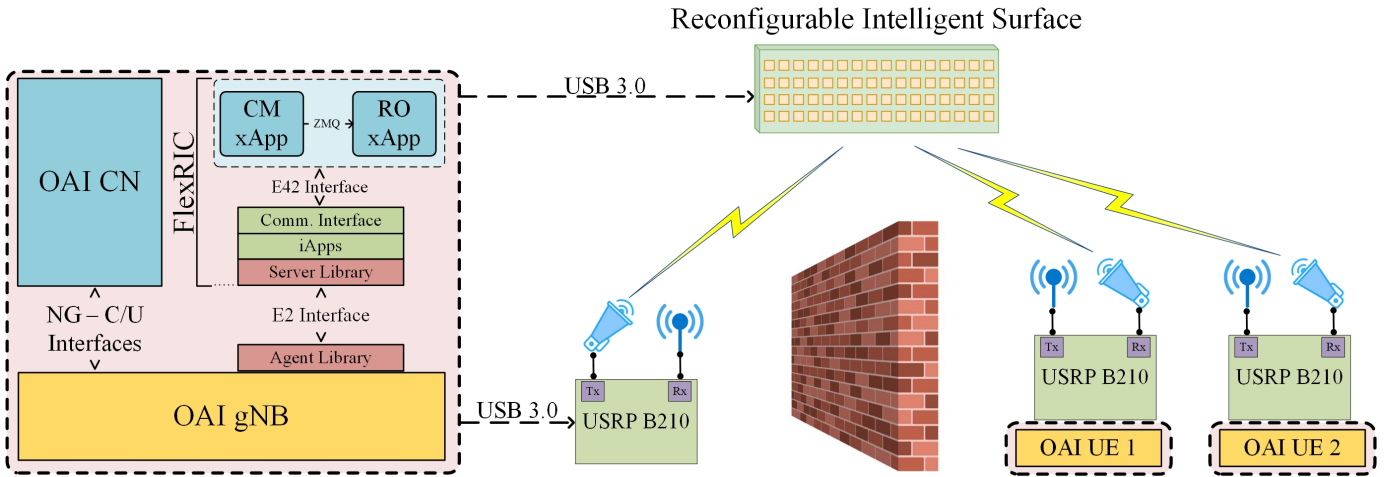


Fig. 1: RIS-assisted end-to-end 5G wireless system model.

IV. MULTI-USER RIS OPTIMIZATION ALGORITHM

In this study, we propose a multi-user RIS optimization algorithm to maximize the weighted sum of the user RSRP values as follows:

$$RSRP_{WS} = \sum_{i=1}^{N_{UE}} w_i * RSRP_i \quad (1)$$

where N_{UE} , w_i , and $RSRP_i$ denote the number of users, the weight of the user i , and the RSRP value of the user i , respectively. The user weights are determined by three different approaches according to the network administrator specified policies. In the first method, the users are assigned equal weights without considering their channel qualities, and hence their RSRP values. The second and third methods determine the weights by utilizing the channel quality information of the users. In the second method, the weights are calculated using the proportional fair approach while the third method optimizes the RIS phase shifts by improving the QoS of the strong user further than the weak user.

For the optimization of the RIS, the reference algorithm proposed in [5], [12] has been modified to accommodate multiple UEs. The pseudo-code of the algorithm is given in Algorithm 1. The phase shifts of the RIS elements are represented by the *States* vector which is initially set to 0. Each RIS element can take N different states (i.e., N distinct phase shifts). The corresponding element of *States* is reconfigured using the phase shift of the selected element that maximizes the weighted sum of the RSRP value (i.e., $RSRP_{WS}$). This process is repeated sequentially for all elements.

Method 1: The RIS phase shifts are optimized using Algorithm 1, where the weights of the users are set to equal values. The expected outcome is to have a similar performance improvement for all users as their weights are the same. The weights for Method 1 are calculated as follows:

$$w_i = 1/N_{UE}, \quad \forall i = 1, \dots, N_{UE} \quad (2)$$

Algorithm 1 RIS Optimization through RIC Algorithm

Output: *States*

- 1: initialize *States* to 0° phase shift
- 2: collect $RSRP_i$ and calculate w_i for user i
- 3: calculate $RSRP_{WS,max}$
- 4: $StepList \leftarrow shuffle[1, M \times N]$
- 5: **for** each $i \in StepList$ **do**
- 6: **for** each $j \in [1, N]$ **do**
- 7: configure i th element with state j
- 8: collect $RSRP_i$ and calculate w_i for user i
- 9: calculate $RSRP_{WS}$
- 10: **if** $RSRP_{WS} > RSRP_{WS,max}$ **then**
- 11: update i th element of *States* with state j
- 12: $RSRP_{WS,max} \leftarrow RSRP_{WS}$
- 13: **end if**
- 14: **end for**
- 15: **end for**
- 16: **return** *States*

Method 2: This method aims to demonstrate how the RIS phase shift optimization should be performed when the users have distinct channel qualities (e.g., one user has significantly worse channel quality compared to the other user). This approach provides a higher weight to the user with a poor channel condition, and hence the expected outcome is to have a higher performance improvement for this disadvantaged user. In this case, the weight calculation method is inspired by the Proportional Fair scheduling algorithm in 5G NR [13].

Firstly, the transport block size for the i th user (TBS_i) is computed as described in TS 38.214 [14]. The next step is to measure the throughput value of the downlink shared channel for the i th user ($R_{DLSCH,i}$). Finally, the weights of the corresponding users are calculated as follows:

$$w_i = TBS_i/R_{DLSCH,i} \quad \forall i = 1, \dots, N_{UE} \quad (3)$$



Fig. 2: Experimental Setup.

Method 3: This method sets the weights of the users proportional to their channel quality indicator (CQI) values. The main motivation is to optimize the RIS phase shifts such that the highest performance improvement is achieved for the user having the highest channel quality. This is expected to yield the highest system throughput similar to the Best CQI scheduling algorithm [15]. The weights are calculated using the CQI values of the users as follows:

$$w_i = \frac{CQI_i}{\sum_{i=k}^{N_{UE}} CQI_k}, \quad \forall i = 1, \dots, N_{UE}, \quad CQI = 1, \dots, 15 \quad (4)$$

V. EXPERIMENT RESULTS

In this section, we present the experimental setup and the results of the measurement experiments using the end-to-end 5G testbed including the RIS prototype. The measurement based RIS optimization is performed according to the following procedure. Firstly, a 5G CN is started for the management and control of the 5G network, and then a monolithic gNB is employed. The RIC is connected to the gNB through the E2 interface. Subsequently, two UEs are started, and the registration of the gNB and two UEs to the network is verified through the 5G CN log files. Afterward, the channel monitoring xApp is activated to obtain channel measurements of both UEs, where the measurement parameters are defined under the 3GPP standards known as Key Performance Measurements (KPM) in [16]. The channel monitoring (CM) xApp gets the channel information of the users and sends this information to the RIS Optimization (RO) xApp through the zero message queue (ZMQ) interface.



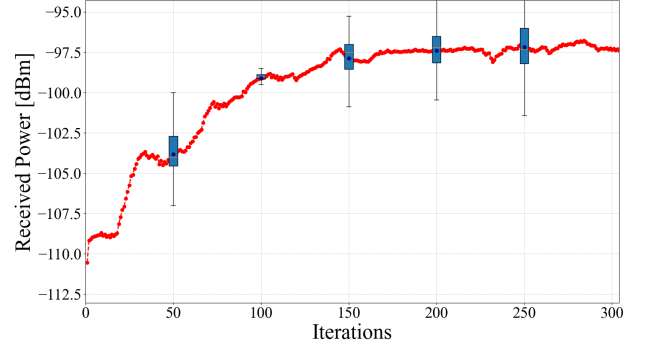


Fig. 3: RIS Optimization for a single UE.


The experimental setup is shown in Fig. 2, where 5G CN, 5G RAN, FlexRIC, and the corresponding xApps are deployed on a single computer. A USRP B210 software defined radio (SDR) is used for RF signal transmission and reception at the base station (gNB), with a horn antenna for the transmitter and an omnidirectional antenna for the receiver. For both UEs, two separate computers along with two USRP B210s are utilized. In contrast to the gNB, both B210s are equipped with horn antennas at the receiver side and omnidirectional antennas at the transmitter side. It is important to note that hardware and software components are identical for both UEs. The Greenerwave RIS prototype includes 76 RIS elements, each with four states, resulting in a total of 304 iterations for a single loop of the RIS optimization algorithm described in Algorithm 1. For the performance results, the enhancement of the initial synchronization signal RSRP (SS-RSRP) values

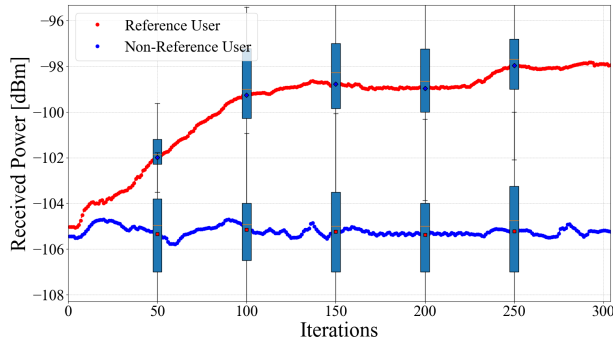


(a) A single reference UE.

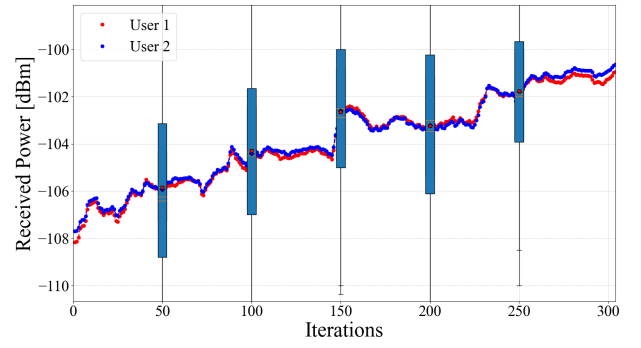

(b) Method 1.

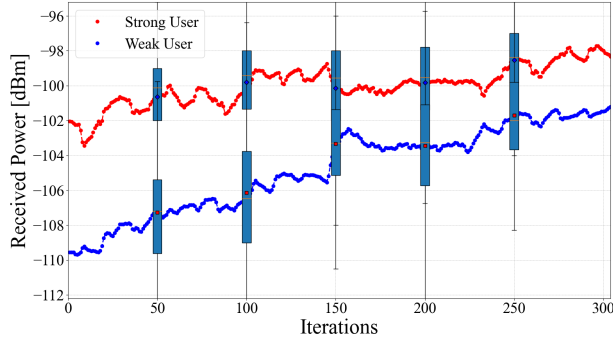

(c) Method 2.

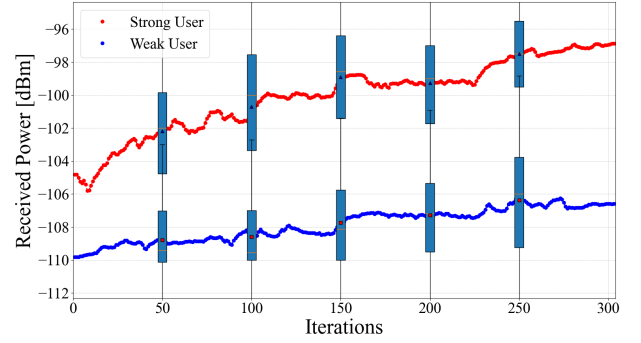

(d) Method 3.

Fig. 4: The Comparison of RIS Optimization Methods.

are reported for each scenario. For each case, we perform 300 experiments and the mean RSRP values of the UEs are reported in the figures.

In the first set of experiments, there is only a single UE in the 5G network and the RIS optimization is performed by considering this particular UE performance. The objective of this case is to simply understand the impact of RIS configuration within a 5G network. The results in Fig. 3 show that the SS-RSRP values are around -110 dBm. Following the RIS optimization, the SS-RSRP values increase to approximately -97.5 dBm. The results correspond to approximately 13 dBm performance improvement, indicating that the RIS can effectively enhance the UE performance in a 5G system.

The second case includes two UEs within the 5G network, where one of the UEs is selected as the reference UE such that the RIS phase shift optimization is performed for this reference UE without taking the second UE into account. The results in Fig. 4a indicate that the reference UE experiences a significant increase in its RSRP values while the second UE (i.e., the non-reference user) does not experience any notable change in its RSRP values. Quantitatively, the reference user experiences an RSRP enhancement of approximately 7 dBm whereas the non-reference user observes an RSRP enhancement of only about 0.2 dBm. The results indicate that the RIS can be strategically optimized to enhance the performance of the selected user.

The third case includes two UEs within the 5G system when the RIS phase shift optimization is performed using the weight calculation by Method 1. The corresponding results are shown in Fig. 4b, where the RIS provides uniform enhancements for both UEs. Specifically, the first UE experiences an RSRP improvement of approximately 7.2 dBm while the second UE experiences an RSRP improvement of around 7 dBm. Both users experience similar performance increases through the RIS optimization. Note that all measurements were taken under identical conditions, including distance, angles, and other factors. When the results are compared with the single reference case shown in Fig. 4a, it is clear that the performance improvements are not attributable to physical layer parameters such as the users' positions or distances. Considering this, it can be suggested that approximately equal performance improvements for both users are due to Method 1.

The fourth case examines a scenario, where two UEs experience different quality of services (QoS). The proposed algorithm aims to improve the performance of both users' connections, with a higher priority given to the user with the lower QoS, referred to as the "weak user". Conversely, the user with higher QoS values is designated as the "strong user". The results of the proposed algorithm are given in Fig. 4c. As expected, both users experienced significant improvements in channel conditions. The weak user can observe an

RSRP improvement of around 8.4 dBm while the strong user can only observe an RSRP improvement of around 4 dBm. These results indicate that the proposed algorithm works as intended. It should be noted that, unlike previous scenarios, the proposed algorithm dynamically assigns weights to each user. In this case, when a user's performance improves, their assigned weight is reduced to achieve more fair results. Around the 140th iteration, the strong user's performance improves steadily while the weight decreases accordingly. Consequently, around the 150th iteration, the RIS focuses on improving the weaker user's performance due to their higher weights. A similar situation is observed around the 225th iteration where the weak user is assigned higher weights while the strong user is assigned with lower weights. From these results, it can be observed that the proposed algorithm is well-suited for scenarios, where the fairness is an essential metric for the RIS deployment within the 5G network.

Similar to the fourth case, the fifth case involves two UEs experiencing different QoS. The proposed algorithm for the fifth case aims to improve the service quality of the strong user further than the weak user. As illustrated in Fig. 4d, the strong user begins with the RSRP values around -105 dBm and experiences an improvement of nearly 8 dBm, while the weak user experiences an RSRP improvement of around 3.5 dBm. In the proposed algorithm, the user weights are dynamically assigned, akin to the previous case. Since the objective is to improve the performance of the strong user relative to the weak one, it is expected that the performance gap between two users widens as the number of iterations increases. The results confirm that the performance improvement of the strong user is greater than that of the weak user as the iterations progress. On a final note, it can be concluded that the proposed algorithm is well-suited for scenarios, where the RIS is employed to maximize the overall system performance in the presence of multiple users.

VI. CONCLUSION

In this study, an RIS-assisted end-to-end open-source 5G system has been deployed together with an open-source RIC platform. Two xApps are developed, the first one for monitoring the users' wireless channel qualities and the second one for performing the RIS phase shift optimization. We propose multi-user RIS optimization algorithm to influence how RIS will help improving the user RSRP values. The measurement experiments using the real RIS prototype in a multi-user indoor scenarios using three different weight calculation methods demonstrate that the RIS can be effectively used to boost the network performance by significantly improving the selected user RSRP value or treat both UEs fairly. The weight selection method can be configured by the network operator to impose high level network policies. While many of the existing studies

focus on how to optimize the RIS through the physical layer parameters, our work provides a novel perspective that incorporates high level network policies within the O-RAN framework. The future work will implement AI/ML techniques within the RIS optimization xApps.

REFERENCES

- [1] M. Polese, L. Bonati, S. D'oro, S. Basagni, and T. Melodia, "Understanding o-ran: Architecture, interfaces, algorithms, security, and research challenges," *IEEE Communications Surveys & Tutorials*, vol. 25, no. 2, pp. 1376–1411, 2023.
- [2] E. Basar, M. Di Renzo, J. De Rosny, M. Debbah, M.-S. Alouini, and R. Zhang, "Wireless communications through reconfigurable intelligent surfaces," *IEEE access*, vol. 7, pp. 116 753–116 773, 2019.
- [3] M. Munochiveyi, A. C. Pogaku, D.-T. Do, A.-T. Le, M. Voznak, and N. D. Nguyen, "Reconfigurable intelligent surface aided multi-user communications: State-of-the-art techniques and open issues," *IEEE Access*, vol. 9, pp. 118 584–118 605, 2021.
- [4] X. Gan, C. Zhong, Y. Zhu, and Z. Zhong, "User selection in reconfigurable intelligent surface assisted communication systems," *IEEE Communications Letters*, vol. 25, no. 4, pp. 1353–1357, 2021.
- [5] S. Keşir, S. Kayraklık, İ. Hökelek, A. E. Pusane, E. Basar, and A. Görçin, "Measurement-based characterization of physical layer security for ris-assisted wireless systems," in *2023 IEEE 97th Vehicular Technology Conference (VTC2023-Spring)*. IEEE, 2023, pp. 1–6.
- [6] S. Kayraklık, I. Yildirim, E. Basar, I. Hokelek, and A. Gorcin, "Practical implementation of ris-aided spectrum sensing: A deep-learning-based solution," *IEEE Systems Journal*, 2024.
- [7] 3rd Generation Partnership Project (3GPP), "Study on new radio access technology: Radio access architecture and interfaces," ETSI, Tech. Rep. TS 38.801, 2017. [Online]. Available: https://www.etsi.org/deliver/etsi_ts/138800_138899/138801/14.00.00_60/ts_138801v140000p.pdf
- [8] B. Balasubramanian, E. S. Daniels, M. Hiltunen, R. Jana, K. Joshi, R. Sivaraj, T. X. Tran, and C. Wang, "Ric: A ran intelligent controller platform for ai-enabled cellular networks," *IEEE Internet Computing*, vol. 25, no. 2, pp. 7–17, 2021.
- [9] N. Nikaevin, M. K. Marina, S. Manickam, A. Dawson, R. Knopp, and C. Bonnet, "Openairinterface: A flexible platform for 5g research," *ACM SIGCOMM Computer Communication Review*, vol. 44, no. 5, pp. 33–38, 2014.
- [10] R. Schmidt, M. Irazabal, and N. Nikaevin, "Flexric: An sdk for next-generation sd-rans," in *Proceedings of the 17th International Conference on emerging Networking EXperiments and Technologies*, 2021, pp. 411–425.
- [11] Greenerwave, "Greenerwave 2022, 35 rue du sentier, 75002 paris, france," <https://greenerwave.com/>, 2022.
- [12] S. Kayraklık, I. Yildirim, Y. Gevez, E. Basar, and A. Görçin, "Indoor coverage enhancement for ris-assisted communication systems: Practical measurements and efficient grouping," in *ICC 2023-IEEE International Conference on Communications*. IEEE, 2023, pp. 485–490.
- [13] D. Perdana, A. N. Sanyoto, and Y. G. Bisono, "Performance evaluation and comparison of scheduling algorithms on 5g networks using network simulator," *International Journal of Computers Communications & Control*, vol. 14, no. 4, pp. 530–539, 2019.
- [14] ETSI TS 138 214, "5g; nr; physical layer procedures for data," European Telecommunications Standards Institute (ETSI), Tech. Rep. v15.3.0, 2019. [Online]. Available: https://www.etsi.org/deliver/etsi_ts/138200_138299/138214/15.03.00_60/ts_138214v150300p.pdf
- [15] M. Mamode and T. P. Fowdur, "Comparative analysis of scheduling algorithms in 5g uplink transmission," *Journal of Engineering Research and Sciences*, 2022.
- [16] ETSI, "5G; Management and Orchestration; 5G Performance Measurements (3GPP TS 28.552 version 17.7.1 Release 17)," ETSI, Tech. Rep. ETSI TS 128 552 V17.7.1, Jul. 2022. [Online]. Available: https://www.etsi.org/deliver/etsi_ts/128500_128599/128552/17.07.01_60/ts_128552v170701p.pdf