

Quantum key distribution with asymmetric channel noise

Xiang-Bin Wang*

Imai Quantum Computation and Information Project,

ERATO, Japan Sci. and Tech. Corp.,

Daini Hongo White Bldg. 201, 5-28-3,

Hongo, Bunkyo, Tokyo 113-0033, Japan

(Dated: February 6, 2019)

Abstract

We show that, one may take advantage of the asymmetry of channel noise. With appropriate modifications to the standard protocols, the key rate or the tolerable total channel noise can be increased if the channel noise is asymmetric.

arXiv:quant-ph/0406099v1 15 Jun 2004

*Electronic address: wang@qci.jst.go.jp

I. INTRODUCTION

Unlike classical key distribution, quantum key distribution (QKD) is built on the fact that measuring an unknown quantum state will almost surely disturb the state. The first published QKD protocol, proposed in by Bennett and Brassard in 1984[2], is called BB84. For a history of the subject, one may refer to, for example, Ref. [3]. Since then, studies on QKD are extensive. Strict mathematical proofs for the unconditional security have been given already[4, 8, 9, 10, 13]. It is greatly simplified if one connects this with the quantum entanglement purification protocol (EPP)[4, 11, 12, 13].

To all QKD protocols, the first important requirement is the unconditional security, i.e., using whatever type of attack, eavesdropper (Eve) can never have non-negligible information to the final key shared by Alice and Bob. A conditional secure protocol without a testable condition is not so useful, since it is essentially same to the classical protocol on its security. For instance, the security should not be dependent on the properties of the physical channel, since Eve. may totally control the channel during the QKD being done by Alice and Bob.

Besides the security requirement, we also hope to improve the feasibility of a protocol in practical use, e.g., the tolerable channel error rate and the key rate. Different from the security issue, one can improve the feasibility of a protocol based on the properties of physical channel. For example, Alice and Bob may first investigate the property of their physical channel and then take some physical treatment to decrease the error rate of their physical channel. In the protocol, Alice and Bob will test the error rate of the improved channel instead of the original physical channel. Although Eve may in principle do whatever to change the original physical properties, if Eve wants to hide her presence, she must not change the error rate of the transmitted qubits as expected by Alice and Bob, since Alice and Bob will test the error rate before they distill the final key. Moreover, the final key rate and the security are totally dependent on the error test results rather than the full properties of the channel. Two *different* channels are *equivalent* for the QKD purpose if their channel error rates are equal. This is to say, given an unconditionally secure protocol, if Eve hides her presence, Eve's channel is *equivalent* to the original physical channel, i.e., Eve's actions does not affect the error test result done by Alice and Bob. If Eve does not hide herself, she may change the error rate or patterns of the transmitted qubits therefore the result in the error test step is changed. This may decrease the final key rate, or even destroy the protocol if she

improves the error rate too much. Even in such a case Eve cannot obtain a nonnegligible amount of information to the final key, given an unconditionally secure protocol. In this work, in evaluating the feasibility of our protocol, we only consider an invisible Eve, i.e., Eve always hides her presence. Note that no protocol can work as efficiently as it is expected with a visible Eve. A visible Eve may always destroy *any* protocol. We shall propose protocols with higher key rate and tolerable channel error rate, given an asymmetric physical channel and invisible Eve. The key rate and tolerable channel error rate of our protocol are dependent on the physical channel itself, but the security is independent of the physical channel, i.e., our protocols are unconditionally secure under whatever intercept-and-resend attack with conditional advantages in feasibility.

Most of the known prepare-and-measure protocols assume the symmetric channel to estimate the noise threshold for the protocol. Also, most of the protocols use the symmetrization method: Alice randomly chooses one basis from certain set to prepare her initial state. All basis in the set is chosen with equal probability. In such a way, even the noise of the channel (Eve's channel) is not symmetric, the symmetrization make the error rate to the key bits be always symmetric. In this work we show that actually we can let all key bits prepared in a single basis and we can have advantages in key rate or noise threshold provided that the channel noise is asymmetric.

II. CHANNEL ERROR, TESTED ERROR AND KEY-BITS ERROR

Normally, Alice will transmit qubits in different basis (e.g., Z basis and X basis) to Bob, Bob will also measure them in different basis. The Hadamard transformation $H = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$ interchanges the Z-basis $\{|0\rangle, |1\rangle\}$ and X-basis $\{|\pm\rangle = \frac{1}{\sqrt{2}}(|0\rangle \pm |1\rangle)\}$. We shall use the term key bits for those raw bits which are used to distill the final key and the term check bits for those bits whose values are announced publicly to test the error rates. Our purpose is to know the bit-flip rate and phase-flip rate to key-bits. We do it in this way: first test flipping rates of the check-bits, then deduce the channel flip rate and determine the error rates of key-bits. As it was shown in Ref[7], the tested flipping rate is in general different from the real error rate of key bits, due to the basis transformation. Here we give a more detailed study on this issue. We first consider the 4-state protocol with CSS code,

where only two basis, Z -basis and X -basis are involved in operation. For such a case of 4-state protocol, we define asymmetric channel as the channel with its bit flip error rate being different from its phase flip error rate. The check bits will be discarded after the error test. We use the term Z -bits for those qubits which are prepared and measured in Z basis, the term X -bits for those bits which are prepared and measured in X basis. For clarity we shall regard Alice's action of a certain state preparation in X basis as the joint actions of state preparation in Z basis followed by a Hadamard transform. We shall also regard Bob's measurement in X basis as the joint action of first taking a Hadamard transform and then taking the measurement in Z basis. Therefore we shall also call those Z -bits as I -qubits and those X -bits as H -bits. To let the CSS code work properly, we need to know the value of average bit-flip rate and average phase-flip rate to all key bits. We define three Pauli matrices:

$$\sigma_x = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}, \quad \sigma_y = \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix}, \quad \sigma_z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}.$$

The matrix σ_x applies a bit flip error but no phase flip error to a qubit, σ_z applies a phase flip error but no bit flip error, σ_y applies both errors. We assume the $\sigma_x, \sigma_y, \sigma_z$ rates of the physical channel are q_{x0}, q_{y0}, q_{z0} respectively. Note that the phase flip rate or bit flip rate of the channel is the summation of q_{z0}, q_{y0} or q_{x0}, q_{y0} . Explicitly we have

$$p_{x0} = q_{x0} + q_{y0}$$

$$p_{z0} = q_{z0} + q_{y0} \tag{1}$$

$$p_{y0} = q_{x0} + q_{z0} \tag{2}$$

and q_{y0} is defined as the channel flipping rate to the qubits prepared in Y -basis ($\frac{1}{\sqrt{2}}(|0\rangle \pm i|1\rangle)$). After the test with check bits, Alice and Bob know the value of p_{z0}, p_{x0} of the channel. Given the channel flipping rates q_{x0}, q_{y0}, q_{z0} , one can calculate the bit-flip rate and phase-flip rate for the remained qubits. For those I -bits, the bit-flip rate and phase-flip rate are just $q_{x0} + q_{y0}$ and $q_{z0} + q_{y0}$ respectively, which are just the channel bit flip rate and phase flip rate. Therefore the channel bit-flip rate p_{x0} is identical to the tested flip rate of I -bits. The channel phase-flip rate p_{z0} can be determined by testing the flip rate of those H -bits. An H -qubit is a qubit treated in the following order

prepared in Z basis, Hadamard transform, transmitted over the noisy channel, Hadamard

transform, measurement in Z basis. If the channel noise offers a σ_y error, the net effect is

$$H\sigma_yH \begin{pmatrix} |0\rangle \\ |1\rangle \end{pmatrix} = \sigma_y \begin{pmatrix} |0\rangle \\ |1\rangle \end{pmatrix}. \quad (3)$$

This shows, the channel σ_y error will also cause a σ_y error to an H -qubit. Similarly, due to the fact of

$$\begin{aligned} H\sigma_zH &= \sigma_x \\ H\sigma_xH &= \sigma_z, \end{aligned} \quad (4)$$

a channel σ_x flip or a channel σ_z flip will cause a net σ_z error or σ_x error, to an H -bit. Consequently, a channel phase flip causes a bit flip error to H-bit, a channel bit-flip causes a phase flip error to H-bit. This is to say, *the measured error of H-bits is just the channel phase flipping rate.* Therefore the average bit-flip error rate and phase-flip error rate to each types of key bits will be

$$\begin{aligned} p_z^I &= p_x^H = p_{z0}, \\ p_z^H &= p_x^I = p_{x0} \end{aligned} \quad (5)$$

Here $p_x^H, p_x^I (p_z^H, p_z^I)$ are for the bit flip (phase flip) error of H -bits and I -bits from those key-bits respectively. Suppose the key bits consist of η I-bits and $1 - \eta$ H-bits, the average flip error of the key bits is

$$\begin{aligned} p_x &= \eta p_x^I + (1 - \eta) p_x^H = \eta p_{x0} + (1 - \eta) p_{z0}; \\ p_z &= \eta p_z^I + (1 - \eta) p_z^H = \eta p_{z0} + (1 - \eta) p_{x0}. \end{aligned} \quad (6)$$

Modified BB84 protocol with CSS code. We first consider an almost trivial application of our analysis of asymmetric channel above. In the standard BB84 protocol, since the preparation basis of key bits are symmetrized, the average bit flip error and phase flip error to those key bits are always equal no matter whether the channel noise itself is symmetric or not. That is to say, when half of the key-bits are X-bits and Half of them are Z-bits, the average flip rates to all key bits are always

$$p_x = p_z = (p_{x0} + p_{z0})/2. \quad (7)$$

Therefore the key rate for the standard BB84 protocol (Shor-Preiskill protocol)[13] with whatever asymmetric channel is $1 - 2H\left(\frac{p_{x0} + p_{z0}}{2}\right)$ [13], where $H(t) = -(t \log_2 t + (1-t) \log_2 (1-t))$

t). (Note that in the 4-state protocol, asymmetric channel is simply defined by $p_{x0} \neq p_{z0}$.) However, if all key bits had been prepared and measured in Z basis, then the bit flip and phase flip rates to key bits would be equal to those flipping values of the channel itself. In such a case the key rate is

$$R = 1 - H(p_{x0}) - H(p_{z0}). \quad (8)$$

Obviously, this is, except for the special case of $p_{x0} = p_{z0}$, always larger than the key rate in standard BB84 protocol with CSS code (Shor-Preskill protocol), where the key-bits are prepared in Z -basis and X -basis with equal probability. For a higher key rate, one should *always* use the above modified BB84 protocol with all key bits prepared and measured in a single basis, Z -basis.

In fact, this type of QKD protocol with one single basis for key bits had been proposed already in the past for different purposes, see e.g., ref[17]. Now we come to the main results of this paper, the case of 6-state protocol with asymmetric channel noise.

III. 6-STATE PROTOCOL WITH 2-WAY CLASSICAL COMMUNICATIONS.

Now we start to present the main results of this work: how to improve the tolerable error rate with 2-way communication 6-state protocol given the asymmetric channel. The symmetric channel noise for a 6-state protocol is defined by $q_{x0} = q_{y0} = q_{z0}$, if this condition is broken, we regard it as an asymmetric channel for 6-state protocols. In the standard 6-state protocol[5, 7, 16], symmetrization is used, i.e., the key-bits are equally consisted by X -, Y -, Z -bits. When the channel noise itself is symmetric, i.e., $q_{x0} = q_{y0} = q_{z0}$, a 6-state protocol can have a higher noise threshold than that of a 4-state protocol. This is because in the 6-state protocol, the σ_y type of channel error rate is also detected. In removing the bit flip error, σ_y error is also reduced. However, in a 4-state protocol, σ_y error is never tested therefore we have to assume the worst situation that $q_{y0} = 0$ [7].

We shall show that one can have a higher tolerable channel errors if one modify the existing protocols, given the asymmetric channel(i.e., the channel with its Y -bits flipping error being different from that of X -bits or Z -bits.) For example, in the case that $q_{y0} = 0$ and $q_{x0} = q_{z0}$. The different types of error rates to the key bits are

$$q_x = q_{x0}, q_y = 0, q_z = q_{z0}$$

for those Z -bits;

$$q_x = q_{z0}, q_y = 0, q_z = q_{x0}$$

for those X -bits and

$$q_x = q_{z0}, q_y = q_{x0}, q_z = 0$$

for Y -bits. The average error rates to all key bits are:

$$\bar{q}_x = q, \bar{q}_y = q/3, \bar{q}_z = 2q/3, q = q_{x0} = q_{z0}. \quad (9)$$

With such a fact, the threshold of total channel noise $q_{t0} = (q_{x0} + q_{y0} + q_{z0})$ for the protocol [16] is 41.4%, same with the case with symmetric noise[16]. Actually, by our numerical calculation we find that the threshold of total channel noise for Chau protocol[16] is almost unchanged with whatever value of q_{y0} . However, if *all* key bits were prepared in Y -basis (the basis of $\{|y\pm\rangle = \frac{1}{\sqrt{2}}(|0\rangle \pm i|1\rangle)\}$), there would be no σ_z type of error therefore one only needs to correct the bit-flip error. To see this we can regard a Y -qubit as a qubit treated in the following order

prepared in Z basis, T transform, transmitted over the noisy channel, T^{-1} transform, measurement in Z basis. Here $T = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & i \\ 1 & -i \end{pmatrix}$, it changes states $|0, 1\rangle$ into $|y\pm\rangle$. The following facts

$$T\sigma_x T^{-1} = \sigma_y; T\sigma_y T^{-1} = \sigma_z; T\sigma_z T^{-1} = \sigma_x \quad (10)$$

cause the consequence that a channel flip of the type $\sigma_x, \sigma_y, \sigma_z$ will cause an error to Y -bits in the type of $\sigma_y, \sigma_z, \sigma_x$ respectively. With this fact, if the channel error of p_{y0} is 0, the σ_z type of error to the Y -qubit is also 0. Using the iteration formula given in Ref[16], once all bit-flip error is removed, all errors are removed. Therefore the error rate threshold is

$$Q_x = Q_z = 25\%, \quad (11)$$

i.e., a total error rate of 50%. In practice, it is not likely that σ_y type of channel flip is exactly 0. Numerical calculation (Fig. 1) shows that, using Y -basis as the only basis for all key-bits always has an advantage provided that the channel flipping rate satisfies $q_{y0} < q_{x0} = q_{z0}$. For the purpose of improving the noise threshold, we propose the following protocol:

- 1: Alice creates $(6 + \delta)n$ random bits.

- 2:** Alice chooses a random $(6 + \delta)n$ -element string b with $n + \delta$ elements being 0, $n + \delta$ elements being -1 and all other elements being 1 in string b . All elements in string b are randomly positioned. For each bit, she creates a state in the $|0\rangle, |1\rangle$ basis (if the corresponding bit of b is 0) or the $|+\rangle, |-\rangle$ basis (if the bit of b is -1) and Y basis if the element in string b is 1.
- 3:** Alice sends all the resulting qubits to Bob.
- 4:** Bob receives the $(6 + \delta)n$ qubits, measuring each in the $|0\rangle, |1\rangle$ or the $|+\rangle, |-\rangle$ or Y basis at random.
- 5:** Alice announces b .
- 6:** Bob discards any results where he measured a different basis than Alice prepared. With high probability, there are at least $2n$ bits left (if not, abort the protocol). Alice decides on a set of n Z-bits to use for the protocol, and use the remained n bits to be check bits. (Among all the check bits, $1/3$ of them are X-bits, $1/3$ of them are Z-bits.)
- 7:** Alice and Bob announce the values of their check bits. If too few of these values agree, they abort the protocol.
- 8:** Alice randomly group the key bits with each group consisting 2 bits. Alice and Bob compare the parity values on each side to each group. If the values agree, they discard one bit and keep the other one. If the value disagree, they discard both bits of that group. They repeatedly do this for a number of grounds until they believe they can find a certain integer k so that both bit-flip error and phase-flip error are less than 5% after the following step is done.
- 9:** They randomly group the remained key bits with each group consisting k bits. They use the parity value of each group as the new bits after this step.
- 10:** Alice and Bob use classical CSS code to distill the final key.

Remark 1: Step 9 is to reduce the phase flip error. Although in the extreme case that the phase flip error rate is always 0 if initially the σ_y type of error is 0, however, in practice the initial σ_y type of error rate is not exactly 0. Even in the case the tested rate on the check bits is zero, we still have to assume a small error rate to increase the confidence level.

Remark 2: The above protocol is unconditionally secure. This means, under whatever type of intercept-and-resend attack, Eve's information to the final key is exponentially small. The security proof can be done through the purification and reduction procedure given by Ref.[13].

Remark 3: We don't recommend to use the above protocol blindly. Before doing the QKD, the users should make calculations and decide to use which protocol. Numerical calculation shows that, In the case of $q_{x0} = q_{z0}, q_{y0} < q_{x0}$, our protocol always has a higher error rate threshold than the corresponding 6-state protocol with key bits' bases equally distributed in all 3 bases. This fact is shown in Fig.(1).

Remark 4: The conditional advantage require the users first test the properties of the physical channel before doing QKD. And we assume that the physical channel is stable. Note that we don't require anything for Eve's channel. Physical channel is in general different from Eve's channel since Eve may take over the whole channel only at the time Alice and Bob do the QKD. However, if Eve wants to hide her presence, she must respect the expected results of the error test in the protocol. For example, if the error rates for physical channel is $p_{x0} = p_{z0}, p_{z0} = 0$, Eve's operation must not change these values. Since if these values are changed, Alice and Bob will abort the protocol after the error test. This is to say, for the purpose of QKD, the physical channel is equivalent to Eve's channel if Eve hides her presence. Eve can destroy the protocol if she does not hide her presence. In such a case Eve can also destroy any other protocol therefore no protocol will work.

To make it clearer, we consider a specific game. Suppose now Alice and Bob are prisoned in two separate places. They are offered a chance to be freed immediately. The rule is set as this: If they can make an unconditionally secure final key, they will be freed immediately. If any third party obtained a non-negligible amount of information to the final key, they will be shot immediately. Suppose both Alice and Bob want to be freed immediately, but they take the value that being alive is more important than freedom[18]. The noise of the physical is known: the $p_y = 0; p_x = p_z = 22\%$. In such a case, those conditionally secure protocol with untestable conditions cannot be used, since those protocols will bring the risk to Alice and Bob of being shot. For example, protocol T is conditionally secure with individual attack, but we don't know how to see whether Eve has only used the individual attack. Even though T has a very large tolerable channel noise, Alice and Bob cannot use this protocol because they have a risk to be shot immediately. Previously known unconditionally secure protocols will not bring the risk of being shot to Alice and Bob, but those protocols cannot help Alice and Bob to be freed, since all of previously known secure protocols cannot tolerate such a high channel flipping error. However, our protocol in this work can help Alice and Bob to be freed without any non-negligible risk of being shot. In such a case, our protocol is

the only protocol that may help Alice and Bob while all previously known unconditionally secure protocols cannot.

Besides the advantage of a higher tolerable error rate, there are also advantages in the key rate of our protocol with asymmetric channel noise. Obviously, when the error rate is higher than other protocols' threshold while lower than our protocol's threshold, our protocol always has an advantage in key rate. More interestingly, even in the case that the error rate is significantly lower than the threshold of Shor-Prekill's protocol, we may modify our protocol and the advantage in key rate may still holds. We modify our protocol in such a way: take one round bit-error-rejection with two way communication and then use CSS code to distill the final key. As it was shown in Ref.[16], the various flipping rates will change by the following formulas after the bit-flip-error rejection

$$\left\{ \begin{array}{l} q_I = \frac{p_{I0}^2 + p_{z0}^2}{(q_{I0} + q_{z0})^2 + (q_{x0} + q_{y0})^2}, \\ q_x = \frac{q_{x0}^2 + q_{y0}^2}{(q_{I0} + q_{z0})^2 + (p_{x0} + p_{y0})^2}, \\ q_y = \frac{2q_{x0}q_{y0}}{(q_{I0} + q_{z0})^2 + (q_{x0} + q_{y0})^2}, \\ q_z = \frac{2q_{I0}q_{z0}}{(q_{I0} + q_{z0})^2 + (q_{x0} + p_{y0})^2}. \end{array} \right. \quad (12)$$

Also, it can be shown that, the number of remained pairs is

$$f = \frac{1}{2} \frac{1}{(q_{I0} + q_{z0})^2 + (q_{x0} + p_{y0})^2}. \quad (13)$$

The key rate of our protocol is given by

$$R = f \cdot (q_x \log_2 q_x + q_y \log_2 q_y + q_z \log_2 q_z + q_I \log_2 q_I) \quad (14)$$

We shall compare this with the key rate of the six-state Shor-Prekill protocol[19], i.e.

$$r = q_{x0} \log_2 q_{x0} + q_{y0} \log_2 q_{y0} + q_{z0} \log_2 q_{z0} + q_{I0} \log_2 q_{I0}. \quad (15)$$

The numerical results are given in Fig.(2).

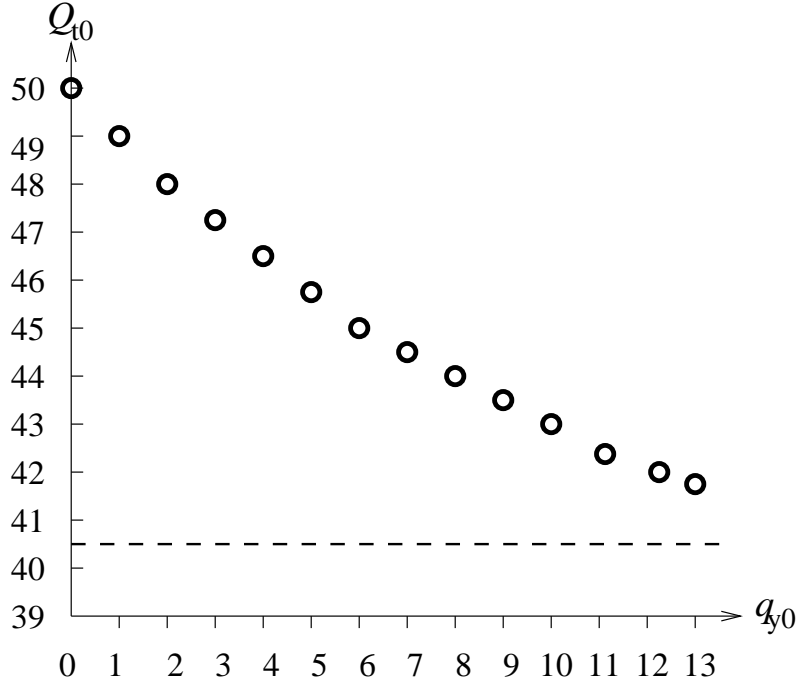


FIG. 1: Comparison of channel error threshold of different protocols. All values are in the unit of one percent. Q_{t0} is the threshold value of total channel noise given certain value of q_{y0} . In calculating Q_{t0} , we assume $q_{x0} = q_{z0}$. The dashed line is the threshold value of Chau protocol, the circled curve is the threshold of the six state protocol given in this work.

IV. SUMMARY

In summary, We have shown that, given the asymmetric channel flip rate one can have advantages in tolerable flip rates and efficiency, if one uses a single basis for the key-bits. We have demonstrated this point by both 4-state protocol with CSS-code and the 6-state protocol with 2-way communication. It should be interesting to investigate the most general case that p_{x0}, p_{y0}, p_{z0} are all different for the case of 6-state protocol.

Acknowledgement: Wang thanks Prof Imai H for support. Wang also thanks Univ. of Hong Kong for supporting his visit. Valuable conversations with H. F. Chau is also gratefully acknowledged.

[1] W.K. Wothers and W.H. Zurek, Nature (London) 299, 802(1982).

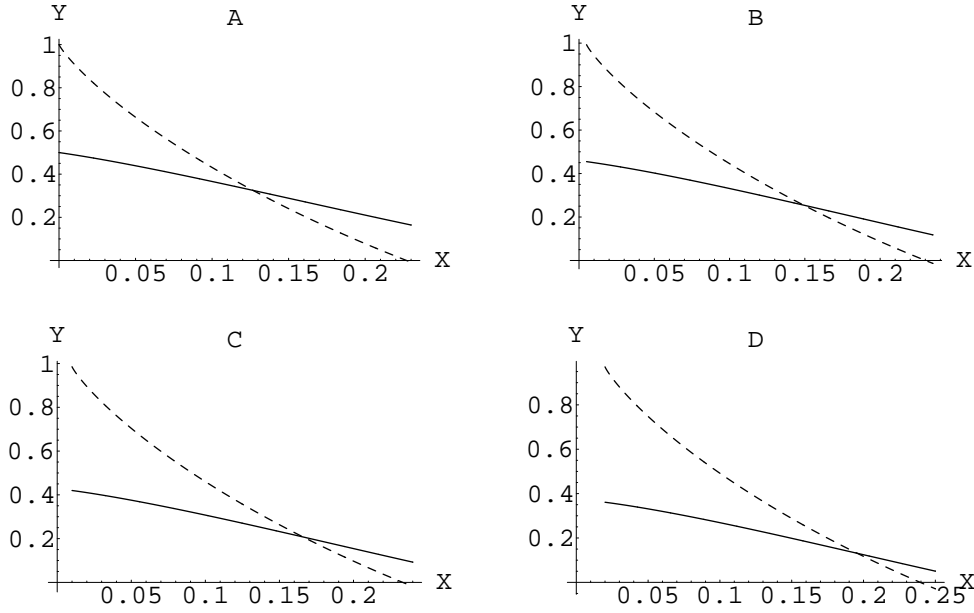


FIG. 2: Comparison of the key rate of our protocol(the solid line) and six-state Shor-Prekill protocol (the dashed line). The Y-axis is for the key rate, X axis is $q_{x0} + q_{y0} + q_{z0}$; A, B, C, D are for the cases of $q_{y0} = 0, 0.5\%, 1\%, 2\%$, respectively. In all cases we have assumed $q_{x0} = q_{y0}$. We can see that, if q_{y0} is small, our protocol can have a higher efficiency than six-state Shor-Prekill protocol even the total error rate is significantly lower than the threshold value of the six-state Shor-Prekill protocol.

- [2] C. H. Bennett and G. Brassard, *Proceedings of IEEE International Conference on Computers, Systems and Signal Processing, Bangalore, India, 1984*, (IEEE Press, 1984), pp. 175–179; C.H. Bennett and G. Brassard, IBM Technical Disclosure Bulletin **28**, 3153–3163 (1985).
- [3] N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden, *Reviews of Modern Physics*, vol. 74, pp. 145-195.
- [4] H.-K. Lo and H. F. Chau, *Science*, 283, 2050(1999)
- [5] D. Bruss, *Phys. Rev. Lett.* 81, 3018(1998).
- [6] P. G. Kwiat, K. Mattle, H. Weinfurter, A. Zeilinger, A.V. Sergienko, and Y. H. Shih, *Phys. Rev. Lett.* 75, 4337(1995).
- [7] D. Gottesman and H.-K. Lo, *IEEE Transactions on Information Theory*, 49, 457(2003).
- [8] D. Mayers, *Journal of ACM*, 48,351.

- [9] E. Biham, M. Boyer, P. O. Boykin, T. Mor, and V. Roychowdhury, *Proceedings of the Thirty-Second Annual ACM Symposium on Theory of Computing (STOC)* (ACM Press, New York, 2000), p. 715.
- [10] M. Ben-Or, Unpublished.
- [11] C. H. Bennett, D. P. DiVincenzo, J. A. Smolin, and W. K. Wootters, *Phys. Rev. A* **54**, 3824(1996)
- [12] D. Deutsch, A. Ekert, R. Jozsa, C. Macchiavello, S. Popescu, and A. Sanpera, *Phys. Rev. Lett.*, **77**, 2818(1996); Erratum *Phys. Rev. Lett.* **80**, 2022 (1998).
- [13] P. W. Shor and J. Preskill, *Phys. Rev. Lett.*, vol. 85,441(2000).
- [14] D. Gottesman and J. Preskill, *Phys. Rev. A* **63**,22309(2001).
- [15] A. R. Calderbank and P. Shor, *Phys. Rev. A* **54**, 1098(1996), A. M. Steane, *Proc. R. Soc. London A* **452**, 2551(1996).
- [16] H. F. Chau, *Phys. Rev. A* **66**, 060302(R) (2002).
- [17] H. K. Lo, H. F. Chau and M. Ardehali, Efficient Quantum Key Distribution Scheme And Proof of Its Unconditional Security, quant-ph/0011056.
- [18] We don't insist on the value that being alive is more important than freedom for human beings in general, though we assume such a value for Alice and Bob here. The assumption here is just to demonstrate why our protocol can be useful.
- [19] H.-K. Lo, quant-ph/0102138.