

Improved Multiuser Detection in Asynchronous Flat-Fading Non-Gaussian Channels

K. Vidyullatha, *Student Member, IEEE*,

Electronics and Communication Engineering Department,
Kakatiya Institute of Technology and Science,
Warangal, Andhra Pradesh, India – 506 105.
e-mail: v_kanchanapally@yahoo.com

V. Harish, *Student Member, IEEE*,

Electronics and Communication Engineering Department,
Kakatiya Institute of Technology and Science, Warangal,
Andhra Pradesh, India – 506 015.
e-mail: harishvictory@gmail.com

S. V. N. L. Tejaswi,

Electronics and Communication Engineering Department,
Kakatiya Institute of Technology and Science, Warangal,
Andhra Pradesh, India – 506 015.
e-mail: svnlchunduriece@gmail.com

T. Anil Kumar, *Member, IEEE*

Electronics and Communication Engineering Department,
RRS College of Engineering and Technology, Patancheru,
Andhra Pradesh, India – 502 300.
e-mail: tvakumar2000@yahoo.co.in

Abstract— In this paper, a new M-estimator based multiuser detection in asynchronous flat-fading non-Gaussian CDMA channels is considered. A new closed-form expression is derived for the characteristic function of the multiple-access interference signals. Simulation results are provided to prove the effectiveness of the derived bit-error probabilities obtained with this expression in asynchronous flat-fading non-Gaussian CDMA channels.

Keywords- bit-error rate; code-division multiple-access; inter symbol interference; multiuser detection; M-estimation.

I. INTRODUCTION

Recently, the problem of robust multiuser detection in non-Gaussian channels has been addressed in the literature [1] & [2], which were developed based on the Huber and Hampel estimators. The Huber's estimator [3] can limit the effect of gross errors; however, the effect may still have to be large enough to reach an unacceptable level. The Hampel's estimator [4] avoids this problem by setting up three regions to reflect the influence of gross errors with different magnitudes. It is noticed that big gross errors greater than a given threshold will have no effect on the solution as a sharp rejection point may corrupt the estimation when observations are not carefully treated due to low redundancy. Hence, a new M-estimator is proposed for multiuser detection in asynchronous flat-fading non-Gaussian channels in this paper. Further, a new closed-form expression is derived for computing the average bit-error rate (BER) under asynchronous transmission conditions in flat-fading non-Gaussian channels using the characteristic function method.

II. SYSTEM MODEL

Consider the signal model of [5] in matrix notation, which can be written as

$$\mathbf{y}(i) = \mathbf{A}\boldsymbol{\theta}(i) + \mathbf{n}(i) \quad (1)$$

where $\mathbf{y}(i) \equiv [y_1(i), \dots, y_N(i)]^T$, $\mathbf{n}(i) \equiv [n_1(i), \dots, n_N(i)]^T$, $\boldsymbol{\theta}(i) \equiv (1/\sqrt{N})[b_1(i)g_1(i), \dots, b_L(i)g_L(i)]^T$, $\mathbf{A} \equiv [\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_L]$, $\mathbf{a}_l = [a_l^1, \dots, a_l^N]^T$, $b_l(i)$ denote symbol stream for the l th user, and $g_l(i)$ is the l th channel fading coefficient (N is the processing gain and L is the number of active users). It is assumed that the sequence of noise samples $\{\mathbf{n}(i)\}$ is a sequence of independent and identically distributed (i.i.d.) complex random variables whose in-phase and quadrature components are independent non-Gaussian random variables with a common probability density function (pdf) f . The pdf of this noise model has the form

$$f = (1 - \varepsilon)\mathfrak{N}(0, v^2) + \varepsilon\mathfrak{N}(0, \kappa v^2) \quad (2)$$

with $v > 0$, $0 \leq \varepsilon \leq 1$, and $\kappa \geq 1$. Here $\mathfrak{N}(0, v^2)$ represents the nominal background noise and the $\mathfrak{N}(0, \kappa v^2)$ represents an impulsive component, with ε representing the probability that impulses occur.

III. BER ANALYSIS

In this section, the characteristic function method is used to compute the average BER under asynchronous transmission conditions in flat-fading non-Gaussian channels. We first examine the statistics of each interferer. This analysis parallels that of [6], and so the presentation here is brief. We have the definition of interference from each interferer as $I_k = G_k W_k$, where G_k is a zero-mean unit-variance gaussian random variable and W_k is defined in terms of random variables P_k, Q_k, X_k, Y_k, S_k as

$$W_k = P_k S_k + Q_k (1 - S_k) + X_k + Y_k (1 - 2S_k) \quad (3)$$

where, S_k is a uniform random variable over $[0,1)$, P_k and Q_k are symmetric Bernoulli random variables, X_k and Y_k are the discrete random variables that represent the sums of different sets of independent symmetric Bernoulli random variables. Thus, given W_k , I_k is a Gaussian random variable with zero-mean and conditional variance $\sigma_{I_k|W_k}^2 = W_k^2$. This implies through (3) that I_k given $P_k, Q_k, X_k, Y_k, S_k, B$ (where B equals the number of chip boundaries with transitions in target user's signature waveform) is Gaussian and the conditional pdf for I_k follows as

$$f_{I_k|P_k, Q_k, X_k, Y_k, S_k, B}(i_k) = \frac{1}{\sqrt{2\pi} |P_k S_k + Q_k(1-S_k) + X_k + Y_k(1-2S_k)|} \times \exp\left\{-\frac{i_k^2}{2[P_k S_k + Q_k(1-S_k) + X_k + Y_k(1-2S_k)]^2}\right\} \quad (4)$$

since W_k may take negative values, a modulus operation is required in (3). Averaging over P_k, Q_k, X_k, Y_k (which is equivalent to averaging over all interferers, spreading sequences and data sequences), yields

$$f_{I_k|S_k, B}(i_k) = \frac{1}{4\sqrt{2\pi}} 2^{-(N-1)} \sum_{i \in A} \sum_{j \in B} \binom{A}{\frac{i+A}{2}} \binom{B}{\frac{j+B}{2}} \times \left\{ \sum_{l=1,2,3,4} \frac{1}{\sigma_l(i, j, S_k)} \exp\left\{-\frac{i_k^2}{2\sigma_l^2(i, j, S_k)}\right\} \right\} \quad (5)$$

where,

$$\sigma_1^2(i, j, S_k) = [1+i+j(1-2S_k)]^2 \quad (6)$$

$$\sigma_2^2(i, j, S_k) = [2S_k - 1 + i + j(1-2S_k)]^2 \quad (7)$$

$$\sigma_3^2(i, j, S_k) = [1-2S_k + i + j(1-2S_k)]^2 \quad (8)$$

$$\sigma_4^2(i, j, S_k) = [-1+i+j(1-2S_k)]^2 \quad (9)$$

note that to obtain (6), it was considered that X_k and Y_k given B are independent. It is clear from (6) that the pdf of I_k given S_k and B is not gaussian, though the functional form is a weighted summation of "Gaussian-like" terms. We postpone averaging S_k here since they appear in the denominators of the exponential function arguments giving an intractable integral. The characteristic function of I_k , given S_k and B , is

$$\Phi_{I_k|S_k, B}(\omega) = \frac{2^{-(N-1)}}{4} \sum_{i \in A} \sum_{j \in B} \binom{A}{\frac{i+A}{2}} \binom{B}{\frac{j+B}{2}} \times \left\{ \sum_{l=1,2,3,4} \exp\left\{-\frac{1}{2} \sigma_l^2(i, j, S_k) \omega^2\right\} \right\} \quad (10)$$

The S_k 's now appear in the numerators of the exponential function arguments and averaging can be carried out to give

$$\Phi_{I_k|B}(\omega) = \int_0^1 \Phi_{I_k|S_k, B}(\omega) dS_k = \frac{2^{-(N-1)}}{4} \sum_{i \in A} \sum_{j \in B} \binom{A}{\frac{i+A}{2}} \binom{B}{\frac{j+B}{2}} \times [J(i+1, j) + J(i, j-1) + J(i, j+1) + J(i-1, j)] \quad (11)$$

where,

$$J(i, j) = \begin{cases} \frac{\sqrt{\pi/2}}{j|\omega|} \{Q(|\omega|(i-j)) - Q(|\omega|(i+j))\}, & (j, \omega \neq 0) \\ \exp(-\frac{1}{2} i^2 \omega^2), & j=0 \\ 1, & \omega=0 \end{cases} \quad (12)$$

then, using the fact that the I_k 's given B are independent, we have the characteristic function for the total interference term I , given B , as

$$\Phi_{I|B}(\omega) = \prod_{k=2}^K \Phi_{I_k|B}(\omega) \quad (13)$$

Let, $\xi|B = I|B + n_1$, where n_1 is a Gaussian random variable representing the background noise, $I|B$ is the total other-user interference given B , and $\xi|B$ is the total disturbance given B . Since the other-user interference and background noise are independent, we have

$$\Phi_{\xi|B}(\omega) = \Phi_{I|B}(\omega) \Phi_{n_1}(\omega) = \Phi_{n_1}(\omega) - [1 - \Phi_{I|B}(\omega)] \Phi_{n_1}(\omega) \quad (14)$$

We use the Fourier inversion formula for the real integral to find the distribution function of $\xi|B$, $F_{\xi|B}(\cdot)$ which is to be used to calculate the BER, as

$$F_{\xi|B}(\xi) = \frac{1}{2} + \frac{1}{\pi} \int_0^{+\infty} \frac{\Phi_{I|B}(\omega)}{\omega} \sin(\xi\omega) d\omega \quad (15)$$

The conditional BER for our target user can be expressed, by symmetry, as

$$P_{e|A_1, B} = P\{\xi < -A_1 N\} = 1 - F_{\xi}(A_1 N) = \frac{1}{2} - \frac{1}{\pi} \int_0^{+\infty} \frac{\sin(A_1 N \omega)}{\omega} \Phi_{\xi|B}(\omega) d\omega = Q\left(\frac{A_1 N}{\sigma_{n_1}}\right) + \frac{1}{\pi} \int_0^{+\infty} \frac{\sin(A_1 N \omega)}{\omega} \times [1 - \Phi_{I|B}(\omega)] \Phi_{n_1}(\omega) d\omega \quad (16)$$

Averaging over the pdf of A_1 , and using the integral identity

$$\int_0^{+\infty} \sin(kx)xe^{-x^2/2} dx = \sqrt{\frac{\pi}{2}}ke^{-k^2/2} \quad (17)$$

we have,

$$P_{elB} = \frac{1}{2} \left[1 - \frac{N}{\sqrt{\sigma_{n1}^2 + N^2}} \right] + \frac{N}{\sqrt{2\pi}} \int_0^{+\infty} [1 - \Phi_{lB}(\omega)] \Phi_{n1}(\omega) \times \exp\left\{-\frac{1}{2}\omega^2 N^2\right\} d\omega \quad (18)$$

which finally yields,

$$P_{elB} = \frac{1}{2} - \frac{N}{\sqrt{2\pi}} \int_0^{+\infty} \Phi_{lB}(\omega) \Phi_{n1}(\omega) \exp\left\{-\frac{1}{2}\omega^2 N^2\right\} d\omega \quad (19)$$

where the characteristic function of noise is given by

$$\Phi_{n1}(\omega) = e^{-\{v^2(1-\varepsilon)^2 + k^3v^2\varepsilon^2\}\omega^2} \quad (20)$$

IV. ROBUST MULTIUSER DETECTION

The basic idea of M -estimator based multiuser detection is to detect the symbols in (1) by first estimating the vector $\theta(i)$, and then extracting symbol estimates from these continuous estimates [1] & [2]. The required estimates of $\theta(i)$ are obtained by using M -estimators proposed by Huber [3]. M -estimators minimize a sum of function $\rho(\cdot)$ of the residuals

$$\hat{\theta}(i) = \arg \min_{\theta(i) \in C^L} \sum_{n=1}^N \left\{ \rho \left(\Re \left\{ y_n(i) - \sum_{k=1}^L [A]_{nk} \theta_k(i) \right\} \right) + \rho \left(\Im \left\{ y_n(i) - \sum_{k=1}^L [A]_{nk} \theta_k(i) \right\} \right) \right\} \quad (21)$$

where $y_n(i)$ and $\theta_k(i)$ are the n th and the k th element of the vectors $\mathbf{y}(i)$ and $\boldsymbol{\theta}(i)$, respectively, $[A]_{nk}$ is the n, k th element of the matrix \mathbf{A} , \Re denotes imaginary part, and ρ is a symmetric, positive-definite function with a unique minimum at zero, and is chosen to be less increasing than square. Suppose that ρ has a derivative ($\psi = \rho'$), then the solution to (21) satisfies the implicit equation

$$\sum_{n=1}^N \left\{ \psi \left(\Re \left\{ y_n(i) - \sum_{k=1}^L [A]_{nk} \theta_k(i) \right\} \right) + \psi \left(\Im \left\{ y_n(i) - \sum_{k=1}^L [A]_{nk} \theta_k(i) \right\} \right) \right\} [A]_{nk} = 0, k=1, \dots, L \quad (22)$$


In an impulsive noise environment, a more efficient estimator can be obtained by considering a less sensitive function $\rho(\cdot)$ of the residuals. Hence, the following penalty function $\rho(\cdot)$ and the corresponding influence functions $\psi(\cdot)$ are proposed (also see Figure 1)

$$\rho_{PROPOSED}(x) = \begin{cases} \frac{x^2}{2}, & \text{for } |x| \leq a \\ \frac{a^2}{2} - a|x|, & \text{for } a < |x| \leq b \\ -\frac{ab}{2} \exp\left(1 - \frac{x^2}{b^2}\right) + d, & \text{for } |x| > b \end{cases} \quad (23)$$

and

$$\psi_{PROPOSED}(x) = \begin{cases} x, & \text{for } |x| \leq a \\ a \operatorname{sgn}(x), & \text{for } a < |x| \leq b \\ \frac{a}{b} x \exp\left(1 - \frac{x^2}{b^2}\right), & \text{for } |x| > b \end{cases} \quad (24)$$

where d is a constant.

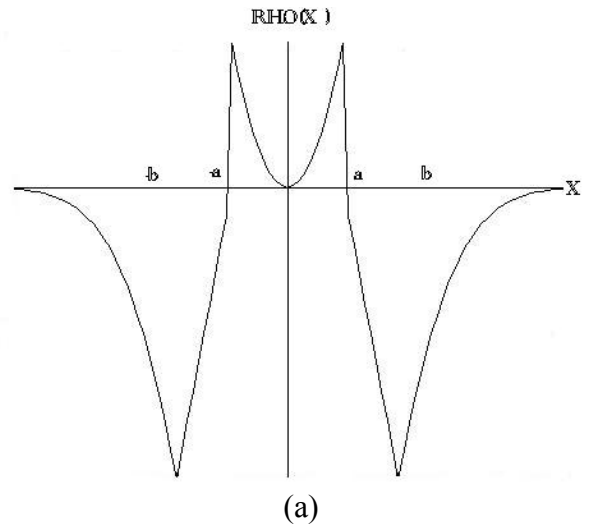

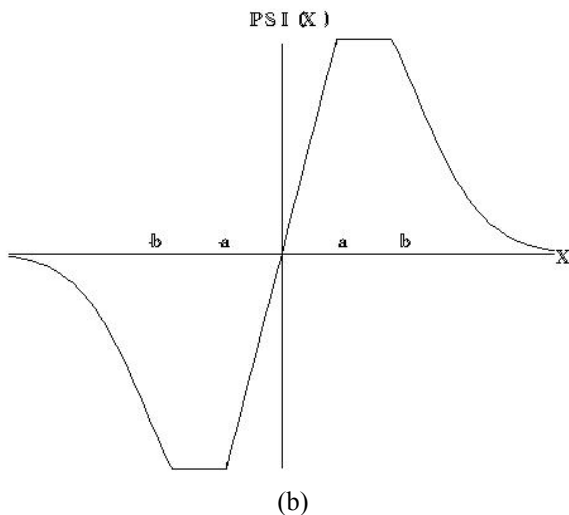


Figure 1. (a) Penalty function and (b) influence functions of the proposed estimator

V. SIMULATION RESULTS

In simulations, a CDMA system with 6 users, in which the spreading sequence of each user is a shifted version of m -sequence, is considered. The fading channel is modeled (having a perfect knowledge of the channel coefficients $g_l(i)$ ($l=1,2,\dots,L$)) as [5]. The performance of the proposed detector as a function of signal-to-noise ratio (SNR) in asynchronous flat-fading non-Gaussian channel (with $\epsilon = 0.1$ and 0.01 , $\kappa = 100$) for $N=127$ is shown in Fig. 2 and 3. The bit rate, the pole radius, and the spectral peak frequency have been fixed at $1/T=10Kb/s$, $r_d = 0.998$, and $f_p = 80Hz$.

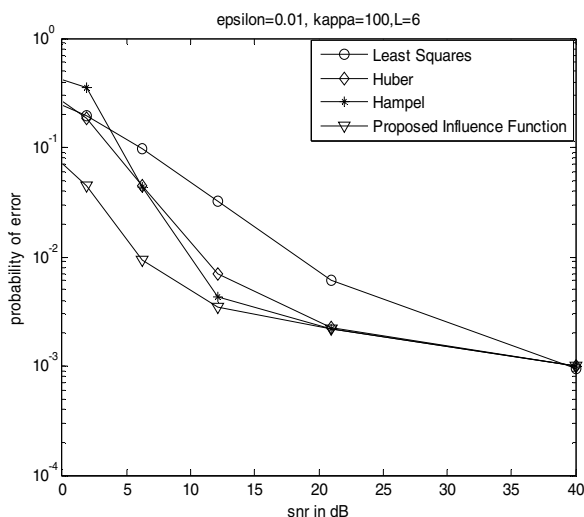


Figure 2. Probability of error versus SNR for user 1 for the considered detectors in asynchronous flat-fading CDMA channel with non-Gaussian noise. $N=127$.

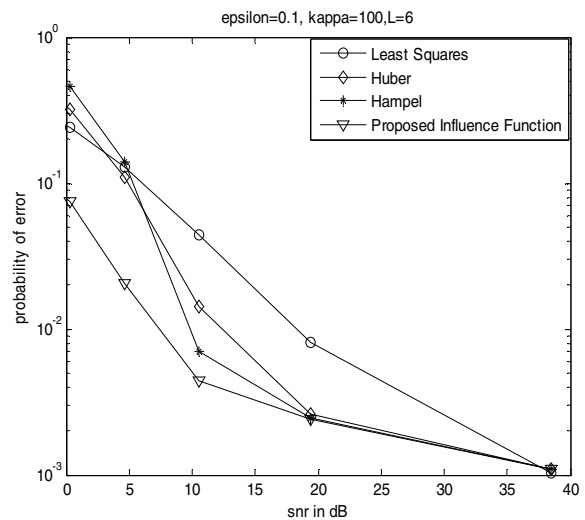


Figure 3. Probability of error versus SNR for user 1 for the considered detectors in asynchronous flat-fading CDMA channel with non-Gaussian noise. $N=127$.

These Simulation results show that the proposed detector with the proposed influence function outperforms the linear decorrelating detector and minimax detectors (with Huber and Hampel estimators) in asynchronous flat-fading non-Gaussian channels.

VI. CONCLUSIONS

In this paper, a new closed-form expression is derived for computing the average BER in asynchronous flat-fading non-Gaussian channels using the characteristic function method. Further a new M -estimator based multiuser detection technique is proposed that is seen to significantly outperform linear decorrelating detector and minimax detectors (with Huber and Hampel M -estimators) in asynchronous flat-fading CDMA channels with impulsive noise with little attendant increase in the computational complexity.

REFERENCES

- [1] X. Wang and H. V. Poor, "Robust multiuser detection in non-Gaussian channels," *IEEE Trans. Signal Processing*, vol. 47, 289-305, Feb. 1999.
- [2] T. Anil Kumar, and K. Deerga Rao, "Improved robust techniques for multiuser detection in non-Gaussian channels," *Circuits Systems and Signal Processing J.*, Vol. 25, No. 4, 2006.
- [3] P. J. Huber, *Robust Statistics*. New York: Wiley, 1981.
- [4] F. R. Hampel et al., *Robust Statistics: The Approach Based on Influence Functions*. New York: Wiley, 1986.
- [5] Z. Zvonar and D. Brady, "Multiuser detection in single-path fading channels," *IEEE Trans. Commun.*, vol. 42, pp. 1729-1739, Feb.-Apr. 1994.
- [6] J. Cheng and N. C. Beaulieu, "Accurate DS-CDMA Bit-Error Probability Calculation in Rayleigh Fading," *IEEE Trans. Wireless Commun.*, vol. 1, pp. 3-15, Jan. 2002.