

Arbitrary bending of optical solitonic beam regulated by boundary excitations in a doped resonant medium

Anjan Kundu^a, Tapan Naskar^b

^aTheory Division, Saha Institute of Nuclear Physics, 1/AF, Bidhannagar, Kolkata 700064, India

Temporary address: International Centre for Theoretical Physics, Trieste, Italy

^b Centre for Excellence in Basic Sciences, University of Mumbai, Vidhyanagari Campus, Mumbai - 400098, India

Abstract

Bending of a shape-invariant optical beam is achieved so far along parabolic or circular curves. Borrowing ideas used in nonlinear optical communication, we propose such a bending along any preassigned curve or surface, controlled by the boundary population inversion of atoms in an Erbium doped medium. The optical beam generated in a nonlinear Kerr medium and transmitted through a doped resonant medium as an accelerating soliton, predicted here, should be realizable experimentally and applicable to nonlinear events in other areas like plasma or ocean wave.

Keywords: bending of light beam, accelerating soliton, nonlinear optics, integrable system

1. Introduction

1.1. Bending of light beam

It is our long-standing dream, that it would be possible some day to produce a localized light beam in a medium, that could be bent to any preassigned curve maintaining its shape throughout the propagation. Such a self-accelerating beam would be able to self-bend around an obstacle, making it virtually invisible. However, the first step in achieving the bending of an optical beam through theoretical and experimental studies was taken quite late [1, 2], inspired by a pioneering work of Berry et al related to accelerating free quantum particles [3]. The beam, typically an Airy function solution of linear Schrödinger equation, could preserve its parabolic form over a finite distance. Subsequently, acceleration along an arbitrary curve was achieved, though at the cost of non-preservation of the shape [4]. Meanwhile bending of propagating solitons has been achieved in other fields, e.g. ring accelerator for matter-wave solitons [5], in chirped photonic lattices [6], self-bending of soliton in optical lattices [7] etc.

Bending of an optical beam along a circular path is reported recently for a shape-sustaining optical beam on a plane, breathing periodically in time, as a Bessel function related exact solution to the linear Maxwell equation in vacuum [8].

A parallel development has taken place involving nonlinear media, in which an Airy-like beam solution was found to the nonlinear Schrödinger (NLS) equation in a Kerr medium [9, 10]. Negating the prevailing scepticism, that symmetric nonlinearities can not produce self-accelerating soliton, a shape-invariant static beam oriented along a parabolic curve on a plane was obtained and generalized also to 3D, which subsequently have been verified in real experiments [11, 10].

Email addresses: anjan.kundu@saha.ac.in (Anjan Kundu), tapan.naskar@cbs.ac.in (Tapan Naskar)

Nevertheless, in all these exciting achievements, the bending of a shape-preserving beam is restricted basically to two specific curves: circular or parabolic, linked to the Airy or Bessel function solutions [1]-[3],[8]-[10]. This situation however falls way short of our expectation of having a stable optical beam that could bend along any desired curve, regulated by an arrangement in the medium and turn any object invisible by bending around it. We offer here a breakthrough by proposing a scenario close to the above expectation, where a localized 2D or 3D optical beam could be accelerated arbitrarily, resulting to its bending along an arbitrary curved path. The nature of the curve can be controlled by the boundary configuration of the population inversion of atoms in a doped resonant medium, through which the shape-invariant beam passes. Therefore, the optical beam can turn around an object of arbitrary shape without hitting it. The idea of our construction for the bending of an optical beam follows a path, fundamentally different from those adopted so far, as briefed above, and is inspired by a series of earlier studies in the nonlinear optical communication [13]-[22]. Though our proposal is based on theoretical models we hope its feasibility through future experiments.

1.2. Solitonic optical communication

Soliton based optical communication rests on the principle that, when the intensity of the optical pulses crosses a threshold value the fiber medium behaves nonlinearly, since the refractive index becomes intensity dependent. Moreover, the self-phase modulation (SPM) due to Kerr nonlinearity acts in opposition to the dispersion in the medium at the anomalous dispersion regime. At proper choice of the parametric set the effect of dispersion could be at perfect balance with that of the nonlinear SPM creating a condition for the stable solitonic pulse propagation of the electric field $E(t, z)$, with its dynamics governed by the NLS equation

$$iE_z + E_{tt} + 2|E|^2E = 0. \quad (1)$$

The well known and well studied NLS equation (1) can be derived from the Maxwell equation in a nonlinear medium [12]. Note that, fiber communication through an electric field, transmitted in a Kerr medium as a stable solitonic pulse moving with a constant velocity, was proposed long ago [13].

Another proposal, which gained popularity for improved transmission of nonlinear optical pulses, is due to self-induced transparency (SIT) produced by the coherent response of a medium to ultra short pulses [14]. The medium is doped usually with Erbium ions, since this rare earth material prominently exhibits an effective two-level energy spectrum (with $j = \frac{15}{2}$, as the ground state and $j = \frac{13}{2}$, as the excited state), though with a smearing of the levels due to the Stark effect. Moreover, the energy difference between these two levels is nearly equal to that of the wavelength at which soliton pulses are propagated. Therefore the resonant interaction makes the two-level medium optically transparent to that wavelength, inducing a SIT process. The interacting fields involve polarization p in the resonant medium induced by the propagating optical field E and population inversion (PI) N of an ensemble of two-level atoms. The resonant interaction these fields makes the two-level medium transparent to the wavelength at which the optical pulses propagate. Amplification and long-distance soliton transmission is now successfully achieved for practical purposes using distributed Er-doped fibers [15, 16, 17]. The dynamics of the fields is described by the SIT equations

$$iE_z = 2p, \quad ip_t = 2(N E - \omega_0 p), \quad iN_t = E^* p - p^* E, \quad (2)$$

which are reduced from the Maxwell-Bloch (MB) equations through an ensemble average together with assumptions of a sharp resonance and homogeneous broadening [14, 18, 19]. The SIT equations represent also an integrable system generating solitonic pulses moving with a constant velocity [14].

A subsequent important development is to combine these two models by suitably fabricating the optical fibers for coherent transmission of optical pulses. When a two-level resonant medium such as Er is doped with the core of the optical fiber the propagation of optical soliton is described by the MB equations (2), whereas the silica material of the fiber induces the solitonic propagation due to NLS equation (1). Therefore the wave propagation can have both these effects due to silica and doped medium, with Er-impurities accounting for the SIT effect. The dynamics of the combined system, with wave propagation in Er-doped optical fibers is governed by the coupled NLS-SIT equations

$$\begin{aligned} iE_z + E_{tt} + 2|E|^2E &= 2p, \\ ip_t &= 2(NE - \omega_0 p), \quad iN_t = E^*p - p^*E. \end{aligned} \quad (3)$$

In this NLS-SIT system an optical soliton, created in a Kerr medium, is transmitted through an Erbium doped resonant medium inducing polarization and excitation of the two-level dopant atoms, which has been theoretically predicted first by Maimistov and Manyakin [18] and since then been experimentally verified [19], extended further [20, 22] and implemented for practical usage [21, 15, 16, 17]. Further details on this combined system can be found in a recent monograph [21]. Since the ensemble of dopant atoms in the doped medium act as an effective two-level system with the energy gap between the levels being close to that of the wavelength of the propagating solitonic pulses, the resonant interaction induces a balance between the optical absorption and emission, sustaining a stable shape-preserving pulse propagation. Remarkably, this coupled system turns out also to be integrable admitting exact soliton solutions for all fields propagating with the same constant velocity.

1.3. The present aim

Our intention is to borrow the idea of this combined system, already in use in nonlinear optical communication and apply it in the present context of the optical beam bending on a 2D plane, by using the same governing equations (3), though adopting suitably for the current purpose. To achieve this we shift to a moving frame: $x = \frac{1}{v}(z + vt)$ and map the fields as

$$E(t, z) \rightarrow \tilde{E}(x, z), \quad p(t, z) \rightarrow \tilde{p}(x, z), \quad N(t, z) \rightarrow \tilde{N}(x, z), \quad (4)$$

Note that, since the NLSE and SIT equations are coupled, the solutions created for all the fields E, p, N belonging to these interacting equations move with the same group velocity as well as the soliton velocity, which therefore makes it possible to shift to coordinates (x, z) in the moving frame with a fixed velocity, simultaneously for all the fields. This translates the evolution in (3) as

$$E_z(t, z) = \tilde{E}_z(x, z), \quad E_{tt}(t, z) = \tilde{E}_{xx}(x, z), \quad p_t(t, z) = \tilde{p}_x(x, z), \quad N_t(t, z) = \tilde{N}_x(x, z), \quad (5)$$

due to the mutual independence of coordinates (t, z) as well as of (x, z) , rewriting equation (3), suitable for optical communication, to the stationary equations convenient for the light beam propagation:

$$iE_z + E_{xx} + 2|E|^2E = 2p, \quad (6)$$

coupled to the stationary SIT equation

$$ip_x = 2(NE - \omega_0 p), \quad iN_x = E^*p - p^*E, \quad (7)$$

involving induced polarization p and the population inversion N of the resonant medium. In (6,7) and their subsequent analysis we drop the $\tilde{}$ sign on the fields for convenience. In the Erbium doped medium

with effective two-level atoms the normalized wave functions may be given by ν and $\tilde{\nu}$ for the ground and the excited states, respectively with the optical field $E(x, z)$ inducing polarization $p(x, z) = \nu\tilde{\nu}^*$ in the resonant medium and interacting with the PI $N(x, z) = |\tilde{\nu}|^2 - |\nu|^2$, of the two-level atoms. As a result the PI profile can change within the range $-1 \leq N \leq +1$ and all interacting fields satisfying equations (6, 7) can *move* self-consistently in the form of stationary solitonic pulses with a constant *space*-velocity. In this set up therefore optical field can produce a localized straight beam without any bending. However, at a closer look, it is important to identify that the soliton velocity in a SIT system is linked to the PI of dopant atoms at the initial moment and its constancy is caused due to the conventional assumption of the initial PI taken to be a constant: $N_0 = 1$ [19, 22]. Note that since we have moved from the variables (t, z) to (x, z) the time t is replaced by the transverse dimension x and as a consequence the initial condition in time $|t| \rightarrow \infty$ is to be replaced in the present context by a transverse boundary condition in $|x| \rightarrow \infty$, as evident from the governing equations (6, 7). We will see below what happens, when this boundary condition is relaxed and will use it in favor of the beam bending scenario.

2. Arbitrary bending of a 2D beam

A crucial observation for coupled NLS-SIT system (6,7) is that, in place of fixing the PI at the transverse boundaries: $N(x, z)_{x \rightarrow \pm\infty} = N_0$ as a constant $N_0 = 1$, we may choose it to be an arbitrary function $N_0 = N_0(z)$, varying along the optical axis. Such a change may be made by exciting the dopant atoms at the boundaries not uniformly, but with variable intensities, irradiated suitably by laser pumping. This alteration in preparing the setup, however, can bring a significant change in the character of the optical solitonic beam propagating through the medium. Since the soliton velocity is linked to the boundary PI configuration in a straightforward way, the velocity itself becomes a function of z [22].

2.1. Lax pair formulation

For understanding the mechanism of creating an accelerating solitonic beam we have to go deeper into the integrable structure of the NLS-SIT system and look into its associated Lax pair $(U(\lambda), V(\lambda))$, which are given by a deformation of the well known Lax pair $(U_1(\lambda), V_2(\lambda))$ [23] associated with the NLS equation as

$$U(\lambda) = U_1(\lambda), \quad V(\lambda) = V_2(\lambda) + V_{-1}(\lambda), \quad (8)$$

with the addition of another matrix $V_{-1}(\lambda)$, containing the SIT fields: N, p, p^* and a negative power of the spectral parameter λ^{-1} [19, 20, 22]. These Lax operators may be given in the explicit form as

$$U_1(\lambda) = i(\lambda\sigma^3 + U^{(0)}), \quad U^{(0)} = \begin{pmatrix} 0 & E \\ E^* & 0 \end{pmatrix}, \quad (9)$$

$$V_2(\lambda) = 2i(\lambda^2\sigma^3 + \lambda U^{(0)}) + \sigma^3(U_x^{(0)} - iU^{(0)^2}), \quad (10)$$

and

$$V_{-1}(\lambda) = \frac{1}{\lambda - \omega_0} \begin{pmatrix} N & p \\ p^* & -N \end{pmatrix} \quad (11)$$

It is not difficult to check that the flatness condition:

$$U_z(\lambda) - V_x(\lambda) + [U(\lambda), V(\lambda)] = 0 \quad (12)$$

of the associated Lax pair (8) generates the NLS-SIT equation (6,7) revealing the integrability of the system, which admits an exact soliton solution in the form

$$\begin{aligned} E(x, z) &= -2i \operatorname{sech} 2\xi(x, z) e^{2i\theta(x, z)}, \quad \xi(x, z) = \eta(x - v(z)), \\ \theta(x, z) &= -kx + \omega(z), \end{aligned} \quad (13)$$

exhibiting variable solitonic velocity $v(z)$ and the modulation frequency $\omega(z)$, linked to the asymptotic value of the second Lax operator $V(\lambda)$ in (8) at $x \rightarrow \pm\infty$. Since the fields satisfy the boundary conditions

$$E(x \rightarrow \pm\infty, z) = 0, \quad p(x \rightarrow \pm\infty, z) = 0, \quad N(x \rightarrow \pm\infty, z) = N_0(z), \quad (14)$$

where the boundary PI $N_0(z)$ could be an arbitrary function of z along the optical axis, the boundary value of the Lax operator $V(\lambda)$ can be given as

$$V(\lambda, x \rightarrow \pm\infty) = (V_2(\lambda) + V_{-1}(\lambda))_{x \rightarrow \pm\infty} = (2i\lambda^2 + \frac{1}{\lambda - \omega_0} N_0(z)) \sigma^3. \quad (15)$$

Note that the first term in the boundary value of the Lax operator (15), coming from the NLS system is a constant, while the second term originating from the SIT system depends on the boundary PI: $-1 \leq N_0(z) \leq +1$, and could be an arbitrary function.

This possibility of achieving a z -dependent function at the boundaries in place of the conventional choice of $N_0 = 1$, gives rise to the variable soliton velocity and modulation frequency (13) as

$$v(z) = v_0 z + v_m f(z), \quad \omega(z) = \omega_0 z + \omega_m f(z), \quad (16)$$

with the variable parts of the velocity and the frequency linked to the PI profile at the transverse boundaries as

$$f(z) = \int_0^z dz' N_0(z').$$

The constant parts of the velocity and the frequency: v_0, ω_0 on the other hand are linked to the NLS, while the corresponding multiplicative factors: v_m, ω_m to the SIT contribution, as demonstrated in (15). We call $v(z)$ and $\omega(z)$ as the velocity and the modulation frequency for convenience, though strictly speaking their derivatives $v'(z) = v_0 + v_m N_0(z)$ and $\omega'(z) = \omega_0 + \omega_m N_0(z)$, should be the proper entries and be called the *space-velocity* and the *space-modulation frequency*, respectively. Consequently, the intensity of the optical field in the system (6,7) given as a solitonic beam (13) can move with a variable velocity determined by the variable boundary PI profile $N_0(z)$. Therefore the *space-acceleration* of the beam: $|v''(z)| \equiv R^{-1}(z) = v_m N_0'(z)$, becomes a nontrivial function inducing a bending of the optical beam along a curve with variable curvature $R(z)$. It is illuminating to see, that for the conventional treatment with constant boundary PI giving $N_0' = 0$, the soliton acceleration would be zero inducing no bending for the beam. However, in the more general set up we are considering here, the intensity of the solitonic beam (13) being maximum at $\xi(x, z) = 0$, the optical beam with its peak intensity would bend along the curve $x = v(z)$ in the (x, z) plane, where arbitrary function $v(z)$ is fixed by the boundary setting of the PI profile $N_0(z)$. Notice again, that for a constant value of the boundary PI: $N_0 = 1$, the intensity peak of the beam reduces to a straight line $x = (v_0 + v_m)z$. Note, that unlike the infinite energy Airy beam obtained earlier, the optical beam produced here is exponentially localized as a finite energy soliton solution. It is important to note for physical applications that, since the curve-generating arbitrary function $v(z)$ is determined by the variable boundary PI profile $N_0(z)$, one can tune the form of the curve, along which the beam would

bend, by suitably designing and maintaining the PI configuration of the dopant atoms at the transverse boundaries.

We present below examples of different curves (Fig. 1 a-d) along which the peak intensity of the solitonic optical beam could bend. These curves can be generated for different choices of the arbitrary function $v(z)$, linked to the transverse boundary PI profile.

i) $v(z) = az^2$, would induce bending of an optical beam along a *parabolic* curve (Fig. 1a).

ii) $v(z) = (r - \alpha z^2)^{\frac{1}{2}}$ corresponds to an *elliptic* curve along which an optical solitonic beam could bend (Fig. 1b). The curve naturally degenerates to a *circle* for $\alpha = 1$.

iii) $v(z) = bz^{-1}$ would give a *hyperbolic* curve for the bending of the beam (Fig. 1c).

iv) For the choice $v(z) = asinkz$, an optical beam would follow a *periodic* curve (Fig. 1d).

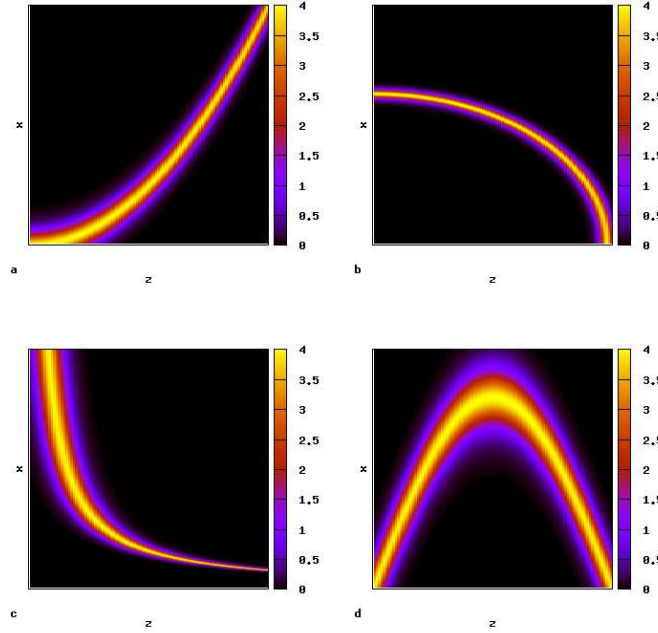


Figure 1: Examples of the possible bending of an optical beam along different curves. The panels show the peak intensity of an optical beam in the first quadrant of the plane (a) along a parabolic curve $x = az^2$, $a = 0.1$, (b) an ellipse: $x^2 + \alpha z^2 = r$, with $\alpha = 0.4$, $r = 40.0$, (c) a hyperbola $xz = b$, $b = 8.0$ and (d) a periodic curve: $x = asinkz$, with $a = 8.0$, $k = 0.3$.

This result demonstrates, that in our setup the bending of an optical 2D beam can be achieved along any desired planer curve, by suitably choosing an arbitrary function, linked to the boundary PI. Therefore, the nature of the curve along which the optical beam bends, can be controlled by presetting the boundary population inversion, which in turn could be realized by properly preparing the excitation profile of the dopant atoms along the boundaries in the transverse dimension. Note, that we obtain here an exact self-accelerating shape-invariant solitonic beam in an integrable system, seemingly contradicting the common belief, that accelerating soliton can not exist in such a system due to its strict conservation laws. Resolution of this apparent paradox is that, here the acceleration of the soliton is linked to an arbitrary boundary function, which serves as an external source of energy and should also be included for the validity of the conservation laws.

3. Arbitrary bending of 3D beam

To generalize the above result on the bending of an optical beam to higher dimensions, we include another transverse dimension y , since our bigger goal is to achieve arbitrary bending of a beam in a physical space. Therefore we look for creating an optical soliton beam, that could move with an arbitrary acceleration in a 3D space. Unfortunately, the conventional extension of the NLS equation to higher dimensions with cubic nonlinearity will not serve our purpose, since it does not allow a stable soliton [24]. We focus therefore on an integrable extension of the NLS equation obtained by replacing the standard cubic term by a current like nonlinearity [25, 26]. In analogy with the NLS-SIT system presented above, we couple this higher dimensional NLS equation:

$$iE_z + E_{yx} + 2iE(E^*E_x - EE_x^*) = 2p, \quad (17)$$

to the SIT equation (7), where the interacting fields: the optical field, the induced polarization and the PI of the dopant atoms, are given now in a 3D space, with x, y as transverse dimensions and z as the optical axis.

Remarkably, the set of coupled higher-dimensional equations (7) and (17) turns out also to be an integrable system allowing a Lax pair formulation given by

$$U(\lambda) = U_2(\lambda), \quad V(\lambda) = V_3(\lambda) + V_{-1}(\lambda), \quad (18)$$

where the pair $(U_2(\lambda), V_3(\lambda))$ could be related to the integrable 2D NLS equation [25, 26] and $V_{-1}(\lambda)$ is given in the same form as (11). The flatness condition (12) of this Lax pair generates the integrable set of coupled 2DNLS-SIT equations (17, 7) together with a 1D NLS like constraint. The 2DNLS-SIT equations admit also solitonic beam solution for the optical field with intensity: $|E| = 2\text{sech}\xi$, $\xi = 2(x - vy - V(y, z))$, moving with a self-accelerated motion in space. Since the peak-intensity of the soliton is exponentially localized at $\xi = 0$, this shape-invariant optical beam would self-bend over an arbitrarily curved surface $x = vy + V(y, z)$. Note that the form of this surface embedded in a 3D space is determined by an arbitrary function $V(y, z)$, in y and z , which in turn is linked to the boundary setting of the PI function along $x \rightarrow \pm\infty$: $N(x \rightarrow \pm\infty, y, z) = N_0(y, z) = \frac{1}{v_m}(\partial_z V(y, z))$, similar to the 2D case (16), considered above.

Therefore, it is possible to realize the bending of a 3D optical beam over any preassigned surface by suitably maintaining the population inversion profile of dopant atoms along the boundaries in a transverse direction x , generalizing the 2D model. We consider an example of a surface: a circular paraboloid open along x , over which a 3D beam can bend. Fig. 2 shows a circular and a parabolic curve obtained as sections of this surface. Such an optical beam can curve around a 3D object placed inside the hollow of the cup, turning it invisible. Other choices for the surface-generating function $V(y, z)$ and hence for the boundary PI $N_0(y, z)$ would result to other forms of the surface in a 3D space.

4. Concluding remarks

We have borrowed an idea, actively used in nonlinear optical fiber communication, and applied it in the context of optical beam bending. The results obtained here show, that an optical beam created in a nonlinear Kerr medium in resonant interaction with an Erbium doped medium, can move as a shape-invariant localized soliton with a constant velocity. The constancy of the soliton velocity is caused by the conventional assumption of an uniform boundary condition for the population inversion of the dopant atoms. However, when the boundary values of the population inversion becomes nonuniform, the optical

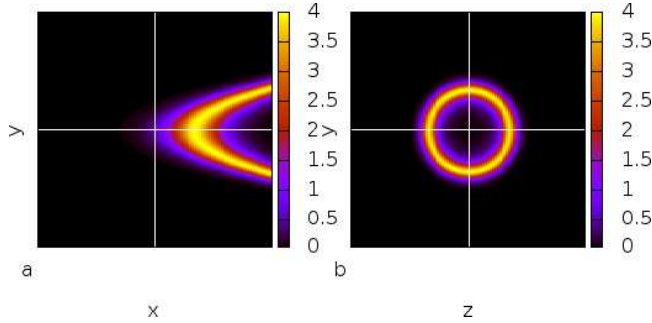


Figure 2: The panels show two sections of a paraboloid giving a) a parabolic curve at a vertical section $z = 0.0$ and b) a circle at a horizontal section $x = 3.0$. Such a surface on which the peak intensity of a 3D optical solitonic beam is localized, is obtained for a specific choice of the surface generating function,

soliton beam can acquire an arbitrary acceleration, inducing the peak intensity of the beam to follow an arbitrary curve or a surface. The desired form of this curved path traversed by the beam, can be controlled by carefully exciting the atoms of the doped medium, along the boundaries in a transverse direction. Excitation of the dopant atoms with variable intensity, could be created and maintained at the boundaries by means of external laser pumping. This regulated pumping of external energy into the system would be in fact responsible for the accelerated motion of the optical solitonic beam. The outcome of the present theoretical study is a possible prediction, viability of which would depend on the proper and clever experimental set up, which would be an experimental challenge. However in setting up the relevant experiment utmost care should be taken in overcoming the difficulty faced in realizing the needed stationary regime for the Bloch waves, since ultrafast fields are involved in the SIT equations [27]. Nevertheless, we do hope that this theoretical possibility of bending an optical beam beyond the reported parabolic and circular curves, based on the idea used in nonlinear optical communication, would be feasible for experimental verification, opening up new vistas of practical applications. Unlike the infinite energy spread-out solutions related to the Airy or Bessel functions used earlier for obtaining the bending of an optical beam, our proposal based on a finite energy soliton solution offers a strictly localized beam with a tightly curved path travelled by it. Moreover, due to the importance of the NLS equation and the soliton solution in nonlinear phenomena in diverse areas in physics like plasma, ocean wave, optical communication etc. the possibility of creating accelerating solitons in related systems should be of significant applicable interest.

5. Acknowledgement

A. Kundu, as Senior Associate of ICTP, Italy wants to thank the Centre, where this work was completed, for its continuing support.

References

- [1] G. A. Siviloglou and D. N. Christodoulides, Accelerating finite energy Airy beams, *Opt. Lett.* **32**, 979 (2007).
- [2] G. A. Siviloglou, J. Broky, A. Dogariu and D. N. Chistodoulides ,Observation of Accelerating Airy Beams *Phys. Rev. Lett.* **99**, 213901 (2007).
- [3] M. V. Berry and N. L. Balazs, Nonspreading Wave Packets, *Am. J. Phys.* **47**, 264 (1979).

- [4] E. Greenfield, M. Segev, W. Walasik and O. Raz, Accelerating Light Beams along Arbitrary Convex Trajectories, *Phys. Rev. Lett.* **106**, 213902 (2011).
- [5] A. V. Carpentier and H. Michinel, A ring accelerator for matter-wave solitons, *Euro Phys. Lett.* **78** 10002 (2007)
- [6] Y. V. Kartashov, V. A. Vysloukh and L. Torner, Soliton control in chirped photonic lattices, *J Opt. Soc. America B-Opt. Phys* **22** 1356 (2005)
- [7] Y. V. Kartashov, V. A. Vysloukh and L. Torner, Tunable soliton self-bending in optical lattices with nonlocal nonlinearity, *Phys. Rev. Lett.* **93** 153903 (2004)
- [8] I. Kaminer, R. Bekenstein, J. Nemirovsky and M. Segev, Nondiffracting Accelerating Wave Packets of Maxwells Equations, *Phys. Rev. Lett.* **108**, 163901 (2012).
- [9] I. Kaminer, M. Segev and D. N. Christodoulides, Self-Accelerating Self-Trapped Optical Beams, *Phys. Rev. Lett.* **106**, 213903 (2011).
- [10] A. Lotti, D. Faccio, A. Couairon, D. G. Papazoglou, P. Panagiotopoulos, D. Abdollahpour and S. Tzortzakis, Stationary nonlinear Airy beams, *Phys. Rev. A* **84**, 021807 (2011).
- [11] I. Dolev, I. Kaminer, A. Shapira, M. Segev and A. Arie, Experimental Observation of Self-Accelerating Beams in Quadratic Nonlinear Media, *Phys. Rev. Lett.* **108**, 113903 (2012).
- [12] G. P. Agarwal, *Nonlinear Fiber Optics* (Acad. Press, N.Y., 2007).
- [13] A. Hasegawa and F. D. Tappert, Transmission of stationary nonlinear optical pulses in dispersive dielectric fibers. I. Anomalous dispersion , *Appl. Phys. Lett.* **23**, 142 (1973);
A. Hasegawa, *Optical Fiber Solitons* (Springer,Berlin, 1989)
- [14] S. L. McCall and E. L. Hahn, Self-Induced Transparency by Pulsed Coherent Light, *Phys. Rev. Lett.* **18**, 908 (1967);
G. L. Lamb Jr., *Rev. Mod. Phys.* Analytical Descriptions of Ultrashort Optical Pulse Propagation in a Resonant Medium, **43**, 99 (1971).
A. I. Maimistov, A.M. Basharov, S.O. Elyutin, Yu.M. Sklyarov, Present state of self-induced transparency theory, *Phys. Rep.* **191**, 1 (1990)
- [15] K. Rottwitt et al, Long-distance transmission through distributed Er-doped fibers, *J. Lightwave Technology* **11**, 2105 (1993)
- [16] K. Suzuki and Y. Kimura, 20-GHz Soliton amplification transmission with Er³⁺-doped fiber, *Opt. Lett.* **14**, 1065 (1989)
- [17] S. Wen, Distributed Erbium-doped fiber amplifier for soliton transmission, *Opt. Lett.* **19**, 22 (1994)
- [18] A. I. Maimistov and E. A. Manyakin, *Sov. Phys. JETP* **58**, 685 (1983).
- [19] M. Nakazawa, E. Yamada and H. Kubota, Coexistence of self-induced transparency soliton and non-linear Schrödinger soliton, *Phys. Rev. Lett.* **66**, 2625 (1991);
- [20] K. Porsezian and K. Nakkeeran, Optical Soliton Propagation in an Erbium Doped Nonlinear Light Guide with Higher Order Dispersion, *Phys. Rev. Lett.* **74**, 2941 (1995).

- [21] S. Bhadra and A. Ghatak, *Guided Wave Optics and Photonic Devices* (CRC Press, Taylor and Francis Group), 2013.
- [22] A. Kundu, Hidden possibilities in controlling optical soliton in fiber guided doped resonant medium , *AIP Advances* **1**, 022137 (2011).
- [23] S. Novikov et al , *Theory of Solitons* (Consultants Bureau, NY, 1984); M. Ablowitz, D. J. Kaup, A. C. Newell and H. Segur, *Stud. Appl. Math.* **53**, 294 (1974).
- [24] A. R. Osborne, M. Onorato, and M. Serio, The nonlinear dynamics of rogue waves and holes in deep-water gravity wave trains, *Physics Letters A* **275**, 386 (2000).
- [25] A. Kundu, Unraveling hidden hierarchies and dual structures in an integrable field model, arXiv: 1201.0627 [nlin.SI], 2012.
- [26] A. Kundu and A. Mukherjee, Novel integrable higher-dimensional nonlinear Schroedinger equation: properties, solutions, applications, arXiv:1305.4023 [nlin.SI], 2013.
- [27] A. I. Maimistov (*private communication*)