

Ionization Efficiency Study for Low Energy Nuclear Recoils in Germanium

D. Barker^a, W.-Z. Wei^a, D.-M. Mei^{a,*}, and C. Zhang^{a,b}

^a*Department of Physics, The University of South Dakota, Vermillion, South Dakota 57069*

^b*College of Sciences, China Three Gorges University, Yichang 443002, China*

Abstract

We used the internal conversion (E_0 transition) of germanium-72 to indirectly measure the low energy nuclear recoils of germanium. Together with a reliable Monte Carlo package, in which we implement the internal conversion process, the data was compared to the Lindhard ($k=0.159$) and Barker-Mei models. A shape analysis indicates that both models agree well with data in the region of interest within 4%. The most probable value (MPV) of the nuclear recoils obtained from the shape analysis is 17.5 keV with an average path-length of 0.014 μm .

Key words: Nuclear Recoil, Ionization Efficiency, Dark Matter Detection
PACS: 95.35.+d, 07.05.Tp, 25.40.Fq, 29.40.Wk

1 Introduction

Understanding detector response to low energy nuclear recoils is imperative to the interpretation of experimental results from a detector designed to search for WIMPs (weakly interacting massive particles), a dark matter candidate. Direct detection of low mass WIMPs occurs in the low energy region of detectors with a threshold down to sub keV. Since the threshold energy represents the visible energy in the detector, understanding the ionization efficiency of the detector response to low energy nuclear recoils is crucial to calculating the recoil energy. An example of the need for this requirement is the claim of experimental evidence for dark matter by CoGeNT [1] that has been unverified by CDMS II [2]. Both experiments use germanium as the target material. Thus,

* Corresponding author.

Email address: Dongming.Mei@usd.edu (D.-M. Mei).

similar results are expected if the detection thresholds for both experiments were determined using a standardized ionization efficiency, which accurately accounts for all processes that occur at a low energy range. This standardized ionization efficiency must also be validated with measurements in combination with reliable Monte Carlo simulations.

Two different approaches can be used for modeling ionization efficiency in germanium detectors [3,4]. One model, traditionally used for a number of different detector materials, is proposed by Lindhard *et. al.* [3]:

$$\varepsilon = \frac{k \cdot g(\epsilon)}{1 + k \cdot g(\epsilon)}, \quad (1)$$

where, Z is the atomic number, A is the mass number, E_r is the recoil energy, $k = 0.133Z^{2/3}A^{-1/2}$, $g(\epsilon) = 3\epsilon^{0.15} + 0.7\epsilon^{0.6} + \epsilon$, and $\epsilon = 11.5E_rZ^{-7/3}$. However, this model has not been proved accurate at low energies as the theoretical derivation has uncertainties in this region [3].

Another model designed for low energy interactions in germanium was proposed by Barker and Mei [4]. This model takes into account the fraction of nuclear stopping power that contributes to the ionization efficiency at low energies [4]. The Barker-Mei model can be expressed as:

$$\varepsilon_c = \frac{0.14476 \cdot E_r^{0.697747}}{-1.8728 + \exp[E_r^{0.211349}]} \quad (2)$$

This model is valid for recoil energies, E_r , from 1 keV to 100 keV. However, the Barker-Mei model has not been experimentally verified; this paper addresses that issue.

A comparison between the two models and existing data was performed [4], and Fig. 1 shows both models together with available experimental data. As shown in Fig. 1, the two models agree in the low energy region but disagree with the available data points in the same region. Further validation of the Lindhard and Barker-Mei models, using more measurements and accurate Monte Carlo simulations, is necessary.

Taking exact nuclear recoil measurements can be challenging at lower energies when systematic errors are introduced by a variety of sources. For example, thermal neutrons and elastic/inelastic scattering will have their own uncertainties. Utilizing thermal neutrons requires the full absorption of out-going gamma rays measured by another detector in coincidence. Without this additional measurement, Compton scattering from out-going gamma rays within the germanium detector can contaminate the visible energy. In a measurement of neutron elastic scattering, a Monte Carlo simulation must be incorpo-

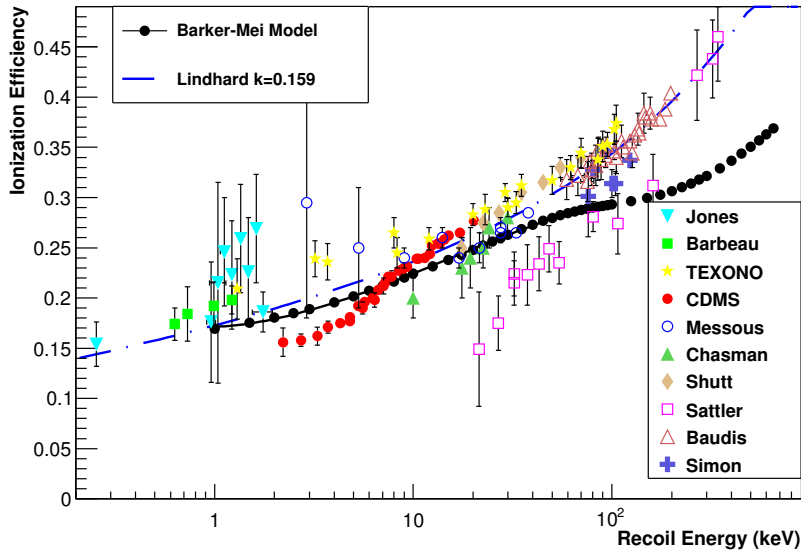


Fig. 1. The Barker-Mei and Lindhard models of ionization efficiency with the experimental data [5,6,7,8,9,10,11,12,13].

rated to exclude multiple scatters. It is also necessary to precisely measure the scattering angle and time-of-flight of the out-going neutrons. With inelastic scattering, the Compton scattering due to de-excitation of gamma rays in the detector can contaminate the signal. All of these techniques need to be implemented with an accurate Monte Carlo that reduces systematic errors in order to obtain a reliable ionization efficiency. However, current popular simulation tools often need to be tuned to simulate inelastic scattering processes.

Therefore, we desired a simple method to accurately measure nuclear recoils in germanium. The E_0 transition of germanium-72 ($^{72}\text{Ge}(n,n'e)$), which is the internal conversion process for this nucleus, was chosen. The E_0 transition of $^{72}\text{Ge}(n,n'e)$ is induced when neutrons inelastically scatter off a ^{72}Ge nucleus. After this collision, the ^{72}Ge nucleus is left in an excited state. When the nucleus returns to ground state, it does not produce a gamma-ray (as is common for other nuclei), but interacts electromagnetically with the inner shell electrons and causes one to be emitted from the atom [14]. The physics process for the internal conversion of ^{72}Ge can be generalized as:

$$n + {}^{72}\text{Ge} \longrightarrow n' + {}^{72}\text{Ge}^* \leftrightarrow {}^{72}\text{Ge} + e^- + X\text{-ray}, \quad (3)$$

where $^{72}\text{Ge}^*$ denotes the excited 0^+ state. The total detectable energy from the $^{72}\text{Ge}^*(0^+)$ to $^{72}\text{Ge}(0^+)$ transition is 691.6 keV, which includes energy from the X-ray. This energy is well within the visible range of traditional detectors, and both electron and X-ray can be detected with a consistency of approximately 100%. The characteristic energy 691.6 keV is superimposed with the

nuclear recoil of a ^{72}Ge nucleus to form a quasi-triangular shape, which is distinguishable from other processes in the spectrum. Thus, we can observe low energy nuclear recoils without taking low energy nuclear recoil measurements. The quasi-triangular shape, starting at 691.6 keV, has been studied in great detail [15,20,21,22,23]. The tail of the quasi-triangular shape is a combination of the 691.6 keV energy deposition and nuclear recoil energy due to neutron scattering.

Depending on the incident neutron energy and scattering angle [15], nuclear recoil energy can be expressed as:

$$E_r = \frac{4mME_n}{(M+m)^2}(\cos^2\theta), \quad (4)$$

where E_r is the nuclear recoil energy, E_n is the neutron energy, M is the nucleus mass, m is the neutron mass, and θ is the scattering angle between the incident neutron and the recoil nucleus. The quasi-triangular shape is created by adding the energy from the nuclear recoils to 691.6 keV energy deposition as:

$$E = 691.6\text{keV} + \epsilon \cdot E_r, \quad (5)$$

where E is the observed energy and ϵ is the ionization efficiency. The nuclear recoil energies can be determined using a Monte Carlo simulation with applied ionization efficiency, if an agreement with the measurements is obtained.

To validate the ionization efficiency models proposed by Lindhard and Barker-Mei, a Geant4.9.2-based Monte Carlo simulation package, corrected for the internal conversion processes [16], was used. This simulation package was verified using a well-calibrated ^{60}Co radioactive source with the same experimental setup.

Utilizing the measurements with a substantiated Monte Carlo simulation, we compared the unique quasi-triangular shape induced by the 691.6 keV electrons and nuclear recoils in the data with Monte Carlo simulations for the two models. Shape analysis was used to verify the quasi-triangular shape of spectra in the data and Monte Carlo simulations by analyzing data points in the region of interest. We found a good agreement between measurements and the Lindhard (with $k = 0.159$) and Barker-Mei models.

In this paper, we corroborate the ionization efficiency models proposed by Lindhard *et al* and Barker-Mei with a neutron induced E_0 transition for ^{72}Ge . The experimental design is discussed in Section 2 followed by data analysis in Section 3. The Monte Carlo simulation is demonstrated and validated in Section 4, and the comparison with data described in Section 5. Section 6 summarizes our results.

2 Experimental Design

The germanium detector used in our experiment was an old coaxial detector from Princeton Gamma Tech, model RG11B/C [17]. Its linearity of energy response between consecutive calibrations was within 0.35%. However, the full width at half maximum (FWHM) was 7.1 keV at the 1173 keV ^{60}Co peak, a factor of two worse in energy resolution than a new germanium detector. Nevertheless, the detector was sufficient for measuring neutron induced internal conversion. We used an ^{241}Am - ^9Be (AmBe) source with neutron energies ranging from ~ 1.0 to 11.2 MeV at a frequency of 100 Hz [18].

An AmBe neutron source produces neutrons in four discrete groups, n_0 , n_1 , n_2 , and n_3 , which populate the ground state, the 4.443 MeV level, the 7.65 MeV level, and the 9.64 MeV level of the ^{12}C product nucleus, respectively [24,25]. The n_1 group neutrons, accompanied by 4.443 MeV gamma rays, dominate the production of neutrons in an AmBe source [24,25]. This feature allows us to set up a coincidence measurement using sodium-iodide (NaI) detectors (Bicron model number 3M3/3 [19]) with a threshold of above 1 MeV. Utilizing this coincidence method, the NaI detectors will measure gamma rays while neutrons are being detected with the germanium detector. This coincidence pattern required that the NaI and Ge detectors both trigger in order for an event to be recorded, suppressing random background events generated by gamma rays from surrounding materials. We took approximately 22 days of data with three NaI detectors and 13 days of data with two NaI detectors.

Due to the low neutron emission, the source was placed on the center of the Ge detector cap and held in place by electrical tape. When using three NaI detectors, they were placed on the right, the left, and directly in front of the germanium detector. When using two NaI detectors, they were placed on the right and on the left of the germanium detector. Fig. 2 shows the experimental set-up. The data acquisition was performed using a National

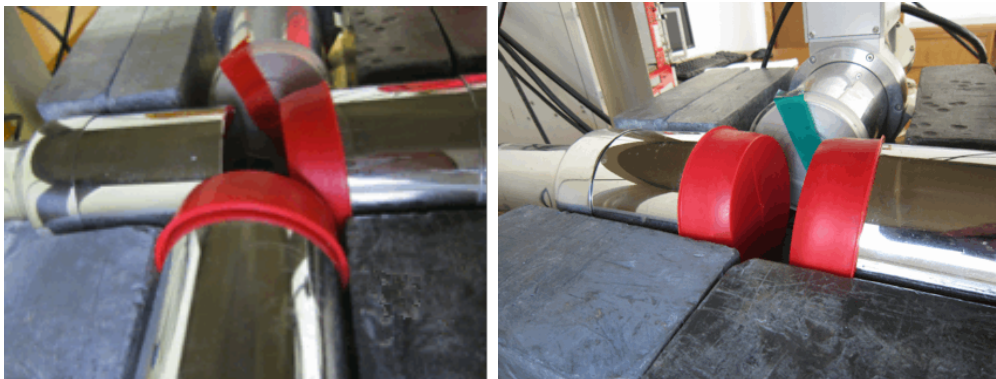


Fig. 2. Experimental setup for Ge and NaI detectors. Left: Three NaI detectors. Right: Two NaI detectors.

Instruments PXI-1031 system [26] and Igor Pro 4.07 software [27]. Each run lasted approximately 4.5 days. The data from each individual run was added consecutively off-line using analysis code from the Root software package [28]. Evidence of the 691.6 keV E_0 transition peak can be seen in Fig. 3.

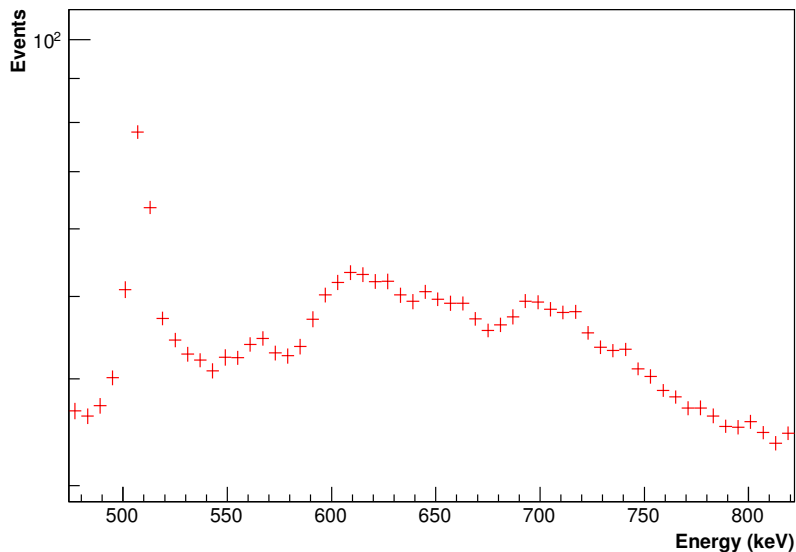


Fig. 3. Data taken with AmBe source after 35 days.

3 Experimental Results

3.1 Data Analysis

After 35 days, the number of events in the region of interest (670 ~ 760 keV) was approximately 500. This is consistent with the known neutron emission from the AmBe source and coincidence method, which suppresses random background events from gamma rays. Because of the small sample size of valid data in the region of interest, the bin size in the histogram is set to 6 keV in order to mitigate statistical fluctuation. As shown in Fig. 3, there are several peaks near the region of interest. We identified these peaks in order to help understand the processes that took place within our detector as well as possible sources of contamination.

The first peak can be fitted using a standard Gaussian distribution and linear

background distribution. This is given by:

$$p_0 \cdot \exp \left[-\frac{1}{2} \left(\frac{E - p_1}{p_2} \right)^2 \right] - p_3 + p_4 E, \quad (6)$$

where $p_0 = 37$ is the normalization constant, $p_1 = 508$ keV is the center value, $p_2 = 4.7$ keV is the Gaussian width, $p_3 = -65$ is a constant, $p_4 = 0.2$ is the slope, and E is the energy in keV. The peak at 511 keV is mainly from the annihilation of e^+e^- pairs induced by cosmic rays passing through the surrounding materials. The fitted central value of 508 keV is slightly lower than the expected 511 keV, but still within the margin of error for the bin size.

The remaining peaks can be fitted using a Moyal distribution and linear background. The Moyal distribution used is [29]:

$$\Psi = \sqrt{\frac{1}{2\pi}} \exp \left[- (R(E - E_{mpv}) + \exp[R(E - E_{mpv})]) \right], \quad (7)$$

where R is a constant and E_{mpv} is the most probable value of energy deposition in the detector. R and E_{mpv} are physically significant parameters.

The peak around 560 keV, is likely caused by events from $^{76}\text{Ge}(n, n'\gamma)$ inelastic scattering. Because of the small number of events, the fitting function was only partially accurate. The second peak at around 600 keV has the fitted parameters, $R = 0.06$ and $E_{mpv} = 609$ keV. This peak is likely the combination of inelastic scattering from $^{74}\text{Ge}(n, n'\gamma)$ and the neutron capture on ^{73}Ge , $^{73}\text{Ge}(n, \gamma)$. Finally, the peak of interest, 691.6 keV, exhibits the internal conversion of $^{72}\text{Ge}(n, n'e)$. The fitted parameters are, $R = 0.06$ and $E_{mpv} = 705$ keV. All fits in the region of interest are shown in Fig. 4.

We also took a background spectrum using the coincidence method to identify any random coincidence. This spectrum is also shown in Fig. 4. The background data was taken using two sodium iodide detectors (see right of Fig. 2) for 4.6 days.

After the background spectrum was collected, we subtracted it from the AmBe data sets as shown by Fig. 5. The 511 keV peak was significantly reduced, verifying our conjecture on the main origin of this peak as induced pair production from cosmic rays in the surrounding materials. The subtracted data set was also fitted using a Moyal distribution and linear background. It was found that the most probable value of energy deposition in the detector for the E_0 transition was 696 keV. Thus the percent difference of the AmBe data with and without background subtraction is 1.3%. This difference is within the error

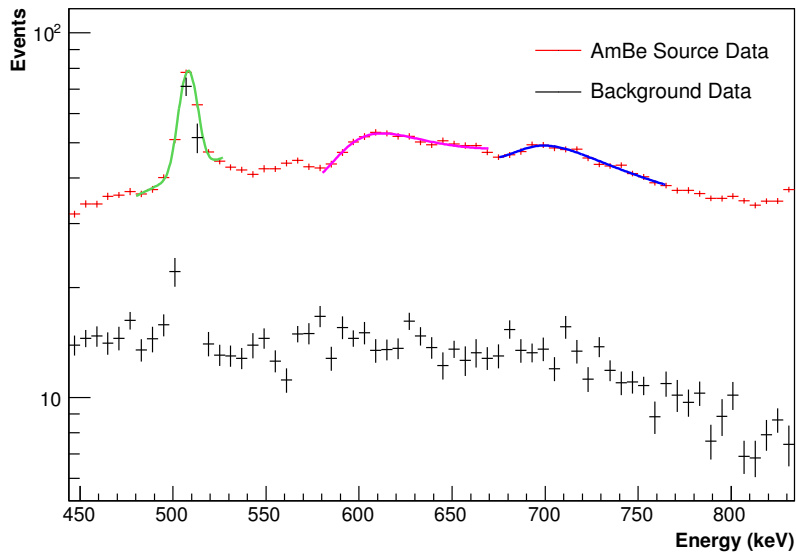


Fig. 4. Region of interest with all peaks fitted, and the coincidence background spectrum.

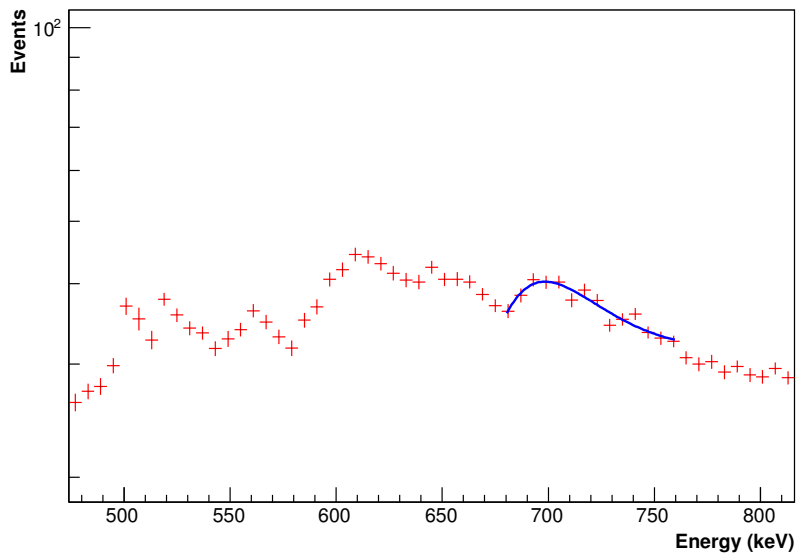


Fig. 5. Region of interest with the background subtracted from the original data files.

margin of a histogram with 6 keV bin size.

3.2 Interpretation of Results

Electrons and nuclear recoils that travel through germanium with a high momentum lose energy by exciting and ionizing the germanium atoms. The average amount of energy lost can be calculated with the Bethe-Bloch equation [30]. However, the energy transfer is not a continuous process. It occurs through random collisions during which various amounts of energy can be transferred. The energy loss in the detector can be described by the Moyal distribution, Eq. 7, as shown in Fig. 4.

R is the reciprocal of the density, ρ , times the average path-length of charged particles in the detector, d , times the parameter, K , given by the Bethe-Block formula:

$$R = \frac{1}{K \cdot \rho \cdot d}, \quad (8)$$

where $K = 4\pi N_a m_e c^2 r_e^2 z^2 \frac{Z}{A \beta^2}$ is related to the stopping power, with constants N_a , Avogadro's number; m_e , the mass of electrons; c , the speed of light; r_e , the Bohr radius; z , the electron charge; Z , atomic number of target; A , the atomic mass number of target; and β , the speed of charged particles divided by c . The density of germanium is $\rho = 5.323 \text{ g/cm}^3$.

Since electronic stopping power is different from nuclear stopping power, the value of R is very different for pure electronic recoils and nuclear recoils. Thus, the value of R can be used to derive the average path-length for a given electronic recoil or nuclear recoil. However, the value of R from our measurements is a combination of electronic and nuclear recoils, and it cannot be used to directly determine the average path length for either. Nevertheless, we can use the most probable value of energy deposition, which is related to the stopping power multiplied by the average path length, to determine the average path length.

Given $E_{mpv} = 696 \text{ keV}$, obtained from the fitted function in Fig. 5, is a convolution of the 691.6 keV energy deposition and the nuclear recoils, then we contend that $696 \text{ keV} = \frac{dE}{dX} \cdot d \cdot \rho$, where $\frac{dE}{dX}$ is mass stopping power in keV cm^2/g . Since there are both electronic and nuclear recoils, we can rewrite this as:

$$696 \text{ keV} = \left(\frac{dE}{dX_e} \cdot d_e + \frac{dE}{dX_n} \cdot d_n \right) \cdot \rho, \quad (9)$$

where $\frac{dE}{dX_e} = 1301 \text{ keV cm}^2/\text{g}$ [31] and $\frac{dE}{dX_e} \cdot d_e \cdot \rho = 691.6 \text{ keV}$; thus $d_e = 691.6 / (\frac{dE}{dX_e} \cdot \rho) = 0.1 \text{ cm}$, which is the average path length in germanium for

electrons with an energy of 691.6 keV. Therefore, we have

$$696 \text{ keV} = 691.6 \text{ keV} + \frac{dE}{dX_n} \cdot d_n \cdot \rho \quad (10)$$

and

$$4.4 \text{ keV} = \frac{dE}{dX_n} \cdot d_n \cdot \rho. \quad (11)$$

From Eq.(11), we can conclude that the most probable nuclear recoils that we measured in the detector have an average of 4.4 keV electronic equivalent energy, which corresponds to approximately 17.5 keV nuclear recoil energy from ionization efficiency in the Barker-Mei model.

To determine d_n , we can use $\frac{dE}{dX_n} = 2341720 \text{ keV cm}^2/\text{g}$ for a nuclear recoil of 17.5 keV [4]. Thus, $d_n = 17.5 \text{ keV} / (\frac{dE}{dX_n} \cdot \rho) = 0.014 \text{ }\mu\text{m}$ is the average path length in germanium for 17.5 keV nuclear recoils. This determines the range of low energy nuclear recoils in a germanium detector.

4 Monte Carlo Simulation of E_0

An accurate Monte Carlo simulation is needed to determine the validity of the Lindhard and Barker-Mei models when compared to collected data. Two crucial steps were taken before creating a Monte Carlo simulation that would determine nuclear recoil energy: 1) the E_0 transition in Geant4.9.2 [16] was fixed and 2) the Monte Carlo simulation was verified with a well-known gamma-ray source.

4.1 Fixing the E_0 transition in Geant4.9.2

By studying the inelastic scattering processes that contribute to internal conversion, we found that the E_0 transition code is included in Geant4.9.2, but is missing neutron data for ^{72}Ge . Specifically, Geant4.9.2 does not provide γ/e transition data in each energy level (Data Type = 12) and has no cross section data corresponding to the E_0 transition.

In order to make the internal conversion process available in our Geant4.9.2 simulation, we created a γ/e ratio in the database for ^{72}Ge (see our correction in Ref. [32]). In addition, we calculated all the cross-sections of the $^{72}\text{Ge}(n, n')$

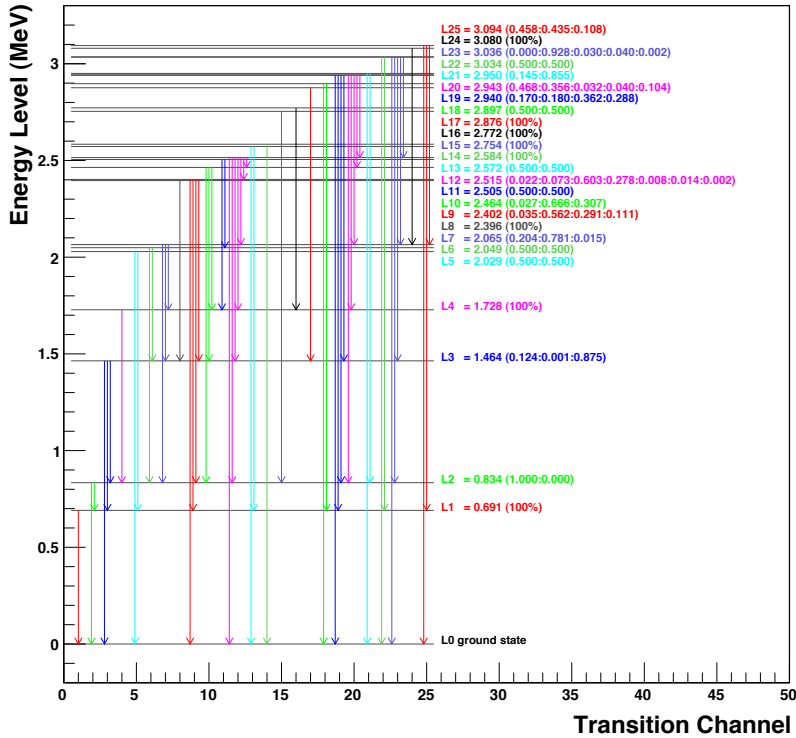


Fig. 6. The orbital e^- transition ratio of ^{72}Ge in its excited states.

reaction using TALYS [33], a reliable software for the simulation of nuclear reactions. We then converted the transition cross-section data into the transition ratio as shown in Fig. 6.

The independence of this ratio can be cross-checked by looking at the reactions in different energy scales. Eventually, the TALYS data was converted to Geant4 format and added to the bottom of the file,

G4NEUTRONHPDATA/Inelastic/F01/32_72_Germanium,

where it could be used in the internal conversion process (see the supplemental data used in Geant4.9.2 from Ref. [32]).

During the E_0 transition, a characteristic X-ray, or Auger electron, is produced simultaneously with the conversion electron. This process was not included in the Geant4 code. However, since this is a complicated process that involves binding energy, it would require editing for all the elements in the Geant4 package. For the sake of simplicity, we combined the X-ray and conversion electron together, since they both contribute to the total energy deposition (in a solid germanium detector only). A more general solution will be required when considering other materials.

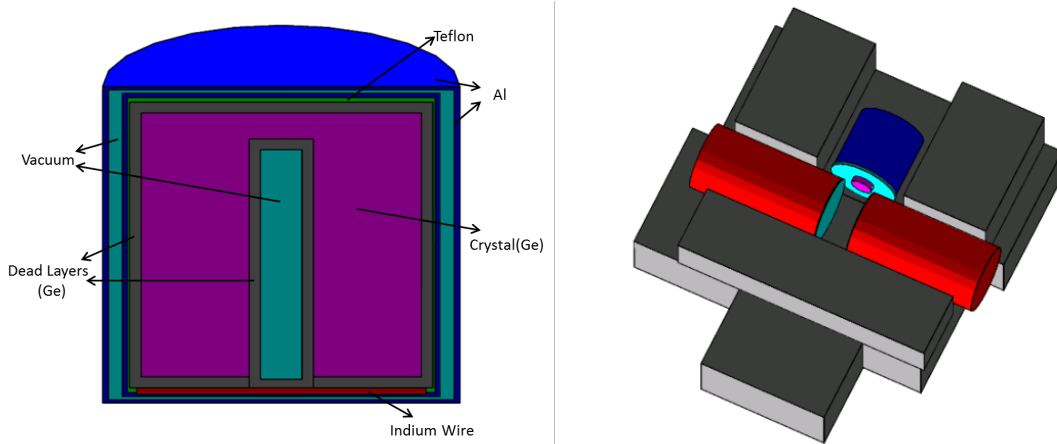


Fig. 7. Simulated geometry for Ge and NaI detectors. Left: Cross section of Ge detector. Right: Ge detector (Blue), two NaI detectors (Red) and Lead bricks (Gray).

A simulation was created from the Geant4.9.2 and G4NDL3.13 packages that includes the additional transition ratio data. For further information, readers can refer to Ref. [37] for the detailed geometry and experimental framework. After the missing data was added, the E_0 transition of $^{72}\text{Ge}(n, n'e)$ could be simulated using Geant4.9.2. This makes the Geant4.9.2 simulation more reliable for dark matter searches utilizing germanium detectors.

4.2 Verification of the Monte Carlo Simulation

To obtain reliable results from our Monte Carlo, it was essential to verify the simulation. ^{60}Co , with an original radioactivity of $1.0 \mu\text{Ci}$, was used to validate the simulation. The ^{60}Co source was mounted on the center of the Ge detector cap as shown in Fig. 2 (right). The corresponding geometry used in the Monte Carlo simulation is shown in Fig. 7. Since the germanium detector is aged, the Monte Carlo geometry was modified to include a dead layer of thickness 2.5 mm (see Fig. 7, left). We also implemented a smearing process by applying energy resolution to the spectrum of deposited energy in the active germanium. When fitting the energy resolution, these four peaks were identified: 1173 keV, 1332 keV, 2506 keV and 662 keV. The first three peaks are gamma rays from the ^{60}Co source and the last peak is a gamma ray from ^{137}Cs source. The best fit function is presented in Eq. 12:

$$0.2017 \times \sqrt{0.3 + (0.001E)^{(-1.96)} + (0.001E)^{(-3.436)}}, \quad (12)$$

where E is the energy in keV. Under the square root, the first term, 0.3, is the percentage of energy resolution, for a new Ge detector; the second and

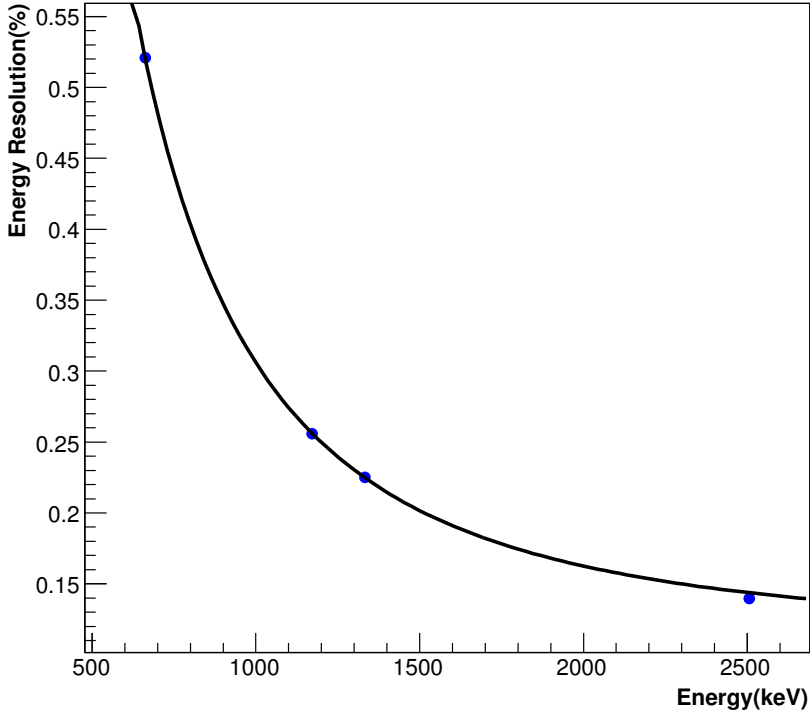


Fig. 8. Percentage of relative energy resolution as a function of energy.

third terms are due to noise and the age of the Ge detector. The percentage of relative energy resolution as a function of energy is plotted in Fig. 8 Using this fitted function, we applied the energy resolution to the range 500 keV \sim 2510 keV and obtained agreement between the experimental data and Monte Carlo simulation as shown in Fig. 9. This validates that our Monte Carlo can be reliably used for gamma-ray simulation.

5 Monte Carlo Simulation of Nuclear Recoils

Using the modified Geant4.9.2 package, we performed simulations to verify the accuracy of the Lindhard and Barker-Mei models with an AmBe neutron source. The experimental setup for our Ge and NaI detectors, as shown in Fig. 2, was simulated according to the dimension and material information provided by the manufacturer [34]. Since the $^{72}\text{Ge}(n, n'e)$ reaction causes a quasi-triangular shape in the data, we expect to see this same feature in our Monte Carlo simulation if the Lindhard and Barker-Mei models are accurate. In order to provide an accurate simulation, the geometry, as well as the AmBe source generator, need to be implemented correctly.

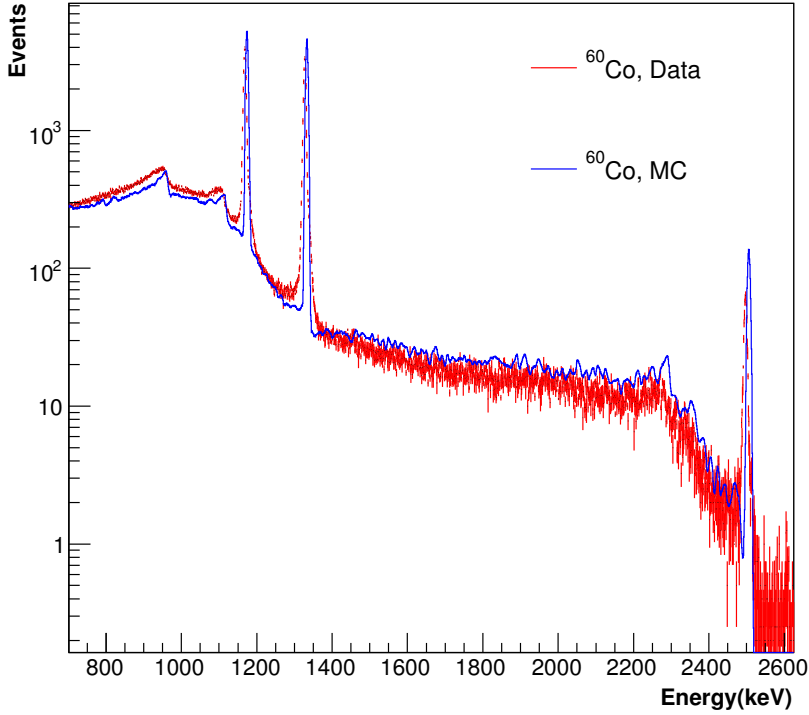


Fig. 9. Comparison between MC and data in energy deposition spectrum.

5.1 AmBe Neutron Generator

Because the AmBe source was placed very close to the germanium detector, gamma rays emitted from the source have a greater chance of entering the germanium detector and causing contamination in the region of interest (670 keV \sim 760 keV). Thus, in the simulation it is necessary to account for all potential gamma rays emitted from the AmBe source.

Two reactions, shown in Eqs. 13 and 14, occur in the AmBe source:



Eq. 13 shows the decay of ${}^{241}\text{Am}$ to ${}^{237}\text{Np}$, which causes the emission of alpha particles and gamma rays. Eq. 14 shows the reaction between an alpha particle and ${}^9\text{Be}$. In Eq. 14, the energy of gamma rays emitted depends on the resulting state of ${}^{12}\text{C}$, which is 4.443 MeV (for the 1st excited state), 7.65 MeV (for the 2nd excited state) and 9.64 MeV (for the third excited state). Using the gamma ray energy and recoil energy of ${}^{12}\text{C}$, the resulting neutron energy can be calculated by applying energy conservation to Eq. 14.

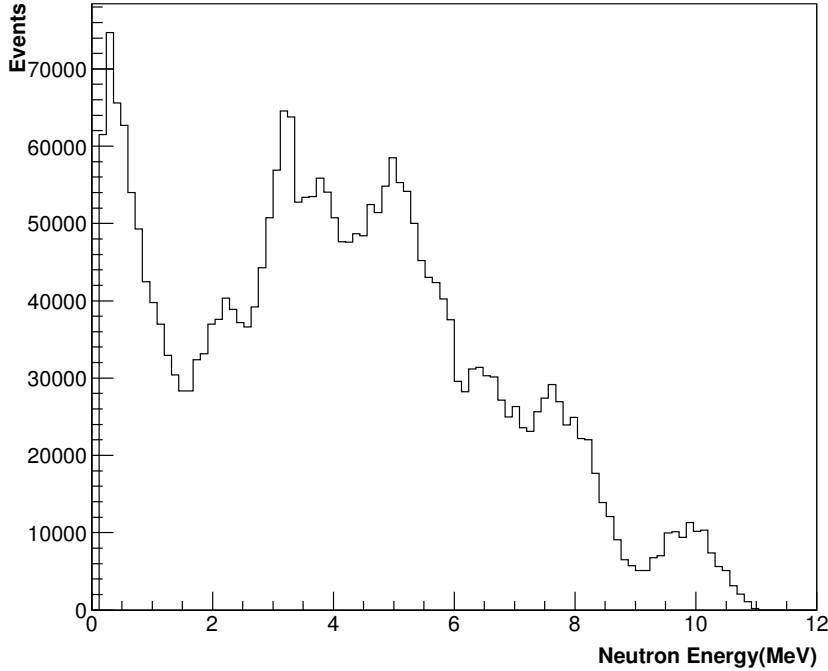


Fig. 10. Simulated neutron energy spectrum from AmBe neutron source.

Fully absorbed gamma rays (from Eq. 14) will not be in the region of interest ($670 \text{ keV} \sim 760 \text{ keV}$) since their energies are at a few MeV. However, the Compton continuum of their interaction can contribute to the region of interest. In addition, gamma rays (from Eq. 13) with energies 26.34 keV (a branching ratio of 2.4%), 59.54 keV (a branching ratio of 35.9%) and 722.01 keV (a branching ratio of 0.000196%) [35] can contribute to the region of interest by occurring in coincidence with the E_0 transition (26.34 keV and 59.54 keV) or by becoming fully absorbed (722.01 keV). We generated these three gamma rays in our Monte Carlo simulation along with gamma rays at energies of 4.443 MeV , 7.65 MeV , and 9.64 MeV caused by the transitions in the excited ^{12}C nucleus.

The simulated neutron energy spectrum from the AmBe neutron source is shown in Fig. 10. The spectrum agrees with the prediction from Marsh et. al. [36]. After this validation, the AmBe source generator was implemented in the Monte Carlo simulation.

5.2 Verification of the E_0 Transition in Simulation

The simulated results are presented as a spectrum of energy deposited in the germanium detector after the application of smearing, which is the process of

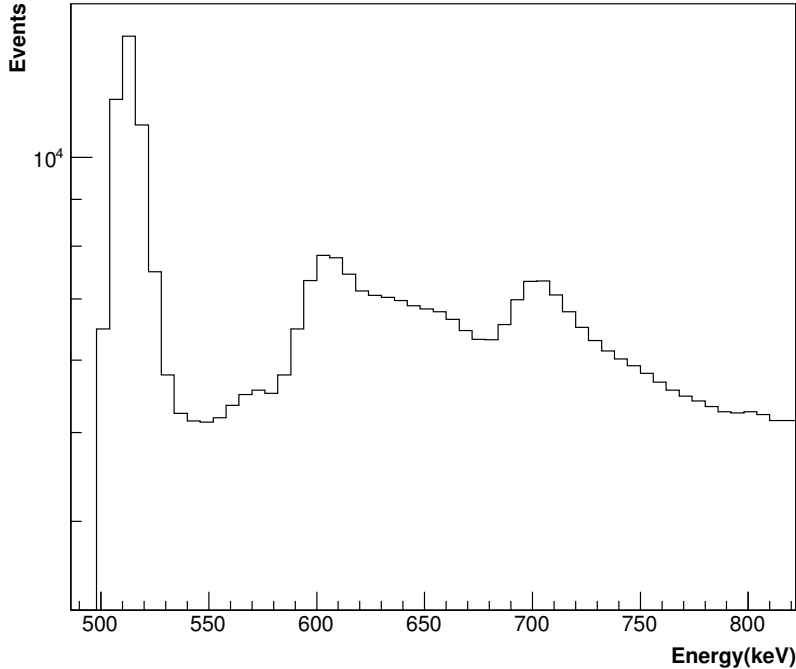


Fig. 11. The spectrum of energy deposition in the germanium detector after smearing.

accounting for energy resolution in a germanium detector.

Gaussian and Moyal distributions with fitted parameters from our data (Section 3) have been incorporated into the smearing of different peaks in the region of interest. We used the model proposed by Lindhard *et al.* [3] ($k = 0.159$) to determine the ionization efficiency for a germanium detector. Fig. 11 shows the simulated energy deposition spectrum after smearing. The E_0 , 691.6 keV, transition is visible, as shown in Fig. 11. Appearance of this peak indicates that the internal conversion process has been successfully implemented in our Geant4.9.2.

6 Monte Carlo Shape Analysis

After successfully simulating the AmBe neutrons in our Geant4.9.2, we collected the energy deposited in the germanium detector. This collected energy spectrum was compared with our data after the application of smearing (Eq. 12). Two models utilizing ionization efficiency functions were applied to the Monte Carlo spectrum: Lindhard $k = 0.159$ and the Barker-Mei model. Normalization was applied to the energy range 670 to 760 keV. By overlaying the Monte Carlo energy spectrum and the collected data, we were able to per-

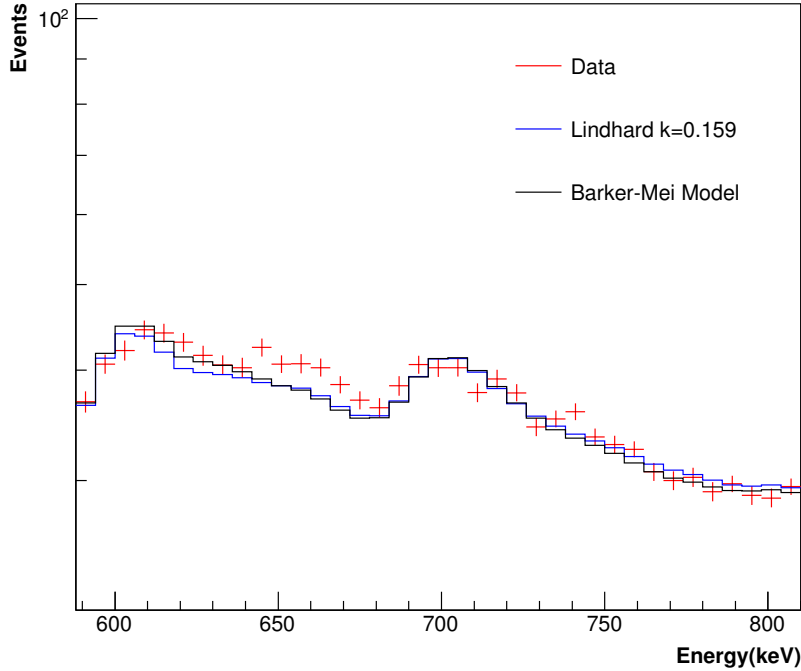


Fig. 12. Comparison of our Monte Carlo simulation utilizing the Lindhard ($k = 0.159$) and Barker-Mei models and our collected data after background subtraction.

Table 1

The percent difference between the collected data and the Monte Carlo simulations with two models. E_{vr} is the average visible nuclear recoil energy corresponding to each bin used in the analysis.

| Energy (keV) | 696 | 702 | 708 | 714 | 720 | 726 | 732 | 738 | 744 |
|------------------------------|-----|------|------|------|------|------|------|------|------|
| Lindhard ($k = 0.159$) (%) | 1.4 | 3.9 | 3.1 | 1.0 | 0.8 | 2.1 | 2.8 | 3.0 | 2.9 |
| Barker-Mei (%) | 1.0 | 3.2 | 2.3 | 0.6 | 0.9 | 1.8 | 2.2 | 2.1 | 1.8 |
| E_{vr} (keV) | 4.4 | 10.4 | 16.4 | 22.4 | 28.4 | 34.4 | 40.4 | 46.4 | 52.4 |

form a shape analysis on the characteristic E_0 transition. This is demonstrated in Fig. 12.

The shape analysis was performed on a bin-to-bin basis by comparing the data and two Monte Carlo simulations, which correspond to the two models. The difference in shape between the data and the two Monte Carlo simulations was calculated using $\frac{(data-MC)}{(data+MC)/2}$. Table 1 shows the results of this comparison in which the largest difference is shown to be less than 4%.

Unfortunately, we were not able to include the neutron capture lines of even nuclei in our Geant4.9.2 package. Thus, at 708.2 keV and 747.7 keV, there is a discrepancy between the collected data and Monte Carlo simulations due to

the neutron capture of $^{70}\text{Ge}(n, \gamma)$ [37]. There is also inconsistency in the energy range 650 - 680 keV that is likely due to $^{115}\text{In}(n, \gamma)$ and $^{206}\text{Pb}(n, n'\gamma)$ [37] processes, which are not included in the Geant4.9.2 package.

7 Conclusion

We took measurements using an AmBe neutron source, incident on a germanium detector, for a total of 35 days. The characteristic quasi-triangular shape located at 691.6 keV represents the E_0 transition of germanium-72. All peaks in the region of interest have been identified, thereby confirming source related and environmental backgrounds. The unique quasi-triangular shape induced by neutrons can be described using the Moyal distribution with the fitted parameters $R = 0.06$ and $E_{mpv} = 696$ keV, after background subtraction. Utilizing these parameters, we derived the most probable value for nuclear recoils as 4.4 keV electronic equivalent energy, which corresponds to a nuclear recoil energy of 17.5 keV. The average path length in the germanium detector for 17.5 keV nuclear recoils was approximately $0.014 \mu\text{m}$.

A Monte Carlo simulation employing a corrected Geant4.9.2 package was modified to duplicate the same experimental setup and AmBe neutron source. The Lindhard ($k = 0.159$) and Barker-Mei models were used to apply ionization efficiency to the energy spectrum and were compared to the experimental measurements. A bin-to-bin shape analysis was performed, and the difference between the measurements and two models were calculated. We obtained a percent difference that was less than 4% for the collected data and two Monte Carlo simulations. Because of this agreement, we calculated the most probable values for visible nuclear recoils (as shown in Table 1). Therefore, the Lindhard model (with $k = 0.159$) and Barker-Mei model can be used to determine the ionization efficiency in germanium detectors for 1 to 100 keV nuclear recoil energy.

Acknowledgments

The authors wish to thank Iseley Marshall and Angela A. Chiller for their careful reading of this manuscript. Additionally, the authors would like to thank Rupak Mahapatra for his comments and suggestions. This work was supported in part by NSF PHY-0758120, DOE grant DE-FG02-10ER46709, the Office of Research at the University of South Dakota and a 2010 research center support by the State of South Dakota.

References

- [1] C.E. Aalseth *et al.* (CoGeNT), Phys. Rev. Lett. **107**, 141301 (2011).
- [2] Z. Ahmed *et al.* (CDMS), arXiv:1203.1309 (2012).
- [3] J. Lindhard *et al.*, Mat. Fys. Medd. K. Dan. Vidensk. Selsk. **33**, 1 (1963).
- [4] D. Barker and D.-M. Mei, Astroparticle Physics, Volume 38, p. 1-6. arXiv:1203.4620v4.
- [5] K.W. Jones and H.W. Kraner Phys. Rev. C, **4** 125 (1971).
- [6] P.S. Barbeau, J.I. Collar and O. Tench JCAP09(2007)009; P. Barbeau, PhD. Thesis, U. Chicago (2009).
- [7] Xichao Ruan, *Nuclear recoil quenching factor measurment for HPGe detector* (CDEX-TEXONO Collaboration), Beijing, China, 24-26 March 2011.
- [8] Y. Messous *et al.* Astrophys. **3** (1995) 361-366.
- [9] C. Chasman *et al.* Phys. Rev. Lett., **21** 1430 (1968).
- [10] T. Shutt *et al.* Phys. Rev. Lett. **69** 3425 (1992).
- [11] A.R. Sattler *et al.* Phys. Rev. **143** 588 (1966).
- [12] L. Baudis *et al.* Nucl. Instrum. Methods Phys. Res. A **418** (1998) 348-354.
- [13] E. Simon *et al.* Nucl. Instrum. Methods Phys. Res. A **507** (2003) 643-656.
- [14] Kenneth S. Krane, Introductory Nuclear Physics, 1987, p. 341 published by John Wiley & Sons, Inc.
- [15] A. Dragic *et al.*, 2013 J. Phys.: Conf. Ser. 409 012054 doi:10.1088/1742-6596/409/1/012054.
- [16] GEANT4, S. Agostinelli *et al.*, Nucl. Instrum. Meth. A506, 250 (2003).
- [17] Princeton Gamma Tech Inc.
- [18] Sources, QSA Global Inc.
- [19] SAINT-GOBAIN Crystals.
- [20] R. Wordel *et al.*, NIM A369(1996)557.
- [21] G. Fehrehbacher, R. Meckbach and H. G. Paretzke, NIM A372(1996)239.
- [22] G. Fehrehbacher, R. Meckbach and H. G. Paretzke, NIM A372(1996)391.
- [23] E. Gete *et al.*, NIM A388(1997)212.
- [24] K. W. Geiger and L. Van Der Zwan, Nuclear Instruments and Methods 131 (1975) 315-321.

- [25] F. De Guarrini and R. Malaroda, Nuclear Instruments and Methods 92 (1971) 277-284.
- [26] X-Ray Instruments Associates, 8450 Central Ave., Newark CA 94560, USA.
- [27] Wavemetrics Inc., PO Box 2088, Lake Oswego, OR 97035, USA.
- [28] Rene Brun and Fons Rademakers, Nucl. Instr. and Meth. **389**, 81 (1997); <http://root.cern.ch>.
- [29] J.E. Moyal, Theory of ionization fluctuations, Phil. Mag. 46 (1955) 263.
- [30] H. Bethe und J. Ashkin in "Experimental Nuclear Physics, ed. E. Segré, J. Wiley, New York, 1953, p. 253.
- [31] M.J. Berger, J.S. Coursey, M.A. Zucker, and J. Chang (2005), ESTAR, PSTAR, and ASTAR: Computer Programs for Calculating Stopping-Power and Range Tables for Electrons, Protons, and Helium Ions (version 1.2.3). [Online] Available: <http://physics.nist.gov/Star>. National Institute of Standards and Technology, Gaithersburg, MD.
- [32] Refer to problem 957 in the Geant4 Problem Tracking System: http://bugzilla-geant4.kek.jp/show_bug.cgi?id=957.
- [33] A. J. Koning, S. Hilaire and M. C. Duijvestijn, AIP Conf. Proc., 769, 11541159 (2005).
- [34] Leong Ying, Princeton Gamma-Tech Instruments (Private communication).
- [35] Refer to <http://ie.lbl.gov/toi/nuclide.asp?iZA=950241>.
- [36] J. W. Marsh, D. J. Thomas and M. Burke, Nuclear Instruments and Methods in Physics Research A 366 (1995) 340-348.
- [37] D.-M. Mei, S. R. Elliott, A. Hime, V. Gehman and K. Kazkaz, Phys. Rev. C77, 054614 (2008).