The Development of ADS Virtual Accelerator Based on XAL

Wang Peng-Fei (王鹏飞)^{1,2} Cao Jian-She (曹建社)¹ Ye Qiang (叶强)¹ ¹Institute of High Energy Physics, Chinese Academy of Sciences, Beijing 100049, China ²University of Chinese Academy of Sciences, Beijing 100049, China

Abstract

XAL [1-3] is a high level accelerator application framework originally developed by the Spallation Neutron Source (SNS), Oak Ridge National Laboratory. It has advanced design concept and adopted by many international accelerator laboratories. Adopting XAL for ADS is a key subject in the long term. This paper will present the modifications to the original XAL applications for ADS. The work includes proper relational database schema modification in order to better suit ADS configuration data requirement, redesigning and re-implementing db2xal application and modifying the virtual accelerator application. In addition, the new device types and new device attributes for ADS online modeling purpose is also described here.

Key words: XAL; ADS; relational database; db2xal; virtual accelerator PACS: 89.20.Ff, 29.20.Ej

1. Background

The Accelerator Driven Sub-critical System (ADS) takes the spallation neutrons as the external neutron source to drive the sub-critical blanket system [4]. So, it has the inherent safety and has been universally regarded as the most effective approach to dispose the long-lived nuclear wasted [5]. In 2011, the Chinese Academy of Sciences launched the "Strategic Priority Research Program" named "Future Advanced Nuclear Fission Energy" [4]. This program has two sub-programs, and the ADS Project is one of them.

XAL is a mature framework for rapid development of applications. It is written in Java, and provides users with a hierarchal view of the accelerator which shown schematically in Fig.1. Features include database configuration of the accelerator structure, a common look-and-feel graphical user interface (GUI), an online envelope model that is configurable from design or live machine values, a scripting interface for algorithm development, and many other utility packages.




Fig.1: Schematic of the XAL accelerator class hierarchy.

2. ADS accelerator database

The decision to use MySQL was made easily and early: the world's most popular open source database; it is widely used in the world by many of the largest organizations including Facebook, Google and Adobe; it is extremely easy to use; scalability and flexibility; high performance; high availability; robust transactional support; strong data protection; management ease; the relational model

is well known and understood. Compared with relational database, OO databases have some stability-related "early adopter" problems. These factors led us to choose MySQL.

The ADS Virtual Accelerator Database that shown in Fig.2 use the standard relational model. It is redesigned and implemented by referencing SNS [6] and CSNS [7] Virtual Accelerator Database

2.1 Database brief introduction

- 1) BEAM_LINE_DVC: Information of beam line devices such as the measured misalignments, aperture shape and size.
- 2) DVC: Information of all devices including standby equipment.
- 3) BEAM_LINE: Version information of beam line.
- 4) DVC_WS_SFTW: The WS device is profile monitor or wire scanner.
- 5) DVC_SET: Information of the device settings for beam line devices.
- 6) CHANNEL: The master list of valid EPICS PVs and its handler that classified by device type.
- 7) BPM_DVC: Unique information of the BPM device.
- 8) DVC_SEQ: Information of accelerator sequences.
- 9) RF_GAP: Unique information of the RF cavity gap.
- 10) RF_DVC: Unique information of the RF cavity.
- 11) MAG_DVC: Unique information of the magnet.

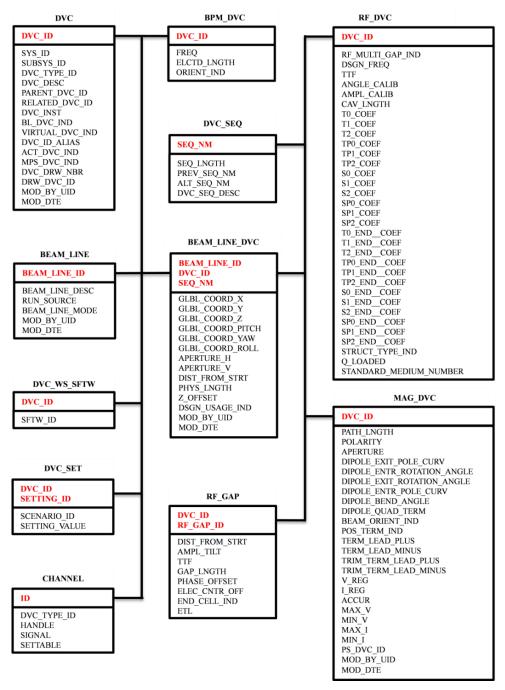


Fig.2: ADS Virtual Accelerator Database

3. ADS virtual accelerator configuration files

The XAL configuration mechanism is driven by five main files and two auxiliary files, as shown in Fig.3. The main.xal file contains the names and locations of other four main files, which are: ads.impl, ads.xdxf, model.params, timing_pvs.tim. The two auxiliary files are ADSMEBT1Entr.probe and xdxf.dtd.




Fig.3: XAL configuration files

4. Db2xal

Among the XML configuration files, the ads.xdxf file has tens of thousands of lines. It is difficult to manually generate this file. Db2xal is a XAL general purpose application to do this tedious task, but the original db2xal has much SNS specific information embedded in the code which leads to bad performance in ADS. ADS also has specific elements, like the solenoid element. Besides, the bunchers in MEBT1 and RF cavities in CM1 use the new attribute ETL instead of the separate properties—the longitudinal electric field(E), the transit time factor (T) and the gap length (L). In addition, the original db2xal application has poor interaction. Redesigning and re-implementing db2xal application to better suit ADS configuration data requirement is needed. The flowchart of db2xal is shown in Fig.4.

4.1 Implementing

1) Three main classes

• Main. It is a subclass of ApplicationAdaptor base class.

• Db2XalDocument. As a general purpose application, the Db2XalDocument class subclass the XalDocument base class. It typically implements the actions for the views defined in the gui.bricks file and the menu definitions file.

• Db2XalExtractDataFromDB. It is the main class responsible for extracting data from the database to generate corresponding optics configuration information.

2) Four auxiliary classes

• Db2XalMyTableModel. It is an inner class of Db2XalDocument and used to generate data of the table shown in the left part of Fig.5 and handle the button event

• MyTimerTask. It is an inner class of Db2XalDocument and used to update the information of the status bar and the status of the progress bar

- Db2XalBeamlineIDTableDialog. It is used to pop up a dialog box and handle the button event
- Db2XalBeamlineIDTableModel. It is an inner class of Db2XalBeamlineIDTableDialog and used to generate the data of table in dialog box

3) GUI file [8]

• Gui.bricks which resides in the "resources" subfolder of Db2XAL is generated by the Bricks application. It describes the views within the document's associated main window. The main interface of db2xal include title bar, menu bar, toolbar, workspace and status bar shown in Fig.5. The title bar and toolbar is provided by the XAL framework. The menu bar is defined in the menu definition file which resides in the same folder of Gui.bricks. Gui.bricks describes the layout of the views within the workspace and status bar.

4.2 Program function

The ADS initial design development stage wherein, it is possible that errors will be discovered which will require design changes. The version information of beam line such as beam line ID and beam line info is used to record these changes. The read-only textbox shown in the upper part of Fig.5 is used to display the version information. Beam line ID can be changed by click the "Change ID" button. In order to generate configuration file, it is needed to select appropriate beam line ID and continuous sequences. A warning message-"You must select continuous sequences!" appears when discontinuous sequences are selected. When the user click the "Generate XDXF" button, the main process of db2xal will extract data from development database or production database and display the result in the textarea control. Development database that mainly used by program staffs is used to test new device or sequence. Production database as the db2xal's default database is used to daily operations. User can change the default database by selecting the "Database" menu item. Meanwhile, some measures are taken to promote the interactivity such as using a status label to display messages during different phases of the application's life cycle, using a progress bar to show an approximate percentage of completion of the main process. The final result displayed in textarea control can be edited according to customer needs or be exported to "ads.xdxf" should the user click the "Save" button.

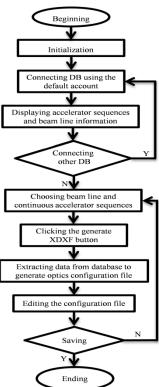


Fig.4: Flowchart of db2xal [10]




Fig.5: The main interface of db2xal

5. Virtual accelerator

With the Virtual Accelerator, it is possible to for an operator to judge whether setting parameters would be justified or not, examine the control system of the machine and practice the commissioning without a beam. The original virtual accelerator application don't support solenoid PVs and ADS new attribute—ETL, so proper modification is needed in order to better suit ADS online modeling purpose.

5.1 Modification

1) Adding support for solenoid PVs

• Modifying the registerNodeChannels method in VAServer.java to register PVs for the node type of solenoid

2) Adding new attribute—ETL

- Adding new attribute-ETL to the RfGapBucket class which define a set of RF gap attributes
- Adding definitions and functions in the RfGap class to handle the new attribute of ETL
- Modifying the definition of METHOD_LIVE_ETL and METHOD_DESIGN_ETL in the
- RfGapPropertyAccessor class
- Modifying the putSetPVs method, the configureReadbacks method and the
- SelectedSequenceChanged method in VADocument.java to suit the new attribute of ETL

5.2 Program test result

The main process of the ADS virtual accelerator will be in recurrent state after user start the simulation. The build-in EPICS portable channel access server broadcast all PVs which defined in the selected sequence or sequence combo within the LAN. Any computers in the same network segment can get and set the value of virtual PVs. The final result shown in Fig.7 validates that solenoid PVs and the new PV—cavETL can work normally. It also proves that the ADS configuration files generated by the application of db2xal are correct and the ADS virtual accelerator runs normally.

File Edit Ac	celerator Mode	View Wind		Accelerator	· · (MEBT1-CM1) - Uni	titled.va*	_ 0
	Probe Editor	Set Noise	Start VA	Stop VA			
liter							
Node		Readback PV		Readback	Setpoint PV	Setopint	
MEBT1, Mag: QH01		MEBT1_Mag.QH01:8		30.0	MEBT1.Mag.PS.OH01:8.Set	3	
MEBT1, Mag. QV02		MEBT1, Mag. QV02:8		23.3012	MEBT1_Mag:PS_QV02:B_Set	23.30	
MEBT1.RF.BnchO1		MEBT1,LLRF:FCM1:cavPhaseAvg		-90.093307	MEBT1.LLRF.FCM1:OIPhaseSet	-90.0933	
MEBT1.RF.BnchO1:Rg01		MEBT1.U.RF.FCM1:cavETL		0.081490995	MEBT 1, LURF FCM1: CIETLSet	0.0814909	
MEBT1, Mag. QH03		MEBT1,Mag:QH03:8		13.6887	MEBT1, Mag:PS, QH03:8, Set	13.68	
MEBT1, Mag QVO4		MEBT1, Mag. QVO4:8		16.8444	MEBT1_Mag.PS_QV04:8_Set	16.84	
MEBT 1 RF Bnch02		MEBT1_LLRP_FCM2:cavPhaseAvg		-90.060978	MEBT 1_LLRF FCM2 : CtiPhaseSet	-90.0509	
MEBT1.RF.Bnch02:Rg01		MEBT1.LLRF:FCM2:cavETL		L.	0.087055899	MEBT 1_LLRF:FCM2:CtIETLSet	0.087055
MEBT 1, Mag QH05		MEBT1_Mag:QH05:8		14.0463	MEBT 1_Mag PS_QH05:8_Set	14.04	
MEBT1 Mag 0V05		MEBT1 Mag OV06:8			15.6612	MEBT1_Mag:PS_QV06:B_Set	15.66
CM1.RF:SCLCavity01		CM1.LLRF.FCM1:cavPhaseAvg		seAva.	-39.98517	CM1.LLRF-FCM1:CtPhaseSet	-39.985
CM1.RFSCLCavtv01:Rd01		CM1_LLRF_FCM1:cavETL			0.2777626		0.27776
CM1.MagSOLE01		CM1.MagSOLE01:8			-0.729994	CM1.Mag/PS.SOLE01/8.Set	-0.729
CM1_RFSCLCavity02		CM1.ULRF.FCM2:cavPhaseAvg		se.Aug	-37.98517	CM1.LLRF.FCM2:CtiPhaseSet	-37.98
CM1_RFSCLCavIty02_Rd01		CM1.LLRF:FCM2:cavETL		-	0.32192882	CM1.LLRF:FCM2:CtIETLSet	0.32192
CM1_Mag/SOLE02		CM1_MagSOLE02:8			-0.755629	CM1_Mag PS_SOLE02 8_Set	-0.755
CM1 RESCLCavIty03		CM1 LLRF FCM3 cavPhaseAvg		seAug	-36.988708	CM1_LLRF FCM3:CtiPhaseSet	-36.988
CM1_RFSCLCavtty03:Rg01 CM		CM1.LLRF.FC	CM1.LLRF.FCM3:cavETL		0.37006249	CM1_LLRF-FCM3:Ct/ETLSqt	0.37006
CM1_MagSOLE	1_MagSOLE03 CM1_MagSOLE03		LEO3:B		-0.784701	CM1_Mag PS_SOLE03:8_Set	-0.784
CM1 RF:SCLCap			peAva	-34.990133	CM1 LLRF-FCM4:Ct/PhaseSet	-34.990	
CM1.RF:SCLCap	CLCavity04:Rg01 CM1.LLRF.FCM4:cavETL			0.4415414	CM1.LLRF:FCM4:CtIETLSet	0.4415	
CM1_MapSOLE				-0.819133	CM1_Mag PS_SOLEO4:8_Set	-0.819	
CM1,RF:SCLCa	/tty05	CM1.LLRF.FCM5.cavPhaseAvg			-32.991409	CM1,LLRF:FCM5:CtiPhaseSet	-32.991
CM1_RF:SCLCap	.RF:SCLCavity05:Rg01 CM1.ULRF.FCM5:cavETL			0.5349021	CM1.LLRF.FCM5:CtIETLSet	0.53490	
CM1_MagSOLE05		CM1.Mag/SOLE05:8			-0.857595	CM1_Mag PS_SOLE05:8_Set	-0.857
CM1_RF_SCLCavIty06 CM1_LLRF_FCM6_cavF			M6:cavPha	seAug	-29.99261	CM1_LLRF_FCM6:CtiPhaseSet	-29.99
CM1_RFSCLCavity06.Rg01		CM1_LLRF.FCM6:cavETL		0.68288661	CM1 LLRF-FCM6:CtIETLS4t	0.682886	

Fig.6: The main interface of virtual accelerator

3	WPF@localhost:~	_ D X
文件(E) 编辑(E) 查看(M) 经端(T) 经签(B) 帮助(H)		
[WPF@localhost ~]\$ caget MEBT1_L	LRF:FCM1:cavETL	•
MEBT1_LLRF:FCM1:cavETL 0	.081491	
[WPF@localhost ~]\$ caput MEBT1_L	LRF:FCM1:Ct1ETLSet 0.080250	
01d : MEBT1_LLRF:FCM1:Ct1ETLSet	0.081491	
New : MEBT1_LLRF:FCM1:Ct1ETLSet	0.08025	
[WPF@localhost ~]S caget CM1_Mag	:SOLE01:B	
CM1_Mag:SOLE01:B -	0.729994	
[WPF@localhost ~]\$ caput CM1_Mag	:PS_SOLE01:B_Set750025	
Old : CMl_Mag:PS_SOLEO1:B_Set	-0.729994	
New : CM1_Mag:PS_SOLE01:B_Set	-0.750025	
[WPF@localhost ~]\$ caget MEBT1_M	ag:QHO1:B	
MEBT1_Mag:QH01:B 3	0	
[WPF@localhost ~]\$ caput MEBT1_M	ag:PS QH01:B Set 33	
	30	
New : MEBT1 Mag:PS QH01:B Set	33	

Fig.7: Test result of virtual accelerator

References

- [1] http://xaldev.sourceforge.net.
- [2] https://wiki.ornl.gov/sites/xaldocs/default.aspx.
- [3] J. Galambos, et al, XAL Application Programming Structure, Proceedings of 2005 Particle Accelerator Conference.
- [4] Zhan Wen-Long and Xu Hu-Shan, Advanced Fission Energy Program—ADS Transmutation System, Bulletin of the Chinese Academy of Sciences, 2012,27(3)
- [5] Wang Yi-Fang, et al, The 40th anniversary album of IHEP
- $[6] \ http://snsapp1.sns.ornl.gov/SNS_Data_Model/index.htm$

[7] Gan Quan. Development of the CSNS Virtual Accelerator Based on XAL (Ph. D. Thesis). Beijing:

Institute of High Energy Physics (IHEP), CAS, 2009 (in Chinese)

[8] Thomas Pelaia II, XAL Application Framework and Bricks GUI Builder