

Error estimates for a certain class of elliptic optimal control problems

O. Mali

November 24, 2021

Abstract

In this paper, error estimates are presented for a certain class of optimal control problems with elliptic PDE-constraints. It is assumed that in the cost functional the state is measured in terms of the energy norm generated by the state equation. The functional a posteriori error estimates developed by Repin in late 90's are applied to estimate the cost function value from both sides without requiring the exact solution of the state equation. Moreover, a lower bound for the minimal cost functional value is derived. A meaningful error quantity coinciding with the gap between the cost functional values of an arbitrary admissible control and the optimal control is introduced. This error quantity can be estimated from both sides using the estimates for the cost functional value. The theoretical results are confirmed by numerical tests.

1 Introduction

This paper presents two-sided estimates for the value of the cost functional (assuming that the state equation can not be solved exactly) and shows how they can be used to generate estimates for a certain error quantity (cf. (3.13) and Theorem 3.4). In the case of unconstrained control, some estimates and numerical tests have been presented in [4]. In [16], the case of “box constraints” is treated. Here, these results are extended considerably for constraints of more general type, a new error quantity is introduced, and the results are confirmed by numerical tests.

In section 2, definitions and standard results related to optimal control problems with elliptic state equation are recalled. Cost functionals are assumed to be of a certain type, where the state is measured in terms of the energy norm generated by the state equation. This is a special case of the general theory which can be found, e.g., from monographs [8, 17].

In section 3, the functional a posteriori error estimates (see monographs [13, 16, 10] and references therein) for the state equation are applied to generate two-sided bounds for the value of the cost functional. The strong connections between the estimates and the principal relations generating the optimal control problem are underlined. Theorem 3.4 (generalization of [16, Ch. 9, Th. 9.14] for the case of constrained control) is the analog of the Mikhlin identity (cf. Theorem 3.4) for the optimal control problem. It introduces a well motivated

error quantity and shows how the estimates for the cost function value can be used to generate two-sided bounds.

Some examples of optimal control problem of the type described in Sect. 2 are discussed in Sect. 4.1. Numerical tests in Sect. 4.3 depict how the estimates can be combined with an arbitrary (conforming) numerical method.

2 Elliptic optimal control problem

2.1 Definitions

Let W , H , and U be Hilbert spaces. Their inner products and norms are denoted by subscripts, e.g., $(\cdot, \cdot)_W$ and $\|\cdot\|_W$. Moreover, $V \subset W$ is a Hilbert space generated by the inner product $(q, z)_V := (q, z)_W + (\Lambda q, \Lambda z)_H$, where $\Lambda : V \rightarrow H$ is a linear, bounded operator. The injection from V to W is continuous and V is dense in W . Operator Λ satisfies a Friedrichs type inequality

$$\|q\|_W \leq c\|\Lambda q\|_H, \quad \forall q \in V_0, \quad (2.1)$$

where a subspace $V_0 \subset V$ is closed. Assume $V_0 \subset V \subset W \subset V_0^*$, where V_0^* is the dual space of V_0 .

Define linear bounded operators $\mathcal{B} : U \rightarrow V_0^*$, $\mathcal{A} : H \rightarrow H$, $\mathcal{N} : U \rightarrow U$, where \mathcal{A} and \mathcal{N} are symmetric and positive definite,

$$\underline{c}\|q\|_H^2 \leq (\mathcal{A}q, q)_H \leq \bar{c}\|q\|_H^2, \quad \forall q \in H$$

and

$$\underline{\kappa}\|v\|_U^2 \leq (\mathcal{N}v, v)_U \leq \bar{\kappa}\|v\|_U^2, \quad \forall v \in U,$$

where \underline{c} and \bar{c} ($\underline{\kappa}$ and $\bar{\kappa}$) are positive constants. Thus, they generate inner products

$$(q, z)_{\mathcal{A}} := (\mathcal{A}q, z)_H, \quad (q, z)_{\mathcal{A}^{-1}} := (\mathcal{A}^{-1}q, z)_H, \quad (v, w)_{\mathcal{N}} := (\mathcal{N}v, w)_U,$$

and the respective norms

$$\|q\|_{\mathcal{A}} := \sqrt{(\mathcal{A}q, q)_H}, \quad \|q\|_{\mathcal{A}^{-1}} := \sqrt{(\mathcal{A}^{-1}q, q)_H}, \quad \|v\|_{\mathcal{N}} := \sqrt{(\mathcal{N}v, v)_U}.$$

The adjoint operators $\Lambda^* : H \rightarrow V_0^*$ and $\mathcal{B}^* : V_0 \rightarrow U^*$ are defined by the relations

$$\langle \Lambda^* z, q \rangle_{V_0} = (z, \Lambda q)_H, \quad \forall z \in H, q \in V_0$$

and

$$\langle \mathcal{B}v, q \rangle_{V_0} = (v, \mathcal{B}^*q)_U, \quad \forall v \in U, q \in V_0, \quad (2.2)$$

where $\langle \cdot, \cdot \rangle_{V_0}$ denotes the pairing of V_0 and its dual space V_0^* . By the Riesz representation theorem, there exists an isomorphism (denoted, e.g., by $\mathcal{I}_U : U \rightarrow U^*$) from any Hilbert space onto the corresponding dual space. The adjoint operator defines a subspace

$$\mathcal{Q} := \{q \in H \mid \Lambda^*q \in W\} \subset H.$$

The norm to V_0^* is

$$|\ell| := \sup_{\substack{q \in V_0 \\ q \neq 0}} \frac{|\langle \ell, q \rangle_{V_0}|}{\|\Lambda q\|_{\mathcal{A}}}.$$

Consider a bilinear form $a : V_0 \times V_0 \rightarrow \mathbb{R}$,

$$a(q, z) := (\mathcal{A}\Lambda q, \Lambda z)_{\mathbb{H}}.$$

It is V_0 -elliptic and continuous and generates an energy norm $\|q\| := \sqrt{a(q, q)}$ in V_0 .

2.2 Optimal control problem

The state equation is

$$a(y(v), q) = \langle \ell + \mathcal{B}v, q \rangle_{V_0}, \quad \forall q \in V_0, \quad (2.3)$$

where $\ell \in V_0^*$, $v \in U_{\text{ad}} \subset U$ is the control, and $y(v) \in V_0$ is the corresponding state. Let $U_{\text{ad}} \subset U$ be a non-empty, convex, and closed set. The cost functional $J : U \rightarrow \mathbb{R}$ is

$$J(v) := \|y(v) - y^d\|^2 + \|v - u^d\|_{\mathcal{N}}^2, \quad (2.4)$$

where $u^d \in U$ and $y^d \in V_0$. The optimal control problem is to find $u \in U_{\text{ad}}$, such that

$$J(u) \leq J(v), \quad \forall v \in U_{\text{ad}}. \quad (2.5)$$

Under earlier assumptions, J is U -elliptic, coercive, and lower semi-continuous. Thus, the solution of the optimal control problem exists and is unique (see, e.g., [8, Chap. II, Th. 1.2]).

Remark 2.1. *Cost functional of type*

$$J_2(v) := \|\Lambda y(v) - \sigma^d\|_{\mathcal{A}}^2 + \|v - u^d\|_{\mathcal{N}}^2$$

can be shifted using a projection: Find $y^d \in V_0$ such that

$$(\mathcal{A}(\Lambda y^d - \sigma^d), \Lambda q)_{\mathbb{W}} = 0, \quad \forall q \in V_0.$$

Then, $J(v) = J_2(v) - \|\Lambda y^d - \sigma^d\|_{\mathcal{A}}^2$

The derivative of J at v is

$$\begin{aligned} \langle J'(v), w \rangle_U &= \lim_{t \rightarrow 0^+} \frac{1}{t} (J(v + tw) - J(v)) = 2\langle \mathcal{B}w, y(v) - y^d \rangle_{V_0} + (v - u^d, w)_{\mathcal{N}} \\ &= 2(\mathcal{I}_U^{-1} \mathcal{B}^*(y(v) - y^d) + \mathcal{N}(v - u^d), w)_U. \end{aligned} \quad (2.6)$$

The necessary conditions for the optimal control problem (2.5) are (2.3) and

$$\langle J'(u), v - u \rangle_U \geq 0, \quad \forall v \in U_{\text{ad}} \quad (2.7)$$

(see, e.g., [8, Ch. I, Th. 1.3], [17, Le. 2.21]), i.e.,

$$(\mathcal{I}_U^{-1} \mathcal{B}^*(y(u) - y^d) + \mathcal{N}(u - u^d), v - u)_U \geq 0, \quad \forall v \in U_{\text{ad}}. \quad (2.8)$$

Note that for the cost functional of type (2.4), there is no need to define an adjoint state to present the necessary conditions (compare [8, Chap. II, Th. 1.4]).

The following proposition (dating back to [12], see, e.g., [3, Chap. I, Pr. 2.2] or [2, Chap. 7, Pr. 7.4]) allows to write (2.8) in a different form.

Proposition 2.1. *Including the earlier assumptions, let $x \in \mathbf{U}$. Then, the following conditions are equivalent,*

- (i) $(u - x, v - u)_{\mathcal{N}} \geq 0, \quad \forall v \in \mathbf{U}_{\text{ad}},$
- (ii) $\|x - u\|_{\mathcal{N}} = \inf_{v \in \mathbf{U}_{\text{ad}}} \|x - v\|_{\mathcal{N}},$
- (iii) $u = \Pi_{\text{ad}}^{\mathcal{N}} x, \text{ where } \Pi_{\text{ad}}^{\mathcal{N}} : \mathbf{U} \rightarrow \mathbf{U}_{\text{ad}} \text{ is a projection.}$

Proof. Assume (i). The identity

$$\|x - v\|_{\mathcal{N}}^2 - \|x - u\|_{\mathcal{N}}^2 = \|u - v\|_{\mathcal{N}}^2 + 2(u - x, v - u)_{\mathcal{N}} \geq 0$$

leads at $\|x - u\|_{\mathcal{N}} \leq \|v - x\|_{\mathcal{N}}$ for arbitrary $v \in \mathbf{U}_{\text{ad}}$, i.e., (ii).

Assume (ii). Let $v \in \mathbf{U}_{\text{ad}}$ be arbitrary and $t \in (0, 1)$, then by the convexity of \mathbf{U}_{ad}

$$\|x - u\|_{\mathcal{N}}^2 \leq \|x - ((1 - t)u + tv)\|_{\mathcal{N}}^2 = \|(x - u) + t(u - v)\|_{\mathcal{N}}^2.$$

Expanding the right side leads at $2t(x - u, u - v)_{\mathcal{N}} \leq t^2\|t(u - v)\|_{\mathcal{N}}^2$, tending t to zero yields (i).

Conditions (ii) and (iii) equal by definition. \square

Proposition 2.1 and (2.8) yield the so called projection condition

$$u = \Pi_{\text{ad}}^{\mathcal{N}} (u^d - \mathcal{N}^{-1} \mathcal{I}_{\mathbf{U}}^{-1} \mathcal{B}^*(y(u) - y^d)). \quad (2.9)$$

Remark 2.2. *Typical choice is $\mathcal{N} = \alpha \text{Id}$, where $\alpha > 0$ and Id denotes the identity mapping. Then (2.9) becomes*

$$u = \Pi_{\text{ad}} (u^d - \frac{1}{\alpha} \mathcal{I}_{\mathbf{U}}^{-1} \mathcal{B}^*(y(u) - y^d)).$$

Remark 2.3. *If $\mathbf{U}_{\text{ad}} = \mathbf{U}$, then $\Pi_{\text{ad}}^{\mathcal{N}} = \text{Id}$ and (2.9) reduces to*

$$u = u^d - \mathcal{N}^{-1} \mathcal{I}_{\mathbf{U}}^{-1} \mathcal{B}^*(y(u) - y^d). \quad (2.10)$$

Substituting (2.10) to (2.3) yields a following linear problem: Find $y(u) \in \mathbf{V}_0$ satisfying

$$\begin{aligned} a(y(u), z) + \langle \mathcal{B} \mathcal{N}^{-1} \mathcal{I}_{\mathbf{U}}^{-1} \mathcal{B}^* y(u), z \rangle_{\mathbf{V}_0} \\ = \langle \ell + \mathcal{B} u^d, z \rangle_{\mathbf{V}_0} + \langle \mathcal{B} \mathcal{N}^{-1} \mathcal{I}_{\mathbf{U}}^{-1} \mathcal{B}^* y^d, z \rangle_{\mathbf{V}_0} \quad \forall z \in \mathbf{V}_0. \end{aligned} \quad (2.11)$$

3 Estimates

3.1 Estimates for the state equation

The solution $y(v) \in \mathbf{V}_0$ of (2.3) minimizes a quadratic energy functional (see, e.g., [8, Chapter I, Theorem 1.2 and Remark 1.5]), i.e.,

$$E(y(v)) \leq E(q) := \|q\|^2 - 2\langle \ell + \mathcal{B}v, q \rangle_{\mathbf{V}_0}, \quad \forall q \in \mathbf{V}_0. \quad (3.1)$$

The benefit for measuring $y(v) - y^d$ in the $\|\cdot\|$ -norm in (2.4) (instead of, e.g., $\|\cdot\|_{\mathbf{W}}$ -norm) is due to the following results (Theorem 3.1 is due to [11] and generalized in [16]).

Theorem 3.1. *Let $y(v)$ be the solution of (3.1) and $z \in \mathbf{V}_0$ be arbitrary, then*

$$\|y(v) - z\|^2 = E(z) - E(y(v)). \quad (3.2)$$

Proof. By (2.3),

$$\begin{aligned} \|y(v) - z\|^2 &= \|y(v)\|^2 - 2a(y(v), z) + \|z\|^2 \\ &\quad - 2(a(y(v), y(v)) + \langle \ell + \mathcal{B}v, y(v) \rangle_{\mathbf{V}_0}) \\ &= -\|y(v)\|^2 + 2\langle \ell + \mathcal{B}v, z \rangle_{\mathbf{V}_0} + \|z\|^2 - 2\langle \ell + \mathcal{B}v, y(v) \rangle_{\mathbf{V}_0} \\ &= E(z) - E(y(v)). \end{aligned}$$

□

Theorem 3.2. *Let $y(v)$ be the solution of (3.1) and $z \in \mathbf{V}_0$ be arbitrary, then*

$$\sup_{q \in \mathbf{V}_0} \underline{M}^2(z, q, v) = \|y(v) - z\|^2 = \inf_{\substack{\tau \in \mathbf{Q} \\ \beta > 0}} \overline{M}^2(z, \tau, \beta, v),$$

where

$$\underline{M}^2(z, q, v) := E(z) - E(q) \quad (3.3)$$

and

$$\overline{M}^2(z, \tau, \beta, v) := (1 + \beta)\|\tau - \mathcal{A}\Lambda z\|_{\mathcal{A}^{-1}}^2 + \frac{1 + \beta}{\beta} \|\Lambda^* \tau + \mathcal{B}v + \ell\|^2. \quad (3.4)$$

Proof. \underline{M}^2 is obtained directly from (3.1) and (3.2). For \overline{M}^2 , see, e.g., [13, Chap. 6, (6.2.3)], [16, Chap. 7, (7.1.19)]. Upper bounds of more general type have been presented already in [14, 15]. □

Remark 3.1. *It is easy to confirm that the supremum over \underline{M}^2 is obtained at $q = y(v)$ and the infimum over \overline{M}^2 is attained at $\tau = \mathcal{A}\Lambda y(v)$ and $\beta \rightarrow 0$.*

3.2 Estimates for the cost functional

Applying Theorem 3.2 to the first term of (2.4), leads to two-sided bounds for $J(v)$. These bounds are guaranteed, have no gap, and do not depend on $y(v)$, i.e., they do not require the solution of the state equation.

Theorem 3.3. *For any $v \in \mathbf{U}$,*

$$\sup_{q \in \mathbf{V}_0} \underline{J}(v, q) = J(v) = \inf_{\substack{\tau \in \mathbf{Q} \\ \beta > 0}} \overline{J}(v, \tau, \beta), \quad (3.5)$$

where

$$\underline{J}(v, q) := \underline{M}^2(y^d, q, v) + \|v - u^d\|_{\mathcal{N}}^2 \quad (3.6)$$

and

$$\overline{J}(v, \tau, \beta) := \overline{M}^2(y^d, \tau, \beta, v) + \|v - u^d\|_{\mathcal{N}}^2. \quad (3.7)$$

Theorem 3.3 can be used to estimate $J(u)$. By (2.5) and (3.5),

$$\inf_{v \in \mathbf{U}_{\text{ad}}} \underline{J}(v, q) \leq J(u) \leq \overline{J}(v, \tau, \beta), \quad \forall q \in \mathbf{V}_0, v \in \mathbf{U}, \tau \in \mathbf{H}, \beta > 0, \quad (3.8)$$

where all inequalities hold as equalities if $v = u$, $q = y(u)$, $\tau = \mathcal{A}\Lambda y(u)$, and $\beta \rightarrow 0$. In view of (3.8), it is very important that the minimizer of $\underline{J}(v, q)$ over $v \in \mathbf{U}_{\text{ad}}$ can be explicitly computed. Computation of the minimizers of \overline{J} require further assumptions of the structure of the problem (cf. Propositions 4.1 and 4.2).

Proposition 3.1. *For all $v \in \mathbf{U}_{\text{ad}}$ and $q \in \mathbf{V}_0$,*

$$\begin{aligned} \underline{J}(\hat{v}(q), q) &= \inf_{v \in \mathbf{U}_{\text{ad}}} \underline{J}(v, q), \\ \underline{J}(v, \hat{q}(v)) &= \sup_{q \in \mathbf{V}_0} \underline{J}(v, q), \end{aligned} \quad (3.9)$$

where $\hat{q}(v) = y(v)$ (from (2.3)) and

$$\hat{v}(q) := \Pi_{\text{ad}}^{\mathcal{N}}(u^d + \mathcal{N}^{-1}\mathcal{B}^*(y^d - q)). \quad (3.10)$$

Proof. The condition $\hat{q}(v) = y(v)$ follows directly from Remark 3.1.

By (3.1), (3.3), and (3.6), \underline{J} has the following form

$$\begin{aligned} \underline{J}(v, q) &= \|y^d\|_{\mathcal{N}}^2 - 2\langle \ell, y^d \rangle - \|q\|_{\mathcal{N}}^2 + 2\langle \ell, q \rangle + 2\langle \mathcal{B}v, q - y^d \rangle_{\mathbf{V}_0} + \|v - u^d\|_{\mathcal{N}}^2 \\ &= \|v\|_{\mathcal{N}}^2 - 2\langle v, u^d \rangle_{\mathcal{N}} - 2\langle \mathcal{B}v, y^d \rangle_{\mathbf{V}_0} - \|q\|_{\mathcal{N}}^2 + 2\langle \ell, q \rangle + 2\langle \mathcal{B}v, q \rangle_{\mathbf{V}_0} + \text{const.} \end{aligned}$$

Clearly, it is quadratic w.r.t v and the minimizer $\hat{v} \in \mathbf{U}_{\text{ad}}$ is identified by the following variational inequality (see, e.g., [8, Chap. I, Th. 1.2]):

$$\langle \hat{v}, v - \hat{v} \rangle_{\mathcal{N}} \geq \langle v - \hat{v}, u^d \rangle_{\mathcal{N}} + \langle \mathcal{B}(v - \hat{v}), y^d - q \rangle_{\mathbf{V}_0}, \quad \forall v \in \mathbf{U}_{\text{ad}}.$$

Reorganizing and (2.2) yields

$$\langle \hat{v} - u^d + \mathcal{N}^{-1}\mathcal{B}^*(q - y^d), v - \hat{v} \rangle_{\mathcal{N}} \geq 0, \quad \forall v \in \mathbf{U}_{\text{ad}},$$

and Proposition 2.1 leads at (3.10). \square

Remark 3.2. *By (3.5) and (3.8), $\overline{J}(v, \tau, \beta)$ is an upper bound of $J(u)$ for all $v \in \mathbf{U}_{\text{ad}}$, $\tau \in \mathbf{Q}$, and $\beta > 0$ and $\underline{J}(v, q)$ is a lower bound for $J(v)$ for all $q \in \mathbf{U}_{\text{ad}}$, but it is a lower bound of $J(u)$ only if $v = \hat{v}(q)$ (see (3.10)).*

Remark 3.3. *Lower bound \underline{J} generates a saddle point formulation for the original optimal control problem (2.5). Find (\tilde{v}, \tilde{q}) satisfying*

$$\underline{J}(\tilde{v}, q) \leq \underline{J}(\tilde{v}, \tilde{q}) \leq \underline{J}(v, \tilde{q}), \quad \forall v \in \mathbf{U}_{\text{ad}}, q \in \mathbf{V}_0. \quad (3.11)$$

Note that \underline{J} is convex, lower semi-continuous, and coercive w.r.t. v and concave, upper semi-continuous, and anti-coercive w.r.t. q , \mathbf{U}_{ad} is convex, closed, and non-empty, and \mathbf{V}_0 is convex, closed, and non-empty. Thus, the solution of (3.11) exists and is unique (see, e.g., [3, Chap. VI, Pr. 2.4]). By Remark 3.1, $\tilde{v} = u$ and $\tilde{q} = y(u)$. Moreover, $\hat{v}(y(u)) = u$, where \hat{v} is defined in (3.10). The left and right-hand-side of (3.11) yield (3.1) and (2.8) (i.e., necessary conditions (2.3) and (2.7)), respectively.

Remark 3.4. By (3.8), $J(u) \leq J(v) \leq \bar{J}(v, \tau, \beta)$ and it is easy to see that $J(u) = \lim_{\beta \rightarrow 0} \bar{J}(u, \mathcal{A}\Lambda y(u), \beta)$. Thus, the upper bound generates a minimization problem

$$\bar{J}(u, \mathcal{A}\Lambda y(u), 0) = \min_{\substack{v \in \mathbf{U}_{\text{ad}}, \tau \in \mathbf{Q} \\ \beta > 0}} \bar{J}(v, \tau, \beta),$$

where the constraint related to (2.3) does not appear.

3.3 Estimates for an error quantity

The following identity can be viewed as an analog of (3.1) for the optimal control problem.

Theorem 3.4. For any $v \in \mathbf{U}_{\text{ad}}$,

$$\|y(v) - y(u)\|^2 + \|v - u\|_{\mathcal{N}}^2 + \langle J'(u), v - u \rangle_{\mathbf{U}} = J(v) - J(u). \quad (3.12)$$

Proof. We have,

$$\begin{aligned} J(v) - J(u) = & \|y(v) - y(u)\|^2 + 2a(y(v) - y(u), y(u) - y^d) \\ & + \|v - u\|_{\mathcal{N}}^2 + 2(v - u, u - u^d)_{\mathcal{N}}. \end{aligned}$$

By (2.3) and (2.6),

$$a(y(v) - y(u), y(u) - y^d) = \langle \mathcal{B}(v - u), y(u) - y^d \rangle_{\mathbf{V}_0}$$

and

$$2a(y(v) - y(u), y(u) - y^d) + 2(v - u, u - u^d)_{\mathcal{N}} = \langle J'(u), v - u \rangle_{\mathbf{U}}.$$

□

Remark 3.5. If $\mathbf{U}_{\text{ad}} = \mathbf{U}$, then $\langle J'(u), v \rangle_{\mathbf{U}} = 0$, for all $v \in \mathbf{U}$ and (3.12) reduces to [16, Ch. 9, Th. 9.14].

Equality (3.12) shows that it is reasonable to include $\langle J'(u), v - u \rangle_{\mathbf{U}}$ to the applied error measure. Obviously, $\langle J'(u), v - u \rangle_{\mathbf{U}}$ is positive for any $v \in \mathbf{U}_{\text{ad}}$ by (2.7), it is convex and vanishes if $v = u$. Thus, the error measure is

$$\text{err}^2(v) := \|y(v) - y(u)\|^2 + \|v - u\|_{\mathcal{N}}^2 + \langle J'(u), v - u \rangle_{\mathbf{U}}. \quad (3.13)$$

The ‘‘derivative weight’’ guarantees that the sensitivity of the cost functional at the optimal control is taken into account. Most importantly, $\text{err}(v)$ can be estimated from both sides by computable functionals, which do not require the knowledge of the optimal control u , the respective state $y(u)$, or the exact state $y(v)$. Indeed, applying (3.5), (3.8), and (3.9) to the right hand side of (3.12) yields the following theorem:

Theorem 3.5. For any $v \in \mathbf{U}_{\text{ad}}$,

$$\sup_{\substack{q \in \mathbf{V}_0, v_2 \in \mathbf{U}_{\text{ad}}, \\ \tau \in \mathbf{Q}, \beta > 0}} \underline{\text{err}}^2(v, q, v_2, \tau, \beta) = \text{err}^2(v) = \inf_{\substack{\tau \in \mathbf{Q}, \beta > 0, \\ q_2 \in \mathbf{V}_0}} \overline{\text{err}}^2(v, \tau_2, \beta_2, q_2), \quad (3.14)$$

where

$$\underline{\text{err}}^2(v, q, v_2, \tau, \beta) := \underline{J}(v, q) - \bar{J}(v_2, \tau, \beta)$$

and

$$\overline{\text{err}}^2(v, \tau_2, \beta_2, q_2) := \bar{J}(v, \tau_2, \beta_2) - \underline{J}(\hat{v}(q_2), q_2).$$

Remark 3.6. By Remark 3.2, (3.6), (3.7), and (3.12), the equality (3.14) is attained at

$$\underline{\text{err}}^2(v, y(v), u, \mathcal{A}\Lambda y(u), 0) = \text{err}^2(v) = \overline{\text{err}}^2(v, \mathcal{A}\Lambda y(v), 0, y(u)).$$

Remark 3.7. Obviously $J(v)$ and $\text{err}^2(v)$ are positive. However, e.g., the lower bound $\underline{J}(\hat{v}(q_2), q_2)$ for $J(u)$ may be negative if q_2 is not close enough to $y(u)$ and $\underline{\text{err}}^2(v, q, v_2, \tau, \beta)$ may be negative value if v_2 is not “good enough” in comparison with v , or the upper bound $\bar{J}(v_2, \tau, \beta)$ is not “sharp enough”.

4 Examples, algorithms and numerical tests

4.1 Examples

In the following examples, the domain $\Omega \subset \mathbb{R}^d$ is open, simply connected and has a piecewise Lipschitz-continuous boundary Γ . Spaces are $W = L^2(\Omega)$, $V = H^1(\Omega)$, $H = L^2(\Omega, \mathbb{R}^d)$, and $Q = H(\text{div}, \Omega)$. Operators are $\Lambda = \nabla$, $\Lambda^* = -\text{div}$, $\mathcal{A} = \text{Id}$, and $N = \alpha \text{Id}$ ($\alpha > 0$). Then $a(q, z) := (\nabla q, \nabla z)_{L^2(\Omega, \mathbb{R}^d)}$ and $\|w\| = \|\nabla w\|_{L^2(\Omega, \mathbb{R}^d)}$. The examples differ only by the selection of V_0 , U , \mathcal{B} , and ℓ .

4.1.1 Dirichlet problem, distributed control

Let $U := L^2(\Omega)$, $V_0 := H_0^1(\Omega)$, and $\langle \ell, w \rangle = (f, w)_{L^2(\Omega)}$, where $f \in L^2(\Omega)$. Moreover, $B = \text{Id}$, i.e., $\langle Bv, q \rangle = (v, q)_{L^2(\Omega)}$. The analog of (2.1) is the Friedrichs inequality

$$\|q\|_{L^2(\Omega)} \leq c_\Omega \|\nabla q\|_{L^2(\Omega, \mathbb{R}^d)}, \quad \forall q \in H_0^1(\Omega).$$

The cost functional (2.4) is

$$J(v) := \|\nabla(y(v) - y^d)\|_{L^2(\Omega, \mathbb{R}^d)}^2 + \alpha \|v - u^d\|_{L^2(\Omega)}^2. \quad (4.1)$$

The state equation (2.3) is

$$(\nabla y(v), \nabla z)_{L^2(\Omega, \mathbb{R}^d)} = (f + v, z)_{L^2(\Omega)}, \quad \forall z \in H_0^1(\Omega) \quad (4.2)$$

and it has the classical form

$$\begin{cases} -\Delta y(v) &= f + v & \text{a.e. in } \Omega, \\ y(v) &= 0 & \text{on } \Gamma. \end{cases}$$

The majorant (3.4) is

$$\bar{M}^2(q, \tau, \beta, v) = (1 + \beta) \|\tau - \nabla z\|_{L^2(\Omega, \mathbb{R}^d)}^2 + \frac{1 + \beta}{\beta} c_\Omega^2 \|\text{div} \tau + f + v\|_{L^2(\Omega)}^2.$$

The counterpart of the Proposition 3.1 is below.

Proposition 4.1. For all $v \in U_{\text{ad}}$, $\tau \in H(\text{div}, \Omega)$, and $\beta > 0$

$$\begin{aligned} \bar{J}(\hat{v}(\tau, \beta), \tau, \beta) &= \inf_{v \in U_{\text{ad}}} \bar{J}(v, \tau, \beta), \\ \bar{J}(v, \hat{\tau}(v, \beta), \beta) &= \inf_{\tau \in H(\text{div}, \Omega)} \bar{J}(v, \tau, \beta), \\ \bar{J}(v, \tau, \hat{\beta}(v, \tau)) &= \inf_{\beta > 0} \bar{J}(v, \tau, \beta), \end{aligned}$$

where

$$\hat{v}(\tau, \beta) = \Pi_{\text{ad}} \left(\frac{\alpha\beta}{(1+\beta)c_\Omega^2} u^d - \text{div}\tau - f \right), \quad (4.3)$$

$\hat{\tau} := \hat{\tau}(v, \beta)$ satisfies

$$\begin{aligned} & \beta(\hat{\tau}, \xi)_{L^2(\Omega, \mathbb{R}^d)} + c_\Omega^2(\text{div}\hat{\tau}, \text{div}\xi)_{L^2(\Omega)} \\ &= \beta(\nabla y^d, \xi)_{L^2(\Omega, \mathbb{R}^d)} + c_\Omega^2(f + v, \text{div}\xi)_{L^2(\Omega)}, \quad \forall \xi \in H(\text{div}, \Omega), \end{aligned} \quad (4.4)$$

and

$$\hat{\beta}(v, \tau) = \frac{c_\Omega \|\text{div}\tau + f + v\|_{L^2(\Omega)}}{\|\tau - \nabla y^d\|_{L^2(\Omega, \mathbb{R}^d)}}. \quad (4.5)$$

Proof. The upper bound \bar{J} can be rewritten as follows,

$$\begin{aligned} \bar{J}(v, \tau, \beta) &= (1+\beta)\|\tau - \nabla z\|_{L^2(\Omega, \mathbb{R}^d)}^2 + \frac{1+\beta}{\beta}c_\Omega^2\|\text{div}\tau + f + v\|_{L^2(\Omega)}^2 + \alpha\|v - u^d\|_{L^2(\Omega)}^2 \\ &= \left(\frac{1+\beta}{\beta}c_\Omega^2 + \alpha \right) \|v\|_{L^2(\Omega)}^2 - 2 \left(\alpha u^d - \frac{1+\beta}{\beta}c_\Omega^2(\text{div}\tau + f), v \right)_{L^2(\Omega)} + \text{const w.r.t } v. \end{aligned}$$

Thus, the minimizer $\hat{v} \in \mathbf{U}_{\text{ad}}$ satisfies

$$\left(\frac{1+\beta}{\beta}c_\Omega^2 + \alpha \right) (\hat{v}, w - \hat{v})_{L^2(\Omega)} \geq \left(\alpha u^d - \frac{1+\beta}{\beta}c_\Omega^2(\text{div}\tau + f), w - \hat{v} \right)_{L^2(\Omega)}, \quad \forall w \in \mathbf{U}_{\text{ad}}.$$

Reorganizing leads at

$$\left(\hat{v} - \frac{\alpha\beta}{(1+\beta)c_\Omega^2} u^d + \text{div}\tau + f, w - \hat{v} \right)_{L^2(\Omega)}, \quad \forall w \in \mathbf{U}_{\text{ad}},$$

and Proposition 2.1 yields (4.3).

Condition (4.4) can be easily derived, since \bar{M}^2 is quadratic w.r.t. $\tau \in H(\text{div}, \Omega)$ and (4.5) results from solving a one-dimensional minimization problem. \square

The relation (3.10) becomes

$$\hat{v}(q) = \Pi_{\text{ad}} \left(u^d + \frac{1}{\alpha}(y^d - q) \right), \quad (4.6)$$

where $\Pi_{\text{ad}} : L^2(\Omega) \rightarrow \mathbf{U}_{\text{ad}}$ is a projection.

Example 4.1. If $\mathbf{U}_{\text{ad}} = L^2(\Omega)$, then by (2.11) $y(u) \in H_0^1(\Omega)$ satisfies

$$\begin{aligned} & (\nabla y(u), \nabla z)_{L^2(\Omega, \mathbb{R}^d)} + \frac{1}{\alpha}(y(u), z)_{L^2(\Omega)} \\ &= (f + \frac{1}{\alpha}y^d + u^d, z)_{L^2(\Omega)}, \quad \forall z \in H_0^1(\Omega) \end{aligned} \quad (4.7)$$

and $\Pi_{\text{ad}} = \text{Id}$ in (4.3) and (4.6).

Example 4.2. Let

$$\mathbf{U}_{\text{ad}} = \{v \in L^2(\Omega) \mid \psi_- \leq v \leq \psi_+ \quad \text{a.e in } \Omega\}, \quad (4.8)$$

then the projection operator $\Pi_{\text{ad}} : L^2(\Omega) \rightarrow \mathbf{U}_{\text{ad}}$ is

$$\Pi_{\text{ad}}v = \min \{\psi_+, \max \{\psi_-, v\}\}.$$

Example 4.3. *Let*

$$\mathbf{U}_{\text{ad}} = \{v \in L^2(\Omega) \mid \|v\|_{L^2(\Omega)} \leq M\},$$

then the projection operator $\Pi_{\text{ad}} : L^2(\Omega) \rightarrow \mathbf{U}_{\text{ad}}$ is

$$\Pi_{\text{ad}}v = \begin{cases} \frac{Mv}{\|v\|_{L^2(\Omega)}} & \text{if } \|v\|_{L^2(\Omega)} > M, \\ v & \text{else} \end{cases}$$

Finally, functional a posteriori error estimates for the problem (4.7) are recalled. (see, e.g., [16, Ch. 4.2], and [10, Ch. 3.2]).

Theorem 4.1. *Let y be the solution of (4.7) and $z \in H_0^1(\Omega)$, then*

$$\|\nabla(y - z)\|_{L^2(\Omega, \mathbb{R}^d)}^2 + \frac{1}{\alpha}\|y - q\|_{L^2(\Omega)}^2 = \inf_{\substack{\tau \in H(\text{div}, \Omega), \beta > 0, \\ \nu \in L^2(\Omega, [0, 1])}} \overline{M}(z, \tau, \beta, \nu),$$

where

$$\begin{aligned} \overline{M}(z, \tau, \beta, \nu) &:= (1 + \beta)\|\nabla z - \tau\|_{L^2(\Omega, \mathbb{R}^d)}^2 \\ &\quad + \frac{1+\beta}{\beta}c_\Omega^2\|\nu\mathcal{R}(z, \tau)\|_{L^2(\Omega)}^2 + \alpha\|(1 - \nu)\mathcal{R}(z, \tau)\|_{L^2(\Omega)}^2 \end{aligned}$$

and

$$\mathcal{R}(z, \tau) = \text{div}\tau - \frac{1}{\alpha}z + f + \frac{1}{\alpha}y^d + u^d.$$

4.1.2 Neumann problem, boundary control

The boundary Γ consists of two parts $\Gamma_N \cup \Gamma_D$, where Γ_D has a positive measure. By the trace theorem there exists a bounded linear mapping $\gamma : H_0^1(\Omega) \rightarrow L^2(\Gamma_N)$,

$$\|\gamma q\|_{L^2(\Gamma_N)} \leq c\|q\|_{H^1(\Omega)},$$

such that $\gamma v = v|_\Gamma$ for all $v \in C^1(\bar{\Omega})$. Let $\mathbf{U} := L^2(\Gamma_N)$ and

$$\mathbf{V}_0 := V_0 := \{w \in H^1(\bar{\Omega}) \mid w \text{ has zero trace on } \Gamma_D\}.$$

Moreover, $\langle Bv, q \rangle = (v, \gamma q)_{L^2(\Gamma_N)}$ and $\langle \ell, q \rangle = (f, q)_{L^2(\Omega)} - (g, \gamma q)_{L^2(\Gamma_N)}$, where $f \in L^2(\Omega)$ and $g \in L^2(\Gamma_N)$.

The cost functional (2.4) is

$$J(v) := \|\nabla(y(v) - y^d)\|_{L^2(\Omega)}^2 + \alpha\|v - u^d\|_{L^2(\Gamma_N)}^2,$$

and the state equation (3.1) is

$$(\nabla y(v), \nabla q)_{L^2(\Omega, \mathbb{R}^d)} = (f, q)_{L^2(\Omega)} + (g + v, \gamma q)_{L^2(\Gamma_N)}, \quad \forall q \in V_0.$$

It has the classical form

$$\begin{cases} -\Delta y(v) &= f & \text{a.e. in } \Omega, \\ y(v) &= 0 & \text{on } \Gamma_D, \\ \frac{\partial y(v)}{\partial n} &= g + v & \text{on } \Gamma_N. \end{cases}$$

The majorant (3.4) has the form (see, e.g., [16, Sect. 4.1] for details)

$$\begin{aligned} \overline{M}^2(q, \tau, \beta) &= (1 + \beta) \|\tau - \nabla q\|_{L^2(\Omega, \mathbb{R}^d)}^2 \\ &\quad + \frac{1 + \beta}{\beta} \left(c_{\Omega, 2}^2 \|\operatorname{div} \tau + f\|_{L^2(\Omega)}^2 + c_{\Gamma_N}^2 \left\| \frac{\partial \tau}{\partial n} + g + v \right\|_{L^2(\Gamma_N)}^2 \right), \end{aligned}$$

where constants satisfy

$$\|q\|_{L^2(\Omega)} \leq c_{\Omega, 2} \|\nabla q\|_{L^2(\Omega, \mathbb{R}^2)} \quad \text{and} \quad \|q\|_{L^2(\Gamma_N)} \leq c_{\Gamma_N} \|\nabla q\|_{L^2(\Omega, \mathbb{R}^2)}, \quad \forall q \in V_0.$$

Proposition 4.2. *For all $q \in H_0^1(\Omega)$, $\tau \in H(\operatorname{div}, \Omega)$, and $\beta > 0$*

$$\overline{J}(q, \hat{\tau}, \beta) = \inf_{\tau \in H(\operatorname{div}, \Omega)} \overline{J}(q, \tau, \beta),$$

$$\overline{J}(q, \tau, \hat{\beta}) = \inf_{\beta > 0} \overline{J}(q, \tau, \beta),$$

where $\hat{\tau}$ satisfies

$$\begin{aligned} &\beta(\hat{\tau}, \xi)_{L^2(\Omega, \mathbb{R}^d)} + c_{\Omega}^2 (\operatorname{div} \hat{\tau}, \operatorname{div} \xi)_{L^2(\Omega)} + c_{\Gamma_N}^2 \left(\frac{\partial \hat{\tau}}{\partial n}, \frac{\partial \xi}{\partial n} \right)_{L^2(\Gamma_N)} \\ &= \beta(\nabla q, \xi)_{L^2(\Omega, \mathbb{R}^d)} + c_{\Omega}^2 (f + v, \operatorname{div} \xi)_{L^2(\Omega)} + c_{\Gamma_N}^2 (g + v, \frac{\partial \xi}{\partial n})_{L^2(\Gamma_N)}, \quad \forall \xi \in H(\operatorname{div}, \Omega) \end{aligned}$$

and

$$\hat{\beta} = \frac{\left(c_{\Omega, 2}^2 \|\operatorname{div} \tau + f\|_{L^2(\Omega)}^2 + c_{\Gamma_N}^2 \left\| \frac{\partial \tau}{\partial n} + g + v \right\|_{L^2(\Gamma_N)}^2 \right)^{1/2}}{\|\tau - \nabla q\|_{L^2(\Omega, \mathbb{R}^d)}}.$$

4.2 Algorithms

The results of Sect. 3 give grounds for several error estimation Algorithms. Note that the estimates in Theorems 3.3 and 3.5 are valid for any approximations from \mathbf{U}_{ad} . There is no need for Galerkin orthogonality, extra regularity, or mesh dependent data. Thus they can be combined with any existing numerical scheme, which generates approximations of the optimal control (and/or state). Computation of the derived estimates requires some finite dimensional subspaces. Hereafter, assume that $\mathbf{U}_{\text{ad}}^h \subset \mathbf{U}_{\text{ad}}$, $\mathbf{V}_0^h \subset \mathbf{V}_0$ and $\mathbf{Q}^h \subset \mathbf{Q}$ are given. They can be generated, e.g., by finite elements or Fourier series. The approximate solution of (2.3) is $y^h(v) \in \mathbf{V}_0^h \subset \mathbf{V}_0$ that satisfies

$$a(y^h(v), z) = \langle Bv + \ell, z \rangle_{\mathbf{V}_0}, \quad \forall z \in \mathbf{V}_0^h. \quad (4.9)$$

Remark 4.1. *By Remark 3.2, the evaluation of (the approximation of) $J(v)$ by computing $y^h(v)$ from (4.9) and $J_h(v) := \|y^h(v) - y^d\|^2 + \|v - u^d\|_{\mathcal{N}}^2$ coincides with the lower bound $\underline{J}(v, y^h(v)) = \max_{y \in \mathbf{V}_0^h} \underline{J}(v, y)$.*

The generation of the estimates for the cost function value $J(v)$ for a given approximation $v \in \mathbf{U}_{\text{ad}}$ is depicted as Algorithm 1.

In order to test the presented error estimates, a projected gradient method (see, e.g., [5, 7]) is applied to generate a sequence approximations. Method consists of line searches along (anti)gradient directions, where all evaluated points are first projected to the admissible set. A projected gradient method with

Algorithm 1 Generation of bounds for the cost functional value

input: $v \in \mathbf{U}_{\text{ad}}$ {approximation of the control} \mathbf{V}_0^h {subspace for state}, \mathbf{Q}^h {subspace for the flux of state}, I_{max} {maximum number of iterations}, ε {stopping criteria}

$$y^h = \operatorname{argmax}_{y \in \mathbf{V}_0^h} \underline{J}(v, y) \text{ \{compute } y^h(v) \text{ from (4.9)\}}$$

$$\hat{v}^h = \operatorname{argmin}_{v \in \mathbf{U}_{\text{ad}}} \underline{J}(v, y^h) \text{ \{compute } \hat{v}(y^h) \text{ by (3.10)\}}$$

$$\beta^0 = 1$$

for $k = 1$ **to** I_{max} **do**

$$\tau^k = \operatorname{argmin}_{\tau \in \mathbf{Q}^h} \bar{J}(v, \tau, \beta^{k-1})$$

$$\beta^k = \operatorname{argmin}_{\beta > 0} \bar{J}(v, \tau^k, \beta)$$

$$\text{if } \frac{\bar{J}(v, \tau^{k-1}, \beta^{k-1}) - \bar{J}(v, \tau^k, \beta^k)}{\bar{J}(v, \tau^k, \beta^k)} < \varepsilon \text{ then}$$

break

end if

end for

$$\underline{J}_h(v) = \underline{J}(v, y^h)$$

$$\bar{J}_h(v) = \bar{J}(v, \tau^k, \beta^k)$$

$$\underline{J}_h(u) = \underline{J}(\hat{v}^h, y^h)$$

output: $\underline{J}_h(u)$ {lower bound for $J(v)$ }, $\bar{J}_h(v)$ {upper bound for $J(v)$ }, $\underline{J}_h(u)$ {lower bound for $J(u)$ },

error estimates is depicted as Algorithm 2. At the beginning of every projected gradient step Algorithm 1 is used to generate approximations for the cost functional. After the execution of Algorithm 2 (N iteration steps taken), cost estimates are recalled to generate two-sided estimates for $\text{err}(v)$ (i.e., the difference $J(v) - J(u)$) at each iteration step ($k = 1, \dots, N$) as follows:

$$\text{err}^2(v^k) \geq \underline{J}_h^2(v^k) - \bar{J}_h(v^N)$$

$$\text{err}^2(v^k) \leq \bar{J}_h(v^k) - \underline{J}_h^N(u)$$

Note that the iterate of the last step (N 'th step) is used to generate as accurate bounds as possible for $J(u)$.

4.3 Numerical tests

Finite dimensional subspaces are generated by the finite element method (see, e.g., [1]). In these tests, $\mathbf{U} = L^2(\Omega)$, $\mathbf{V}_0 = H_0^1(\Omega)$, and $\mathbf{Q} = H(\text{div}, \Omega)$. Subspaces $DG_h^p \subset L^2(\Omega)$, $V_h^p \subset H_0^1(\Omega)$, and $\text{RT}^p \subset H(\text{div}, \Omega)$ are generated by Discontinuous Galerkin elements, Lagrange elements, and Raviart-Thomas elements, respectively. Superscripts p denote the order of basis functions. All the numerical tests were performed using FEniCS (see [9, Ch. 3] for detailed descriptions of the applied elements and for additional references).

Example 4.4. Let $\Omega = (0, 1)^2$. Consider the optimal control problem generated by (4.1), (4.2), and \mathbf{U}_{ad} defined by (4.8), where $\psi_-(x_1, x_2) = -3$ and

Algorithm 2 Projected gradient method with guaranteed cost estimates

input: $v^0 \in \mathbf{U}_{\text{ad}}$ {initial approximation of the control} \mathbf{V}_0^h {subspace for state}, \mathbf{Q}^h {subspace for the flux of state}, $I_{\text{max}}^{\text{PG}}$ {maximum number of iterations (projected gradient)}, ε^{PG} {stopping criteria (projected gradient)} I_{max} {maximum number of iterations (\bar{J} minimization)}, ε {stopping criteria (\bar{J} minimization)}

for $k = 0$ **to** $I_{\text{max}}^{\text{PG}}$ **do**
 $\{ \underline{J}_h(v^k), \bar{J}_h(v^k), \underline{J}_h^k(u) \} = \text{GenerateCostEstimates}(v^k, \mathbf{V}_0^h, \mathbf{Q}^h, I_{\text{max}}, \varepsilon)$
 $d^k = 2 (B^*(y^d - y(v^k)) + \mathcal{N}(u^d - v^k))$ {search direction}
 $s^k = \text{argmin}_{\lambda \in [0, \lambda_{\text{max}}]} J_h(\Pi_{\text{ad}}(v^k + \lambda d^k))$ {step length (golden section method)}
 $v^{k+1} = v^k + s^k d^k$ {update approximation}
if $\frac{\|v^k - v^{k-1}\|}{\|v^{k-1}\|} < \varepsilon^{\text{PG}}$ **then**
break
end if
end for

output: $\{v^k\}_{k=1}^N$ {sequence of approximations}, $\{\underline{J}_h(v^k)\}_{k=1}^N$ {lower bounds for $J(v^n)$ }, $\{\bar{J}_h(v^k)\}_{k=1}^N$ {upper bounds for $J(v^n)$ }, $\underline{J}_h^N(u)$ {lower bound for $J(u)$ }

$\psi_+(x_1, x_2) = 3$. *Select*

$$\begin{aligned} y(x_1, x_2) &= \sin(k_1 \pi x_1) \sin(k_1 \pi x_2), \\ y^d(x_1, x_2) &= \sin(k_1 \pi x_1) \sin(k_1 \pi x_2) + \beta \sin(m_1 \pi x_1) \sin(m_1 \pi x_2), \\ u^d(x_1, x_2) &= 0 \\ u(x_1, x_2) &= \max \left\{ \psi_-(x_1, x_2), \min \left\{ \psi_+(x_1, x_2), \frac{\beta}{\alpha} \sin(m_1 \pi x_1) \sin(m_1 \pi x_2) \right\} \right\} \\ f(x_1, x_2) &= \pi^2 (k_1^2 + k_2^2) \sin(k_1 \pi x_1) \sin(k_1 \pi x_2) - u(x_1, x_2), \end{aligned}$$

where $k_1, k_2, m_1, m_2 \in \mathbb{Z}$ and $\beta \in \mathbb{R}$.

In Example 4.4, select $k_1 = 1$, $k_2 = 1$, $m_1 = 2$, $m_2 = 1$, $\beta = 0.5$, and $\alpha = 0.05$. A mesh of 50×50 cells divided to triangular elements is being used. Consider first linear elements, i.e., $p_1 = p_2 = p_3 = 1$, the amount of corresponding global degrees of freedom are $\dim(\text{DG}_h^1) = 15000$, $\dim(V_h^1) = 2601$, and $\dim(\text{RT}_h^1) = 7600$. The bounds generated by Algorithm 2 ($I_{\text{max}}^{\text{PG}} = 10$) are depicted in Figure 1. If the order of approximation for state and flux are increased, i.e., subspaces \mathbf{V}_h and \mathbf{Q}_h are enhanced, then the accuracy of error bounds improves significantly (see Fig. 2). Here $\dim(V_h^2) = 10201$ and $\dim(\text{RT}_h^2) = 25200$. In previous examples, $J(v)$ and $J(u)$ (and other integrals also) were computed using a uniformly refined mesh and 121 integration points in each triangle.

Obviously, the negative lower bound for the error could be rejected immediately. Sharp lower bound requires a very good approximation of the optimal control $v \approx u$ and the corresponding flux of the respective state $\tau \approx \nabla y(u)$. Then the upper bound $J(u) \leq J(v) \leq \bar{J}(v, \tau, \beta)$ would be very efficient. However, ten steps of the projected gradient method does not provide a very accurate

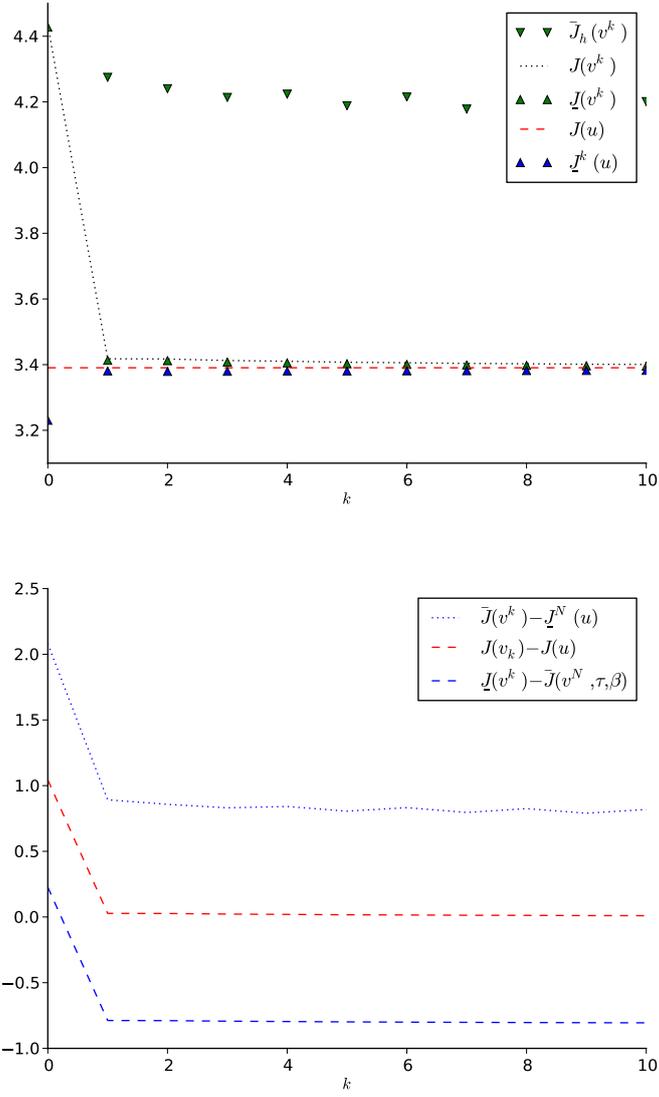


Figure 1: Estimates for the cost function value (top) and the error quantity (bottom), where subspaces for control, state, and flux are DG_h^1 , V_h^1 , and RT_h^1 , respectively.

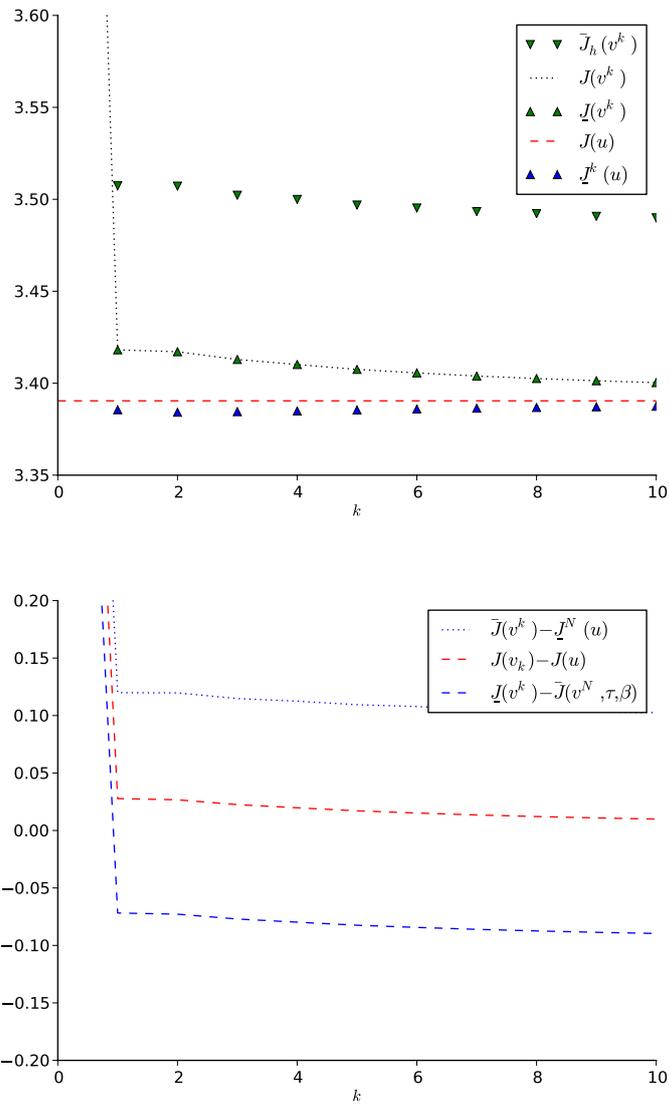


Figure 2: Estimates for the cost function value (top) and the error quantity (bottom), where subspaces for control, state, and flux are DG_h^1 , V_h^2 , and RT_h^2 , respectively.

approximation. It is a matter of further numerical tests to apply more efficient approximation methods (see, e.g., [6]) and to apply the element wise contributions of the error estimates to generate adaptive sequences of subspaces.

References

- [1] P. G. Ciarlet. *The finite element method for elliptic problems*. North-Holland Publishing Co., Amsterdam, 1978. Studies in Mathematics and its Applications, Vol. 4.
- [2] F. Clarke. *Functional analysis, calculus of variations and optimal control*, volume 264 of *Graduate Texts in Mathematics*. Springer, London, 2013.
- [3] I. Ekeland and R. Temam. *Convex Analysis and Variational Problems*. North-Holland, New York, 1976.
- [4] A. Gaevskaya, R. W. H. Hoppe, and S. Repin. A posteriori error estimation for elliptic optimal control problems with distributed control. *J. Math. Sci. (N. Y.)*, 144:4535–4547, 2007.
- [5] W. A. Gruver and E. Sachs. *Algorithmic methods in optimal control*, volume 47 of *Research Notes in Mathematics*. Pitman (Advanced Publishing Program), Boston, Mass.-London, 1981.
- [6] K. Ito and K. Kunisch. *Lagrange multiplier approach to variational problems and applications*, volume 15 of *Advances in Design and Control*. Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, 2008.
- [7] C. T. Kelley. *Iterative methods for optimization*, volume 18 of *Frontiers in Applied Mathematics*. Society for Industrial and Applied Mathematics (SIAM), Philadelphia, PA, 1999.
- [8] J.-L. Lions. *Optimal control of systems governed by partial differential equations*. Translated from the French by S. K. Mitter. Die Grundlehren der mathematischen Wissenschaften, Band 170. Springer-Verlag, New York, 1971.
- [9] A. Logg, K.-A. Mardal, G. N. Wells, et al. *Automated Solution of Differential Equations by the Finite Element Method*. Springer, 2012.
- [10] O. Mali, S. Repin, and P. Neittaanmäki. *Accuracy verification methods, theory and algorithms*, volume 32 of *Computational Methods in Applied Sciences*. Springer, 2014.
- [11] S. G. Mikhlin. *Variational methods in mathematical physics*. Translated by T. Boddington; editorial introduction by L. I. G. Chambers. A Pergamon Press Book. The Macmillan Co., New York, 1964.
- [12] J.-J. Moreau. Proximité et dualité dans un espace hilbertien. *Bull. Soc. Math. France*, 93:273–299, 1965.
- [13] P. Neittaanmäki and S. Repin. *Reliable methods for computer simulation, Error control and a posteriori estimates*. Elsevier, New York, 2004.

- [14] S. Repin. A posteriori estimates for approximate solutions of variational problems with strongly convex functionals. *Problems of Mathematical Analysis*, 17:199–226, 1997.
- [15] S. Repin. A posteriori error estimation for variational problems with uniformly convex functionals. *Math. Comp.*, 69(230):481–500, 2000.
- [16] S. Repin. *A posteriori estimates for partial differential equations*, volume 4 of *Radon Series on Computational and Applied Mathematics*. Walter de Gruyter GmbH & Co. KG, Berlin, 2008.
- [17] F. Tröltzsch. *Optimal control of partial differential equations*, volume 112 of *Graduate Studies in Mathematics*. American Mathematical Society, Providence, RI, 2010. Theory, methods and applications, Translated from the 2005 German original by Jürgen Sprekels.