

Optimal engine performance using inference for non-identical finite source and sink

Preety Aneja ^{*}, Harsh Katyayan and Ramandeep S. Johal [†]

Department of Physical Sciences

Indian Institute of Science Education and Research, Mohali

Sector 81, Knowledge city

Manauli P.O., Ajit Garh - 140306, Punjab, India

We quantify the prior information to infer the optimal characteristics for a constrained thermodynamic process of maximum work extraction for a pair of non-identical finite systems. The total entropy of the whole system remains conserved. The ignorance is assumed about the final temperature of the finite systems and then a prior distribution is assigned to the unknown temperatures. We derive the estimates of efficiency for this reversible model of heat engine with incomplete information. The estimates show good agreement with efficiency at optimal work for arbitrary sizes of systems, however the estimates become exact when one of the reservoir becomes very large in comparison to the other.

PACS numbers: 05.70.-a, 05.70.Ln, 02.50.Cw

Keywords: Inference; Constrained thermodynamic process; Finite source/sink

I. INTRODUCTION

In this paper, we revisited the problem of maximum work extraction from the inference approach [1–5]. The extraction of maximum work using a pair of finite source and sink has been discussed earlier in literature [6–10]. The whole set-up working as a heat engine delivers maximum work for a reversible process in accordance with *Maximum Work Theorem*. The maximum achievable efficiency of such a heat engine is clearly less than that of the *Carnot efficiency* (η_c) because of the finite size of source/sink. In recent years, the field of finite-time thermodynamics has become a popular area of research since it deals with the realistic constraints in heat engines such as finite-time of the engine operation cycle, finite reservoirs, internal friction etc. These constraints, in turn, lead to a less efficient heat engine than Carnot engine but is of practical importance. However, such engines can be optimised to deliver maximum power with a compromise of efficiency.

^{*} preetyaneja@iisermohali.ac.in

[†] rsjohal@iisermohali.ac.in

The inference approach is based on Bayesian approach to uncertainty [11–14] in which any uncertainty can be treated probabilistically. This probabilistic approach is associated with a rational degree of belief of the observer rather than relative frequency interpretation of probability [15, 16]. The uncertain parameter is assigned with a probability distribution simply known as a prior to quantify the ignorance of the likely values of the uncertain parameter. Priors with different justification have been proposed [12, 17–20]. In our work, we propose prior for a constrained thermodynamic process with incomplete information of the thermodynamic coordinates.

In our previous work [2], we addressed the problem of maximum work extraction with finite source/sink within this inference approach. A pair of identical, similar sized finite reservoirs were considered which serve as finite source and sink. The fundamental thermodynamic relation obeyed by the reservoirs is taken to be $S = \kappa U^{\omega_1}$, where κ may depend on some universal constants and/or volume, particle number of the system. We restrict to the case $0 < \omega_1 < 1$, which implies systems with a positive heat capacity. The optimal or maximum work extracted from this reservoir set-up is estimated. The efficiency at optimal work is also inferred upto second order as $\eta \approx \eta_c/2 + \eta_c^2/8$ [21–24], in near equilibrium regime ($\eta_c \ll 1$). A generalisation of this approach can be thought of by considering the non-identical systems as reservoirs [4]. In paper [4], finite reservoirs are modelled by perfect gas systems with different constant heat capacities. Thus, the new information about distinct source and sink was utilized in the assignment of prior for the uncertain temperatures. The temperatures T_1 and T_2 can be distinguished now. Moreover, the ranges of allowed values of T_1 and T_2 are different. In this paper, we consider two dissimilar systems obeying a thermodynamic relation of the form $S = \kappa U^{\omega_1}$ and reconsider the maximum work extraction process within inference approach. We derive the temperature and efficiency estimates for this model which show remarkable agreement with their optimal values.

This paper is organised as follows. In section II, we discuss the model for finite reservoirs. Section III outlines the discussion of the range for T_1 and T_2 and the form of priors. It also comprises of the discussion of inference for special cases when one system becomes very large in comparison to the other. Then, we discuss the estimation procedure close to equilibrium analytically. In section V A, numerical results for arbitrary sizes of reservoirs have discussed. Finally in section VI, we make some concluding remarks on our extended inference approach applied in case of non-identical systems.

II. MODEL

To model the finite reservoirs, consider a pair of thermodynamic systems obeying the relation of the form $S = \kappa U^{\omega_1}$, where U is the internal energy of the system and ω_1 is some known constant. Some well-known physical examples in this framework are the ideal Fermi gas ($\omega_1 = 1/2$), the degenerate Bose gas ($\omega_1 = 3/5$) and the black body radiation ($\omega_1 = 3/4$) [25]. Classical ideal gas can also be treated as the limit, $\omega_1 \rightarrow 0$. Using the basic definition : $\partial S/\partial U = 1/T$, we get: $U = (\omega_1 \kappa T)^{1+\omega_1}$. Alternately, we can write : $S = \kappa^{1+\omega_1} (\omega_1 T)^{\omega_1}$, where $\omega = \omega_1/(1 - \omega_1)$.

Since the thermodynamic relation obeyed by the two systems remains the same, the two may be non-identical only if they differ in their volumes, number/nature of particles etc. Thus, it is the constant of proportionality, κ , which is different for the two systems. Let T_+ and T_- ($< T_+$) be the initial temperatures of two systems with κ_1 and κ_2 as the proportionality constants respectively.

To perform inference, examine an arbitrary intermediate stage of the process when the temperatures of the two systems are T'_1 and T'_2 respectively. The work extracted from the engine is $W = -\Delta U$ which can be written as:

$$W = (k_2 \omega_1)^{1+\omega} \left[\gamma^{-(1+\omega)} (T_+^{1+\omega} - T_1'^{1+\omega}) + (T_-^{1+\omega} - T_2'^{1+\omega}) \right], \quad (1)$$

where $\gamma = \kappa_2/\kappa_1$. For convenience, we define $\gamma^{1+\omega} = \sigma$, $\theta = T_-/T_+$, $T_1 = T_1'/T_+$ and $T_2 = T_2'/T_-$. Thus, work can be rewritten as :

$$W = (k_2 \omega_1 T_+)^{1+\omega} \left[\sigma^{-1} (1 - T_1^{1+\omega}) + (\theta^{1+\omega} - T_2^{1+\omega}) \right]. \quad (2)$$

The constraint of entropy conservation $\Delta S = 0$ gives $S_1 + S_2 = S_+ + S_-$, where S_+ (S_-) and S_1 (S_2) are the values of entropy in initial and final state of system 1 (2) respectively. Then, we can write:

$$T_1 = [1 + \sigma(\theta^\omega - T_2^\omega)]^{\frac{1}{\omega}}, \quad (3)$$

or equivalently,

$$T_2 = [\theta^\omega + \sigma^{-1}(1 - T_1^\omega)]^{\frac{1}{\omega}}. \quad (4)$$

By making use of above equations, work can be written as a function of one variable (say T_2)

only:

$$W(T_2) = (k_2\omega_1 T_+)^{1+\omega} \left[\sigma^{-1} \left(1 - (1 + \sigma(\theta^\omega - T_2^\omega))^{\frac{1+\omega}{\omega}} \right) + (\theta^{1+\omega} - T_2^{1+\omega}) \right]. \quad (5)$$

Similarly, work can be written as a function of T_1 also.

The optimal work can be extracted from the engine when the two systems reach a common temperature. The common temperature, T_c , is given from Eq. (3) with $T_1 = T_2 = T_c$ as:

$$T_c = \left(\frac{1 + \sigma\theta^\omega}{1 + \sigma} \right)^{\frac{1}{\omega}}. \quad (6)$$

The efficiency of the engine is given as $\eta = 1 - Q_{\text{out}}/Q_{\text{in}}$, where $Q_{\text{in}} = (\omega_1\kappa_1 T_+)^{1+\omega}(1 - T_1^{1+\omega})$ is the heat absorbed from the source and $Q_{\text{out}} = (\omega_1\kappa_2 T_+)^{1+\omega}(T_2^{1+\omega} - \theta^{1+\omega})$ is the waste heat rejected to the sink. Thus, for any arbitrary value of γ , efficiency at any intermediate stage of the process can be given as:

$$\eta_\gamma = 1 - \sigma \frac{(T_2^{1+\omega} - \theta^{1+\omega})}{(1 - T_1^{1+\omega})}. \quad (7)$$

For efficiency at optimal work (η_γ^*), we substitute $T_1 = T_2 = T_c$ in above equation to obtain:

$$\eta_\gamma^* = 1 - \sigma \frac{(T_c^{1+\omega} - \theta^{1+\omega})}{(1 - T_c^{1+\omega})}. \quad (8)$$

Let us discuss the efficiency in the limiting cases:

(a) In the limit $\gamma \rightarrow 0$ i.e. when heat source is very large as compared to heat sink, temperature of source remains constant at $T_1' = T_+$ or $T_1 = 1$ while temperature of sink approaches this value for optimal work extraction. We write efficiency as a function of T_2 as

$$\eta_0 = 1 - \left(\frac{\omega}{1 + \omega} \right) \left(\frac{T_2^{1+\omega} - \theta^{1+\omega}}{T_2^\omega - \theta^\omega} \right). \quad (9)$$

Efficiency at optimal work in this limit is given by substituting $T_2 = 1$ in above equation as:

$$\eta_0^* = 1 - \left(\frac{\omega}{1 + \omega} \right) \left(\frac{1 - \theta^{1+\omega}}{1 - \theta^\omega} \right). \quad (10)$$

(b) In the limit $\gamma \rightarrow \infty$ i.e. when heat sink is very large in comparison to heat source, the sink stays at temperature (T_-) and source approaches this value for optimal work extraction. The

efficiency can be expressed in terms of T_1 as:

$$\eta_\infty = 1 - \theta \left(\frac{1 + \omega}{\omega} \right) \left(\frac{1 - T_1^\omega}{1 - T_1^{1+\omega}} \right). \quad (11)$$

For the optimal process, substitute $T_1 = \theta$ in above expression to obtain:

$$\eta_\infty^* = 1 - \theta \left(\frac{1 + \omega}{\omega} \right) \left(\frac{1 - \theta^\omega}{1 - \theta^{1+\omega}} \right). \quad (12)$$

III. ASSIGNMENT OF PRIOR

The inference is performed by assigning the prior probability distributions for the uncertain parameters T_1 and T_2 , since we assume ignorance of the actual values of T_1 and T_2 or the extent to which the process has proceeded. Thus, there are two observers, 1 and 2, for T_1 and T_2 respectively. Let us first summarise the prior information we possess before making the inference:

(i) There exists a one-to-one relation between T_1 and T_2 given by Eq. (3) or Eq. (4) which suggests that probability of T_1 to lie in small range $[T_1, T_1 + dT_1]$ is same as the probability of T_2 to lie in $[T_2, T_2 + dT_2]$, so we can write :

$$P_1(T_1)dT_1 = P_2(T_2)dT_2, \quad (13)$$

where P_1 and P_2 are the normalised prior distribution functions for T_1 and T_2 .

(ii) The set-up works like a heat engine and thus $W \geq 0$.

With identical systems, we had an additional assumption of the same form of normalised prior distribution, P , for T_1 and T_2 and thus prior distribution is invariant under the change of parameter. Here, with non-identical systems, still we assume the same functional form f of the prior distributions for T_1 and T_2 . However, since now the two systems are not identical, this information has to be incorporated while assigning the prior. So, this information is incorporated in the allowed values of the range of T_1 and T_2 . Now, the allowed range for T_1 and T_2 is not $[\theta, 1]$. It will be different for both the parameters for different values of γ ($\neq 1$). Thus, say, T_1 ranges in $[T_m, 1]$ and T_2 ranges in $[\theta, T_M]$ respectively satisfying the constraint $W \geq 0$ [4]. This can be shown graphically in Figure 1 for the two cases with $\gamma < 1$ and $\gamma > 1$. For $\gamma < 1$ (larger source in comparison to sink), the range of allowed values of T_1 is narrower than the range for T_2 . In the limiting case of $\gamma \rightarrow 0$ (infinite source and finite sink), $[T_m, 1]$ shrinks to a point

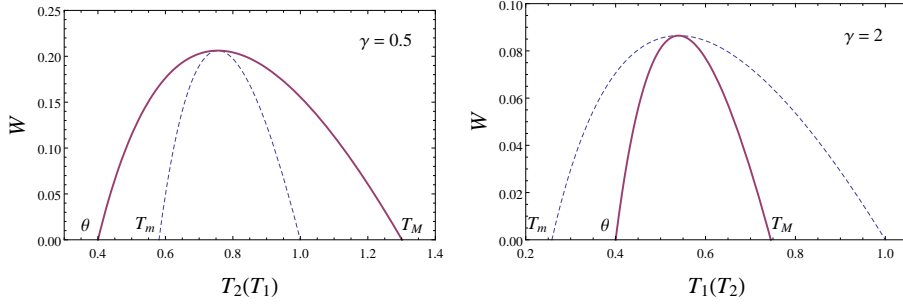


FIG. 1: Work as a function of T_1 (Dashed Curve) and T_2 (Solid Curve) for $\omega_1 = 0.1$, $\theta = 0.4$

$T_1 = 1$ which is expected for an infinite source as now the temperature of the source stays at $T_+ = 1$. Similarly, for $\gamma > 1$ (larger sink in comparison to source), the range for T_2 shrinks in comparison to the range for T_1 , and $[\theta, T_M]$ shrinks to a point $T_2 = \theta$ for $\gamma \rightarrow \infty$ (infinite sink and finite source). This information on the range of uncertain parameters will be incorporated to determine the normalisation constants for prior distributions and thus we can write P_1 and P_2 as [4]:

$$P_1(T_1) = \frac{f(T_1)}{\int_{T_m}^1 f(T_1) dT_1}, \quad (14)$$

$$P_2(T_2) = \frac{f(T_2)}{\int_{\theta}^{T_M} f(T_2) dT_2}, \quad (15)$$

where the form of f is determined from the constraint condition $dS = 0$, which can be written as:

$$dS_1 + dS_2 = 0, \quad (16)$$

which can be further written, using additivity of energy, as:

$$\left(\frac{\partial S_1}{\partial U_1}\right)_V \left(\frac{\partial U_1}{\partial T_1}\right)_V dT_1 + \left(\frac{\partial S_2}{\partial U_2}\right)_V \left(\frac{\partial U_2}{\partial T_2}\right)_V dT_2 = 0. \quad (17)$$

Using $\left(\frac{\partial S}{\partial U}\right)_V = \frac{1}{T}$ and $\left(\frac{\partial U}{\partial T}\right)_V = C(T)$ in above equation, we get:

$$\frac{dT_1}{dT_2} = -\frac{C_2/T_2}{C_1/T_1}, \quad (18)$$

Combining Eq.(18) and Eq.(13), suggests the following form of prior [5]:

$$P(T_i) = \frac{C_i(T_i)/T_i}{N}, \quad (19)$$

where $i = 1, 2$ and $N = \int_{\theta}^1 C_i(T_i)/T_i dT_i$ is the normalisation constant. With our model of the reservoirs ($S_i \propto U_i^{\omega_1}$), the functional form of the prior distribution can be written as:

$$P(T_i) \propto T_i^{\omega-1}. \quad (20)$$

IV. ESTIMATION OF TEMPERATURE

The expected value of a temperature is:

$$\bar{T}_i = \int_{T_{i,min}}^{T_{i,max}} T_i P(T_i) dT_i, \quad (21)$$

where $i = 1, 2$. Taking into account the respective ranges of allowed values of T_1 and T_2 , identified above, we obtain:

$$\bar{T}_1 = \left(\frac{\omega}{1+\omega} \right) \left(\frac{1 - T_m^{1+\omega}}{1 - T_m^{\omega}} \right), \quad (22)$$

and

$$\bar{T}_2 = \left(\frac{\omega}{1+\omega} \right) \left(\frac{T_M^{1+\omega} - \theta^{1+\omega}}{T_M^{\omega} - \theta^{\omega}} \right). \quad (23)$$

To determine T_m or T_M , we solve Eq. (2) by setting $W(T_1) = 0$ or $W(T_2) = 0$ respectively. In general, Eq. (2) has to be solved numerically for arbitrary values of ω_1 . For ideal Fermi gas ($\omega_1 = 1/2$), it can be solved analytically [26] and thus we get:

$$T_1 \in \left[\frac{1 - \gamma^2 + 2\gamma^2\theta}{1 + \gamma^2}, 1 \right], \quad (24)$$

$$T_2 \in \left[\theta, \frac{2 - \theta + \gamma^2\theta}{1 + \gamma^2} \right]. \quad (25)$$

Due to Eq. (3), we can write one-to-one relation between T_m and T_M as:

$$1 - T_m^{\omega} = \sigma(T_M^{\omega} - \theta^{\omega}). \quad (26)$$

Using above equation in $W(T_M) = 0$, we obtain:

$$1 - T_m^{1+\omega} = \sigma(T_M^{1+\omega} - \theta^{1+\omega}). \quad (27)$$

From Eqs. (22), (23), (26) and (27), we can write:

$$\bar{T}_1 = \bar{T}_2. \quad (28)$$

However, firstly we will solve the Eq. (2) for the limiting cases when one of the systems become very large in comparison to the other system.

A. Infinite source and finite sink

This case corresponds to the limit $\gamma \rightarrow 0$. Here the only uncertain parameter is T_2 as temperature of source stays at $T_+ = 1$ while the temperature of sink approaches T_+ at optimal work extraction. To discuss this limit, we set Eq. (5) as $W(T_2) = 0$ and obtain:

$$T_2^{1+\omega} - \theta^{1+\omega} = \frac{1}{\sigma} \left[1 - (1 + \sigma(\theta^\omega - T_2^\omega))^{\frac{1+\omega}{\omega}} \right]. \quad (29)$$

Taking the limit $\gamma \rightarrow 0$, the above equation gets simplified to :

$$\omega (T_2^{1+\omega} - \theta^{1+\omega}) = (1 + \omega) (T_2^\omega - \theta^\omega), \quad (30)$$

whose trivial solution is $T_2 = \theta$. The other solution is T_M so we write:

$$\omega (T_M^{1+\omega} - \theta^{1+\omega}) = (1 + \omega) (T_M^\omega - \theta^\omega). \quad (31)$$

Consistency between Eqs. (23) and (31) demands that we must have:

$$\bar{T}_2 = 1. \quad (32)$$

Thus expected sink temperature exactly matches with temperature of heat source for optimal process. The efficiency is estimated by replacing T_2 in Eq. (9) by Eq.(32) and estimate for efficiency is same as Eq.(10). Hence, inference approach reproduces the optimal behaviour exactly in the limit $\gamma \rightarrow 0$.

B. Finite source and infinite sink

Consider the case of infinite sink in comparison to source ($\gamma \rightarrow \infty$). Here, the sink stays at temperature $T_- (= \theta)$ and the temperature of source approaches T_- for optimal work extraction. Hence T_1 is the only uncertain parameter for this limiting case. The range for T_1 is determined by using (4) in (2) and then setting $W(T_1) = 0$, we get:

$$1 - T_1^{1+\omega} = \sigma \left[(\theta^\omega + \sigma^{-1}(1 - T_1^\omega))^{\frac{1+\omega}{\omega}} - \theta^{1+\omega} \right]. \quad (33)$$

In the limit $\gamma \rightarrow \infty$, the above equation gets simplifies to:

$$\omega (1 - T_1^{1+\omega}) = \theta(1 + \omega) (1 - T_1^\omega). \quad (34)$$

The trivial root of above equation is $T_1 = 1$ and other root (T_m) satisfies:

$$\omega (1 - T_m^{1+\omega}) = \theta(1 + \omega) (1 - T_m^\omega). \quad (35)$$

From Eqs. (22) and (35), we obtain:

$$\bar{T}_1 = \theta. \quad (36)$$

It is clear from the Eq. (36) that the average temperature of the source exactly matches with the temperature of the infinite sink which happens in case of maximum work extraction. Further, efficiency at optimal work (η_∞^*) is also inferred exactly due to Eqs. (11) and (36). Thus, we are able to infer exactly the optimal behaviour of the system with infinite sink and finite source also.

C. Near-equilibrium estimation

In this section, we approximate the values of T_m and T_M when θ is close to unity. For this, consider the case $0 < \gamma < 1$. Let us examine the case of observer 2. Since close to equilibrium, T_M is also close to unity so we can introduce a small parameter $\epsilon > 0$ such that $T_M = \theta (1 + \epsilon)$. Rewriting the Eq. (5) as $W(T_M) = 0$:

$$1 + \sigma\theta^{1+\omega}[1 - (1 + \epsilon)^{1+\omega}] = (1 + \sigma\theta^\omega[1 - (1 + \epsilon)^\omega])^{\frac{1+\omega}{\omega}}. \quad (37)$$

Making series expansion in ϵ and keeping terms only upto second order, we get a quadratic equation in ϵ as:

$$(1 - \omega) [\sigma^2 \theta^{2\omega} + 3\sigma \theta^\omega - \omega(1 - \theta) + 2] \epsilon^2 - 3[\sigma - \omega(1 - \theta) + 1] \epsilon + 6(1 - \theta) = 0. \quad (38)$$

For instance, if we take limit $\omega \rightarrow 0$ in above equation, we reproduce the case for perfect gas as:

$$(\gamma + 1)(\gamma + 2)\epsilon^2 - 3(\gamma + 1)\epsilon + 6(1 - \theta) = 0, \quad (39)$$

whose acceptable solution [4] is approximated upto second order in η_c as:

$$\epsilon = \frac{2}{1 + \gamma} \eta_c + \frac{4(2 + \gamma)}{3(1 + \gamma)^2} \eta_c^2. \quad (40)$$

Similarly, Eq. (38) can be solved for ϵ and the solution can be approximated as:

$$\epsilon = \frac{2}{1 + \sigma} \eta_c + \frac{2[4 - \omega + \sigma(\omega + 2)]}{3(1 + \sigma)^2} \eta_c^2. \quad (41)$$

Then T_M is determined, which in turn determines T_m due to Eq. (3).

Suppose \tilde{T}_1 (\tilde{T}_2) are the estimates for T_1 (T_2) by the observer 2 (1) by making use of (3) and (4). Let us examine the near-equilibrium expansion of the estimates of temperature as well as T_c as:

$$\bar{T}_2 = 1 - \frac{\sigma}{1 + \sigma} \eta_c - \frac{\sigma(1 - \omega)}{3(1 + \sigma)^2} \eta_c^2 + O[\eta_c^3], \quad (42)$$

$$\tilde{T}_2 = 1 - \frac{\sigma}{1 + \sigma} \eta_c - \frac{(1 + 3\sigma)(1 - \omega)}{6(1 + \sigma)^2} \eta_c^2 + O[\eta_c^3], \quad (43)$$

$$\tilde{T}_1 = 1 - \frac{\sigma}{1 + \sigma} \eta_c - \frac{\sigma(3 + \sigma)(1 - \omega)}{6(1 + \sigma)^2} \eta_c^2 + O[\eta_c^3], \quad (44)$$

$$T_c = 1 - \frac{\sigma}{1 + \sigma} \eta_c - \frac{\sigma(1 - \omega)}{2(1 + \sigma)^2} \eta_c^2 - \frac{\sigma(2 + \sigma + \omega(\sigma - 1))(1 - \omega)}{6(1 + \sigma)^3} \eta_c^3 + O[\eta_c^4]. \quad (45)$$

We have skipped the lengthy expressions of third order terms in series expansion of temperature

estimates. Let us define the estimated value of the temperature of one reservoir as the weighted mean of the estimates by two observers. It will be given as

$$T_{i,m} = A\bar{T}_i + B\tilde{T}_i, \quad (46)$$

where $i = 1, 2$ and A, B are the weights satisfying the condition $A + B = 1$. In the above case, we have seen that both estimates, \bar{T}_2 (by observer 2) and \tilde{T}_2 (by observer 1), match with T_c only upto first order. If we choose weights A and B so as to obtain matching beyond first order, then the weights are calculated as:

$$A = \frac{1}{1 + \sigma}, \quad (47)$$

$$B = \frac{\sigma}{1 + \sigma}. \quad (48)$$

This weighted mean estimated temperature ($T_{2,m}$) of the sink shows remarkable agreement with T_c upto third order in η_c close to equilibrium. Further, for $\gamma \rightarrow 0$, $T_{2,m}$ becomes exactly equal to \bar{T}_2 showing that estimation is done only by observer 2 as the other reservoir corresponding to observer 1 (source) becomes infinite in comparison and hence, its temperature stays constant at T_+ and no uncertainty exists in its value as the process proceeds. In other limit of $\gamma \rightarrow \infty$, \bar{T}_1 becomes exactly equal to T_c .

V. ESTIMATION OF EFFICIENCY

Efficiency is estimated by replacing \bar{T}_2 in Eqs. (3) and (5) to obtain efficiency estimate by observer 2 ($\tilde{\eta}_2$). Similarly, denote the efficiency estimate by observer 1 as ($\tilde{\eta}_1$). Expanding the estimates of efficiency close to equilibrium and make a comparison with the efficiency at optimal work as follows:

$$\tilde{\eta}_1 = \frac{\eta_c}{2} + \frac{2(1 + \sigma) + \omega(\sigma - 2)}{12(1 + \sigma)}\eta_c^2 + O[\eta_c^3], \quad (49)$$

$$\tilde{\eta}_2 = \frac{\eta_c}{2} + \frac{(1 + \sigma) + \omega(2\sigma - 1)}{12(1 + \sigma)}\eta_c^2 + O[\eta_c^3], \quad (50)$$

$$\eta_\gamma^* = \frac{\eta_c}{2} + \frac{(1 + 2\sigma) + \omega(\sigma - 1)}{12(1 + \sigma)}\eta_c^2 + O[\eta_c^3]. \quad (51)$$

It is clear from the above expressions that estimates of efficiency either by observer 1 ($\tilde{\eta}_1$) or by observer 2 ($\tilde{\eta}_2$) matches with efficiency at optimal work (η_γ^*) only upto first order in η_c .

However, we define mean efficiency ($\tilde{\eta}_m$) and compare it with η_γ^* as:

$$\tilde{\eta}_m = A\tilde{\eta}_1 + B\tilde{\eta}_2, \quad (52)$$

where A and B are the weights assumed for the estimation done by observer 1 and observer 2 respectively satisfying $A + B = 1$, similar to the case of temperature estimation. Estimated mean efficiency ($\tilde{\eta}_m$) matches with efficiency at optimal work upto second order. For the limiting cases of $\gamma \rightarrow 0$ and $\gamma \rightarrow \infty$, $\tilde{\eta}_2$ and $\tilde{\eta}_1$ give the exact estimates for efficiency at optimal work respectively.

A. Numerical results for arbitrary γ

Eq. (5) has to be solved to determine the roots, one trivial root is θ while the other root, T_M , can be determined numerically for given values of ω_1 , γ , and θ . Then, we obtain numerical estimates of efficiency by observer 1 ($\tilde{\eta}_1$) and observer 2 ($\tilde{\eta}_2$) for arbitrary values of γ . Figure 2 shows the comparative plots of efficiency for different γ 's.

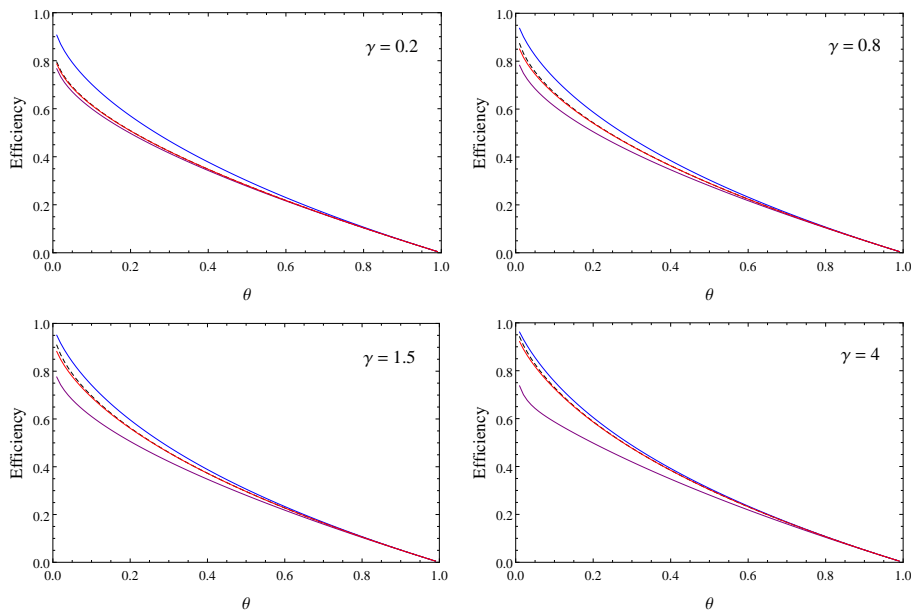


FIG. 2: Efficiency as a function of θ for $\omega_1 = 0.1$. The dashed curve is for efficiency at optimal work, uppermost curve (blue online) is for $\tilde{\eta}_1$, lowermost curve (purple online) is for $\tilde{\eta}_2$, and middle curve (red online) is for mean efficiency ($\tilde{\eta}_m$).

From the numerical plots, it has become clear that in the $0 < \gamma < 1$ regime, estimates made by observer 2 give better results as compared to the observer 1 and vice-versa in the case of $\gamma > 1$.

VI. CONCLUSION

Thus, we have extended our previous approach of inference studied in [2] where two identical finite systems were taken as source and sink. Taking non-identical systems, we can distinguish or label the two systems acting as source and sink. The range for T_1 and T_2 is also different because of dissimilar systems. While generalising this approach, we have observed that estimates match exactly with their optimal values when one of the reservoir becomes very large as compared to the other. For arbitrary values of γ also, numerical calculations have been performed. These calculations show that information incorporated in the prior distribution reproduce the optimal behaviour of the system, however, now the efficiency estimates made by two observers are not symmetrically distributed about the efficiency at optimal work unlike in the case with similar reservoirs ($\gamma = 1$). Instead, estimates made by one observer lie closer to the optimal value as compared to the other depending upon the value of γ . Near-equilibrium, it has been observed that universality, $\eta_c^2/8$, in efficiency does not hold and becomes system dependent. However, in this case, efficiency at optimal work can be reproduced upto second order by defining mean efficiency with non-identical weights for the efficiency estimates by the two observers. Thus, with non-identical systems also, we quantify the prior information and use it to estimate the optimal performance in constrained thermodynamic process

VII. ACKNOWLEDGEMENTS

RSJ acknowledges financial support from the Department of Science and Technology, India under the research project No. SR/S2/CMP-0047/2010(G). PA is thankful to University Grants Commission, India and IISER Mohali for Research fellowship.

-
- [1] P. Aneja and R. S. Johal, *Cent. Eur. J. Phys.* **10**, 708 (2012).
 - [2] P. Aneja and R. S. Johal, *J. Phys. A: Math. Theor.* **46**, 365002 (2013).
 - [3] R. S. Johal, R. Rai and G. Mahler, *Found. Phys.* **45**, 158-170 (2015).
 - [4] R. S. Johal, *J. Noneq. Therm.* (2015) DOI: 10.1515/jnet-2014-0021.
 - [5] P. Aneja and R. S. Johal, “On the form of prior for constrained thermodynamic processes with uncertainty”, arXiv: 1404.0460v1 (2014) (Under review).
 - [6] M. J. Ondrechen, B. Andresen, M. Mozurkewich, and R. S. Berry, *Am. J. Phys.* **49**, 681-685 (1981).

- [7] H. B. Callen, *Thermodynamics and an Introduction to Thermostatistics*, Second edition, (John Wiley and Sons, 1985).
- [8] H. S. Leff, Am. J. Phys. **55**, 701-705 (1987).
- [9] B. H. Lavenda, Am. J. Phys. **75**, 169-175 (2007).
- [10] P. T. Landsberg and H. S. Leff, J. Phys. A : Math. Gen. **22**, 4019 (1989).
- [11] T. Bayes, Phil. Trans. Roy. Soc. **53**, 370-418 (1763). Reprinted in Biometrika, **45**, 296315 (1958).
- [12] P. S. Laplace, Stat. Sc. **1**, 364-378 (1986).
- [13] H. Jeffreys, *Theory of Probability*, Third edition, Clarendon Press, (Oxford, 1961).
- [14] E. T. Jaynes, *Probability Theory : The Logic of Science* (Cambridge University Press, Cambridge, 2003).
- [15] Francisco J. Samanigo, *A comparison of the Bayesian and Frequentist approaches to estimation*, Springer (2010).
- [16] A. H. Welsh, *Aspects of Statistical Inference*, John Wiley and Sons (2011).
- [17] H. Raiffa and R. Schlaifer, *Applied statistical decision theory*, Harvard University (1961).
- [18] H. Jeffreys, *Proceedings of the Royal Society of London. Series A, Mathematical and Physical Sciences* **186**, 453-461 (1946).
- [19] J. M. Bernardo, J. R. Statist. Soc. B **41** (1979).
- [20] S. Abe, EPL **108**, 40008 (2014).
- [21] F. L. Curzon and B. Ahlborn, Am. J. Phys. **43**, 22 (1975).
- [22] T. Schmiedl and U. Seifert, Europhys. Lett. **81**, 20003 (2008).
- [23] Z. C. Tu, J. Phys. A : Math. Gen. **41**, 31203 (2008).
- [24] M. Esposito, K. Lindenberg and C. Van den Broeck, Phys. Rev. Lett. **102**, 130602 (2009).
- [25] Ch. Zylka and G. Vojta, Physics Letters A **152**, 3 (1991).
- [26] H. Katyayan, Subjective probability and inference in thermodynamics, MS-dissertation, IISER Mohali (2014).