

Article Visual Motion Onset Brain–computer Interface

Jair Pereira Junior^{1,2,†}, Caio Teixeira^{1,3,†} and Tomasz M. Rutkowski^{1,‡,*}

- ¹ University of Tsukuba, Tsukuba, Japan
- ² Federal University of ABC (UFABC), Santo Andre, Sao Paulo, Brazil
- ³ University of Campinas (UNICAMP), Campinas, Sao Paulo, Brazil
- * Correspondence: tomek@bci-lab.info
- + These authors contributed equally to this work.
- ‡ Current address: The University of Tokyo, Tokyo, Japan

Academic Editor: name

Version October 17, 2018 submitted to Computers; Typeset by LATEX using class file mdpi.cls

Abstract: The paper presents a study of two novel visual motion onset stimulus-based brain-computer interfaces (vmoBCI). Two settings are compared with afferent and efferent to a computer screen center motion patterns. Online vmoBCI experiments are conducted in an oddball event-related potential (ERP) paradigm allowing for "aha-responses" decoding in EEG brainwaves. A subsequent stepwise linear discriminant analysis classification (swLDA) classification accuracy comparison is discussed based on two inter-stimulus-interval (ISI) settings of 700 and 150 ms in two online vmoBCI applications with six and eight command settings. A research hypothesis of classification accuracy non-significant differences with various ISIs is confirmed based on the two settings of 700 ms and 150 ms, as well as with various numbers of ERP response averaging scenarios. The efferent in respect to display center visual motion patterns allowed for a faster interfacing and thus they are recommended as more suitable for the no-eye-movements requiring visual BCIs.

Keywords: Brain-computer interface (BCI); visual motion perception; neurotechnology application;
 EEG; realtime brain signal decoding.

14 1. Introduction

A brain–computer interface (BCI) is a neurotechnology that utilizes only central nervous system 15 (CNS) signals (brainwaves) of a user to create a new communication channel with others or to 16 control external devices without depending on any muscle activity [1]. The BCI technology has 17 provided a support already to patients' life improvement who suffer from severe paralysis due to 18 diseases like an amyotrophic lateral sclerosis (ALS) [1]. The successful alternative options have been 19 developed recently to utilize spatial auditory [2,3] or tactile (somatosensory) modes [4,5]. Meanwhile, 20 the visual BCI seems to offer still the superior communication options in comparison with the 21 above modalities [1,6–11], yet they require intentionally controlled eye–movements, which some of 22 locked–in syndrome (LIS) users cannot maintain [12,13]. 23

We present results of a novel study utilizing two strategies of the visual motion onset patterns [14,15] for BCI purposes with stimuli presented as afferent or efferent to a centre of the field of vision, the fovea. The vmoBCI patterns used in the presented experiments are shown in Figures 1a and 1b for afferent and efferent movements, respectively. A goal of this study is to compare and test a BCI performance (a classification accuracy) of the novel vmoBCI paradigm in function of two inter–stimulus interval (ISI) settings. Namely the ISI equal to 700 ms (a very easy case) and 150 ms (a harder case due to fast repetition of the presented visual movement patterns and larger overlap of

³¹ the brainwave ERPs) are evaluated in the paper.

1

2

3

4

5

6

7

8

9

10

11

Results obtained with ten healthy users in online BCI experiments with stepwise linear discriminant analysis (swLDA) classifier [16] and two different averaging settings are analyzed and discussed. From now on the paper is organized as follows. In the next section we present results. Discussion, materials and methods used in order to capture, process and classify the brainwave response in application to the proposed vmoBCI follow. Conclusions summarize the paper.

37 2. Results

The results of brainwave ERPs have been summarized as simple grand mean averaged time series with standard error bars in Figures 2a, 2b, 3a, and 3b. Those results have clearly shown a very small impact of the two tested *ISIs* of 700 ms and 150 ms, as well as the afferent and efferent visual motion settings summarized in Figures 2 and 3, respectively.

⁴² More interesting results have been elucidated with an area under curve (AUC) analysis for ERP ⁴³ feature distributions as reported in Figures 4 and 5. The AUC scores, visualizing the EEG features

separability for a subsequent classification, were higher (AUC > 0.65) for the efferent motion cases

depicted in Figures 5a and 5b for ISI of 700 ms and 150 ms, respectively. The AUC analysis results

were confirmed also with vmoBCI classification accuracies summarized in Tables 1 and 2 for afferent

and efferent vmoBCI online experiments using ten and five brainwave ERP averaging scenarios.


⁴⁸ The mean accuracies were non–significantly differing, as tested with pairwise rank–sum Wilcoxon method, among the tested afferent and efferent cases with various *ISI* and averaging settings.

Table 1. Afferent visual motion onset BCI accuracy results (a chance level of 16.7% due to six commands used)

User number	ISI = 700 ms		ISI = 150 ms	
	10 trials	5 trials	10 trials	5 trials
#1	100.0%	83.3%	100.0%	100.0%
#2	16.7%	50.0%	66.7%	83.3%
#3	100.0%	83.3%	100.0%	66.7%
#4	100.0%	100.0%	100.0%	66.7%
#5	100.0%	100.0%	100.0%	66.7%
Average accuracy	$83.3\pm37.2\%$	$83.3\pm20.4\%$	$93.3\pm14.9\%$	$76.7\pm14.9\%$

Table 2. Efferent visual motion onset BCI accuracy results (a chance level of 12.5% due to eight commands used)

User number	ISI = 700 ms		ISI = 150 ms	
	10 trials	5 trials	10 trials	5 trials
#1	100.0%	100.0%	100.0%	100.0%
#2	100.0%	75.0%	100.0%	87.5%
#3	62.5%	50.0%	75.0%	75.0%
#4	100.0%	100.0%	100.0%	100.0%
#5	87.5%	87.5%	87.5%	87.5%
Average accuracy	$92.0\pm16.5\%$	$82.5\pm20.9\%$	$92.5\pm11.2\%$	90.0 ± 10.5%

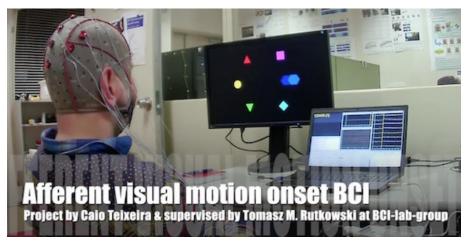

(a) A screenshot from a video available online (https://youtu.be/ JbdazbFntek) presenting the afferent visual motion onset BCI paradigms with stimuli trajectories towards the screen center



(b) A screenshot from a video available online (https://youtu.be/ UaxIQdOctcQ) presenting the efferent visual motion onset BCI paradigms with stimuli trajectories towards the screen center

Figure 1. The user wearing EEG cap seats in front of a computer display with the visual motion onset BCI paradigms. (a) An afferent visual motion case with six stimuli. (b) An efferent visual motion case with eight patterns. In the both photographs the EEG brainwave signals are presented on smaller computer displays with numbers representing the target movements to be recognized by the user. Published with permission of the depicted user.

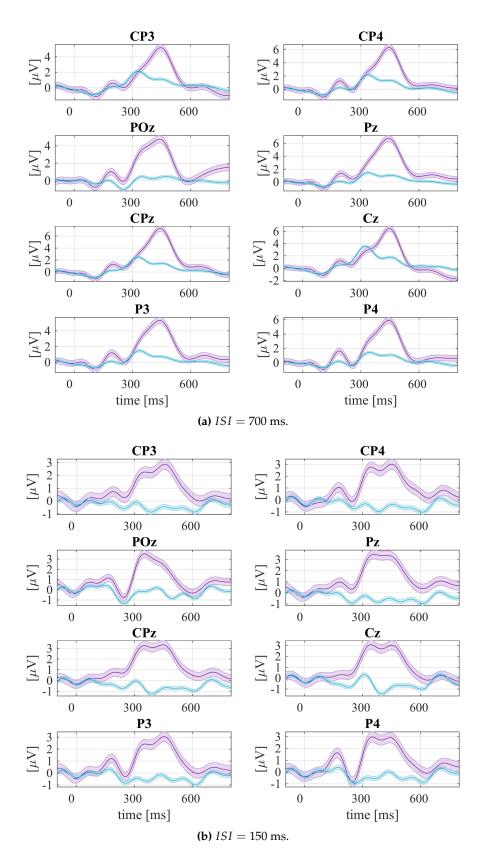


Figure 2. Grand mean averaged brainwave ERP responses in afferent vmoBCI. The green traces depict the attended targets with P300 responses and blue the non–targets. The intervals surrounding the mean traces depict standard errors.


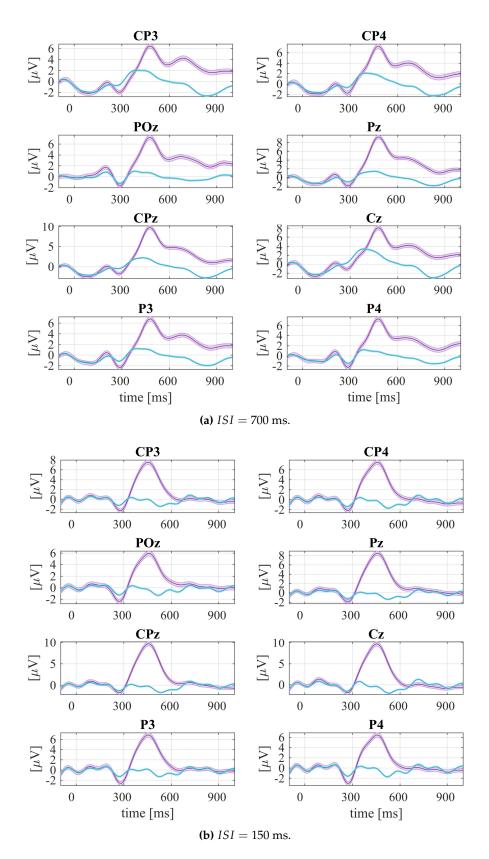



Figure 3. Grand mean averaged brainwave ERP responses in efferent vmoBCI. The green traces depict the attended targets with P300 responses and blue the non-targets. The intervals surrounding the mean traces depict standard errors.

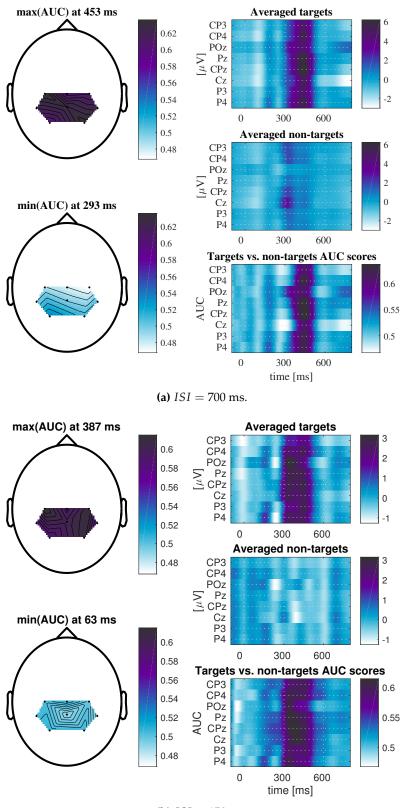

(b) ISI = 150 ms.

Figure 4. AUC analysis of ERP responses in afferent vmoBCI. The left column head topographic plots depict the latencies with the best (maximum) and worse (minimum) of AUC scores. The right column summarizes the ERP responses in form of matrices of all channels and AUC traces at the bottom.

max(AUC) at 488 ms Averaged targets CP3 0.65 CP4 6 POz Pz Pz CPz 4 0.6 2 Cz 0 P3 0.55 -2 P4 0 300 600 900 0.5 Averaged non-targets CP3 CP4 6 POz Pz CPz 4 2 Cz P3 P4 min(AUC) at 305 ms 0 -2 0.65 300 600 900 0 Targets vs. non-targets AUC scores 0.6 CP3 0.65 CP4 0.55 POz 0.6 AUC Pz CPz 0.55 0.5 Cz 0.5 P3 P4 300 900 0 600 time [ms] (a) ISI = 700 ms.max(AUC) at 465 ms Averaged targets CP3 CP4 0.65 POz E Pz CPz 4 0.6 2 Cz 0 P3 0.55 P4 -2 0 300 600 900 0.5 Averaged non-targets CP3 CP4 POz 6 Pz CPz 4 2 Cz P3 0 P4 -2

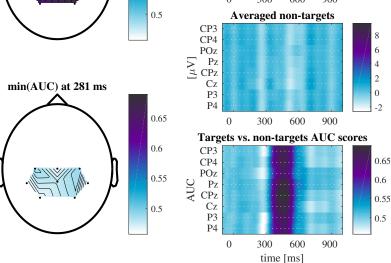

(b) ISI = 150 ms.

Figure 5. AUC analysis of ERP responses in efferent vmoBCI. The left column head topographic plots depict the latencies with the best (maximum) and worse (minimum) of AUC scores. The right column summarizes the ERP responses in form of matrices of all channels and AUC traces at the bottom.

50 3. Discussion

The aim of this study was to test the ISI variability impact on the vmoBCI classification accuracy results in various brainwave averaging scenarios of the proposed visual motion onset paradigm. The online results obtained with the swLDA classifier did not show significant differences for the both afferent and efferent motion scenarios.

The results are very promising for future online applications with patients suffering from LIS allowing for speeding up the BCI stimuli presentation without significant classification degradation.

57 4. Materials and Methods

The visual motion onset stimuli were delivered as colored moving objects on a computer 58 display in moving towards the center (afferent) and off-center (efferent) trajectories as presented 59 in Figures 1a and 1b. The animations were programmed in Processing.org visual programming 60 environment. There were six afferent and eight efferent pattens tested delivered in random order 61 in order to elicit P300 brainwave responses in an oddball style paradigm [1]. The inter-stimulus 62 intervals (ISIs) of 700 ms and 150 ms were chosen. The two different ISI setups were tested in order to 63 evaluate a possible impact of the fast stimulation repetitions on user's BCI performance (the resulting 64 BCI accuracy) in two different brainwave event related potential (ERP) averaging scenarios using 65 ten or five responses. During the EEG experiments, the users were instructed to watch center of a computer screen and to minimize eye-movements as shown in Figures 1a and 1b, as well as in online videos from the experiment¹. The users responded mentally by confirming/counting only to the 68 instructed visual motion patterns while ignoring the others. The EEG signals were captured with 69 a portable EEG amplifier system g.USBamp (g.tec Medical Instruments, Austria). Eight active wet 70 EEG electrodes were used to capture brainwaves with attentional modulation elucidated, within the 71 event related potentials (ERPs), the so-called "aha-" or P300-responses [1]. The EEG electrodes were attached to the head locations CP3, CP4, POz, Pz, CPz, Cz, P3, and P4 as in 10/10 intentional system . 73 A reference electrode was attached to a left earlobe and a ground electrode on the forehead at *FPz* 74 position respectively. 75 The details of the experimental procedures and the research targets of the tpBCI paradigm 76 were explained in detail to the five human users, who agreed voluntarily to participate in the

study. The electroencephalogram (EEG) vmoBCI experiments were conducted in accordance with
 The World Medical Association Declaration of Helsinki - Ethical Principles for Medical Research Involving

80 Human Subjects. The experimental procedures were approved and designed in agreement with the

ethical committee guidelines of the Faculty of Engineering, Information and Systems at University of

Tsukuba, Tsukuba, Japan (experimental permission no. 2013*R*7). The average age of the users was of 26.8 ± 10.7 years.

The EEG signals were recorded and preprocessed online by an in-house extended BCI2000 84 application [17,18] and segmented ("epoched") as features drawn from ERP intervals of $0 \sim 700$ ms. 85 The sampling rate was set to 512 Hz, the high pass filter at 0.1 Hz, and the low pass filter at 40 Hz. The 86 ISI were of 700 ms or 150 ms in two different experimental runs. Each user performed two sessions of 87 selecting six or eight patterns (a spelling of a sequence of digits associated with each tactile pressure 88 pattern) in afferent and efferent visual motion settings, respectively. We performed offline analysis 89 of the collected online EEG datasets in order to test a possible influence of the two ISI settings on the 90 vmoBCI accuracy (compare ERP results in Figures 2a, 2b, 3a, and 3b depicting an impact of faster 91 ISI on the ERP shapes). The swLDA [16] classifier was applied next, with features drawn from the 92 $0 \sim 700$ ms ERP intervals, with removal of the least significant input features, having p > 0.15, and

⁹⁴ with the final discriminant function restricted to contain a maximum of 60 features.

¹ Online demo videos from the vmoBCI experiments: afferent – https://youtu.be/JbdazbFntek and efferent – https:// youtu.be/UaxIQdOctcQ cases.

95 5. Conclusions

The approach presented shall help, if not to reach the goal, to get closer to our objective of the more user friendly visual BCI design. Thus, we can expect that patients suffering from LIS, as well as healthy users, will be able to use the more perceptually friendly BCI interfaces, according to their intact sensory modalities. We expect that the proposed visual motion onset paradigm shall offer a more efficient and comfortable stimulus–driven BCI alternative.

Although the statistical analysis did not yield significant differences between the tested afferent and efferent motion cases, the users preferred the efferent stimuli resulting with better speeds as shown in the example with single ERP classification documented in an online video².

Still there remains a long path to go before providing a natural and comfortable visual motion onset BCI end-user solution, yet our research has progressed toward this goal as presented in this paper.

- Author Contributions: TMR conceived the visual motion onset BCI paradigm; JPJ, CT and TMR designed and
 performed the experiments; TMR analyzed the data; TMR wrote the paper.
- 109 Conflicts of Interest: The authors declare no conflict of interest.

110 Abbreviations

¹¹¹ The following abbreviations are used in this manuscript:

- 112
- 113 BCI: Brain–computer interface
- 114 BMI: Brain–machine interface
- 115 ERP: Event–related potential
- 116 ISI: Inter-stimulus-interval
- ¹¹⁷ swLDA: Stepwise linear discriminant analysis classification
- vmoBCI: Visual motion onset stimulus-based brain-computer interface

119 Bibliography

- Wolpaw, J.; Wolpaw, E.W., Eds. Brain-Computer Interfaces: Principles and Practice; Oxford University Press,
 2012.
- Chang, M.; Nishikawa, N.; Struzik, Z.R.; Mori, K.; Makino, S.; Mandic, D.; Rutkowski, T.M. Comparison
 of P300 Responses in Auditory, Visual and Audiovisual Spatial Speller BCI Paradigms. Proceedings of
 the Fifth International Brain-Computer Interface Meeting 2013; Graz University of Technology Publishing

House, Austria: Asilomar Conference Center, Pacific Grove, CA USA, 2013; p. Article ID: 156.

- Rutkowski, T.M.; Cichocki, A.; Mandic, D.P. Spatial auditory paradigms for brain computer/machine
 interfacing. International Workshop On The Principles and Applications of Spatial Hearing 2009
 (IWPASH 2009) Proceedings of the International Workshop; , 2009; p. P5.
- Rutkowski, T.M.; Mori, H. Tactile and bone-conduction auditory brain computer interface for vision and
 hearing impaired users. *Journal of Neuroscience Methods* 2015, 244, 45 51.
- 131 5. Mori, H.; Matsumoto, Y.; Struzik, Z.R.; Mori, K.; Makino, S.; Mandic, D.; Rutkowski, T.M. Multi-command
- Tactile and Auditory Brain Computer Interface based on Head Position Stimulation. Proceedings of the
- Fifth International Brain-Computer Interface Meeting 2013; Graz University of Technology Publishing
- House, Austria: Asilomar Conference Center, Pacific Grove, CA USA, 2013; p. Article ID: 095.
- Martinez, P.; Bakardjian, H.; Cichocki, A. Fully online multicommand brain-computer interface with
 visual neurofeedback using SSVEP paradigm. *Computational intelligence and neuroscience* 2007, 2007, 13–13.
- Halder, S.; Hammer, E.M.; Kleih, S.C.; Bogdan, M.; Rosenstiel, W.; Birbaumer, N.; Kübler, A. Prediction of
- Auditory and Visual P300 Brain-Computer Interface Aptitude. *PLoS ONE* **2013**, *8*, e53513.

² Online demo video showing the efferent vmoBCI case in the single ERP averaging case – https://youtu.be/UaxIQdOctcQ.

139	8.	Sakurada, T.; Kawase, T.; Komatsu, T.; Kansaku, K. Use of high-frequency visual stimuli above the critical
140		flicker frequency in a SSVEP-based BMI. Clinical Neurophysiology 2014.
141	9.	Aminaka, D.; Makino, S.; Rutkowski, T.M. Classification Accuracy Improvement of Chromatic and
142		High-Frequency Code-Modulated Visual Evoked Potential-Based BCI. In Brain Informatics and Health;
143		Guo, Y.; Friston, K.; Aldo, F.; Hill, S.; Peng, H., Eds.; Springer International Publishing, 2015; Vol. 9250,
144		Lecture Notes in Computer Science, pp. 232–241.
145	10.	Aminaka, D.; Makino, S.; Rutkowski, T.M. Chromatic and High-frequency cVEP-based BCI Paradigm.
146		2015 37th Annual International Conference of the IEEE Engineering in Medicine and Biology Society
147		(EMBC). IEEE Engineering in Medicine and Biology Society, IEEE Press, 2015, pp. 1906–1909.
148	11.	Aminaka, D.; Shimizu, K.; Rutkowski, T.M. Multiuser Spatial cVEP BCI Direct Brain-robot Control.
149		Proceedings of the Sixth International Brain-Computer Interface Meeting: BCI Past, Present, and Future;
150		Verlag der Technischen Universitaet Graz: Asilomar Conference Center, Pacific Grove, CA USA, 2016;
151		p. 70.
152	12.	Patterson, J.R.; Grabois, M. Locked-in syndrome: a review of 139 cases. Stroke 1986, 17, 758-64,
153		[http://stroke.ahajournals.org/content/17/4/758.full.pdf+html].
154	13.	Kaufmann, T.; Holz, E.M.; Kuebler, A. Comparison of tactile, auditory and visual modality for
155		brain-computer interface use: A case study with a patient in the locked-in state. Frontiers in Neuroscience
156		2013, 7.
157	14.	Kremláček, J.; Kuba, M.; Chlubnová, J.; Kubová, Z. Effect of stimulus localisation on motion-onset VEP.
158		Vision Research 2004 , 44, 2989–3000.

- 15. Guo, F.; Hong, B.; Gao, X.; Gao, S. A brain computer interface based on motion-onset VEPs. Engineering
 in Medicine and Biology Society, 2008. EMBS 2008. 30th Annual International Conference of the IEEE.
 161 IEEE, 2008, pp. 4478–4481.
- 16. Krusienski, D.J.; Sellers, E.W.; Cabestaing, F.; Bayoudh, S.; McFarland, D.J.; Vaughan, T.M.; Wolpaw, J.R.
 A comparison of classification techniques for the P300 Speller. *Journal of Neural Engineering* 2006, *3*, 299.
- Schalk, G.; Mellinger, J. A Practical Guide to Brain–Computer Interfacing with BCI2000; Springer-Verlag
 London Limited, 2010.

Matsumoto, Y.; Makino, S.; Mori, K.; Rutkowski, T.M. Classifying P300 responses to vowel stimuli for
 auditory brain-computer interface. Signal and Information Processing Association Annual Summit and
 Conference (APSIPA), 2013 Asia-Pacific, 2013, pp. 1–5. Paper ID 388.

© 2018 by the authors. Submitted to *Computers* for possible open access publication under the terms and
 conditions of the Creative Commons Attribution license (http://creativecommons.org/licenses/by/4.0/)