Generalized Sheet Transition Conditions (GSTCs) for a Metascreen—A Fishnet Metasurface

Christopher L. Holloway, Fellow, IEEE and Edward F. Kuester, Fellow, IEEE

Abstract—We used a multiple-scale homogenization method to derive generalized sheet transition conditions (GSTCs) for electromagnetic fields at the surface of a metascreen—a metasurface with a "fishnet" structure. These surfaces are characterized by periodically-spaced arbitrary-shaped apertures in an otherwise relatively impenetrable surface. The parameters in these GSTCs are interpreted as effective surface susceptibilities and surface porosities, which are related to the geometry of the apertures that constitute the metascreen. Finally, we emphasize the subtle but important difference between the GSTCs required for metascreens and those required for metafilms (a metasurface with a "cermet" structure, i.e., an array of isolated (non-touching) scatterers).

Keywords: generalized sheet transition conditions (GSTC), metafilms, boundary conditions, metamaterials, metascreens, metasurfaces, metagrating, multiple-scale homogenization, surface susceptibilities, surface porosities

I. Introduction

In recent years, there has been a great deal of interest in electromagnetic metamaterials [1]-[7]—novel synthetic materials engineered to achieve desirable/unique properties not normally found in nature. Metamaterials are often engineered by positioning scatterers throughout a three-dimensional region of space in order to achieve some desirable bulk behavior of the material (typically a behavior not normally occurring). This concept can be extended by placing scatterers (or apertures) in a two-dimensional arrangement at a surface or interface. This surface version of a metamaterial is called a metasurface, and includes metafilms and metascreens as special cases [8]-[9].

Metasurfaces are an attractive alternative to threedimensional metamaterials because of their simplicity and relative ease of fabrication. A metasurface is any periodic two-dimensional structure whose thickness and periodicity are small compared to a wavelength in the surrounding media. Metasurfaces should not be confused with classical frequencyselective surfaces (FSS); the important distinction between the two is discussed in [8]. As discussed in [10], we can identify two important subclasses (metafilms and metascreens) within this general designation of metasurfaces. These two subclasses are separated by the type of topology that constitutes the metasurface. Metafilms (as coined in [11]) are metasurfaces that have a "cermet" topology, which refers to an array of isolated (non-touching) scatterers (see Fig. 1a). Metascreens are metasurfaces with a "fishnet" structure (see Fig. 1b), which are characterized by periodically spaced apertures in an otherwise relatively impenetrable surface. There are other types

of meta-structures that lie somewhere between a metafilm and a metascreen. For example, a grating of parallel coated wires (a metagrating) behaves like a metafilm to electric fields perpendicular to the wire axes and like a metascreen for electric fields parallel to the wire axis [12]. In this paper we discuss the behavior of metascreens. Note that the thickness h of the screen in which the apertures of the metascreen are located is not necessarily zero (or even small compared to the lattice constants). The apertures are arbitrarily shaped, and their dimensions are required to be small only in comparison to a wavelength in the surrounding medium; i.e., the thickness and aperture sizes are electrically small.

While metafilms have been investigated extensively in the past [8]-[15], metascreens have received less attention, which is mainly due to not having efficient ways of analyzing metascreens. In this paper, we derive the required boundary conditions (BCs) needed to fully characterize a metascreen. These BCs will allow for the efficient analysis of metascreens, much in the same way BCs have been very useful in the analysis of metafilms [8]-[15]. However, as we will see, the required BCs needed for a metascreen are vastly different from those required for a metafilm.

We start with an explanation of the general features of effective boundary conditions (EBCs) required to describe the interaction of electromagnetic fields with the metascreen of Fig. 1b. A formal proof is not given here, however, we will present arguments that indicate the type of BCs that are required to obtain unique solutions for the fields at the interface or surface of a metascreen. We start by noting that the desired type of EBC will allow the metascreen to be replaced by the interface shown in Figure 2. Furthermore, we want the interaction of the electric (E) and magnetic (H) fields on either side of the metascreen to be taken care of through some type of generalized sheet transition condition (GSTC) applied at that interface. In this type of EBC, all the information about the metascreen (geometry: shape, size, material properties, etc.) is incorporated into the parameters that appear explicitly in the GSTC.

In previous work it has been shown that such GSTCs are the most appropriate way to model metafilms [11], [13]-[15]. The form of GSTCs used for the metafilm is basically a set of BCs for the jumps in both tangential E and H fields at the surface of the metafilm. As it turns out, because of the distinctive properties of a metascreen, GSTCs can still be used, but they must take a different form. The reason for this different form is as follows. For a two-region problem, one needs at least two EBCs for constraining the tangential E- and/or H-fields. The issue with a metascreen is that there is the possibility

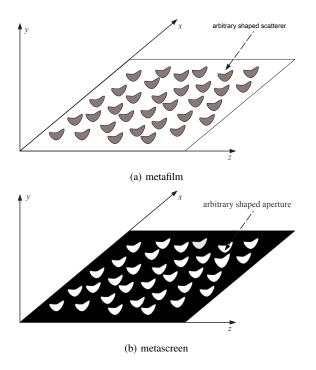


Fig. 1. Illustration of types of metasurfaces, (a) metafilm which consists of arbitrarily shaped scatterers placed on the xz-plane, and (b) metascreen which consists of arbitrarily shaped apertures in a conducting screen located in the xz-plane.




Fig. 2. (a) Metascreen (array of apertures in conducting screen), (b) reference plane at which the GSTCs are applied.

of having tangential surface currents (flowing on the surface of the screen along the z and x directions). Typically these currents would only be known once the tangential components of the H-field are known. An example of this is the case of an electromagnetic field at the surface of a perfect electric conductor (PEC). For a PEC, only the BC for the tangential E-field at the PEC (i. e., $\mathbf{E}_t = 0$ on the PEC) is used in solving boundary problems for the field. The BC for the tangential H-field at the PEC is not used at this point. The tangential

H-field at the PEC is related to the surface current flowing on the PEC and this current is only known once the H-field has been determined. It is useful, therefore, to classify EBCs either as essential for the solution of an electromagnetic boundary problem, or applicable only a posteriori when quantities such as surface current or charge density are to be computed from the fields. For a metascreen, any EBC for the tangential H field is an a posteriori BC and can only be used once the fields have been solved. Thus, the required essential BCs for metascreen should constrain only tangential E, and could be expressed as conditions on the jump in the tangential E-field and on the sum (twice the average) of the tangential E-fields, i.e.,

$$\begin{aligned}
 \left[E_{x}^{A} - E_{x}^{B}\right]_{y=0} & \left[E_{z}^{A} - E_{z}^{B}\right]_{y=0} \\
 \left[E_{x}^{A} + E_{x}^{B}\right]_{y=0} & \left[E_{z}^{A} + E_{z}^{B}\right]_{y=0} ,
\end{aligned} (1)$$

where the superscripts A and B correspond to the regions above and below the reference plane of the metascreen, respectively. We add that these types of GSTCs on both the jump in, and the average of, the E-field at the interface have also appeared in the analysis of a wire grating (or metagrating) [12].

In this paper we present a systematic multiple-scale homogenization approach to fully characterize the field interaction at the surface of the periodic metascreen shown in Fig. 3a. With this method, we derive equivalent (or "averaged") BCs for the metascreen. Due to the geometry of the metascreen, the fields at the interface have both a behavior localized near the apertures and a global (or average) behavior. The localized field behavior varies on a length scale of the order of the spacing of the apertures, while the global field behavior varies on a scale of the order of a wavelength. This local field behavior can be separated from that of the average field (with multiple-scale homogenization [12], [15]-[23]). This technique allows for the fields to be expressed as a product of two functions, one carrying the fine structure and the other the global behavior. It is therefore possible to derive GSTCs for the average or effective field. The electromagnetic scattering from a metascreen can be approximated by applying the GSTCs at the interface of the two media on either side of the metascreen (as shown in Figure 2), and as such, the GSTCs are all that is required to determine macroscopic scattering and reflection from the metascreen.

II. DERIVATION OF GSTCs AND ASYMPTOTIC EXPANSIONS

Some of the derivation of the desired GSTCs are analogous to that used in [12], [15] and [21]-[23], as such, we will not show some of the details when they can be found in these citations. In this section, we first expands the fields in powers of k_0p (where p is the period of the array, $k_0 = \omega \sqrt{\mu_0 \epsilon_0}$ is the free-space wavenumber and ω is the angular frequency corresponding to an assumed $\exp(j\omega t)$ time dependence). Secondly, we determine the BCs for these different field components. Finally, the solution for this set of boundary-value problems will lead to the desired GSTCs for the metascreen.




Fig. 3. (a) Periodic metascreen, and (b) period cell.

A. Asymptotic Expansion of Maxwell's Equations

Let an electromagnetic field be incident onto the array of apertures as shown in Figs. 2 and 3. This array of apertures is periodic in the xz-plane and we assume that the two media on either side of the metascreen are different. The analysis to be presented here is valid for any arbitrarily-shaped aperture. Additionally, the surfaces of the PEC screen will for simplicity be depicted as planar, with vertical aperture sides; this too is not a crucial restriction, and the screen thickness can vary with x and z so long as it remains small compared to a wavelength.

In this analysis, we assume that the two media are homogeneous, and that the screen containing the apertures is a PEC. However, one can show that if we assume the plane is composed of a more general material (e.g., a magneto-dielectric medium with large ϵ or μ), the form of the GSTCs is the same and the only difference is in the surface parameters that characterize the metascreen. Thus, by assuming a PEC screen, we can easily present the framework of the analysis, knowing that the final form of the GSTC will be the same for a more general magneto-dielectric screen. In the case of a highly conducting screen or one where resonances are present, the technique of "stiff" homogenization must be used [21] and [24]-[27].

The underlining assumption is that the period p of the array

of apertures is small. This results in two spatial length scales, one corresponding to the source or incident wave (the free space wavelength λ_0), and the other corresponding to the microstructure of the periodic array of apertures (p). These two spatial length scales results in the fields having a multiple-scale type variation that is associated with the macroscopic and microscopic structures of the problem. Similar to [12], [15] and [21]-[23], Maxwell's equations are expressed as:

3

$$\nabla \times \mathbf{E}^{(A,B)T} = -j\omega \mathbf{B}^{(A,B)T} : \nabla \times \mathbf{H}^{(A,B)T} = j\omega \mathbf{D}^{(A,B)T}$$
(2)

with

$$\mathbf{D}^{(A,B)T} = \epsilon_0 \epsilon_r \mathbf{E}^{(A,B)T} : \mathbf{B}^{(A,B)T} = \mu_0 \mu_r \mathbf{H}^{(A,B)T} ,$$
(3)

where superscript T corresponds to the total fields (i.e, containing both the localized and global behaviors), while μ_r is the relative permeability and ϵ_r is the relative permittivity at a given location. The superscripts A and B correspond to the regions above and below the reference plane (located at y=0) of the metascreen, respectively.

Following [15], [21]-[23], we use a multiple-scale representation for the fields:

$$\mathbf{E}^{T}(\mathbf{r}, \boldsymbol{\xi}) = \mathbf{E}^{T}(\frac{\hat{\mathbf{r}}}{k_0}, \boldsymbol{\xi}) . \tag{4}$$

Similarly expression are used for the other fields. Here, \mathbf{r} is defined as the *slow* spatial variable and $\hat{\mathbf{r}}$ is defined as a dimensionless *slow* variable given by

$$\mathbf{r} = x\mathbf{a}_x + y\mathbf{a}_y + z\mathbf{a}_z \quad \text{and} \quad \hat{\mathbf{r}} = k_0\mathbf{r}$$
 (5)

while the scaled dimensionless variable ξ is called the *fast* variable, defined as

$$\boldsymbol{\xi} = \frac{\mathbf{r}}{p} = \mathbf{a}_x \frac{x}{p} + \mathbf{a}_y \frac{y}{p} + \mathbf{a}_z \frac{z}{p} = \mathbf{a}_x \xi_x + \mathbf{a}_y \xi_y + \mathbf{a}_z \xi_z \quad (6)$$

where p is the period of the apertures that constitute the metascreen. This period p is assumed to be small compared to all other macroscopic lengths in the problem. Note that the slow variable $\hat{\mathbf{r}}$ has significant changes over distances on the order of a wavelength, while the fast variable has changes over much smaller distances, i.e., on the order of p.

Close to the metascreen, we should expect microscopic variations of the fields with ξ . However, once away from the metascreen this behavior should die out. This allows for a boundary-layer field representation for the localized field terms, and as such the total fields can be expressed as:

$$\mathbf{E}^{(A,B) T} = \mathbf{E}^{A,B}(\hat{\mathbf{r}}) + \mathbf{e}^{A,B}(\hat{\mathbf{r}}, \boldsymbol{\xi}) . \tag{7}$$

We can write a similar expression for $\mathbf{H}^{(A,B)}$ T . Here, we define \mathbf{E} and \mathbf{H} as "non-boundary-layer" or "macroscopic" fields, and are referred to as the effective fields in the paper. While \mathbf{e} and \mathbf{h} are defined as the boundary-layer fields. These fields are periodic in ξ_x and ξ_z (because of the periodicity of the array of apertures), but decay exponentially in ξ_y :

$$\mathbf{e}^{\mathrm{A,B}}$$
 and $\mathbf{h}^{\mathrm{A,B}} = O(e^{-(\mathrm{const})|\xi_y|})$ as $|\xi_y| \to \infty$. (8)

These the boundary-layer fields are functions of both the slow and fast variables. As shown in [12], [15], [21]-[23]

for other periodic structures, the boundary-layer fields are functions of just five variables: two slow variables (\hat{x}, \hat{z}) at the interface (which we express succinctly by the position vector $\hat{\mathbf{r}}_o = \mathbf{a}_x \hat{x} + \mathbf{a}_z \hat{z} \equiv k_0 \mathbf{r}_o$), and three fast variables $(\boldsymbol{\xi})$:

$$\mathbf{e}(\hat{\mathbf{r}}_o, \boldsymbol{\xi}) \quad . \tag{9}$$

To account for the two length scales in this multiple-scale analysis, the del operator is expressed in terms of the scaled variables [22]:

$$\nabla \to k_0 \nabla_{\hat{r}} + \frac{1}{p} \nabla_{\xi} \quad , \tag{10}$$

where

$$\nabla_{\hat{r}} = \mathbf{a}_x \frac{\partial}{\partial \hat{x}} + \mathbf{a}_y \frac{\partial}{\partial \hat{y}} + \mathbf{a}_z \frac{\partial}{\partial \hat{z}}$$
 (11)

and

$$\nabla_{\xi} = \mathbf{a}_x \frac{\partial}{\partial \xi_x} + \mathbf{a}_y \frac{\partial}{\partial \xi_y} + \mathbf{a}_z \frac{\partial}{\partial \xi_z} . \tag{12}$$

With this, the curl equations are

$$\nabla_{\hat{r}} \times \mathbf{E} + \nabla_{\hat{r}} \times \mathbf{e} + \frac{1}{\nu} \nabla_{\xi} \times \mathbf{e} = -jc (\mathbf{B} + \mathbf{b})$$

$$\nabla_{\hat{r}} \times \mathbf{H} + \nabla_{\hat{r}} \times \mathbf{h} + \frac{1}{\nu} \nabla_{\xi} \times \mathbf{h} = jc (\mathbf{D} + \mathbf{d}) ,$$
(13)

where ν is a small dimensionless parameter given by

$$\nu = k_0 p ,$$

and c is the speed of light in vacuo.

The relative permeability (μ_r) and relative permittivity (ϵ_r) of the two media are expressed by

$$\epsilon_r = \left\{ \begin{array}{c} \epsilon_A \ (y > 0) \\ \epsilon_B \ (y < 0) \end{array} \right\} : \mu_r = \left\{ \begin{array}{c} \mu_A \ (y > 0) \\ \mu_B \ (y < 0) \end{array} \right\} , \quad (14)$$

where $\epsilon_{A,B}$ and $\mu_{A,B}$ are the background relative permittivity and permeability of the regions A and B. These material properties may be discontinuous at the plane $\xi_y = 0$ (i.e., y = 0). This reference plane (y = 0) is the division between the two values of the background materials, and in our structure, corresponds to the center plane of the metal aperture, see Fig. 2. This reference plane can be chosen at any convenient location in the boundary-layer, even below or above the metascreen. The y = 0 plane can be thought of as located at the "center" of the apertures composing the metascreen, but this restriction is not necessary, and a change in the location of this reference plane would cause only changes in the coefficients appearing in the GSTCs. This would result in shifts in the phase of, say, the plane-wave reflection coefficient obtained from it. The topic of referenceplane location is discussed in [22], [28], and [29]. Use the above description of ϵ_r and μ_r , the constitutive equations (3)

$$\mathbf{D} = \epsilon_0 \epsilon_r \mathbf{E} \quad : \quad \mathbf{B} = \mu_0 \mu_r \mathbf{H} \quad ,$$

$$\mathbf{d} = \epsilon_0 \epsilon_r \mathbf{e} \quad : \quad \mathbf{b} = \mu_0 \mu_r \mathbf{h} \quad .$$
(15)

Recall that the boundary-layer fields given (13) vanish by (8) as $|\xi_y| \to \infty$. As a result, the fields away from the metascreen obey the following macroscopic Maxwell equations:

$$\nabla_{\hat{r}} \times \mathbf{E} = -jc\mathbf{B} \quad \text{and} \quad \nabla_{\hat{r}} \times \mathbf{H} = jc\mathbf{D} \quad .$$
 (16)

However, because the effective fields are independent of ξ , equation (16) is true for all $\hat{\mathbf{r}}$ (i.e., even up to the y=0 plane of the metascreen). Eliminating the effective fields from equation (13) gives

$$\nabla_{\hat{r}} \times \mathbf{e} + \frac{1}{\nu} \nabla_{\xi} \times \mathbf{e} = -jc\mathbf{b}$$

$$\nabla_{\hat{r}} \times \mathbf{h} + \frac{1}{\nu} \nabla_{\xi} \times \mathbf{h} = jc\mathbf{d}$$
(17)

We are only interested in the situation when the period is small compared to a wavelength, which corresponds to $\nu \ll 1$. As such, we expand the fields in powers of ν (the small dimensionless parameter):

$$\mathbf{E} \sim \mathbf{E}^{0}(\mathbf{r}) + \nu \mathbf{E}^{1}(\mathbf{r}) + O(\nu^{2})$$

$$\mathbf{e} \sim \mathbf{e}^{0}(\mathbf{r}_{o}, \boldsymbol{\xi}) + \nu \mathbf{e}^{1}(\mathbf{r}_{o}, \boldsymbol{\xi}) + O(\nu^{2})$$
(18)

A similar set of expressions are obtained for all the other fields. The lowest-order fields (\mathbf{E}^0 , \mathbf{H}^0 , etc.) will include incident fields which may be present, as well as any zeroth-order scattered field.

If we substitute (18) into (16) and group like powers of ν , we find that each order of effective fields \mathbf{E}^m and \mathbf{H}^m ($m=0,1,\ldots$) satisfies the macroscopic Maxwell's equations (16). On the other hand, if we substitute (18) into (15) and group like powers of ν we obtain:

$$\nu^0$$
 : $\mathbf{b}^0 = \mu_0 \mu_r \mathbf{h}^0$ and $\mathbf{d}^0 = \epsilon_0 \epsilon_r \mathbf{e}^0$ (19)

$$\nu^1$$
: $\mathbf{b}^1 = \mu_0 \mu_r \mathbf{h}^1$ and $\mathbf{d}^1 = \epsilon_0 \epsilon_r \mathbf{e}^1$ (20)

and so on for higher powers. We also find that the boundary-layer fields satisfy the following:

$$\nu^{-1} : \nabla_{\xi} \times \mathbf{e}^{0} = 0$$

$$\nabla_{\varepsilon} \times \mathbf{h}^{0} = 0$$
(21)

$$\nu^{0} : \nabla_{\xi} \times \mathbf{e}^{1} = -jc\mathbf{b}^{0} - \nabla_{\hat{r}} \times \mathbf{e}^{0}$$
$$\nabla_{\xi} \times \mathbf{h}^{1} = jc\mathbf{d}^{0} - \nabla_{\hat{r}} \times \mathbf{h}^{0}$$
 (22)

and so on for high powers. Finally, taking the fast divergence ∇_{ξ} of (22) gives:

$$\nabla_{\varepsilon} \cdot \mathbf{b}^0 = 0 \quad \text{and} \quad \nabla_{\varepsilon} \cdot \mathbf{d}^0 = 0 \quad .$$
 (23)

These results show that \mathbf{e}^0 and \mathbf{h}^0 are two-dimensional static fields [as seen by (21) and (23)]. They also are periodic in ξ_x and ξ_z , and decay exponentially as $|\xi_y| \to \infty$. Taking the fast divergence of the $O(\nu^1)$ static curl equations and using (21) gives:

$$\nabla_{\varepsilon} \cdot \mathbf{b}^1 = -\nabla_{\hat{r}} \cdot \mathbf{b}^0 \quad \text{and} \quad \nabla_{\varepsilon} \cdot \mathbf{d}^1 = -\nabla_{\hat{r}} \cdot \mathbf{d}^0$$
 (24)

which, together with (22), gives the complete set of differential equations needed to determine the first-order boundary-layer fields.

In summary, as we would expect, this multiple-scale representation show that the effective fields obey the macroscopic Maxwell's equations (16). Whereas, the boundary-layer fields at zeroth order obey the static field equations (21) and (23), and obey (22) and (24) at first order.

To complete the mathematical description of the problem, BCs must be specified. This will allow the effective fields

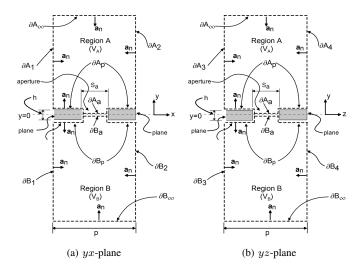


Fig. 4. The period cell with various boundaries defined, (a) yx-plane, and (b) yz-plane. The interior volume of the screen is defined by V_s , which is divided into the portions V_{sA} and V_{sB} lying above and below $\xi_y = 0$, respectively.

at y=0 to be related to the boundary-layer fields at the metascreen interface. Section III-C shows that to first order, the required BCs for the effective fields depend only on the zeroth-order boundary-layer fields and not on the higher-order boundary-layer fields. As such, the desired BCs for the effective fields can be obtained once these zeroth-order boundary-layer fields are determined [which obey equations (21) and (23)].

B. Boundary Conditions on the Screen and at the Interface

In this section, we determine the BCs for the fields on the metascreen. As such, we need to define the surfaces and boundaries that will be used here. Various integrations will be used over portions of the periodic unit-cell as shown in Figs. 3(b) and 4. Volume integrals will be evaluated over regions V_A and V_B , the volumes of the unit cell lying outside the PEC screen cross section and in $\xi_y > 0$ or $\xi_y < 0$ respectively (where ∂A and ∂B denote the boundaries of these regions). The normal vector \mathbf{a}_n is taken "into" region V_A or V_B , see Fig. 4. In particular, in the aperture (denoted by ∂A_a or ∂B_a), we have

$$\mathbf{a}_n|_{\partial A_a} = -\mathbf{a}_n|_{\partial B_a} = \mathbf{a}_y . \tag{25}$$

The contours ∂A_p and ∂B_p are the portions of the boundary of the PEC screen in region A or B, see Fig. 4. In our analysis the normal vector (\mathbf{a}_n) is directed outward from C_p (where $C_p = \partial A_p \cup \partial B_p$ denotes the entire surface of the screen surrounding the apertures within the period cell). The interior volume of the screen is defined by V_p , which is divided into portions V_{pA} and V_{pB} lying above and below $\xi_y = 0$ respectively.

Different BCs hold on the various parts of the boundaries of these regions. For examples, the boundary-layer fields ${\bf e}$, ${\bf h}$ decay exponentially to zero on ∂A_∞ (the boundary where $\xi_y \to \infty$), and on ∂B_∞ (the boundary where $\xi_y \to -\infty$). These boundary-layer fields must also satisfy periodicity conditions in ξ_x and ξ_z . Furthermore, in the aperture ∂A_a or ∂B_a

the total tangential E-field is continuous and on the surface of the PEC screen, the total tangential field is zero:

$$\mathbf{a}_n \times \mathbf{E}^{A,T} \Big|_{\partial A_n} = -\mathbf{a}_n \times \mathbf{E}^{B,T} \Big|_{\partial B_n}$$
, (26)

and

$$\mathbf{a}_n \times \mathbf{E}^{\mathbf{A}, T} \big|_{\partial A_n} = \mathbf{a}_n \times \mathbf{E}^{\mathbf{B}, T} \big|_{\partial B_n} \equiv 0$$
 (27)

Our goal is to develop a set of BCs of the effective field at the y=0 plane (the reference plane). The effective fields on the surface of the screen can be evaluated by extrapolation relative to the reference plane with the use of a Taylor series. As such, any function of the slow variables only can be expressed in the boundary layer as:

$$f(\mathbf{r}) = f(x,0,z) + \nu \xi_y \left. \frac{\partial f(x,y,z)}{\partial \hat{y}} \right|_{\nu=0} + O(\nu^2)$$
 (28)

where $\hat{y} = k_0 y = \nu \xi_y$ was used. Using this Taylor series expansion of (28) and the expansion (18), (27) is expanded to give the following for the *E*-field on ∂A_n :

$$\nu^{0}: \mathbf{a}_{n} \times \mathbf{e}^{A0} \big|_{\partial A_{n}} = -\mathbf{a}_{n} \times \mathbf{E}^{A0}(\mathbf{r}_{o})$$
 (29)

$$\nu^{1}: \mathbf{a}_{n} \times \mathbf{e}^{\mathbf{A}1} \Big|_{\partial A_{p}} = -\xi_{y} \mathbf{a}_{n} \times \left[\frac{\partial}{\partial \hat{y}} \mathbf{E}^{\mathbf{A}0} \right]_{y=0} - \mathbf{a}_{n} \times \mathbf{E}^{\mathbf{A}1}(\mathbf{r}_{o}).$$
(30)

and so on. Likewise, on ∂B_p we have

$$\nu^{0}: \mathbf{a}_{n} \times \mathbf{e}^{\mathrm{B0}}|_{\partial B_{n}} = -\mathbf{a}_{n} \times \mathbf{E}^{\mathrm{B0}}(\mathbf{r}_{o})$$
 (31)

$$\nu^{1}: \mathbf{a}_{n} \times \mathbf{e}^{\mathrm{B1}} \big|_{\partial B_{p}} = -\xi_{y} \mathbf{a}_{n} \times \left[\frac{\partial}{\partial \hat{y}} \mathbf{E}^{\mathrm{B0}} \right]_{y=0} - \mathbf{a}_{n} \times \mathbf{E}^{\mathrm{B1}}(\mathbf{r}_{o}) ,$$
(32)

Using (18) and (26), in the aperture we have

$$\mathbf{a}_{y} \times \left[\mathbf{e}^{\mathbf{A}m} - \mathbf{e}^{\mathbf{B}m} \right] \Big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \times \left[\mathbf{E}^{\mathbf{A}m}(\mathbf{r}_{o}) - \mathbf{E}^{\mathbf{B}m}(\mathbf{r}_{o}) \right]$$
(33)

where m corresponds to the different orders (i.e., 0, 1, etc..). The BC for the total tangential H in the aperture are

$$\mathbf{a}_{y} \times \left[\mathbf{h}^{\mathrm{A}m} - \mathbf{h}^{\mathrm{B}m} \right] \Big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \times \left[\mathbf{H}^{\mathrm{A}m}(\mathbf{r}_{o}) - \mathbf{H}^{\mathrm{B}m}(\mathbf{r}_{o}) \right]. \tag{34}$$

In the aperture $(\partial A_a/\partial B_a)$ we also have that the normal component of the total D-field is continuous:

$$\mathbf{a}_n \cdot \mathbf{D}^{\mathbf{A}, T} \big|_{\partial A_a} = -\mathbf{a}_n \cdot \mathbf{D}^{\mathbf{B}, T} \big|_{\partial B_a} ,$$
 (35)

from which we get

$$\mathbf{a}_{y} \cdot \left[\mathbf{d}^{\mathrm{A}m} - \mathbf{d}^{\mathrm{B}m} \right] \Big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \cdot \left[\mathbf{D}^{\mathrm{A}m}(\mathbf{r}_{o}) - \mathbf{D}^{\mathrm{B}m}(\mathbf{r}_{o}) \right] . \tag{36}$$

The normal component of the total B-field on the screen is zero, and the normal component of B is continuous across the aperture. Thus, in the aperture we have

$$\mathbf{a}_{y} \cdot \mathbf{B}^{\mathbf{A}, T} \big|_{\partial A_{a}} = -\mathbf{a}_{y} \cdot \mathbf{B}^{\mathbf{B}, T} \big|_{\partial B_{a}} , \qquad (37)$$

and on the PEC screen we have

$$\mathbf{a}_n \cdot \mathbf{B}^{\mathbf{A}, T} \Big|_{\partial A_n} = \mathbf{a}_n \cdot \mathbf{B}^{\mathbf{B}, T} \Big|_{\partial B_n} \equiv 0$$
 (38)

On ∂A_p , this gives

$$\nu^{0}: \mathbf{a}_{n} \cdot \mathbf{b}^{A0} \big|_{\partial A_{n}} = -\mathbf{a}_{n} \cdot \mathbf{B}^{A0}(\mathbf{r}_{o})$$
 (39)

$$\nu^{1}: \mathbf{a}_{n} \cdot \mathbf{b}^{\mathrm{A1}} \Big|_{\partial A_{p}} = -\xi_{y} \mathbf{a}_{n} \cdot \left[\frac{\partial}{\partial \hat{y}} \mathbf{B}^{\mathrm{A0}} \right]_{y=0} - \mathbf{a}_{n} \cdot \mathbf{B}^{\mathrm{A1}}(\mathbf{r}_{o}) .$$
(40)

and on ∂B_p we have

$$\nu^{0}: \mathbf{a}_{n} \cdot \mathbf{b}^{\mathrm{B0}} \big|_{\partial B_{p}} = -\mathbf{a}_{n} \cdot \mathbf{B}^{\mathrm{B0}}(\mathbf{r}_{o})$$
 (41)

$$\nu^{1}: \mathbf{a}_{n} \cdot \mathbf{b}^{\mathrm{B1}} \big|_{\partial B_{p}} = -\xi_{y} \mathbf{a}_{n} \cdot \left[\frac{\partial}{\partial \hat{y}} \mathbf{B}^{\mathrm{B0}} \right]_{y=0} - \mathbf{a}_{n} \cdot \mathbf{B}^{\mathrm{B1}}(\mathbf{r}_{o}) ,$$
(42)

and in the aperture we have

$$\mathbf{a}_{y} \cdot \left[\mathbf{b}^{\mathrm{A}m} - \mathbf{b}^{\mathrm{B}m} \right] \Big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \cdot \left[\mathbf{B}^{\mathrm{A}m} (\mathbf{r}_{o}) - \mathbf{B}^{\mathrm{B}m} (\mathbf{r}_{o}) \right] . \tag{43}$$

There are *a posteriori* conditions at the surfaces of the screen. These *a posteriori* conditions relate the fields to free surface current densities or free surface charge, which we denote them as \mathbf{j}_S and ρ_S respectively. The free surface charge are

$$\rho_S^T = \rho_S^0 + \nu \rho_S^1 + \dots , (44)$$

where

$$\rho_S^m = \mathbf{a}_n \cdot \left[\mathbf{D}^m + \mathbf{d}^m \right]_{C_p} \tag{45}$$

and the free surface current density can be expanded as

$$\mathbf{j}_S^T = \mathbf{j}_S^0 + \nu \mathbf{j}_S^1 + \dots , \qquad (46)$$

where

$$\mathbf{j}_S^m = \mathbf{a}_n \times [\mathbf{H}^m + \mathbf{h}^m]_{C_p} \quad . \tag{47}$$

This last condition is the reason why be must develop a non-standard EBC on the average $E_{x,z}$ field at the y=0 location, and not a BC for the jump in the H field at y=0. The EBC resulting from (46) and (47) can only be used once the fields have been determined.

III. GSTCs for a Metascreen

In this section, we derive the GSTCs for the effective fields. We begin by developing a few needed integral identities and then derive BCs for the zeroth-order effective fields at the metascreen. We then introduce normalized boundary-layer fields and state the governing equation for the zeroth-order boundary layer fields. We show that the effective fields at the reference plane can be expressed in terms of volume and surface integrals of these zeroth-order normalized boundary-layer fields. Finally, we show that these integrals represent various surface parameters that appear explicitly in the desired GSTCs.

A. Zeroth-order effective field at the reference surface

Now let us look at the zeroth-order field (i.e., m = 0). Using the solvability condition given in eq. (89) of Appendix A and BCs for e^0 given in (29), (31), and (33) yields

$$\int_{\partial A_n/\partial B_n} \mathbf{a}_y \times \left[\mathbf{E}^{A0} - \mathbf{E}^{B0} \right] dS + \int_{C_n} \mathbf{a}_n \times \mathbf{E}^0 dS = 0$$
 (48)

where we have also used the fact that $\nabla_{\xi} \times \mathbf{e}^0 = 0$. Recall that $\mathbf{E}^{(A,B)0}$ are independent of the fast variable and can be brought outside the integral. We define

$$\int_{\partial A_a/\partial B_a} dS = \hat{S}_a \tag{49}$$




Fig. 5. Volumes and surfaces needed to for $E_x^{(0,1)}(\mathbf{r}_o)$ and $E_z^{(0,1)}(\mathbf{r}_o)$ conditions: (a) periodic in z for $E_x^{(0,1)}(\mathbf{r}_o)$; (b) periodic in x for $E_z^{(0,1)}(\mathbf{r}_o)$. A cross-shaped aperture is used for purposes of illustration.

to be the area of the aperture region intersected by y=0 in scaled (fast) dimensions. We also define \hat{S}_p as the surface area of the screen intersected by the plane y=0 in scaled dimensions, so that $\hat{S}_p + \hat{S}_a = 1$ because the scaled area of the period cell in the plane y=0 is equal to one. The actual areas in unscaled coordinates are $S_a = \hat{S}_a p^2$ and $S_p = \hat{S}_p p^2$. We can readily show that

$$\int_{\partial A_s} \mathbf{a}_n \, dS = \mathbf{a}_y \, \hat{S}_p$$
 and $\int_{\partial B_s} \mathbf{a}_n \, dS = -\mathbf{a}_y \, \hat{S}_p$. (50)

From (48)-(50), we arrive finally at one of the desired BCs for the zeroth order macroscopic E fields:

$$\mathbf{a}_{y} \times \left[\mathbf{E}^{\mathrm{A0}}(\mathbf{r}_{o}) - \mathbf{E}^{\mathrm{B0}}(\mathbf{r}_{o}) \right] = 0 .$$
 (51)

This shows that to zeroth-order, the tangential components of the effective E-fields are continuous across the metascreen.

Now, by enforcing the solvability conditions given in eqs. (90)-(93) of Appendix A, we obtain the two final conditions on the zeroth-order fields at the reference plane (y = 0). Using eqs. (21), (90), and (91), we get separate conditions from the integrals over S_{Ap1} and S_{Bp1} (see Appendix A and Fig. 5):

$$\mathbf{a}_x \cdot \int_{\partial A_{pa}} \mathbf{a}_n \times \mathbf{e}^{A0} dS = \mathbf{a}_x \cdot \int_{\partial B_{pa}} \mathbf{a}_n \times \mathbf{e}^{B0} dS = 0$$
 (52)

where S_{Ap1} and S_{Bp1} are the rectangular surface area of ∂A_{pa} and ∂B_{pa} respectively that lie between the aperture and the x=0 wall of the period cell. Note that S_{Bp1} (and ∂B_{pa}) is equivalent to S_{Ap1} (and ∂A_{pa}), except it corresponds to the bottom (y<0) side of the screen. We are assured that these rectangles have nonzero area because the apertures are assumed to be isolated from each other (see Fig. 5).

Proceeding as we did when leading to (51), we arrive at

$$\hat{S}_{Ap1}E_z^{A0}(\mathbf{r}_o) = 0$$
 and $\hat{S}_{Bp1}E_z^{B0}(\mathbf{r}_o) = 0$, (53)

where we have used the elementary results

$$\int_{\partial A_{pa}} dS = S_{Ap1} \quad \text{and} \quad \int_{\partial B_{pa}} dS = S_{Bp1} \quad . \tag{54}$$

If $\hat{S}_{Ap1} \neq 0$ (and in turn $\hat{S}_{Bp1} \neq 0$), we have

$$E_z^{A0}(\mathbf{r}_o) = E_z^{B0}(\mathbf{r}_o) \equiv E_z^0(\mathbf{r}_o) = 0$$
 (55)

Following a similar procedure but now using eqs. (21), (92), and (93), we obtain:

$$E_x^{\text{A0}}(\mathbf{r}_o) = E_x^{\text{B0}}(\mathbf{r}_o) \equiv E_x^0(\mathbf{r}_o) = 0$$
 (56)

The two conditions given in (55) and (56) state that to zerothorder, the macroscopic tangential *E*-fields are shorted (or forced to zero) by the PEC screen surrounding the aperture and do not penetrate through the metascreen. Any corrections to these essential BCs will appear in the first-order terms, as we will see in the next subsection.

From the y-component of Faraday's law it follows that

$$B_y^0(\mathbf{r}_0) = \frac{1}{jc} \left[\left. \frac{\partial E_z^0(\mathbf{r})}{\partial \hat{x}} \right|_{\mathbf{r}_o} - \left. \frac{\partial E_x^0(\mathbf{r})}{\partial \hat{z}} \right|_{\mathbf{r}_o} \right] \equiv 0 . \quad (57)$$

The conditions that $E_z^0(\mathbf{r}_0) = 0$ and $E_x^0(\mathbf{r}_0) = 0$ were used to obtain this expression (as well as the fact that all their tangential derivatives vanish at y = 0).

B. Analysis of the Lowest-Order Boundary-Layer Fields

With Maxwell's equations separated into the effective and boundary-layer terms (along with their BCs), we can analyze these fields separately at each higher order in ν . We concentrate on the zeroth-order boundary-layer fields because integrals of these fields are related to the surface parameters that characterize the metascreen. We have collected together the governing expressions for the zeroth-order fields ${\bf e}^0$ and ${\bf h}^0$ [governed by (21)] and their BCs, and expressed then here:

$$\nabla_{\boldsymbol{\xi}} \cdot (\boldsymbol{\epsilon}_{r} \mathbf{e}^{0}) = 0 \quad \Rightarrow \boldsymbol{\xi} \in V_{A} \text{ and } V_{B}$$

$$\nabla_{\boldsymbol{\xi}} \times \mathbf{e}^{0} = 0 \quad \Rightarrow \boldsymbol{\xi} \in V_{A} \text{ and } V_{B}$$

$$\mathbf{a}_{n} \times \mathbf{e}^{A0} \big|_{\partial A_{p}} = -\mathbf{a}_{n} \times \mathbf{a}_{y} E_{y}^{A0}(\mathbf{r}_{o}) \text{ for } \boldsymbol{\xi} \in \partial A_{p}$$

$$\mathbf{a}_{n} \times \mathbf{e}^{B0} \big|_{\partial B_{p}} = -\mathbf{a}_{n} \times \mathbf{a}_{y} E_{y}^{B0}(\mathbf{r}_{o}) \text{ for } \boldsymbol{\xi} \in \partial B_{p}$$

$$\mathbf{a}_{y} \times \left[\mathbf{e}^{A0} - \mathbf{e}^{B0}\right] \big|_{\partial A_{a}/\partial B_{a}} = 0$$

$$\mathbf{a}_{y} \cdot \left[\mathbf{d}^{A0} - \mathbf{d}^{B0}\right] \big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \cdot \left[\mathbf{D}^{A0}(\mathbf{r}_{o}) - \mathbf{D}^{B0}(\mathbf{r}_{o})\right]$$
(58)

and

$$\nabla_{\boldsymbol{\xi}} \cdot (\mu_{r} \mathbf{h}^{0}) = 0 \implies \boldsymbol{\xi} \in S_{A} \text{ and } S_{B}$$

$$\nabla_{\boldsymbol{\xi}} \times \mathbf{h}^{0} = 0 \implies \boldsymbol{\xi} \in S_{A} \text{ and } S_{B}$$

$$\mathbf{a}_{n} \cdot \mathbf{b}^{A0} \Big|_{\partial A_{p}} = -\mathbf{a}_{n} \cdot \mathbf{B}^{A0}(\mathbf{r}_{o}) \text{ for } \boldsymbol{\xi} \in \partial A_{p}$$

$$\mathbf{a}_{n} \cdot \mathbf{h}^{B0} \Big|_{\partial B_{p}} = -\mathbf{a}_{n} \cdot \mathbf{B}^{B0}(\mathbf{r}_{o}) \text{ for } \boldsymbol{\xi} \in \partial B_{p}$$

$$\mathbf{a}_{y} \cdot \left[\mathbf{b}^{A0} - \mathbf{b}^{B0}\right] \Big|_{\partial A_{a}/\partial B_{a}} = 0$$

$$\mathbf{a}_{y} \times \left[\mathbf{h}^{A0} - \mathbf{h}^{B0}\right] \Big|_{\partial A_{a}/\partial B_{a}} = -\mathbf{a}_{y} \times \left[\mathbf{H}^{A0}(\mathbf{r}_{o}) - \mathbf{H}^{B0}(\mathbf{r}_{o})\right]$$
(59)

As we see, the sources (forcing terms) for the boundary-layer fields contain only the macroscopic fields at the reference plane y=0, as such, they will be proportional to these macroscopic fields. From (58) and (59) we can see that the sources for \mathbf{e}^0 are $D_y^{A0}(\mathbf{r}_o)$ and $D_y^{B0}(\mathbf{r}_o)$, and the sources for \mathbf{h}^0 are $H_x^{A0}(\mathbf{r}_o)$, $H_x^{B0}(\mathbf{r}_o)$, $H_z^{A0}(\mathbf{r}_o)$, and $H_z^{B0}(\mathbf{r}_o)$. By superposition then, we see that \mathbf{e}^0 and \mathbf{h}^0 must have the following form:

$$\mathbf{e}^{0} = \frac{D_{y}^{A0}(\mathbf{r}_{o})}{\epsilon_{0}} \mathcal{E}_{1}(\boldsymbol{\xi}) + \frac{D_{y}^{B0}(\mathbf{r}_{o})}{\epsilon_{0}} \mathcal{E}_{2}(\boldsymbol{\xi}) , \qquad (60)$$

$$\mathbf{h}^{0} = H_{x}^{A0}(\mathbf{r}_{o})\mathcal{H}_{1}(\boldsymbol{\xi}) + H_{x}^{B0}(\mathbf{r}_{o})\mathcal{H}_{2}(\boldsymbol{\xi}) + H_{z}^{A0}(\mathbf{r}_{o})\mathcal{H}_{3}(\boldsymbol{\xi}) + H_{z}^{B0}(\mathbf{r}_{o})\mathcal{H}_{4}(\boldsymbol{\xi}) .$$

$$(61)$$

where \mathcal{E}_i and \mathcal{H}_i are functions of the fast variables only for which the governing equations are given in Appendix B. As we will see in the next subsection, these two forms for the boundary-layer fields will allow for the effective fields to appear explicitly in the GSTCs. Using the representation of \mathbf{e}^0 and \mathbf{h}^0 given in eqs. (60) and (61), we get the following for the curl of these fields:

$$\nabla_{\hat{r}} \times \mathbf{e}^{0} = -\mathcal{E}_{1} \times \nabla_{t,\hat{r}} E_{y}^{A0}(\mathbf{r}_{o}) - \mathcal{E}_{2} \times \nabla_{t,\hat{r}} E_{y}^{B0}(\mathbf{r}_{o})$$

$$\nabla_{\hat{r}} \times \mathbf{h}^{0} = -\mathcal{H}_{1} \times \nabla_{t,\hat{r}} H_{x}^{A0}(\mathbf{r}_{o}) - \mathcal{H}_{2} \times \nabla_{t,\hat{r}} H_{x}^{B0}(\mathbf{r}_{o})$$

$$-\mathcal{H}_{3} \times \nabla_{t,\hat{r}} H_{z}^{A0}(\mathbf{r}_{o}) - \mathcal{H}_{4} \times \nabla_{t,\hat{r}} H_{z}^{B0}(\mathbf{r}_{o})$$
(62)

The subscript "t" corresponds to derivatives with respect to x and z only. This is due to the fact that e and h are independent of y and as such, the curl on the left hand side of (62) have no y-derivatives.

C. Boundary Conditions for the First-Order Fields and the Desired GSTCs

Here we investigate the first-order effective field, along with their the essential BCs. This will lead to the desired GSTCs. We start by applying (89), see Appendix A, for the case m=1 to obtain

$$\mathbf{a}_{y} \times \int_{\partial A_{a}} \left[\mathbf{e}^{A1} - \mathbf{e}^{B1} \right] dS + \int_{C_{p}} \mathbf{a}_{n} \times \mathbf{e}^{1} dS = -\int_{V_{AB}} \nabla_{\xi} \times \mathbf{e}^{1} dV .$$
(63)

From the components of Faraday's law for the macroscopic field transverse to y, we have

$$\mathbf{a}_{y} \times \frac{\partial \mathbf{E}^{\mathbf{o}}}{\partial \hat{y}} \Big|_{\mathbf{r}_{o}} = -j\eta_{0}\mu_{r} \left[\mathbf{a}_{x} H_{x}^{0}(\mathbf{r}_{o}) + \mathbf{a}_{z} H_{z}^{0}(\mathbf{r}_{o}) \right] + \mathbf{a}_{y} \times \nabla_{t,\hat{r}} E_{y}^{0}(\mathbf{r}_{0})$$

$$(64)$$

where $\eta_0 = \sqrt{\mu_0/\epsilon_0}$ is the free space wave impedance. Using this and the BCs given in (30), (32), and (33), the left hand side of (63) becomes

$$-\mathbf{a}_{y} \times \left[\mathbf{E}^{A1}(\mathbf{r}_{o}) - \mathbf{E}^{B1}(\mathbf{r}_{o})\right] - \hat{V}_{pA} \, \mathbf{a}_{y} \times \nabla_{t,\hat{r}} E_{y}^{A0}(\mathbf{r}_{o})$$

$$-\hat{V}_{pB} \, \mathbf{a}_{y} \times \nabla_{t,\hat{r}} E_{y}^{B0}(\mathbf{r}_{o})$$

$$+j\eta_{0} \mathbf{a}_{x} \left(\mu_{A} \, \hat{V}_{pA} H_{x}^{A0}(\mathbf{r}_{o}) + \mu_{B} \, \hat{V}_{pB} H_{x}^{B0}(\mathbf{r}_{o})\right)$$

$$+j\eta_{0} \mathbf{a}_{z} \left(\mu_{A} \, \hat{V}_{pA} H_{z}^{A0}(\mathbf{r}_{o}) + \mu_{B} \, \hat{V}_{pB} H_{z}^{B0}(\mathbf{r}_{o})\right)$$
(65)

where we used the fact that

$$\int_{\partial A_p} \xi_y \, \mathbf{a}_n \, dS = \mathbf{a}_y \, \hat{V}_{pA} \text{ and } \int_{\partial B_p} \xi_y \, \mathbf{a}_n \, dS = \mathbf{a}_y \, \hat{V}_{pB}$$
(66)

where \hat{V}_{pA} and \hat{V}_{pB} are the scaled internal volumes of the screen (i.e., the plane containing the apertures) that are above and below the y=0, respectively (i.e., $\hat{V}_p=\hat{V}_{pA}+\hat{V}_{pB}$).

Using (19), (20), (22), (60)-(62), the right side of (63) metascreen, respectively, and are defined by reduces to

$$\int_{V_{AB}} \nabla_{\xi} \times \mathbf{e}^{1} dV =
-j\eta_{0} \int_{V_{AB}} \mu_{r} \left[H_{x}^{A0}(\mathbf{r}_{o}) \mathcal{H}_{1} + H_{x}^{B0}(\mathbf{r}_{o}) \mathcal{H}_{2} \right] dV_{\xi}
-j\eta_{0} \int_{V_{AB}} \mu_{r} \left[H_{z}^{A0}(\mathbf{r}_{o}) \mathcal{H}_{3} + H_{z}^{B0}(\mathbf{r}_{o}) \mathcal{H}_{4} \right] dV_{\xi}
+ \int_{V_{AB}} \mathcal{E}_{1} dV \times \nabla_{t,\hat{r}} E_{y}^{A0}(\mathbf{r}_{o}) + \int_{V_{AB}} \mathcal{E}_{2} dV \times \nabla_{t,\hat{r}} E_{y}^{B0}(\mathbf{r}_{o})$$
(67)

Utilizing the results in Appendix C of [12], we can show that $\int \mathcal{E}_i dV$ only has a y-component while $\int \mathcal{H}_i dV$ has no ycomponents and that

$$\int_{AB} \mathcal{E}_1 dV_{\xi} = \mathbf{a}_y \left[\alpha_{Eyy}^{AA} + \alpha_{Eyy}^{BA} \right]
\int_{AB} \mathcal{E}_2 dV_{\xi} = \mathbf{a}_y \left[\alpha_{Eyy}^{AB} + \alpha_{Eyy}^{BB} \right]$$
(68)

and

$$\int_{(A,B)} \mathcal{H}_1 dV_{\xi} = \mathbf{a}_x \alpha_{Mxx}^{(A,B)A} + \mathbf{a}_z \alpha_{Mzx}^{(A,B)A}
\int_{(A,B)} \mathcal{H}_2 dV_{\xi} = \mathbf{a}_x \alpha_{Mxx}^{(A,B)B} + \mathbf{a}_z \alpha_{Mzx}^{(A,B)B}
\int_{(A,B)} \mathcal{H}_3 dV_{\xi} = \mathbf{a}_x \alpha_{Mxz}^{(A,B)A} + \mathbf{a}_z \alpha_{Mzz}^{(A,B)A}
\int_{(A,B)} \mathcal{H}_4 dV_{\xi} = \mathbf{a}_x \alpha_{Mxz}^{(A,B)B} + \mathbf{a}_z \alpha_{Mzz}^{(A,B)B}$$
(69)

where the α_E and α_M are defined as

$$\alpha_{Eyy}^{(A,B)[A,B]} = \mathbf{a}_{y} \cdot \int_{(A,B)} \mathcal{E}_{[1,2]} dV_{\xi}$$

$$\alpha_{Mxx}^{(A,B)[A,B]} = \mathbf{a}_{x} \cdot \int_{(A,B)} \mathcal{H}_{[1,2]} dV_{\xi}$$

$$\alpha_{Mxz}^{(A,B)[A,B]} = \mathbf{a}_{x} \cdot \int_{(A,B)} \mathcal{H}_{[3,4]} dV_{\xi} \quad . \tag{70}$$

$$\alpha_{Mxx}^{(A,B)[A,B]} = \mathbf{a}_{z} \cdot \int_{(A,B)} \mathcal{H}_{[1,2]} dV_{\xi}$$

$$\alpha_{Mzx}^{(A,B)[A,B]} = \mathbf{a}_{z} \cdot \int_{(A,B)} \mathcal{H}_{[3,4]} dV_{\xi}$$

The subscripts and superscripts in these various quantities have the following meanings. The first superscript (A, B) represents an integral over either region A or region B. The second superscript implies that the source of the integrand is from either side A or B of the metascreen (i.e, E_u^{A0} or E_{y}^{B0} , etc.). The first subscript (E or M) corresponds to an integral of either an \mathcal{E} -field or a \mathcal{H} -field. The second subscript corresponds to the x or y component of $\alpha_{E,M}$. The third subscript indicates the component of the excitation field that generates \mathcal{E}_i or \mathcal{H}_i .

Substituting (65) and (67) into (63), the jump condition for the first-order effective E-field is

$$\mathbf{a}_{y} \times \left[\mathbf{E}^{A1}(\mathbf{r}_{o}) - \mathbf{E}^{B1}(\mathbf{r}_{0})\right] = \\
-\mathbf{a}_{y} \times \left[\frac{\chi_{ES}^{Ayy}}{p} \nabla_{t,\hat{r}} E_{x}^{A0} + \frac{\chi_{ES}^{Byy}}{p} \nabla_{t,\hat{r}} E_{y}^{B0}(\mathbf{r}_{o})\right] \\
-\mathbf{a}_{x} j\eta_{0} \left[\frac{\chi_{MS}^{Axx}}{p} H_{x}^{A0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Bxx}}{p} H_{x}^{B0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Axz}}{p} H_{z}^{A0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Bxz}}{p} H_{z}^{B0}(\mathbf{r}_{o})\right] \\
-\mathbf{a}_{z} j\eta_{0} \left[\frac{\chi_{MS}^{Azx}}{p} H_{x}^{A0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Bzx}}{p} H_{x}^{B0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Azz}}{p} H_{z}^{B0}(\mathbf{r}_{o}) + \frac{\chi_{MS}^{Bzz}}{p} H_{z}^{B0}(\mathbf{r}_{o})\right]$$

$$(71)$$

where the coefficients χ_{MS} and χ_{ES} are interpreted as effective magnetic and electric surface susceptibilities of the

$$\chi_{ES}^{Ayy} = -p \left(\alpha_{Eyy}^{AA} + \alpha_{Eyy}^{BA} - \hat{V}_{pA} \right)$$

$$\chi_{ES}^{Byy} = -p \left(\alpha_{Eyy}^{AB} + \alpha_{Eyy}^{BB} - \hat{V}_{PB} \right)$$

$$\chi_{MS}^{Axx} = p \left(\mu_{B} \alpha_{Mxx}^{BA} + \mu_{A} \left[\alpha_{Mxx}^{AA} - \hat{V}_{pA} \right] \right)$$

$$\chi_{MS}^{Bxx} = p \left(\mu_{A} \alpha_{Mxx}^{AB} + \mu_{B} \left[\alpha_{Mxx}^{BB} - \hat{V}_{pB} \right] \right)$$

$$\chi_{MS}^{(A,B)xz} = p \left(\mu_{A} \alpha_{Mxz}^{A(A,B)} + \mu_{B} \alpha_{Mxz}^{B(A,B)} \right)$$

$$\chi_{MS}^{(A,B)zz} = p \left(\mu_{A} \alpha_{Mzx}^{A(A,B)} + \mu_{B} \alpha_{Mzx}^{B(A,B)} \right)$$

$$\chi_{MS}^{Azz} = p \left(\mu_{A} \alpha_{Mzz}^{A(A,B)} + \mu_{A} \left[\alpha_{Mzz}^{AA} - \hat{V}_{pA} \right] \right)$$

$$\chi_{MS}^{Bzz} = p \left(\mu_{A} \alpha_{Mzz}^{AB} + \mu_{B} \left[\alpha_{Mzz}^{BB} - \hat{V}_{pB} \right] \right)$$

which have units of length.

The remaining two essential BCs for the sum of $E_x^{A1}+E_x^{B1}$ and $E_z^{A1}+E_z^{B1}$ are investigated next. Using the solvability condition (90), the BC given in eq. (30), and eqs. (22) and (62), we obtain

$$E_{z}^{A1}(\mathbf{r}_{o}) S_{Ap1} = -\frac{h}{2} S_{Ap1} \mathbf{a}_{x} \cdot \left[\mathbf{a}_{n} \times \frac{\partial}{\partial \hat{y}} E_{z}^{A0}(\mathbf{r}_{o}) \right]$$

$$-j c \mathbf{a}_{x} \cdot \int \mathbf{b}^{0} dV_{Aa} + \mathbf{a}_{x} \cdot \left[\int \mathcal{E}_{1} dV_{Aa} \times \nabla_{t,\hat{r}} E_{y}^{A0}(\mathbf{r}_{o}) \right]$$

$$+ \mathbf{a}_{x} \cdot \left[\int \mathcal{E}_{2} dV_{Aa} \times \nabla_{t,\hat{r}} E_{y}^{B0}(\mathbf{r}_{o}) \right]$$

$$(73)$$

where h is the thickness of the screen (see Fig. 4). Using eqs. (64) and (61) we get

$$E_{z}^{A1}(\mathbf{r}_{o}) = -j\eta_{0}\mu_{r} \left[\mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{1} dV_{Aa}}{S_{Ap1}} - \frac{h}{2} \right] H_{x}^{A0}$$

$$-j\eta_{0}\mu_{r} \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{2} dV_{Aa}}{S_{Ap1}} H_{x}^{B0} - j\eta_{0}\mu_{r} \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{3} dV_{Aa}}{S_{Ap1}} H_{z}^{A0}$$

$$-j\eta_{0}\mu_{r} \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{4} dV_{Aa}}{S_{Ap1}} H_{z}^{B0} - \frac{h}{2} \mathbf{a}_{x} \cdot \mathbf{a}_{y} \times \nabla E_{y}^{A0}$$

$$+ \mathbf{a}_{x} \cdot \left[\frac{\int \mathcal{E}_{1} dV_{Aa}}{S_{Ap1}} \times \nabla_{t,\hat{r}} E_{y}^{A0} \right] + \mathbf{a}_{x} \cdot \left[\frac{\int \mathcal{E}_{2} dV_{Aa}}{S_{Ap1}} \times \nabla_{t,\hat{r}} E_{y}^{B0} \right]$$

$$(74)$$

Using the solvability condition given is eq. (91) and following a similar procedure as above, we obtain:

$$E_{z}^{B1}(\mathbf{r}_{o}) = -j\eta_{0}\mu_{r} \left[\mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{2} dV_{Ba}}{S_{Bp1}} - \frac{h}{2} \right] H_{x}^{B0}$$

$$-j\eta_{0}\mu_{r}\mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{1} dV_{Ba}}{S_{Bp1}} H_{x}^{A0} - j\eta_{0}\mu_{r}\mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{3} dV_{Ba}}{S_{Bp1}} H_{z}^{A0}$$

$$-j\eta_{0}\mu_{r}\mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{4} dV_{Ba}}{S_{Bp1}} H_{z}^{B0} - \frac{h}{2}\mathbf{a}_{x} \cdot \left[\mathbf{a}_{y} \times \nabla E_{y}^{B0} \right]$$

$$+\mathbf{a}_{x} \cdot \left[\frac{\int \mathcal{E}_{1} dV_{Ba}}{S_{Bp1}} \times \nabla_{t,\hat{r}} E_{y}^{A0} \right] + \mathbf{a}_{x} \cdot \left[\frac{\int \mathcal{E}_{2} dV_{Ba}}{S_{Bp1}} \times \nabla_{t,\hat{r}} E_{y}^{B0} \right]$$

$$(75)$$

(71) By adding $E_z^{A1}(\mathbf{r}_o)$ and $E_z^{B1}(\mathbf{r}_o)$, we obtain

$$\begin{bmatrix} E_z^{A1}(\mathbf{r}_o) + E_z^{B1}(\mathbf{r}_o) \end{bmatrix} = -\frac{\pi_{ES}^{Ayy}}{p} \frac{\partial E_y^{A0}(\mathbf{r}_o)}{\partial \hat{z}} - \frac{\pi_{ES}^{By0}}{p} \frac{\partial E_y^{B0}(\mathbf{r}_o)}{\partial \hat{z}} \\
-j\eta_0 \frac{\pi_{MS}^{Axz}}{p} H_x^{A0} - j\eta_0 \frac{\pi_{MS}^{Bxz}}{p} H_x^{B0} \\
-j\eta_0 \frac{\pi_{MS}^{Axz}}{p} H_z^{A0} - j\eta_0 \frac{\pi_{MS}^{Bxz}}{p} H_z^{B0}$$
(76)

where

$$\pi_{ES}^{(A,B)yy} = -p \left[\mathbf{a}_{y} \cdot \frac{\int \mathcal{E}_{(1,2)} \, dV_{Aa}}{S_{Ap1}} \right. \\
+ \left. \mathbf{a}_{y} \cdot \frac{\int \mathcal{E}_{(1,2)} \, dV_{Ba}}{S_{Bp1}} - \frac{h}{2} \right] \\
\pi_{MS}^{(A,B)xx} = p \left[\mu_{A} \, \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{(1,2)} \, dV_{Aa}}{S_{Ap1}} \right. \\
+ \mu_{B} \, \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{(1,2)} \, dV_{Ba}}{S_{Bp1}} - \frac{h}{2} \right] \\
\pi_{MS}^{(A,B)xz} = p \left[\mu_{A} \, \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{(3,4)} \, dV_{Aa}}{S_{Ap1}} \right. \\
- \mu_{B} \, \mathbf{a}_{x} \cdot \frac{\int \mathcal{H}_{(3,4)} \, dV_{Ba}}{S_{Bp1}} \right]$$
(77)

and are interpreted as effective magnetic and electric surface *porosities* of the metascreen.

Using the solvability conditions (92) and (93), and following a similar procedure as above, we have

$$\begin{aligned} \left[E_{x}^{A1}(\mathbf{r}_{o}) + E_{x}^{B1}(\mathbf{r}_{o})\right] &= -\frac{\pi_{ES}^{Ayy}}{p} \frac{\partial E_{y}^{A0}(\mathbf{r}_{o})}{\partial \hat{x}} - \frac{\pi_{ES}^{Byy}}{p} \frac{\partial E_{y}^{B0}(\mathbf{r}_{o})}{\partial \hat{x}} \\ &+ j\eta_{0} \frac{\pi_{MS}^{Azz}}{p} H_{x}^{A0} + j\eta_{0} \frac{\pi_{MS}^{Bzz}}{p} H_{x}^{B0} \\ &+ j\eta_{0} \frac{\pi_{MS}^{Azz}}{p} H_{z}^{A0} + j\eta_{0} \frac{\pi_{MS}^{Bzz}}{p} H_{z}^{B0} \end{aligned}$$

$$(78)$$

where the remaining effective magnetic surface porosities are given by

$$\pi_{MS}^{(A,B)zx} = p \left[\mu_{A} \, \mathbf{a}_{z} \cdot \frac{\int \mathcal{H}_{(1,2)} \, dV_{Aa}}{S_{Ap1}} + \mu_{B} \, \mathbf{a}_{z} \cdot \frac{\int \mathcal{H}_{(1,2)} \, dV_{Ba}}{S_{Bp1}} \right]$$

$$\pi_{MS}^{(A,B)zz} = p \left[\mu_{A} \, \mathbf{a}_{z} \cdot \frac{\int \mathcal{H}_{(3,4)} \, dV_{Aa}}{S_{Ap1}} + \mu_{B} \, \mathbf{a}_{z} \cdot \frac{\int \mathcal{H}_{(3,4)} \, dV_{Ba}}{S_{Bp1}} - \frac{h}{2} \right] .$$
(79)

The two BCs for the sum of the E_x and E_z fields [eqs. (76) and (78)] have the same functional form as the BC needed for an arbitrarily shaped wire-grating (a metagrating) [12]. The wire-grating is a similar structure in that a BC for the sum of the E-field parallel to the wires is required, and is given in terms of surface porosities [12].

We can now use the results for the BCs for the zeroth-order and first-order fields (i.e., eqs. (71), (76), and (78)) to obtain the required BCs for the total effective fields. Utilizing eq. (18), the BC for the total effective E-field at y=0 to first order in ν is

$$\mathbf{a}_{y} \times \left[\mathbf{E}^{A}(\mathbf{r}_{o}) - \mathbf{E}^{B}(\mathbf{r}_{o}) \right] = \mathbf{a}_{y} \times \left[\mathbf{E}^{A0}(\mathbf{r}_{o}) - \mathbf{E}^{B0}(\mathbf{r}_{o}) \right]$$
$$+ \nu \ \mathbf{a}_{y} \times \left[\mathbf{E}^{A1}(\mathbf{r}_{o}) - \mathbf{E}^{B1}(\mathbf{r}_{o}) \right] + O(\nu^{2}) \ . \tag{80}$$

From (51), the first term of the RHS of eq. (80) is zero, and as a result, we have to first order:

$$\mathbf{a}_y \times \left[\mathbf{E}^A(\mathbf{r}_o) - \mathbf{E}^B(\mathbf{r}_o) \right] = \nu \ \mathbf{a}_y \times \left[\mathbf{E}^{A1}(\mathbf{r}_o) - \mathbf{E}^{B1}(\mathbf{r}_o) \right].$$
(81)

Following similar arguments, the other two BCs can be expressed as

$$E_z^A(\mathbf{r}_o) + E_z^B(\mathbf{r}_o) = \nu \left[E_z^{A1}(\mathbf{r}_o) + E_z^{B1}(\mathbf{r}_o) \right] ,$$

$$E_x^A(\mathbf{r}_o) + E_x^B(\mathbf{r}_o) = \nu \left[E_x^{A1}(\mathbf{r}_o) + E_x^{B1}(\mathbf{r}_o) \right] .$$
(82)

Using the fact that $\nu=pk_o$, $\frac{\partial}{\partial\hat{x}}=\frac{1}{k_o}\frac{\partial}{\partial x}$, and $\frac{\partial}{\partial\hat{z}}=\frac{1}{k_o}\frac{\partial}{\partial z}$ the BC for these fields can be written in terms of the original unscaled variables as

$$\mathbf{a}_{y} \times \left[\mathbf{E}^{A}(\mathbf{r}_{o}) - \mathbf{E}^{B}(\mathbf{r}_{0})\right] =$$

$$-\mathbf{a}_{x} j\omega\mu_{0} \left[\chi_{MS}^{Axx} H_{x}^{A}(\mathbf{r}_{o}) + \chi_{MS}^{Bxx} H_{x}^{B}(\mathbf{r}_{o}) + \chi_{MS}^{Azz} H_{z}^{A}(\mathbf{r}_{o}) + \chi_{MS}^{Bzz} H_{z}^{B}(\mathbf{r}_{o})\right]$$

$$-\mathbf{a}_{z} j\omega\mu_{0} \left[\chi_{MS}^{Azx} H_{x}^{A}(\mathbf{r}_{o}) + \chi_{MS}^{Bzz} H_{x}^{B}(\mathbf{r}_{o}) + \chi_{MS}^{Azz} H_{z}^{A}(\mathbf{r}_{o}) + \chi_{MS}^{Bzz} H_{z}^{B}(\mathbf{r}_{o})\right]$$

$$-\mathbf{a}_{y} \times \left[\chi_{ES}^{Ayy} \nabla_{t} E_{y}^{A}(\mathbf{r}_{o}) + \chi_{ES}^{Byy} \nabla_{t} E_{y}^{B}(\mathbf{r}_{o})\right]$$
(83)

for the jump in the tangential E-field, and

$$\mathbf{a}_{y} \times \left[\mathbf{E}^{A}(\mathbf{r}_{o}) + \mathbf{E}^{B}(\mathbf{r}_{0})\right] =$$

$$-\mathbf{a}_{x} j\omega\mu_{0} \left[\pi_{MS}^{Axx} H_{x}^{A}(\mathbf{r}_{o}) + \pi_{MS}^{Bxx} H_{x}^{B}(\mathbf{r}_{o}) + \pi_{MS}^{Axz} H_{z}^{A}(\mathbf{r}_{o}) + \pi_{MS}^{Bxz} H_{z}^{B}(\mathbf{r}_{o})\right]$$

$$-\mathbf{a}_{z} j\omega\mu_{0} \left[\pi_{MS}^{Azx} H_{x}^{A}(\mathbf{r}_{o}) + \pi_{MS}^{Bzx} H_{x}^{B}(\mathbf{r}_{o}) + \pi_{MS}^{Azz} H_{z}^{A}(\mathbf{r}_{o}) + \pi_{MS}^{Bzz} H_{z}^{B}(\mathbf{r}_{o})\right]$$

$$-\mathbf{a}_{y} \times \left[\pi_{ES}^{Ayy} \nabla_{t} E_{y}^{A}(\mathbf{r}_{o}) + \pi_{ES}^{Byy} \nabla_{t} E_{y}^{B}(\mathbf{r}_{o})\right]$$
(84)

for the sum (twice the average) of the tangential E-field.

The two BCs (or the GSTCs) given in (83) and (84) are the main results of this paper. The GSTCs for the metascreen are distinctive in that they have a different form from those of a metafilm ([11], [15]), while having some similarities to the form of the GSTCs for a wire grating [12]. The required surface parameters in the GSTCs for the metafilm are all interpreted as effective magnetic and electric surface susceptibilities (χ_{MS} and χ_{ES}), while some of the surface parameters required in the GSTCs for the metascreen are interpreted as effective surface porosities (π_{ES} and π_{MS}). The surface porosities are required because of the possibility of the metascreen shorting out the fields and allowing no penetration of the fields from one side of the screen to the other. We see that the only surface parameters that appear in (83) are surface susceptibilities. Moreover, (83) has the identical functional form as that obtained for the jump condition on E for a metafilm. For the metascreen, there is no essential jump condition for H (as was needed for the metafilm), but instead a condition on the average tangential E [i.e., (84)], which requires the surface porosities.

The GSTCs given in (83) and (84) have the same functional form as those given in [34] and [35] derived from a different approach. The GSTCs derived in [34] and [35] are constrained in two ways. First, the analysis in [34] and [35] assumes dipole type interactions between the apertures. As such, Clausius-Mossotti type expressions are obtained for the surface susceptibilities and surface porosities, which assumes the apertures are not too closely spaced (an assumption that breaks down if the apertures are tightly packed). Moreover, the analysis in [34] and [35] assumes that the apertures of the metascreen have enough symmetry such the surface susceptibility dyadics and surface porosities have only diagonal terms. For arbitrarily-shaped apertures, we should expect off-diagonal terms to appear in these surface parameters. In fact, we have shown that these type of off-diagonal terms are present in the GSTCs

for metafilms [15] and in the GSTCs for metagratings [12], and from eqs. (83) and (84) we see that, in general, they are also present in the GSTCs for a metascreen.

In separate publications we use these GSTCs to derive the transmission (T) and reflection (R) coefficients for an incident plane-wave onto a metascreen [36] and [37]. We show that with these T and R coefficients (determined either from numerical simulations or measurements) of a metascreen. we can derive a retrieval technique for obtaining the surface susceptibilities and surface porosises [36], which will give a method for uniquely characterizing the metascreen. The surface parameters that uniquely characterized the metascreen are related to the geometry of the apertures that constitute the metascreen, and can exhibit anisotropic properties if this geometry is sufficiently asymmetric. These anisotropic properties can result in the conversion between TE and TM modes when a plane-wave is incident onto a metascreen. These GSTCs are used in [37] to derive the plane-wave T and R coefficients of an anisotropic metascreen, and illustrate the coupling between TE and TM modes.

IV. DISCUSSION AND CONCLUSION

The interaction of electromagnetic fields with a metascreen embedded in a material interface is investigated here, where we have demonstrated now a homogenization method can be used to derive GSTCs for the macroscopic electromagnetic fields at the surface of a metascreen. The surface parameters in these BCs are interpreted as effective magnetic and electric surface susceptibilities and surface porosities, which are related to the geometry of the apertures that constitute the metascreen. The effective surface parameters (the effective magnetic and electric surface porosities and surface susceptibilities) are uniquely defined and, as such, represent the physical quantities that uniquely characterize the metascreen.

The GSTCs required for the metascreen are interesting in that the essential BC for the jump in the tangential E-field is identical in form to that required for a metafilm. However, unlike the metafilm, there is no essential BC for the jump in the tangential H fields, and in place of this we have essential BCs for the sum of the tangential E fields. For the metascreen, BCs for the jump in the H fields are a posteriori BCs and can only be used once the fields have been solved for, using the essential BCs. As such, the GSTCs for the metascreen have some similar characteristics to those seen in metagrating [12].

With this homogenization method, we have presented the details for calculating the required surface susceptibilities and surface porosities, which require a solution of a set of static field problems. With that said, calculating these static fields along with the surface susceptibilities and surface porosities may be difficult for generally shaped apertures. However, the GSTCs present in this paper can be used to determine (or retrieve) these surface parameters from computer or measured transmission and reflection data [36]. This type of retrieval is analogous to what was done for characterizing metamaterials, metasurfaces, metafilms and metagrating in [8], [12], [13], [14], [23], and [29]. In particular, in [13] and [14], the GSTCs for metafilms were used to develop retrieval algorithms

for the surface susceptibilities of a metafilm. As such, the GSTCs presented in this paper can be used to develop retrieval algorithms for the surface porosities of a metascreen [36]. Finally, for a more general, non-PEC screen, we would need a set of expressions similar to those presented in (2) and (3) for the fields inside the screen material, but an analysis similar to that carried out in this paper should allow the GSTCs to be derived. This analysis will form the topic of a future paper.

APPENDIX

A. Integral Constraints (Solvability Conditions) for the Boundary-Layer Fields

By applying Stokes' theorem to the curl of e^m by integrating it over the volume V_A shown in Figs. 3(b) and 4 we obtain

$$\int_{V_A} \nabla_{\xi} \times \mathbf{e}^m \ dV_A = -\oint_{\partial V_A} \mathbf{a}_n \times \mathbf{e}^m \ dS \ , \qquad (85)$$

and the integral over the boundary of V_A breaks up into

$$\oint_{\partial V_A} = \int_{\partial A_a} + \int_{\partial A_p} + \int_{\xi_y \to -\infty} + \sum_{n=1}^4 \int_{\partial A_n} , \qquad (86)$$

where ∂A_n corresponds to the four vertical sides of V_A . Because the fields are period, the integrals over these four sides $(\sum \int_{\partial A_n})$ sum to zero. Also, because $\mathbf{e}^m \to 0$ as $|\xi_y| \to \infty$, the third term in equation (86) vanishes. Thus, equation (85) reduces to

$$\mathbf{a}_{y} \times \int_{\partial A_{a}} \mathbf{e}^{Am} dS + \int_{\partial A_{p}} \mathbf{a}_{n} \times \mathbf{e}^{Am} dS = -\int_{V_{A}} \nabla_{\xi} \times \mathbf{e}^{m} dV_{A} .$$
(87)

Similarly, by integrating $\nabla_{\xi} \times \mathbf{e}^m$ over the volume V_B shown in Figs. 3(b) and 4 (an noting directions of the surface normals \mathbf{a}_n), we have

$$-\mathbf{a}_{y} \times \int_{\partial B_{a}} \mathbf{e}^{Bm} dS + \int_{\partial B_{p}} \mathbf{a}_{n} \times \mathbf{e}^{Bm} dS = -\int_{V_{B}} \nabla_{\xi} \times \mathbf{e}^{m} dV_{B}$$
(88)

where we use the fact that $\mathbf{a}_n = -\mathbf{a}_y$ on ∂B_a . By adding (88) to (87) we obtain

$$\mathbf{a}_{y} \times \int_{\partial A_{a}} \left[\mathbf{e}^{\mathbf{A}m} - \mathbf{e}^{\mathbf{B}m} \right] dS + \int_{C_{p}} \mathbf{a}_{n} \times \mathbf{e}^{m} dS = -\int_{V_{AB}} \nabla_{\xi} \times \mathbf{e}^{m} dV .$$
(89)

where V_{AB} denotes the union of volumes V_A and V_B .

Two final constraints on the zeroth-order fields at y=0 can be obtained by enforcing conditions over different regions than those used above. To accomplish this, we carry out the integration of the fast curl of \mathbf{e}^m only over those portions V_{Aa} and V_{Ba} of them that lie directly above and below the section of screen corresponding to the region shown in Fig. 5(a). Contributions from ∂A_{3a} and ∂A_{4a} cancel due to periodicity. The contributions from the sides ∂A_{1a} and ∂A_{a2} (or ∂B_{a1} and ∂B_{a2} for an integral over a same region for y<0) no longer cancel by periodicity as they did before. However, if we take only the x-components of the resulting equations, these side contributions will vanish because $\mathbf{a}_n=\pm \mathbf{a}_x$ there, giving

$$\mathbf{a}_x \cdot \int \nabla \times \mathbf{e}^m dV_{Aa} = \mathbf{a}_x \cdot \int_{\partial A_{pa}} \mathbf{a}_n \times \mathbf{e}^m dS$$
 (90)

and for the bottom (y < 0) side of the plane

$$\mathbf{a}_x \cdot \int \nabla \times \mathbf{e}^m \, dV_{Ba} = \mathbf{a}_x \cdot \int_{\partial B_{Ra}} \mathbf{a}_n \times \mathbf{e}^m \, dS \quad (91)$$

Similarly, carrying out the integration only over those portions V_{Ab} and V_{Bb} of V_A and V_B that lie directly above and below the section of screen corresponding to the region shown in Fig. 5(b), we obtain:

$$\mathbf{a}_z \cdot \int \nabla \times \mathbf{e}^m \, dV_{Ab} = \mathbf{a}_z \cdot \int_{\partial A_{nb}} \mathbf{a}_n \times \mathbf{e}^m \, dS$$
 (92)

and for the bottom (y < 0) side of the plane

$$\mathbf{a}_z \cdot \int \nabla \times \mathbf{e}^m \, dV_{Bb} = \mathbf{a}_z \cdot \int_{\partial B_{nb}} \mathbf{a}_n \times \mathbf{e}^m \, dS \quad (93)$$

B. Normalized boundary-layer fields

From eqs. (58) and (60), the \mathcal{E}_i are shown to obey

$$\nabla_{\xi} \times \mathcal{E}_{i} = 0 \implies \xi \in V_{A} \text{ and } V_{B}$$

$$\nabla_{\xi} \cdot (\epsilon_{r} \mathcal{E}_{i}) = 0 \implies \xi \in V_{A} \text{ and } V_{B}$$

$$\mathbf{a}_{n} \times \mathcal{E}_{i}^{A} \Big|_{\partial A_{p}} = -A_{i} \mathbf{a}_{n} \times \mathbf{a}_{y} \Big|_{\partial A_{p}}$$

$$\mathbf{a}_{n} \times \mathcal{E}_{i}^{B} \Big|_{\partial B_{p}} = -B_{i} \mathbf{a}_{n} \times \mathbf{a}_{y} \Big|_{\partial B_{p}}$$

$$\mathbf{a}_{y} \cdot \left[\epsilon_{r}^{A} \mathcal{E}_{i}^{A} - \epsilon_{r}^{B} \mathcal{E}_{i}^{B} \right] \Big|_{\partial A_{a} / \partial B_{a}} = 0$$

$$\mathbf{a}_{y} \times \left[\mathcal{E}_{i}^{A} - \mathcal{E}_{i}^{B} \right] \Big|_{\partial A_{a} / \partial B_{a}} = 0$$

$$\oint_{C_{s}} \mathbf{a}_{n} \cdot (\epsilon_{0} \mathcal{E}_{i}) \ dS_{\xi} = 0$$
(94)

where the sources for \mathcal{E}_1 and \mathcal{E}_2 (that appear in the third and fourth lines of these expressions) are given by

$$A_1 = 1$$
 and $B_1 = 0$
 $A_2 = 0$ and $B_2 = 1$ (95)

respectively. Similarly, from eqs. (61) and (59), the \mathcal{H}_i are shown to obey

$$\nabla_{\xi} \times \mathcal{H}_{i} = 0 \Rightarrow \xi \in V_{A} \text{ and } V_{B}$$

$$\nabla_{\xi} \cdot (\mu_{r} \mathcal{H}_{i}) = 0 \Rightarrow \xi \in V_{A} \text{ and } V_{B}$$

$$\mathbf{a}_{n} \cdot (\mu_{r}^{A} \mathcal{H}_{i})\big|_{\partial A_{p}} = -C_{i} \mathbf{a}_{n} \cdot \mathbf{a}_{i}\big|_{\partial A_{p}}$$

$$\mathbf{a}_{n} \cdot (\mu_{r}^{B} \mathcal{H}_{i})\big|_{\partial B_{p}} = -D_{i} \mathbf{a}_{n} \cdot \mathbf{a}_{i}\big|_{\partial B_{p}} ,$$

$$\mathbf{a}_{y} \times \left[\mathcal{H}_{i}^{A} - \mathcal{H}_{i}^{B}\right]\big|_{\partial A_{a}/\partial B_{a}} = 0$$

$$\mathbf{a}_{y} \cdot \left[\mu_{r}^{A} \mathcal{H}_{i}^{A} - \mu_{r}^{B} \mathcal{H}_{i}^{B}\right]\big|_{\partial A_{a}/\partial B_{a}} = 0$$

$$\oint_{C} \mathbf{a}_{n} \times \mathcal{H}_{i} dS_{\xi} = 0$$
(96)

where the sources for \mathcal{H}_1 , \mathcal{H}_2 , \mathcal{H}_3 , and \mathcal{H}_4 are given by

$$\mathbf{a}_{1} = \mathbf{a}_{x} \quad C_{1} = 1 \quad \text{and} \quad D_{1} = 0$$
 $\mathbf{a}_{2} = \mathbf{a}_{x} \quad C_{2} = 0 \quad \text{and} \quad D_{2} = 1$
 $\mathbf{a}_{3} = \mathbf{a}_{z} \quad C_{3} = 1 \quad \text{and} \quad D_{3} = 0$

$$\mathbf{a}_{4} = \mathbf{a}_{z} \quad C_{4} = 0 \quad \text{and} \quad D_{3} = 1$$
(97)

respectively.

REFERENCES

- Advances in Electromagnetics of Complex Media and Metamaterials (S. Zouhdi, A. Sihvola, and M. Arsalane, eds.). Boston: Kluwer Academic Pub., 2002.
- [2] C. Caloz and T. Itoh, Electromagnetic Metamaterials: Transmission Line Theory and Microwave Applications. Hoboken, NJ: IEEE Press, 2005.
- [3] G.V. Eleftheriades and K.G. Balmain, Negative Refraction Metamaterials: Fundamental Principles and Applications. Hoboken, NJ: IEEE Press, 2005.
- [4] N. Engheta and R.W. Ziolkowski, Electromagnetic Metamaterials: Physics and Engineering Explorations. Piscataway, NJ: IEEE Press, 2006.
- [5] R. Marqués, F. Martín and M. Sorolla, Metamaterials with Negative Parameters: Theory, Design, and Microwave Applications. Hoboken, NJ: Wiley-Interscience, 2008.
- [6] F. Capolino (ed.), Metamaterials Handbook: Theory and Phenomena of Metamaterials. Boca Raton, FL: CRC Press, 2009.
- [7] T.J. Cui, D.R. Smith and R. Liu (eds.), Metamaterials: Theory, Design, and Applications. New York: Springer, 2010.
- [8] C.L. Holloway, E.F. Kuester, J.A. Gordon, J. O'Hara, J. Booth and D. R. Smith, "An overview of the theory and applications of metasurfaces: The two-dimensional equivalents of metamaterials", *IEEE Antennas and Propagation Magazine*, vol. 54, no. 2, pp. 10-35, April 2012.
- [9] A.A. Maradudin, ed., Structured Surfaces as Optical Metamaterials. Cambridge, UK: Cambridge University Press, 2011.
- [10] C.L. Holloway, D.C. Love, E.F. Kuester, J.A. Gordon, and D.A. Hill, "Use of generalized sheet transition conditions to model guided waves on metasurfaces/metafilms,", *IEEE Trans. Ant. Prop.*, vol. 60, pp. 5173-5186, Nov. 2012.
- [11] E.F. Kuester, M.A. Mohamed, M. Piket-May and C.L. Holloway, "Averaged transition conditions for electromagnetic fields at a metafilm," IEEE Trans. Antennas and Propagation, vol. 51, pp. 2641-2651, 2003.
- [12] C.L. Holloway, E.F. Kuester, and A. Dienstfrey, "A homogenization technique for obtaining generalized sheet transition conditions for an arbitrarily shaped coated-wire grating", *Radio Science*, vol. 49, no. 10, 813-850, 2014.
- [13] C.L. Holloway, A. Dienstfrey, E.F. Kuester, J.F. O'Hara, A.K. Azad and A.J. Taylor, "A discussion on the interpretation and characterization of metafilms-metasurfaces: The two-dimensional equivalent of metamaterials", *Metamaterials*, vol. 3, pp. 100-112, 2009.
- [14] C.L. Holloway, E.F. Kuester and A. Dienstfrey, "Characterizing metasurfaces/metafilms: The connection between surface susceptibilities and effective material properties", *IEEE Ant. Wireless Prop. Lett.*, vol. 10, pp. 1507-1511, 2011.
- [15] C.L. Holloway and E.F. Kuester, "A homogenization technique for obtaining generalized sheet transition conditions (gstcs) for a metafilm embedded in a magneto-dielectric interface", *IEEE Trans. on Antenna* and Propagation, vo. 64, no. 11, pp. 4671-4686, 2016.
- [16] E. Sanchez-Palencia, "Comportements local et macroscopique d'un type de milieux physique hétérogenes," *Int. J. Eng. Sci.*, vol. 12, pp. 331-351, 1974.
- [17] E.F. Kuester and C.L. Holloway, "A low-frequency model for wedge or pyramid absorber arrays—I: Theory," *IEEE Trans. Electromag. Compat.*, vol. 36, pp. 300-306, 1994.
- [18] E. Sanchez-Palencia, Non-Homogeneous Media and Vibration Theory (Lecture Notes in Physics no. 127). Berlin: Springer-Verlag, 1980, pp. 68-77.
- [19] A. Bensoussan, J.-L. Lions and G. Papanicolaou, Asymptotic Analysis for Periodic Structures. Amsterdam: North-Holland, 1978.
- [20] N. Bakhvalov and G. Panasenko, Homogenisation: Averaging Processes in Periodic Media. Dordecht: Kluwer Academic Publishers, 1989
- [21] C.L. Holloway, and E.F. Kuester, "Impedance-type boundary conditions for a periodic interface between a dielectric and highly conducting medium," *IEEE Trans. Ant. Prop.*, vol. 48, pp. 1660-1672, 2000.
- [22] C.L. Holloway and E.F. Kuester, "Equivalent boundary conditions for a perfectly conducting periodic surface with a cover layer," *Radio Sci.*, vol. 35, pp. 661-681, 2000.
- [23] C.L. Holloway, and E.F. Kuester, "Corrections to the classical continuity conditions at the interface of a composite medium," *Photonics and Nanostructures: Fundamentals and Applications*, vol. 11, pp. 397-422, 2013.
- [24] G. Bouchitté and D. Felbacq, "Homogenization near resonances and artificial magnetism from dielectrics," *Comptes Rendus Acad. Sci. Paris, ser. I*, vol. 339, pp. 377-382, 2004.

- [25] G. Bouchitté, C. Bourel and D. Felbacq, "Homogenization of the 3D Maxwell system near resonances and artificial magnetism," *Comptes Rendus Acad. Sci. Paris, ser. I*, vol. 347, pp. 571-576, 2009.
- [26] D. Felbacq, B. Guizal, G. Bouchitté and C. Bourel, "Resonant homogenization of a dielectric metamaterial," *Micr. Opt. Technol. Lett.*, vol. 51, pp. 2695-2701, 2009.
- [27] G. Bouchitté and B. Schweizer, "Homogenization of Maxwell's equations in a split ring geometry," *Multiscale Model. Simul.*, vol. 8, pp. 717-750, 2010.
- [28] L.A. Wainstein, "On the electrodynamic theory of grids", in *Elektronika Bol'shikh Moshchnostei*, (2) (P. L. Kapitza and L.A. Wainstein, editors). Moscow: Nauka, pp. 26-74, 1963. [in Russian; Engl. transl. in *High-Power Electronics*, 2. Oxford: Pergamon Press, 1966, chapter II, pp. 14-48].
- [29] T.B.A. Senior, and J.L. Volakis, Approximate Boundary Conditions in Electromagnetics. London: Institution of Electrical Engineers, p. 163, 1995
- [30] C. Conca, J. Planchard and M. Vanninathan, Fluids and Periodic Structures. Cichester, UK: Wiley, 1995, chapter 3.
- [31] D. Sjöberg, C. Engstrm, G. Kristensson, D. J. N. Wall, and N. Wellander, "A Floquet–Bloch decomposition of Maxwell's equations applied to homogenization," *Multiscale Model. Simul.*, vol. 4, pp. 149-171, 2005.
- [32] G. Allaire, M. Briane and M. Vanninathan, "A comparison between two-scale asymptotic expansions and Bloch wave expansions for the homogenization of periodic structures," *SeMA Journal*, vol. 73, pp. 237-259 (2016).
- [33] J. Grosser and H. Schulz, "Electrostatic screening by a plane grid," J. Phys. D, vol. 22, pp. 723-729, 1989.
- [34] E.F. Kuester and E. Liu, "Average transition conditions for electromagnetic fields at a metascreen of nonzero thickness", manuscript in preparation, 2017.
- [35] E.F. Kuester, E. Liu, and N.J. Krull "Average transition conditions for electromagnetic fields at a metascreen of vanishing thickness", manuscript in preparation, 2017.
- [36] C.L. Holloway and E.F. Kuester, "Reflection and Transmission Coefficients for a Metascreen: Retrieval Approach for Determining Effective Surface-Susceptibilities and Surface-Porosities," submitted to IEEE Trans. on Antenna and Propag., 2017.
- [37] C.L. Holloway and E.F. Kuester, "Reflection and Transmission Coefficients for an Anisotropic Metascreen: Conversion Between TE and TM Modes," submitted to *Phy. Reveiw B*, 2017.