

# Estimating Historical Hourly Traffic Volumes via Machine Learning and Vehicle Probe Data: A Maryland Case Study<sup>†</sup>

Przemysław Sekuła<sup>a,b</sup>, Nikola Marković<sup>a</sup>, Zachary Vander Laan<sup>a</sup>, Kaveh Farokhi Sadabadi<sup>a</sup>

<sup>a</sup>*Department of Civil and Environmental Engineering, University of Maryland, College Park, MD, USA*

<sup>b</sup>*Faculty of Informatics and Communication, University of Economics in Katowice, Katowice, Poland*

---

## Abstract

This paper focuses on the problem of estimating historical traffic volumes between sparsely-located traffic sensors, which transportation agencies need to accurately compute statewide performance measures. To this end, the paper examines applications of vehicle probe data, automatic traffic recorder counts, and neural network models to estimate hourly volumes in the Maryland highway network, and proposes a novel approach that combines neural networks with an existing profiling method. On average, the proposed approach yields 26% more accurate estimates than volume profiles, which are currently used by transportation agencies across the US to compute statewide performance measures. The paper also quantifies the value of using vehicle probe data in estimating hourly traffic volumes, which provides important managerial insights to transportation agencies interested in acquiring this type of data. For example, results show that volumes can be estimated with a mean absolute percent error of about 20% at locations where average number of observed probes is between 30 and 47 vehicles/hr, which provides a useful guideline for assessing the value of probe vehicle data from different vendors.

*Keywords:* traffic volume estimation, regression, multi-layered neural networks, vehicle probe data

---

## 1. Introduction

Hourly traffic volumes and speeds are important inputs needed by transportation agencies for calculating statewide performance measures. While average vehicle speeds can be readily obtained across the entire state road network (e.g., via probe vehicles), traffic volumes are particularly challenging to determine, as vehicle counts are typically only available at a handful of locations where fixed traffic sensors are located. Currently, many transportation agencies apply speed profiles or other factors to average annual daily traffic (AADT)

---

<sup>†</sup>An earlier version of this paper (Sekuła et al., 2018) will be presented at a TRB annual meeting.

volumes to obtain reasonable hourly volume estimates (Schrang et al., 2015). However, these hourly profiles do not reflect variations in traffic due to weather, incidents, or daily demand fluctuations, and it is often impractical and expensive to install more sensors (Young et al., 2017). Thus, in order to perform more detailed analyses that require accurate volume data, transportation agencies must find ways to improve hourly volume estimates based on limited data sources.

Existing approaches for estimating traffic volumes span multiple research areas, and are briefly discussed in order to articulate the problem addressed in this paper. Broadly speaking, volume estimation research can be divided into (a) estimating historical and (b) predicting future volumes.

- *Estimating historical volumes.* Much of the existing work in this area is concerned with estimating AADT data, which represents a very basic measure of travel demand (AASHTO, 2001). A number of approaches for estimating AADT via regression have been proposed in the literature, encompassing both statistical (Mohamad et al., 1998; Zhao and Park, 2004; Kingan and Westhuis, 2006) and machine learning techniques (Sharma et al., 2001; Castro-Neto et al., 2009; Islam, 2016). For example, Islam (2016) applies artificial neural networks (ANN) and support vector machines (SVM) to estimate AADT based on road geometry, existing counts and local socio-economic data. Related applications of SVM and regression are discussed in Castro-Neto et al. (2009) and Zhao and Chung (2001), respectively. Furthermore, a technique to transform AADT into hourly volume profiles for a typical week is proposed in Schrang et al. (2015), and is widely used in practice to obtain hourly volume estimates that are needed to compute historical network-wide performance measures (e.g., see Schrang et al. 2012; Mahapatra et al. 2015). Another historical volume estimation approach involves utilizing macroscopic traffic models (Papageorgiou et al., 2010), often in conjunction with data assimilation techniques such as the Kalman filtering (Evensen, 2009), examples of which include Herrera and Bayen (2008), Work et al. (2008) and Blandin et al. (2012). While this approach has shown promise on small networks, it is not scalable to the statewide level.
- *Predicting future volumes.* This line of research encompasses short-term and long-term volume predictions, with the vast majority dealing with the former approach. Short-term prediction generally involves building models or learning patterns from a series of historical volume measurements, and uses them to infer volumes for a time interval in the immediate future. A comprehensive review of various short-term traffic prediction methods is provided in Vlahogianni et al. (2014), which categorizes each

approach as time series analysis, function approximation, optimization, pattern recognition or clustering. These approaches can also be categorized as either parametric or non-parametric, with common parametric approaches including variants of the autoregressive integrated moving average (ARIMA) model (e.g., Levin and Tsao 1980; Lee and Fambro 1999; Williams and Hoel 2003), other non-ARIMA time series models (e.g., Yu et al. 2003; Ghosh et al. 2007), state-space models (e.g., Stathopoulos and Karlaftis 2003), and non-parametric techniques including  $k$ -nearest neighbor (e.g., Gong and Wang 2002), support vector regression (e.g., Zhang and Liu 2009), and neural networks (e.g., Vlahogianni et al. 2005). A small body of recent non-parametric research in this area includes applications of deep learning, examples of which are Lv et al. (2015) and Polson and Sokolov (2017). On the other hand, long-term traffic prediction uses historical measurements to predict volumes farther into the future, generally at a much less granular level. An example of this approach is Kingan and Westhuis (2006), which applies robust regression to forecast traffic volumes several years into the future.

The current paper is concerned with the problem of estimating historical hourly traffic volumes, which transportation agencies need for annual computations of various network-wide performance measures (e.g., user delay cost, energy efficiency). The paper makes two major contributions:

- It proposes a novel approach for estimating hourly volumes that combines a widely-used profiling method (Schrank et al., 2015) and an ANN model trained with vehicle probe data from one of the leading GPS companies in North America. The proposed approach yields 26% more accurate volume estimates than the sole profiling method, which represents the state-of-the-practice. Accordingly, the proposed approach could substantially improve the operations of numerous transportation agencies that are currently relying on hourly profiles to compute various performance measures. The prerequisite for implementing the proposed approach would be acquisition of vehicle probe data, whose value in estimating volumes is examined as the second major contribution of this work.
- It quantifies the value of using vehicle probe data in estimating hourly traffic volumes, which provides important managerial insights to transportation agencies interested in acquiring this type of data. For example, results show that volumes can be estimated with mean absolute percent error of about 20% at locations where average number of observed probes is between 30 and 47 vehicles/hr, which provides a useful guideline in assessing the value of probe vehicle data from different vendors. These conclusions are

drawn from analysis of a rich probe vehicle dataset that captures between 0.8% and 4.5% of Maryland traffic.

The rest of the paper is organized into four sections. First, the data used for the analysis are presented. It is followed by a description of the proposed approach and the procedure used to calibrate and evaluate it. After discussing results and assessing performance of the model, conclusions are drawn and several extensions of this work are proposed.

## 2. Data

The basic idea behind the proposed approach is to train an ANN model to learn the relation between traffic volumes and various influencing factors, which would then enable transportation agencies to apply the model and estimate volumes at locations where traffic sensors are unavailable. Accordingly, the proposed work regresses hourly volumes from automatic traffic recording (ATR) stations to explanatory variables obtained from various data sources (e.g., probe vehicles, weather stations). The remainder of this section provides a brief description of the data used to train the model.

- *ATR data.* The state of Maryland has a number of ATR stations, which provide aggregate hourly vehicle counts. Data from 45 stations (90 one-directional carriageways) are used as a ground-truth to train and evaluate the performance of the ANN model. The 45 ATR stations are located along different types of roads, including Interstates, US routes, and MD routes.
- *Vehicle probe volumes.* Raw GPS probe data from one of the leading GPS companies provide a sample of traffic throughout the state of Maryland. Through extensive processing of the raw GPS data described in Marković et al. (2017), hourly vehicle probe volumes were computed for all the road links in Maryland, including the 45 links with ATR stations that will be used to train and evaluate the ANN model. A comparison of vehicle probe and ATR volumes indicates that the average penetration rate of probe vehicles is about 1.8%.
- *Vehicle probe speeds.* Average hourly speed estimates based on GPS data were obtained from the Regional Integrated Transportation Information System (RITIS, 2016), which is a data sharing repository created and maintained by the CATT Lab at the University of Maryland. The vehicle probe speeds are available throughout the state of Maryland, including the 45 roads with ATR stations that will be used in numerical experiments.
- *Weather data.* Multiple weather features were obtained from Weather Underground (Weather Underground, 2017), such as visibility, precipitation, temperature and weather

description (e.g., sunny, rainy, clear). Hourly weather records are available throughout the state, including the 45 locations that will be used to evaluate the ANN model.

- *Infrastructure data.* Road characteristics (number of lanes and speed limits) were obtained from Google (Google Maps, 2017), and each road was classified as an Interstate, US, or MD road. Although time-consuming to obtain, infrastructural characteristics are available throughout the observed road network, including the 45 locations that will be used in the numerical experiments.
- *Temporal data.* Information about the hour of the day and day of the week (weekday vs. weekend) was also considered for each data point in order to account for temporal traffic patterns.
- *Volume profiles.* Hourly volume profiles for a typical week were derived by applying the commonly-used profiling method (Schrank et al., 2015), which transforms AADT estimates from the Highway Performance Monitoring System (HPMS, 2017) into hourly volume profiles based on historical speeds available in RITIS. Specifically, historical speeds were used to identify primary/secondary directions of movement, which in turn determines which profile should be applied to distribute the AADT values.

In total, the dataset used in the current analysis includes over 200,000 data points with 82 features. The number of points corresponds to the number of hourly volume measurements at 45 ATR stations, each of which counts traffic in both directions. On the other hand, the features correspond to the explanatory variables listed above (i.e., everything except the ATR data, which is used as the target for training the ANN model).

### 3. Method

This section provides a brief overview of the proposed approach, which would enable other researchers or transportation agencies to replicate the analysis. The following subsection describes a fully-connected ANN with an Exponential Linear Unit (ELU) activation function and a dropout method, which is used to estimate historical hourly volumes. The subsequent subsection explains the leave-one-ATR-out cross-validation and model evaluation approach.

#### 3.1. Fully connected ANN with ELU activation and dropout

In a fully-connected ANN, each neuron is linked with all the neurons from the previous layer. Furthermore, traffic volumes are estimated using forward propagation, where the output from a neuron is computed as

$$a_i^{(l+1)} = f\left(w_i^{(l+1)} a^{(l)} + b_i^{(l+1)}\right), \quad (1)$$

and  $a_i^{(l+1)}$  denotes the output from the  $i$ -th neuron in layer  $l + 1$ ,  $a^{(l)}$  represents the output vector from the neurons in layer  $l$ ,  $w_i^{(l+1)}$  is a vector of weights between the  $i$ -th neuron in layer  $l + 1$  and all the neurons in layer  $l$ ,  $b_i^{(l+1)}$  represents the bias unit associated with the  $i$ -th neuron in layer  $l + 1$ , and  $f$  denotes an activation function. It is worth noting that the most popular choice for  $f$  is the sigmoid function,

$$f(x) = (1 + e^{-\lambda x})^{-1}, \quad (2)$$

which has many advantages (e.g., its range is between 0 and 1, and its derivative is easy to compute). However, the derivative of the sigmoid function is between -0.25 and 0.25, and therefore the backpropagation process slows down with each additional layer. To overcome this issue, a recently-introduced ELU activation function Clevert et al. (2015),

$$F(x) = \begin{cases} x, & x > 0 \\ \alpha(e^x - 1), & x \leq 0, \end{cases} \quad (3)$$

is employed in this work. For  $x > 0$  the derivative of ELU is equal to 1, while for  $x < 0$ ,  $F'(x) = F(x) + \alpha$ . It results in faster learning compared to standard activation functions (e.g., sigmoid and tanh), as well as functions for deep learning (e.g., rectified linear unit and leaky rectified linear unit).

To prevent the ANN from overfitting the data (i.e., describe noise rather than underlying relations), a recently-proposed dropout procedure (Hinton et al., 2012) is employed. In dropout, randomly selected neurons are ignored during training, which means that their contribution to the activation of downstream neurons is temporally removed on the forward pass and any weight updates are not applied to the neuron in the backward pass. With dropout, the feed-forward operations are defined as

$$r^{(l)} \sim \text{Bern}(p), \quad (4)$$

$$\tilde{a}^{(l)} = r^{(l)} a^{(l)}, \quad (5)$$

$$a_i^{(l+1)} = f(w_i^{(l+1)} \tilde{a}^{(l)} + b_i^{(l+1)}), \quad (6)$$

where  $p$  denotes the parameter of the Bernoulli distribution. Finally, the ANN is trained using the Adaptive Moment Estimation (Adam) algorithm (Kingma and Ba, 2014), which is a recently-introduced stochastic gradient-based optimization method that handles high-dimensional parameter spaces in non-convex optimization problems well. Recent research also shows that Adam outperforms other stochastic gradient-based optimization methods (Ruder, 2016) due to its built-in bias-correction.

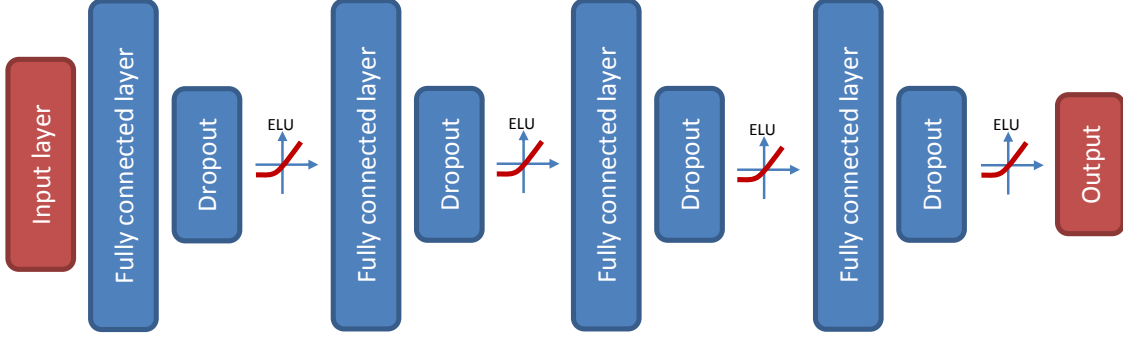


Figure 1: A fully connected ANN with ELU activation is employed to estimate traffic volumes.

**Remark 1.** *The previously-described ANN encompasses recent advances in training algorithms applicable to large data sets (i.e., Adam (Kingma and Ba, 2014)), procedures to prevent overfitting (i.e., dropout (Hinton et al., 2012)), and best practices in combining the two which are discussed in (Srivastava et al., 2014).*

### 3.1.1. Hyperparameters

The ANN’s hyperparameters (i.e., number of layers and number of neurons in the hidden layers) were selected based on preliminary experiments. The final model configuration is comprised of an input layer, three hidden layers with 300 neurons each, and an output layer (Figure 1). The model was trained and evaluated as described in the following subsection.

### 3.2. Model evaluation

The previously-described ANN model is trained on data points from 44 ATR stations, and then tested on data from the remaining ATR station. Model estimates are then compared against the actual (ATR) volumes at this location to evaluate model performance. The outlined procedure is repeated 45 times (holding out each station once) and model accuracy for the 45 test locations (i.e., 90 carriageways) is summarized using four measures discussed below.

**Remark 2.** *In the outlined procedure the ANN model is always evaluated on data points from a location that was NOT considered during training, which corresponds to the real-world application of the proposed model. Iterating through the procedure allows for the evaluation of the model in different scenarios and it also enables fair assessment of its performance on all 90 carriageways.*

#### 3.2.1. Coefficient of determination ( $R^2$ )

The  $R^2$  metric indicates the proportion of traffic volume variance that is explained by the ANN model. This measure is computed as

$$R^2 = 1 - \frac{\sum_{j=1}^n (y_j - \hat{y}_j)^2}{\sum_{j=1}^n (y_j - \bar{y})^2}, \quad (7)$$

Table 1: Freeway and Multilane Highway Segment Capacity Conditions (HCM, 2016)

Free-flow speed (mi/h)	Freeway Capacity (pc/h/ln)	Multilane Highway Capacity (pc/h/ln)
75	2,400	Not applicable
70	2,400	2,300
65	2,350	2,300
60	2,300	2,200
55	2,250	2,100
50	Not applicable	2,000
45	Not applicable	1,900

where  $y_j$  denotes an actual (ATR) volume,  $\hat{y}_j$  is an ANN-based volume estimate, and  $\bar{y}$  represents the sample average. Values closer to 1 indicate better model performance.

### 3.2.2. Mean absolute percentage error (MAPE)

*MAPE* is a measure of the relative accuracy of the model. It is defined as

$$MAPE = \left( \frac{1}{n} \sum_{j=1}^n \left| \frac{\hat{y}_j - y_j}{y_j} \right| \right) \times 100, \quad (8)$$

and it varies between 0 and 100 percent. Smaller values indicate better model performance.

### 3.2.3. Error-to-theoretical-capacity ratio (ETCR)

*ETCR* is a measure of a model’s accuracy relative to the maximum sustainable traffic volume at a given location under prevailing road and traffic conditions (i.e., capacity). It was identified in an earlier survey (Young et al., 2017) as a desirable accuracy measure from a practitioner’s perspective. The same survey suggested that the desirable threshold for this error measure is 10% for most planning and operations applications. It is defined as

$$ETCR = \left( \frac{1}{n} \sum_{j=1}^n \left| \frac{\hat{y}_j - y_j}{c} \right| \right) \times 100, \quad (9)$$

where  $c$  denotes default/theoretical capacity estimates for the relevant facility from the Highway Capacity Manual (HCM, 2016). Note that  $c$  represents a function of free-flow speed at a given location and is expressed in passenger cars per hour per lane (Table 1). The free-flow speeds needed to compute  $c$  were estimated based on vehicle probe data and speed limits. Finally, *ETCR* varies between 0 and 100 percent, and smaller values indicate better model performance.



### 3.2.4. Error-to-maximum-flow ratio (EMFR)

*EMFR* is similar to *ETCR*; however, the difference is that errors are measured relative to the maximum observed volume at each location. It is defined as

$$EMFR = \left( \frac{1}{n} \sum_{j=1}^n \left| \frac{\hat{y}_j - y_j}{y_{max}} \right| \right) \times 100, \quad (10)$$

where  $y_{max}$  is the maximum recorded volume at the observed location. Again, this measure varies between 0 and 100 percent, and smaller values indicate better model performance.

## 4. Results

Performance of the proposed ANN model is first compared against the profiling method that represents the current state-of-the-practice. Subsequently, the effect of vehicle probe volumes and their penetration rates on model performance is assessed, which provides important managerial insights for transportation agencies interested in acquiring vehicle probe data for volume estimation purposes.


### 4.1. The ANN vs. profiling method

The aggregate performance of the two approaches for the 45 test locations (i.e., 90 carriageways) is summarized in Table 2. Comparison of the four measures' median values indicates that the ANN outperforms the profiling method by 21% ( $R^2$ ), 32% ( $MAPE$ ), 23% ( $ETCR$ ), and 28% ( $EMFR$ ), which corresponds to an average improvement of about 26% across the four measures. Comparison of other statistics also confirms the advantage of the ANN-based approach. Specifically, the minimum and maximum of the four measures are better for the ANN model, and the same is true for each quartile. In addition, the Wilcoxon signed rank test (Gibbons and Chakraborti, 2011) rejects the null hypothesis that the median difference for each of the the four measures is zero at the default 5% significance level (i.e., the  $p$ -value is 0.000 when comparing all four measures). An extended comparison of the two approaches is shown via violin plots (Figure 2), which visualize the distribution of the four measures over all 90 test carriageways and reiterate that the ANN model shows superior performance. This can also be seen in Figure 3, which indicates that ANN-based estimates are more centered along the 45° line (i.e., where estimates are equal to actual (ATR) volumes).


**Remark 3.** *The proposed ANN model outperforms the widely-used profiling method by about 26% across the four performance measures.*

Table 2: The overall performance of the ANN model and the widely-used profiling method


Measure	Profiling Method				ANN			
	$R^2$	$MAPE$	$ETCR$	$EMFR$	$R^2$	$MAPE$	$ETCR$	$EMFR$
Minimum	0.28	14.95%	1.80%	2.27%	0.40	12.65%	1.35%	1.67%
25th percentile	0.59	25.07%	3.89%	7.65%	0.76	18.00%	3.24%	5.77%
50th percentile (median)	0.70	33.71%	5.84%	9.13%	0.84	22.99%	4.49%	6.60%
75th percentile	0.81	46.98%	7.97%	10.16%	0.90	29.29%	5.55%	7.75%
Maximum	0.91	184.74%	11.22%	14.61%	0.94	116.19%	8.51%	14.33%

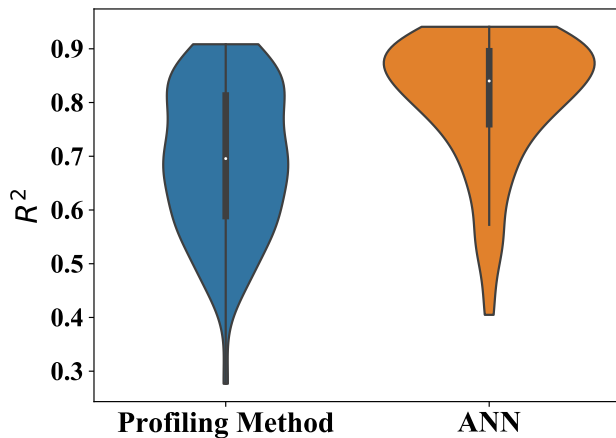


(a) Comparison for  $R^2$  (higher is better).

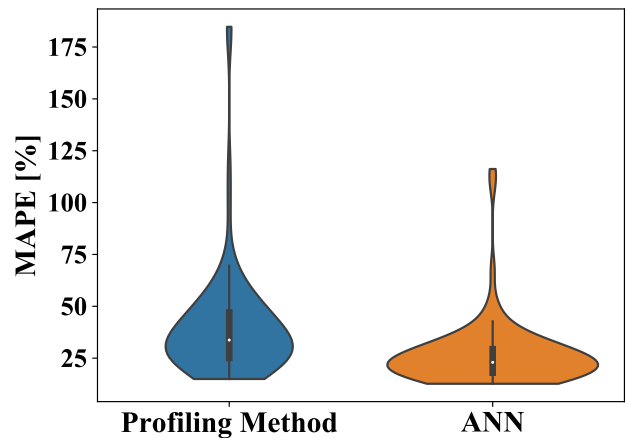

(b) Comparison for  $MAPE$  (smaller is better).

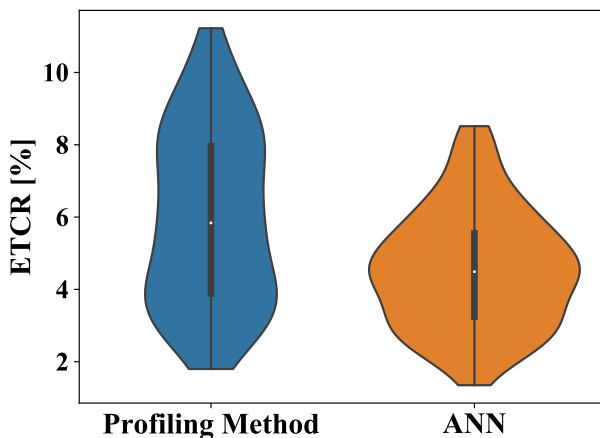

(c) Comparison for  $ETCR$  (smaller is better).

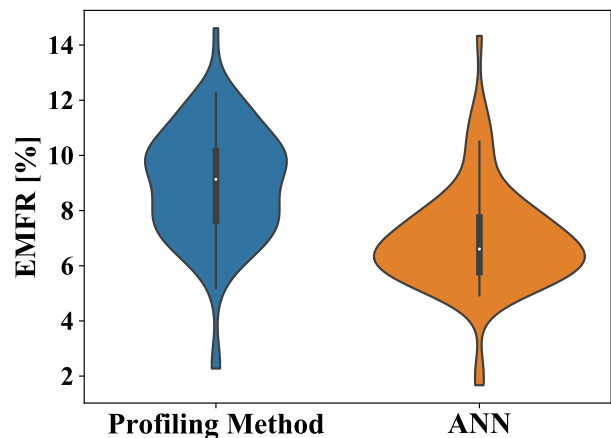

(d) Comparison for  $EMFR$  (smaller is better).

Figure 2: Violin plots comparing overall performance of the two models at 90 carriageways used for testing.

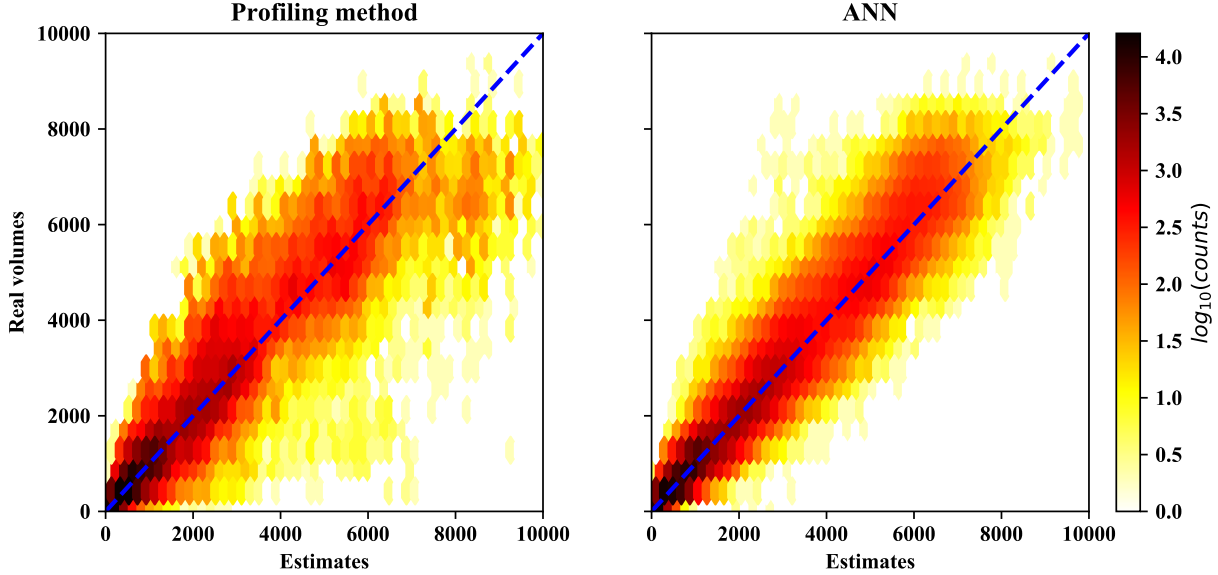


Figure 3: Heat maps comparing both model performance on all data points used for testing.


#### 4.2. The effect of probe volume intensity

The performance of the ANN model is then evaluated for different probe vehicle intensities, and compared against the profiling method (Table 3). Specifically, the 90 test carriageways are divided equally into five groups based on their average vehicle probe volumes, and the four performance measures are computed for both methods (i.e., ANN and profiling) while considering each group separately. Results show that the ANN outperforms the profiling method for each group and all four measures. Moreover, it is noticeable that the  $R^2$  and  $MAPE$  for both methods generally improve as the average vehicle probe volumes are increased. The aforementioned pattern is particularly intuitive in the case of the ANN, and can also be observed in Figure 4 which shows the distribution of the four measures at locations with different vehicle probe volumes. The violin plots comparing  $R^2$  and  $MAPE$  clearly show (in terms of the median and the shape of the entire distribution) that the ANN model provides better volume estimates at locations with higher average vehicle probe volumes. On the other hand,  $ETCR$  and  $EMFR$  are relatively insensitive to the changes in vehicle probe volumes, which is unsurprising because they are computed using maximum theoretical/observed traffic volumes – quantities which are strongly correlated with probe volumes (provided stable penetration rates).


**Remark 4.** *The ANN model outperforms the profiling method at locations with different average vehicle probe volumes. At locations where the average number of probes is between 30 and 47 vehicles/hr, the ANN achieves precision measured with the median MAPE below 20%. The median MAPE drops below 15% at locations where the average number of observed probes is between 52 and 103 vehicles/hr.*

Table 3: The effect of average probe volume intensity on median measures


Probes/hr	Profiling Method				ANN			
	$R^2$	$MAPE$	$ETCR$	$EMFR$	$R^2$	$MAPE$	$ETCR$	$EMFR$
[4, 9]	0.59	48.58%	3.44%	8.25%	0.74	30.07%	3.10%	7.29%
[9, 14.6]	0.61	39.34%	4.31%	9.00%	0.78	30.00%	4.12%	7.74%
[15.4, 30]	0.68	34.99%	7.51%	9.95%	0.84	23.76%	5.32%	6.52%
[30.1, 46.9]	0.78	29.12%	6.04%	8.50%	0.89	19.53%	4.45%	6.44%
[52, 103.2]	0.80	22.93%	7.95%	8.85%	0.92	14.11%	5.26%	5.77%

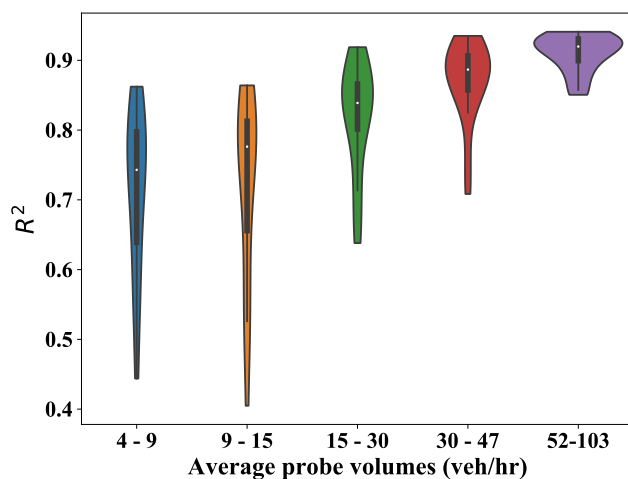


(a) Comparison for  $R^2$  (higher is better).

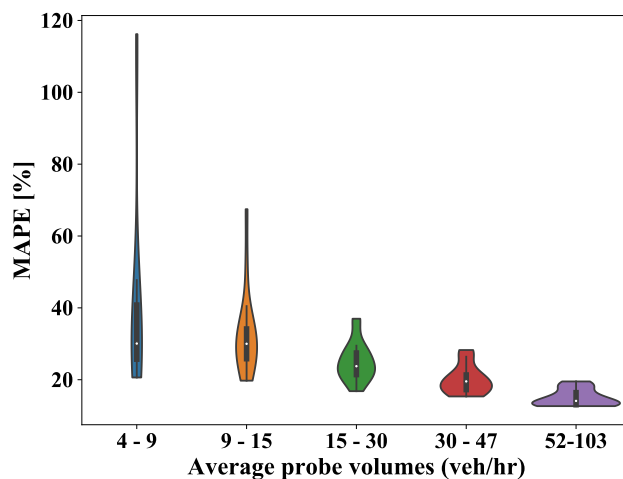

(b) Comparison for  $MAPE$  (smaller is better).

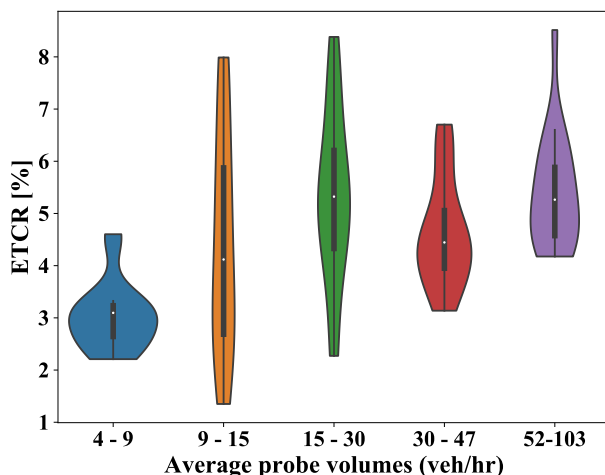

(c) Comparison for  $ETCR$  (smaller is better).

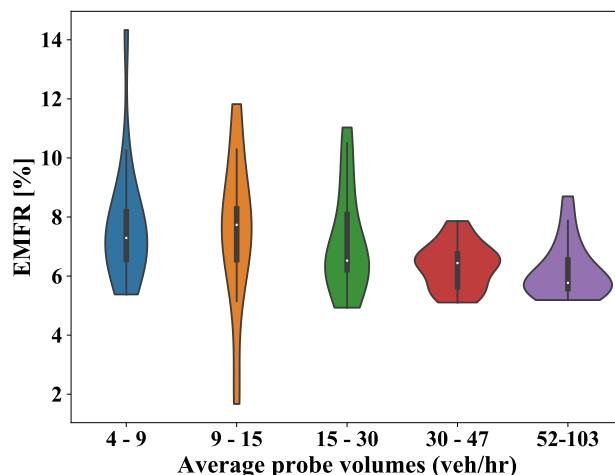

(d) Comparison for  $EMFR$  (smaller is better).

Figure 4: The violin plots showing distribution of ANN's performance measures at locations with different average volumes of probe vehicles.

Table 4: The effect of average probe vehicle penetration rate on median measures

Penetration	Profiling Method				ANN			
	$R^2$	$MAPE$	$ETCR$	$EMFR$	$R^2$	$MAPE$	$ETCR$	$EMFR$
[0.77%, 1.16%]	0.66	46.83%	5.83%	9.31%	0.77	28.60%	5.34%	7.47%
[1.16%, 1.45%]	0.72	34.83%	6.12%	9.70%	0.80	25.90%	4.65%	7.39%
[1.46%, 1.76%]	0.66	38.63%	4.60%	8.88%	0.82	24.28%	4.40%	7.02%
[1.78%, 2.31%]	0.81	24.36%	7.63%	8.70%	0.91	15.76%	4.66%	5.77%
[2.35%, 4.47%]	0.67	34.38%	4.61%	8.70%	0.84	20.99%	3.76%	6.36%


#### 4.3. The effect of probe vehicle penetration rates

A similar analysis is conducted to examine the performance of the ANN model given different penetration rates of probe vehicles (Table 4). Again, the 90 test carriageways are divided equally into five groups, but this time based on the average penetration rate of probe vehicles. The four performance measures are again computed for both methods (i.e., ANN and profiling) while considering each penetration rate group separately. Results again show that the ANN outperforms the profiling method for each group and all measures, and that both models generally provide higher  $R^2$  and  $MAPE$  values at locations with a greater penetration rate of probe vehicles. These intuitive conclusions are also noticeable in Figure 5, which shows the distribution of the ANN’s performance measures at locations with different penetration rates of probe vehicles. The violin plots show that the measures generally improve with higher penetration rates of probe vehicles. A noticeable exception is the last group for  $R^2$ ,  $MAPE$  and  $EMFR$ .


**Remark 5.** *The ANN model outperforms the profiling method at locations with different average penetration rate of probe vehicles. At locations where the average penetration rate of vehicle probes is between 1.78% and 4.47%, the ANN achieves median MAPE of about 20%.*

#### 4.4. Scaling results to entire Maryland road network


In the case of this paper, the proposed ANN model is evaluated on numerous data points from 45 locations (i.e., 90 carriageways) equipped with ATR stations, which provides both the ground-truth for training and testing the model. However, the main impetus for this approach is to train the model on the available ATR stations, and then use it to estimate historical hourly volumes throughout the state of Maryland. This would require mining the explanatory variables for each of the 11,000 traffic message channels in Maryland and simply feeding them to the ANN model. The former task would require significant processing effort to extract all of the data discussed in Section 2 (except for ATR counts which are clearly unavailable throughout the road network), while the latter task would be trivial

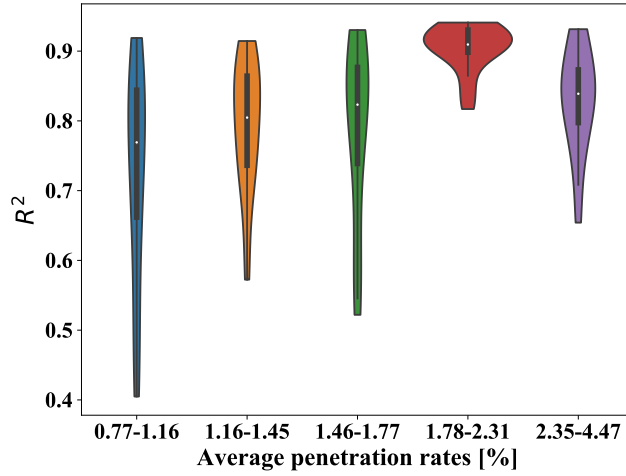


(a) Comparison for  $R^2$  (higher is better).

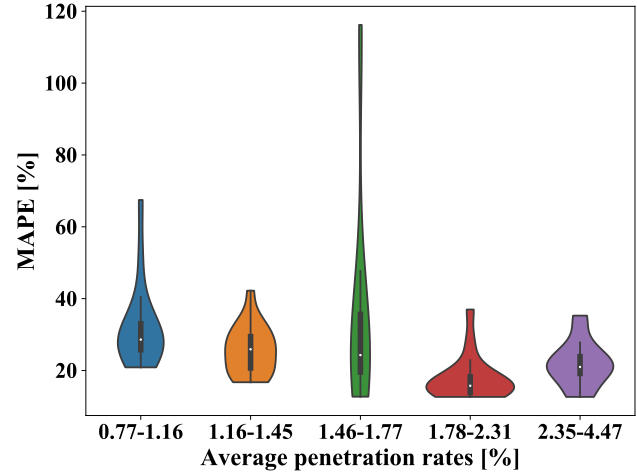

(b) Comparison for  $MAPE$  (lower is better).

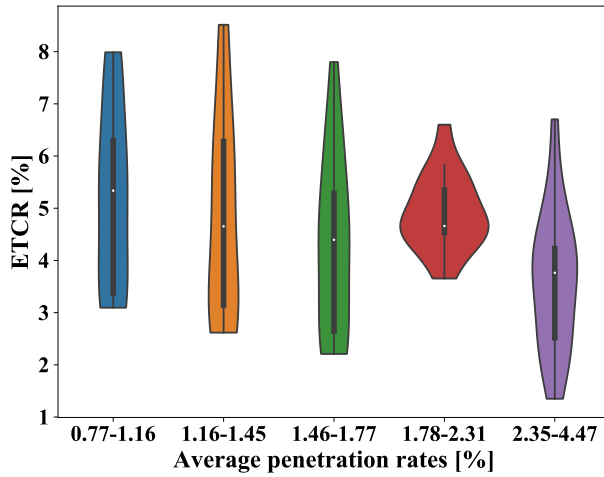

(c) Comparison for  $ETCR$  (lower is better).

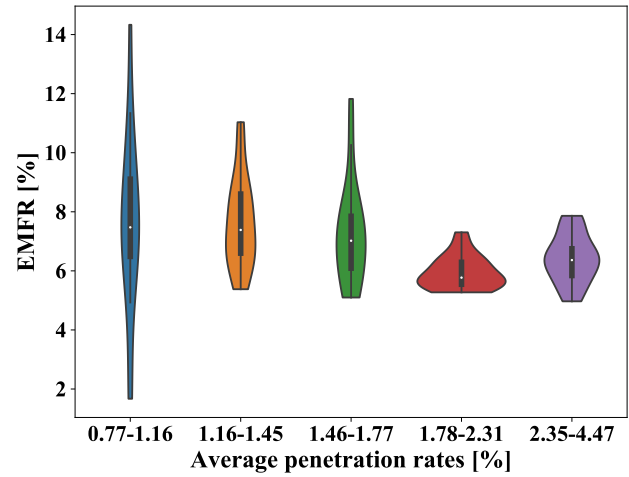

(d) Comparison for  $EMFR$  (lower is better).

Figure 5: The violin plots showing distribution of ANN's performance measures at locations with different average penetration rates of probe vehicles.

and computationally efficient. Based on the encouraging results reported in this paper, the computationally-intensive work may be carried out in collaboration with local agencies and their technical teams.

## 5. Conclusions

This paper addresses the issue of estimating historical hourly traffic volumes that transportation agencies need for planning and statewide performance measurement (e.g., user delay cost, energy efficiency). The proposed ANN-based approach significantly outperforms the profiling method often used to obtain hourly volume profiles from AADT data. The observed improvement of about 26% is based on probe vehicle data that captures about 1.8% of traffic, which indicates that application of vehicle probe data and machine learning is a promising approach towards improving the state-of-the-practice in estimating hourly traffic volumes. Moreover, results show that volumes can be estimated with *MAPE* of about 20% at locations where average number of probes is between 30 and 47 vehicles/hr, and that *MAPE* reduces to about 15% when observed number of probes is between 52 and 103 vehicles/hr. This provides a useful guideline for transportation agencies who wish to assess the value of probe vehicle data from different vendors. It is noteworthy that further GPS technology market penetration (especially cell phone location services) will increase traffic capture rates substantially, and thus improve volume estimation accuracy. Currently, a potential way to increase the capture rates and accuracy of the presented model is to merge vehicle probe and cell phone data from multiple providers.

Future work may also include application of other supervised learning algorithms (e.g., ensemble learning), which can be compared with the approach proposed in this paper. Moreover, the current method estimates volumes for a given road link based on influencing factors pertaining to that road (e.g., number of lanes, probe vehicle volumes and speeds, weather records from the neighboring station). However, since traffic volumes across the network are correlated, it may be useful to draw network-wide information about traffic states and use it to improve volume estimates at a given location. In this regard, information about traffic volumes at neighboring ATR stations or the overall utilization of the network could be considered as additional influencing factors. Finally, future work may include calibration of supervised learning models based on data from multiple states and their subsequent application to estimating volumes throughout the US. In this regard, the authors of this paper recently obtained access to vehicle probe data for two additional states along the East Coast, which will enable regional analysis and estimation of traffic volumes.

## Acknowledgments

The authors would like to thank the I-95 Corridor Coalition for funding this work through the Volume and Turning Movement Project. Help from Subrat Mahapatra and the Maryland State Highway Administration who provided the vehicle probe data is also much appreciated. This support is gratefully acknowledged, but it implies no endorsement of the findings.

## References

- AASHTO (2001), ‘Policy on geometric design of highways and streets’, *American Association of State Highway and Transportation Officials, Washington, DC*.
- Blandin, S., Couque, A., Bayen, A. and Work, D. (2012), ‘On sequential data assimilation for scalar macroscopic traffic flow models’, *Physica D: Nonlinear Phenomena* **241**(17), 1421–1440.
- Castro-Neto, M., Jeong, Y., Jeong, M. K. and Han, L. D. (2009), ‘AADT prediction using support vector regression with data-dependent parameters’, *Expert Systems with Applications* **36**(2), 2979–2986.
- Clevert, D.-A., Unterthiner, T. and Hochreiter, S. (2015), ‘Fast and accurate deep network learning by exponential linear units (elus)’, *arXiv preprint arXiv:1511.07289*.
- Evensen, G. (2009), *Data Assimilation: The Ensemble Kalman Filter*, Springer Science & Business Media.
- Ghosh, B., Basu, B. and OMahony, M. (2007), ‘Bayesian time-series model for short-term traffic flow forecasting’, *Journal of transportation engineering* **133**(3), 180–189.
- Gibbons, J. D. and Chakraborti, S. (2011), *Nonparametric statistical inference*, Springer.
- Gong, X. and Wang, F. (2002), Three improvements on KNN-NPR for traffic flow forecasting, *in* ‘Intelligent Transportation Systems, 2002. Proceedings. The IEEE 5th International Conference on’, IEEE, pp. 736–740.
- Google Maps (2017), <https://mapmaker.google.com/mapmaker>. Accessed: 2017-02-27.
- HCM (2016), ‘Highway capacity manual, sixth edition: A guide for multimodal mobility analysis’, *Transportation Research Board, National Research Council, Washington, DC*.
- Herrera, J. C. and Bayen, A. M. (2008), Traffic flow reconstruction using mobile sensors and loop detector data, *in* ‘Transportation Research Board 87th Annual Meeting’.



- Hinton, G. E., Srivastava, N., Krizhevsky, A., Sutskever, I. and Salakhutdinov, R. R. (2012), ‘Improving neural networks by preventing co-adaptation of feature detectors’, *arXiv preprint arXiv:1207.0580* .
- HPMS (2017), <https://www.fhwa.dot.gov/policyinformation/hpms.cfm>. Accessed: 2017-02-27.
- Islam, S. (2016), Estimation of Annual Average Daily Traffic (AADT) and Missing Hourly Volume Using Artificial Intelligence, PhD thesis, Clemson University.
- Kingan, R. and Westhuis, T. (2006), ‘Robust regression methods for traffic growth forecasting’, *Transportation Research Record: Journal of the Transportation Research Board* (1957), 51–55.
- Kingma, D. and Ba, J. (2014), ‘Adam: A method for stochastic optimization’, *arXiv preprint arXiv:1412.6980* .
- Lee, S. and Fambro, D. (1999), ‘Application of subset autoregressive integrated moving average model for short-term freeway traffic volume forecasting’, *Transportation Research Record: Journal of the Transportation Research Board* (1678), 179–188.
- Levin, M. and Tsao, Y.-D. (1980), ‘On forecasting freeway occupancies and volumes (abridgment)’, *Transportation Research Record* (773).
- Lv, Y., Duan, Y., Kang, W., Li, Z. and Wang, F.-Y. (2015), ‘Traffic flow prediction with big data: A deep learning approach’, *IEEE Transactions on Intelligent Transportation Systems* **16**(2), 865–873.
- Mahapatra, S., Wolniak, M., Beckett, E. and Farokhi Sadabadi, K. (2015), 2015 Maryland state highway mobility report, Technical report, Maryland State Highway Administration.
- Marković, N., Sekuła, P., Laan, Z. V., Andrienko, G. and Andrienko, N. (2017), ‘Applications of trajectory data in transportation: Literature review and Maryland case study’, *arXiv preprint arXiv:1708.07193* .
- Mohamad, D., Sinha, K., Kuczek, T. and Scholer, C. (1998), ‘Annual average daily traffic prediction model for county roads’, *Transportation Research Record: Journal of the Transportation Research Board* (1617), 69–77.
- Papageorgiou, M., Papamichail, I., Messmer, A. and Wang, Y. (2010), Traffic simulation with METANET, in ‘Fundamentals of traffic simulation’, Springer, pp. 399–430.

- Polson, N. G. and Sokolov, V. O. (2017), ‘Deep learning for short-term traffic flow prediction’, *Transportation Research Part C: Emerging Technologies* **79**, 1–17.
- RITIS (2016), ‘The regional integrated transportation information system (RITIS)’, <http://www.cattlab.umd.edu/?portfolio=ritis>. Accessed: 2016-10-14.
- Ruder, S. (2016), ‘An overview of gradient descent optimization algorithms’, *CoRR* **abs/1609.04747**.  
**URL:** <http://arxiv.org/abs/1609.04747>
- Schrank, D., Eisele, B. and Lomax, T. (2012), TTI’s 2012 urban mobility report, Technical report, Texas Transportation Institute, Texas A&M University.
- Schrank, D., Eisele, B., Lomax, T. and Bak, J. (2015), Appendix A: Methodology for the 2015 urban mobility scorecard, Technical report, Texas Transportation Institute, Texas A&M University. <https://static.tti.tamu.edu/tti.tamu.edu/documents/mobility-scorecard-2015-appx-a.pdf>.
- Sekuła, P., Marković, N., Laan, Z. V. and Farokhi Sadabadi, K. (2018), Application of vehicle probe data in estimating traffic volumes: A Maryland case study, *in* ‘Transportation Research Board 97<sup>th</sup> Annual Meeting’.
- Sharma, S., Lingras, P., Xu, F. and Kilburn, P. (2001), ‘Application of neural networks to estimate AADT on low-volume roads’, *Journal of Transportation Engineering* **127**(5), 426–432.
- Srivastava, N., Hinton, G. E., Krizhevsky, A., Sutskever, I. and Salakhutdinov, R. (2014), ‘Dropout: A simple way to prevent neural networks from overfitting’, *Journal of Machine Learning Research* **15**(1), 1929–1958.  
**URL:** <http://www.cs.toronto.edu/~rsalakhu/papers/srivastava14a.pdf>
- Stathopoulos, A. and Karlaftis, M. G. (2003), ‘A multivariate state space approach for urban traffic flow modeling and prediction’, *Transportation Research Part C: Emerging Technologies* **11**(2), 121–135.
- Vlahogianni, E. I., Karlaftis, M. G. and Golias, J. C. (2005), ‘Optimized and meta-optimized neural networks for short-term traffic flow prediction: A genetic approach’, *Transportation Research Part C: Emerging Technologies* **13**(3), 211–234.
- Vlahogianni, E. I., Karlaftis, M. G. and Golias, J. C. (2014), ‘Short-term traffic forecasting: Where we are and where we’re going’, *Transportation Research Part C: Emerging Technologies* **43**, 3–19.

- Weather Underground (2017), <https://www.wunderground.com/>. Accessed: 2017-02-27.
- Williams, B. M. and Hoel, L. A. (2003), ‘Modeling and forecasting vehicular traffic flow as a seasonal ARIMA process: Theoretical basis and empirical results’, *Journal of transportation engineering* **129**(6), 664–672.
- Work, D. B., Tossavainen, O.-P., Blandin, S., Bayen, A. M., Iwuchukwu, T. and Tracton, K. (2008), An ensemble Kalman filtering approach to highway traffic estimation using GPS enabled mobile devices, *in* ‘Decision and Control, 2008. CDC 2008. 47th IEEE Conference on’, IEEE, pp. 5062–5068.
- Young, S. E., Sadabadi, K. F., Sekuła, P., Hou, Y. and Markow, D. (2017), Estimating highway volumes using vehicle probe data – proof of concept, *in* ‘24th ITS World Congress’. Accepted.
- Yu, G., Hu, J., Zhang, C., Zhuang, L. and Song, J. (2003), Short-term traffic flow forecasting based on Markov chain model, *in* ‘Intelligent Vehicles Symposium, 2003. Proceedings. IEEE’, IEEE, pp. 208–212.
- Zhang, Y. and Liu, Y. (2009), ‘Traffic forecasting using least squares support vector machines’, *Transportmetrica* **5**(3), 193–213.
- Zhao, F. and Chung, S. (2001), ‘Contributing factors of annual average daily traffic in a Florida county: Exploration with geographic information system and regression models’, *Transportation Research Record: Journal of the Transportation Research Board* (1769), 113–122.
- Zhao, F. and Park, N. (2004), ‘Using geographically weighted regression models to estimate annual average daily traffic’, *Transportation Research Record: Journal of the Transportation Research Board* (1879), 99–107.