

Physics-based modeling and data representation of pedestrian pairwise interactions

Alessandro Corbetta,¹ Jasper A. Meeusen,¹ Chung-min Lee,² Roberto Benzi,³ and Federico Toschi⁴

¹*Department of Applied Physics, Eindhoven University of Technology, 5600 MB Eindhoven, The Netherlands*

²*Department of Mathematics and Statistics, California State University Long Beach, 90840, Long Beach, CA, USA*

³*Department of Physics and INFN, University of Tor Vergata, I-00133 Rome, Italy*

⁴*Department of Applied Physics, Department of Mathematics and Computer Science, Eindhoven University of Technology - 5600 MB Eindhoven, The Netherlands and CNR-IAC, I-00185 Rome, Italy*

(Dated: August 8, 2018)

The possibility to understand and to quantitatively model the physics of the interactions between pedestrians walking in crowds has compelling relevant applications, e.g. related to the efficient design and the safety of civil infrastructures. In this work we study pedestrian-pedestrian interactions from observational experimental data in diluted pedestrian crowds. While in motion, pedestrians continuously adapt their walking paths trying to preserve mutual comfort distances and to avoid collisions. In mathematical models this behavior is typically modeled via “social” interaction forces.

Leveraging on a high-quality, high-statistics dataset – composed of few millions of real-life trajectories acquired from state of the art observational experiments (about 6 months of high-resolution pedestrian tracks acquired in a train station) – we develop a quantitative model capable of addressing interactions in the case of binary collision avoidance. We model interactions in terms of both long-range (sight based) and short-range (hard-contact avoidance) forces, which we superimpose to our Langevin model for non-interacting pedestrian motion [Corbetta et al. Phys. Rev. E 95, 032316, 2017] (here further tested and extended). The new model that we propose here features a Langevin dynamics with “fast” random velocity fluctuations that are superimposed to the “slow” dynamics of a hidden model variable: the “intended” walking path. In case of interactions, social forces may act both on the intended path and on the actual walked path. The model is capable of reproducing quantitatively relevant statistics of the collision avoidance motion, such as the statistics of the side displacement and of the passing speed. Rare occurrences of actual bumping events are also recovered.

Furthermore, comparing with large datasets of real-life tracks involves an additional computational challenge so far neglected: identifying automatically, within a database containing very heterogeneous conditions, only the relevant events corresponding to binary avoidance interactions. In order to tackle this challenge, we propose a novel and general approach based on a graph representation of pedestrian trajectories, which allows us to effectively operate complexity reduction for efficient data classification and selection.

I. INTRODUCTION

When we walk in a known environment or we explore a new venue, a path is planned in our minds (our “intended path”). As other pedestrians approach us, or as we learn features of the environment (e.g. better directions toward a target destination), this path is continuously adjusted. Either as an impulsive act or as a timely planned adjustment, we side-step to maintain comfort distances among ourselves and other close by pedestrians. This comes with a modification of our intended walking paths that “bend” in order to prevent contacts or collisions with others.

The aim of this paper is to quantitatively understand and model the dynamics behind these path changes – in the simplest condition of two pedestrians walking in opposite directions, trying to avoid each other (“pairwise avoidance” - cf. Fig. 1). This is the first necessary step to understand the interaction physics between pedestrians, before attempting to tackle more complex situations.

The dynamics of path changes is a challenging subject within the broader and compelling issue of understanding the flow of pedestrian crowds [1]. This scientific topic is not only fascinating, because of its connections with

the physics of emerging complexity [2], pattern formation [3, 4] and active matters [5, 6], but it is also extremely relevant for its applications for the design, safety and performance of civil facilities [7, 8].

Because of the macroscopic analogies between crowd and fluid flows [9], modeling pedestrian dynamics in terms of interacting “matter” particles has become an emerging approach [6]. This analogy underlies proper translations between *passive* fluid particles – that move under the action of classic interaction forces – and *active* pedestrians in crowds that interact via “social” forces [10]. Social forces abstract pedestrian-pedestrian interactions in a Newtonian-like way. As such, we expect that mutual repulsive interaction (social) forces may act for ensuring comfort distances and collision avoidance, possibly modifying pedestrians’ intended paths.

Despite the growing scientific and technological interest for the motion of pedestrian crowds, our quantitative understanding remains relatively limited, especially in comparison to other kind of “active matter systems” [11]. A major limitation comes from the fact that high-quality experimental data, with high resolution in space and time, still remain scarce. An important point to be un-

derstood is that pedestrian motion has a strong variability, which can be decoupled from average trends only by considering measurements with extremely high statistics. For instance, in the case of a narrow corridor [12], one needs tens of thousands of measured trajectories to estimate the amplitude of the observables’ fluctuations (e.g. fluctuations in walking position, velocity, etc.) and to characterize the occurrence of related rare events. In this paper, we employ data from tens of thousands of avoidance events to investigate quantitatively and model the changes in intended paths from pairwise avoidance. The measurement of these events was achieved through a months-long real-life experimental campaign that we performed in the main walkway of the train station of Eindhoven, the Netherlands, with state-of-the-art automated pedestrian tracking (see Fig. 2). To the best of our knowledge, such an investigation has never been carried out before with the accuracy and statistics as reported in this work.

The current scarceness of high-quality measurement data is probably related to technical challenges connected to the acquisition of pedestrian trajectory data. Collecting data in real-life conditions demands robust individual tracking techniques, i.e. that remain accurate regardless of factors such as illumination, clothing, presence of objects, crowd density, and so on.

The analysis of pedestrian dynamics in a real-life setting involves, moreover, an additional challenge so far neglected: the automated crowd scenario classification. To illustrate this, let us consider the trajectories collected over weeks in a measurement zone within, e.g., a station or a mall. These trajectories will certainly encompass different and alternating crowd scenarios. For instance, these can include: pedestrians walking undisturbed (i.e. with no peers walking in their neighborhood), pedestrians in small or large social groups, diluted or dense crowd streams in counter-flows, diluted or dense crowd streams in co-flows, and so on (indeed all these scenarios occur in the measurements considered in this paper, cf. Fig. 2). If we focus on a given scenario that is defined by a set of parameters (for instance, pedestrians walking in a unidirectional flow at an assigned density level), and we compare the measurements from the occurrences of such a scenario, we expect to observe analogous features modulo random fluctuations. Besides, as the number of observed occurrences increases, we can quantify with higher and higher accuracy the statistics of fluctuations and of the rare events characteristic of the scenario. For instance, people walking undisturbed are expected to have similar speed within fluctuations. If, instead, we consider social groups, we expect to measure velocities consistently lower than in the undisturbed case [13]. Similarly, we expect counter-flow occurrences to exhibit mutual similarities, yet to feature different characteristic fluxes than co-flow conditions [14, 15]. The scenario considered in this paper involves pairs of pedestrians mutually avoiding each other: to analyze the scenario including statistic fluctuations, we aggregate and analyze as ensemble all

the trajectories occurred under such conditions. When focusing on a specific scenario and conducting our investigation based on the scenario’s occurrences (in the following also referred to as realizations) we are performing a “virtual experiment”. In such a virtual experiment we analyze a subcollection of the whole experimental dataset pertaining to the given target scenario, which it is itself defined by a set of control parameters (e.g. number of pedestrians involved, flow conditions considered, etc.). All occurrences of such scenario in the experimental dataset constitute the virtual experiment data, which we then explore and study as in a traditional laboratory experiment. Differently from a laboratory experiment, the pedestrians involved are not instructed to perform a pre-defined dynamics (cf. e.g. [16]), rather they can freely walk, without potential biases from the experimental setting. Identifying the subset of trajectories belonging to a target scenario is thus a necessary first step in our investigation. Since we deal with hundreds of thousands of trajectories, this identification cannot be performed manually. In fact, this would demand an exhaustive visual analysis of thousands of hours of sensors’ footage (something that has been routinely performed by humans in other smaller scales investigations, e.g. to select groups in [17], to classify walking patterns in [18], or to isolate people waiting in [19]). More in general, this identification task underlies a classification problem in which we associate each trajectory to its scenario.

Automatizing the trajectory classification task is the second aim of this paper, and it is instrumental to analyze the dynamics of path changes. While automatic classification is widely studied in connection e.g. with images, text or speech content [20], to the best of our knowledge this topic remains yet not addressed in the context of scenarios made of (pedestrian) trajectories. Once more, this likely relates with the fact that extensive data collection campaigns for pedestrian dynamics remain a rarity.

In this paper we target a two-fold state-of-the-art advancement. First, we propose a novel representation strategy for pedestrian dynamics measurements, based on graphs, to formally identify scenarios and automatically classify and select real-life trajectory data on such basis. Second, we address quantitatively the dynamics of path changes and related pedestrian-pedestrian social forces in case of avoidance events involving two individuals (i.e. no third individual plays a role in the dynamics). For this, we propose a Langevin-like model, built extending our previous quantitative model for the diluted (i.e. undisturbed/non-interacting) pedestrian dynamics [12] (cf., e.g., [5, 22] for a general modeling reference on Langevin equations). The model is constructed in two steps: first, we generalize the diluted dynamics model to address a richer phenomenology, which is given by a mixture of pedestrians walking and (in tiny percentages) running. Second, we introduce and validate pairwise social forces that act simultaneously on the actual trajectory and on the intended path which we consider too a model variable. This force model enables us to

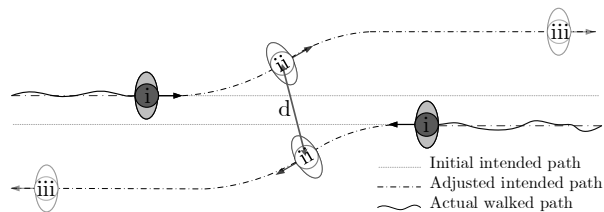


FIG. 1. Mutual avoidance of two pedestrians walking in opposite directions (“pairwise avoidance”). Pedestrians walk trying to follow straight “intended” paths (snapshot i), around which they perform random fluctuations (cf. Sect. IV). Individual motions however remain influenced by the dynamics of peers. As a peer approaches, the intended path is adjusted (snapshot ii) to ensure maintenance of mutual comfort distance (snapshot iii). We investigate and model quantitatively the avoidance dynamics (cf. Sect. V) with reference to three distances (d), transversal to the motion, and characteristic of the interaction: (i) before adjusting the intended path (at the entrance of our observation window), at the moment of side-by-side (ii) and when pedestrians leave our observation window (iii).

reproduce quantitatively our measurements of the pairwise avoidance dynamics including fluctuations and rare events (actual impacts).

The content of this paper is as follows: in Sect. II, we describe our measurement campaign and the acquired data, in the order of millions of trajectories. This sets a basis for both the methodological and the modeling contributions of this work, that are, respectively, in Sect. III and in Sect. IV-V. In the methodological Section III we tackle the trajectory selection and classification issue. In Sect. IV we address the motion of undisturbed pedestrians. This is a necessary building block for Sect. V in which we analyze and model the dynamics of pairwise avoidance and of the intended path. A final discussion closes the paper.

II. MEASUREMENT CAMPAIGN

The pedestrian dynamics data employed in this work have been collected in the period October 2014 – March 2015 through a 24/7 real-life campaign at Eindhoven train station. Our data acquisition took place in the initial section of the main walkway of the station as presented in Fig. 2. The walkway is one of the major pedestrian pathways between the north side and the south side of the city with crowd traffic during the entire day. Different dynamics ordinarily occur, such as co-flows and counter-flows with density ranging from extremely low (one pedestrian in the entire walkway at night time) to high during the morning peak commute times [14]. We aimed at an exhaustive individual tracking with high space- and time-resolution and, overall, we collected about 100 000 trajectories per day and approximately 5 millions in total.

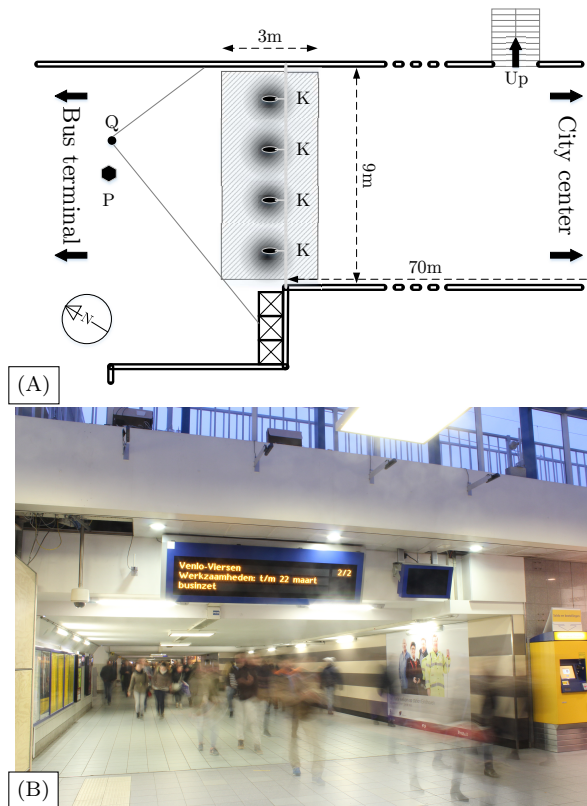


FIG. 2. Experimental setup used in our 6 months-long pedestrian tracking campaign at the train station in Eindhoven (NL); cf. Sect. II. (A) Planar layout of the north entrance hall of Eindhoven train station (as it was between 2013 and early 2015). The measurement area is shaded. The entrance hall, facing the bus terminal of the city, leads to a 70 m long tunnel connecting to the south side of the city. The rail platforms are reachable from the tunnel via several side staircases. Our pedestrian dynamics recordings employed four overhead KinectTM [21] sensors (K) with partially overlapping view. The sensors were attached to the side of the overhang and are supported by metallic arms (cf. (B)). The snapshot (B) was taken from point Q , i.e. in the vicinity of a structural pillar (P) (about 5 m upstream of the recording area).

Four overhead Microsoft KinectTM sensors [21] with partially overlapping view recorded imaging-like data, specifically *depth maps*, at the rate of 15 frames per second. Depth maps encode in gray-scale levels the distance between each filmed pixel and the camera plane; thus regions closer to the overhead sensors, such as heads, result in darker shades. We blend the four depth map signals into a single stream covering the entire measurement region of which we report few frames (already post-processed to include e.g. individual trajectories) in Fig. 6. As in our previous investigations (e.g. [23, 24]) and following the articles [25, 26], we use cluster-based analyses of depth maps to perform accurate localization of pedestrians bodies and heads on a frame-by-frame basis. Finally, we employ particle-tracking algorithms to

extract individual trajectories from the output localization step. We leave further technical details on the detection and tracking procedures to Appendix A.

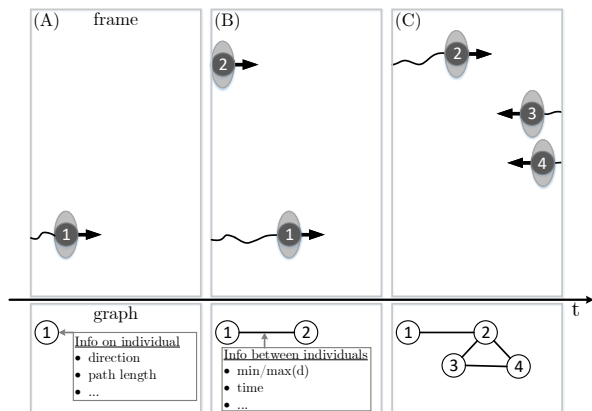


FIG. 3. We represent the recorded crowd dynamics with a graph G . This reduced description enables automatic classification of different flow scenarios (cf. Sect. III). Employing the three sample frames, (A), (B), (C), we schematize the graph construction algorithm. As a pedestrian, e.g. pedestrian “1” in (A), appears in our recording window, we add a corresponding node in the graph G . When two pedestrians are simultaneously in the recording window, e.g. “1” and “2” in (B), we connect the associated nodes with an edge. As further pedestrians are recorded the graph is expanded. In (C), we imagine that pedestrians “3” and “4” entered the observation window after pedestrian “1” left. Therefore, their nodes are connected to one another and further just with the node representing pedestrian “2”. We include additional information in the graph, crucial for the classification task: each node is annotated with scalar observables of the associated pedestrian trajectory (e.g. average velocity, direction) and each edge is weighted with scalar observables of the pairwise dynamics of the nodes (e.g. minimum and maximum distance, joint observation time).

III. REPRESENTATION AND CLASSIFICATION OF CROWD FLOW DATA

In this section we define two subsets of the trajectories collected in our measurement campaign (cf. Sect. II), which we will use to investigate, respectively, the dynamics of undisturbed flows, considered in Sect. IV, and the dynamics of the pairwise avoidance, considered in Sect. V. These subsets will be the output of a more general representation and classification construct, based on graphs, here introduced.

The underlying issue, as stated in Sect. I, is that large-scale measurements of pedestrian dynamics in real-life conditions typically include different scenarios frequently and randomly changing (see also [27]). For instance, around commuting time, in the walkway in Fig. 2, the flow changes abruptly from diluted to dense. Every few seconds, the typical bi-directional pedestrian flow rapidly

TABLE I. Bijective correspondences between real-life measurements and their representation in the graph G : summary of concepts and notation (cf. Sect. III).

Real-life measurement	Graph representation
Trajectory set Γ	Graph G
Trajectory (i.e. pedestrian) $p \in \Gamma$	Node $p \in G$
p and q interacting pedestrians	edge $e = (p, q)$ in \tilde{G}
Scenario	Set of conditions identifying a sub-graph $\tilde{G}_s \subset \tilde{G}$
Realizations of the scenario	Connected components in \tilde{G}_s
Pedestrians walking undisturbed (all realizations)	Sub-graph $\tilde{G}_1 \subset \tilde{G}$ of the singleton nodes
Undisturbed pedestrian p (one realization)	$p \in \tilde{G}_1$
Pedestrians in pairwise avoidance (all realizations)	Sub-graph $\tilde{G}_{2,a} \subset \tilde{G}$ of dyads with opposite walking direction
Single pairwise avoidance event of p and q (one realization)	Dyad $\{p, q\}$ in $\tilde{G}_{2,a}$ connected by an edge

turns into a uni-directional dense stream composed of the passengers just arrived by train. The scenarios of our interest (undisturbed flow, pairwise avoidance) happen as well, yet alternating at random with others. Instead, we would like to perform “virtual experiments” investigating the dynamics of these scenarios one at a time, and use the data from the realizations of individual scenarios to increment our statistics. For instance, thousands of times per day, pedestrians walking undisturbed cross our measurement area. We expect all of them to exhibit a similar behavior whose statistics we can accurately determine thanks to the large number of trajectories. Analogously, we expect pairs of pedestrians in avoidance (cf. Fig. 1) to show similar features as all realizations of the same dynamics.

In the next subsections we provide a strategy to perform virtual experiments. This involves the capability of 1. defining formally and quantitatively scenarios, and 2. efficiently classifying and aggregating trajectories based on whether or not they are realizations of such scenarios.

In conceptual terms, given the set of measured trajectories, say the set $\Gamma = \{p\}$, we construct a representation of Γ in terms of a graph G with a bijective correspondence between trajectories and graph nodes. This representation, reduced in complexity with respect to the original dataset, suitably allows us to define scenarios as conditions that identify sub-graphs of G (Sect. III A). The desired output, i.e. sets of trajectories that are realization of these scenarios, are associated to the connected components of these sub-graphs. Trajectories occurring

in the same instance of a scenario are in the same connected component (and, conversely, the complement of the sub-graph identify trajectories that are not realization of the given virtual experiment).

In Sect. III B we define two sub-graphs $\tilde{G}_1 \subset G$ and $\tilde{G}_{2,a} \subset G$, whose connected components identify, respectively, realizations of diluted flows and of pairwise avoidance, that we will use as experimental comparisons for the models considered respectively in Sect. IV and Sect. V. In Tab. I we report a summary of the symbols and concepts used throughout this section.

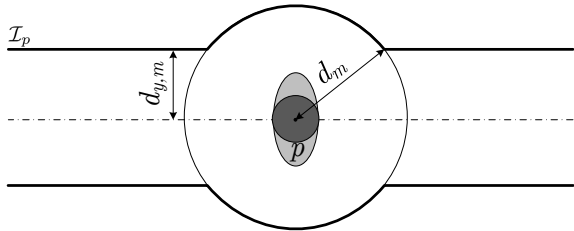


FIG. 4. Sketch of the region \mathcal{I}_p around pedestrian p . We consider the dynamics of p as potentially being influenced by another pedestrian, say q , if, at any time, q entered in \mathcal{I}_p . Conversely, if, for a time interval τ no longer than τ_m , q entered in \mathcal{I}_p or, likewise, p entered in \mathcal{I}_q , we consider the pair (p, q) as non-interacting (even if the two pedestrians appear in the same frames – cf. Fig. 6). By removing the edges in G (cf. G construction in Fig. 3) associated to such non-interacting pedestrians we obtain \tilde{G} , in which only potentially interacting pedestrians are connected by edges (cf. Sect. III B, Tab. I and Fig. 5(B)). The region \mathcal{I}_p is parametrized by the lengths d_m and $d_{y,m}$, respectively the minimum length for interaction and the minimum transversal length for interaction – cf. Tab. II).

A. Graph-based representation

The graph-based representation technique, described in the previous paragraphs and below, significantly improves what previously proposed by us in [27] allowing richer and more parametric scenario classification (the improvement occurs through node annotations and edge weighting). Because of the bijective correspondences between pedestrians and trajectories, and between trajectories and graph nodes, in the following, we will refer interchangeably as pedestrians/trajectories/nodes, which we will identify with the generic symbols p and/or q .

We build G as follows: we scan in chronological order the set of experimental trajectories (Sect. II), and add a node p to G when a new trajectory is found. We further annotate each node with scalar observables of the trajectory. These are: average walking velocity, trajectory length, ultimate direction, starting and ending positions.

As we scan the trajectory data we also introduce edges between nodes. In particular, if pedestrians p and q appear simultaneously in one or more recorded frames, we

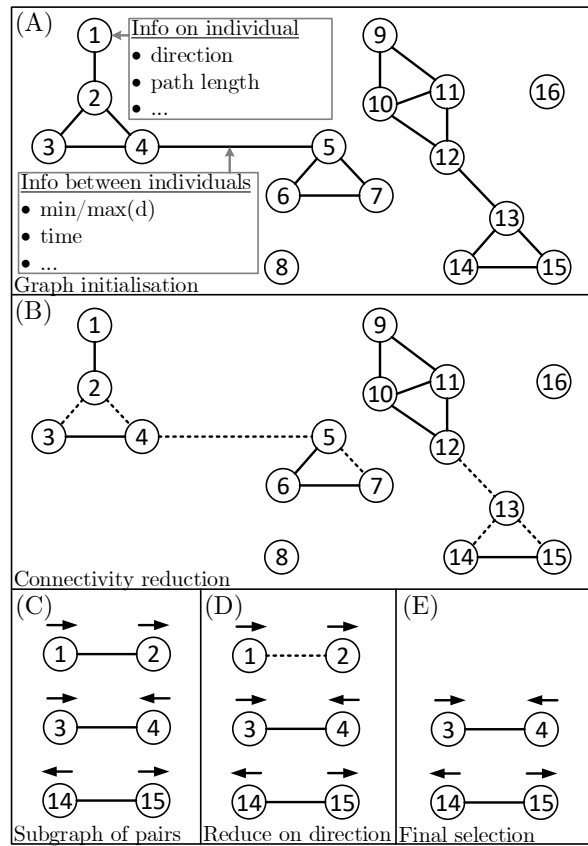


FIG. 5. Occurrences of mutual avoidance of two pedestrians walking in opposite directions are selected automatically using the graph representation. In this figure we summarize the whole process that leads from G (A) to the sub-graph $\tilde{G}_{2,a}$ (E). First, the graph representation in (A) is “sparisified” removing edge should two pedestrians be not interacting (according to the condition in Fig. 4) yielding the sub-graph \tilde{G} in (B). We then isolate the sub-graphs of \tilde{G} constituted only of dyads (connected components with two nodes) are isolated (C) to further retain only the cases in which the walking direction of pedestrians are opposite (D, E). In this last step we further filter to retain pairs of pedestrians whose interaction time satisfies $\tau > \tau_M$.

add an edge $e = (p, q)$ between the associated nodes.

We vector-weight the edge e with scalars quantifying the pairwise dynamics of p and q . The weight $\vec{w}(e)$ reads

$$\vec{w}(e) = (\min(d), \max(d), \tau), \quad (1)$$

where

- d is the distance between p and q (cf. Fig. 1), of which we retain the minimum (min) and the maximum (max) observed values;
- τ is the joint recording time, i.e. the duration p and q are both present in our recording window.

We report the graph construction algorithm in Fig. 3.

We stress that the procedure to construct the graph is efficient in the sense that it is linear-in-time with the amount of frames measured: just one pass of Γ is necessary to construct G .

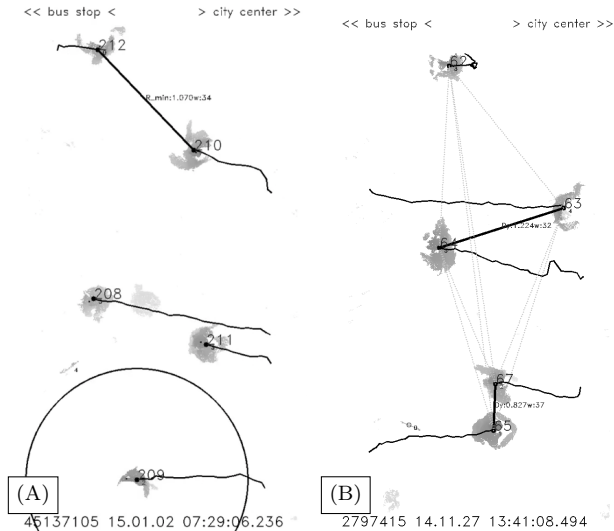


FIG. 6. Examples of depth maps collected in our experimental campaign (cf. Fig. 2 and Sect. II). Individual trajectories have been superimposed to the depth-maps in post-processing. Moreover, the panels include realizations of scenarios of interest. Panel (A) contains one realization of pairwise avoidance (pedestrians (210, 212), joint by a thick black line) and one undisturbed pedestrian (209 - we report the circular region of radius d_m around them that remains not visited by others). Panel (B) contains two realizations of pairwise avoidance (pedestrians (63, 64) and (65, 67)). Note that we can have multiple pairwise avoidance realizations in the same frame, modulo there is no interplay between them. The graph representation flexibly allows to define these scenarios and efficiently recover them in the measurements.

B. Flow classification

The representation via G enables us to formally define virtual experiments and efficiently classify scenarios, both by exploiting the graph topology. In this sub-section we introduce the general approach starting from the specific cases of interest for Sect. IV and V.

In Sect. IV we aim at analyzing the dynamics of undisturbed pedestrians. Singleton nodes in G (i.e. edge bereft) provide a first, yet incomplete, collection of these pedestrians. In fact, no other pedestrian potentially perturbing their dynamics was observed while they were crossing our facility (the singleton condition would otherwise be violated).

Singleton nodes of G , however, identify just a subset of pedestrians walking undisturbed. In fact, it is reasonable to assume that all individuals remaining sufficiently far from their first neighbor walked undisturbed as well. To correctly classify these cases – heuristically speaking

TABLE II. Parameters employed in the construction of the graph-based representation (Sect. III), in the undisturbed dynamics model (Sect. IV) and in its extension to include pairwise avoidance (Sect. V). The pairwise avoidance model extends the undisturbed dynamics model and preserve all its parameters but the percentage of runners. This percentage is reduced following the observations.

Graph-based representation		
d_m	2.4 m	min distance for interaction
$d_{y,m}$	0.8 m	min transversal distance for interaction
τ_m	5 frames = 1/3 s	min time for interaction
τ_M	20 frames = 4/3 s	min interaction time retained (Sect. III C)
Undisturbed dynamics		
$u_{p,w}$	1.29 ms ⁻¹	walkers
$u_{p,r}$	2.70 ms ⁻¹	runners
σ_x	0.25 ms ^{-3/2}	
σ_y	0.25 ms ^{-3/2}	
α_w	0.037 m ⁻² s	walkers
α_r	0.0015 m ⁻² s	runners
β	1.765 m ⁻² s	
ν	0.297 s ⁻¹	
y_p	0.0 m	
runners %	4.02%	
Pairwise avoidance		
θ_1	20°	
θ_2	90°	
μ	1.0 s ⁻¹	
R	2.4 m	
r	0.6 m	
A	1.5 ms ⁻²	
B	0.7 ms ⁻²	
runners %	0.2%	

– we remove edges from the nodes that are “sufficiently far apart from their neighbors” and reduce them to singletons.

More formally, we consider a reference pedestrian p as potentially influenced by a pedestrian q , if q enters in p ’s “neighborhood” \mathcal{I}_p (to be geometrically defined below) for at least one frame.

We define the region \mathcal{I}_p (see Fig. 4) considering two criteria:

- pedestrians walking at short distances (say smaller than a given threshold d_m) most likely play an influence on the respective dynamics, therefore

$$\min(d) < d_m \Rightarrow q \in \mathcal{I}_p; \quad (2)$$

- pedestrian interactions are anisotropic privileging the motion and sight directions over the transversal directions [1, 28]. Therefore, let $d_{y,m}$ a given

threshold for the transversal distance, we set

$$\min(d_y) < d_{y,m} \Rightarrow q \in \mathcal{I}_p. \quad (3)$$

(cf. parameters in Tab. II).

We stress that determining if $q \in \mathcal{I}_p$ or $p \in \mathcal{I}_q$ consists just of a single check on the vector-weight $\vec{w}(e)$ of the edge $e = (p, q)$.

In case two pedestrians p and q , connected by an edge e , exerted no influence on the motion of each other (according to the metric criteria in Eq. (2)-(3)), we remove the edge e . This operation returns a “sparsified” sub-graph $\tilde{G} \subset G$, likely with an increased number of singletons. Let us call \tilde{G}_1 the sub-graph of singletons of \tilde{G} . \tilde{G}_1 identifies all the realizations of undisturbed flows, i.e. the experimental data for our analysis in Sect. IV (further technical constraints on the dataset are described in Sect. III C).

As we expect all singleton nodes to be associated to a similar dynamics (undisturbed pedestrians), we expect connected components with similar edge topology, weights and annotation, to exhibit similar dynamics, and thus to be realizations of the same scenario. In this sense, we formally define virtual experiments by specifying an edge topology and ranges for weights and annotations. This selects a sub-graph $\tilde{G}_s \subset \tilde{G}$, and all the connected components of \tilde{G}_s are associated to the realization of the scenario.

We exploit this concept to retain data about avoidance dynamics of pairs (Sect. V). We find pairs of pedestrians in avoidance among the dyads (connected components of two nodes) in \tilde{G} . Specifically, we retain only those dyads in which 1. the walking directions of the two pedestrians are opposite; 2. the two pedestrian initially faced each other. We call $\tilde{G}_{2,a}$ the sub-graph of such dyads, to be used in the analyses in Sect. V. (As in the case of \tilde{G}_1 , also here we consider further technical constraints, discussed in Sect. III C).

In Fig. 5, we report a schematic description of the selection of avoidance pairs, while some examples of real data selected via the procedure reported here are in Fig. 6.

We finally stress that we use pairwise metric properties (i.e. $\vec{w}(e)$) as discriminant of the occurrence of an interaction. It has been recently recognized that pedestrian interactions, especially at high densities, can be determined by factors beyond the sole metric [2] as it happens, e.g., for social animals [29]. As here we restrict to free-flow conditions and to one-to-one interactions, analyses based on metric arguments appear sufficient.

C. Datasets

In this technical section we discuss the restrictions and transformations further applied to the trajectory sets selected by \tilde{G}_1 and $\tilde{G}_{2,a}$ to yield the datasets employed in the next sections. The restrictions specified below identify further sub-graphs within \tilde{G}_1 and $\tilde{G}_{2,a}$. We however

refrain from introducing new symbols and maintain, with an abuse of notation, these identifiers for the sub-graphs. **Dataset for diluted flow analysis** (Sect. IV - constraints on \tilde{G}_1):

- *Restriction to straight intended paths and quasi-rectilinear trajectories.* We aim at analyzing the fluctuations of the undisturbed motion when occurring around intended paths that are straight. In these conditions, we expect to observe trajectories that are quasi-rectilinear. From energy minimization arguments (cf. [30]), we expect intended paths to be straight when it comes to reach targets in obstacle-free environments. In our dataset, we could however also observe largely erratic trajectories formed e.g. of circular sections or of parabolic arcs. As these trajectories are out of our modeling purpose, we discard them after identify them through the procedure in Appendix B.
- *Coordinate system.* Limiting our scope to quasi-rectilinear trajectories, we rotate them for convenience such that, in a (x, y) reference system, x is the longitudinal walking direction and y is the direction of the transversal fluctuations (quasi-rectilinear trajectories have generally different inclinations depending on their starting position, cf. Fig. 14). The details of the rotation procedure are in Appendix B.

Dataset for pairwise avoidance analysis (Sect. V - constraints on $\tilde{G}_{2,a}$):

- *Time thresholding of pairwise dynamics.* Due to the finiteness of our observation window, the joint observation time for a pairwise dynamics can be limited to few frames. For instance, this occurs when a pedestrian of the pair is about to leave as the second enters the domain. To exclude these cases from our dataset we impose a lower bound, τ_M , on the joint recorded time, i.e. we require $\tau > \tau_M$. We choose τ_M to be comparable with the crossing time of the observation window of an undisturbed pedestrian. Notably this restriction guarantees that the point in space at which the two pedestrians of the pair are closest is roughly in the middle of the observation window.

IV. UNDISTURBED MOTION

In this section we model the dynamics of pedestrians walking undisturbed (also referred to as *free flow*), keeping as a quantitative reference the measurements collected from the setup in Fig. 2 (cf. Sect. II) and selected through \tilde{G}_1 (cf. Sect. III B – III C). The free flow motion is a limit condition for the dynamics, as it involves pedestrian densities at its lowest levels. We consider it as a reference condition for which we interpret pairwise

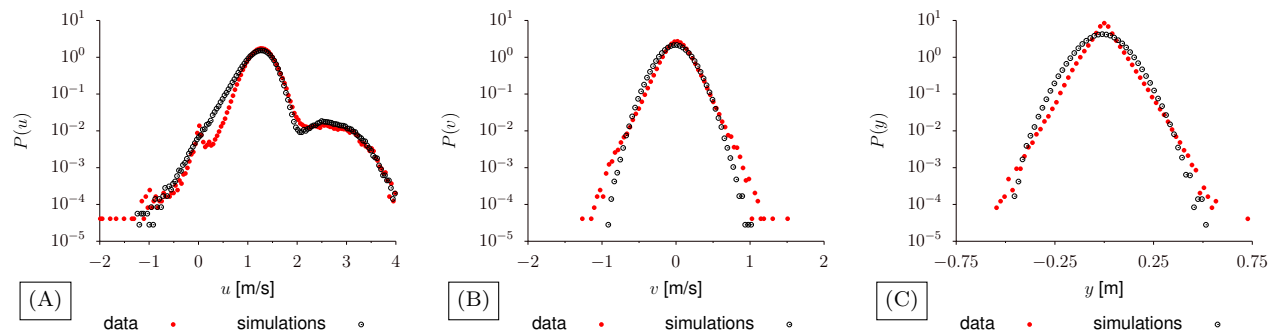


FIG. 7. Probability distribution functions of walking velocity and positions for undisturbed individuals: comparison between measurements (solid red dots) and simulations of Eq. (4)-(7) (black empty dots, simulation parameters in Tab. II). The panels contain respectively (A) longitudinal velocities (u), (B) transversal velocities (v), (C) transversal positions (y , assuming $y_p = 0$). Pedestrians walk most frequently at around 1.29 m/s (cf. (A)). Besides, we observe a tiny fraction of running pedestrians, about 4 %, contributing to the hump at above 2 m/s and pedestrians turning back, providing negative velocities contributions. Transversal fluctuations in velocity (B) appear well-approximated by a Gaussian distribution, while transversal positions exhibit small deviations from a Gaussian behavior (C). Our model (Eq. (4), (6)) reproduces quantitatively the complete longitudinal velocity statistics inclusive of the running hump as well as the inversion events. The transversal dynamics is also well approximated as a stochastic damped harmonic oscillator (Eq. (5), (7)).

interactions (analyzed in Sect. V) as perturbations. We proceed to deduce a model for undisturbed conditions and we then compare it with our measurements in terms of probability distribution functions.

Individuals crossing a large corridor, typically move following straight *intended* paths along quasi-rectilinear trajectories (cf. Sect. III C). Besides this variability in the individual intended paths, each pedestrian performs small and high-frequency random fluctuations (about 1 Hz due to walking physiology). Moreover, as observed in [12], rare large fluctuations in the motion occur too. Such rare large deviations include, but does not limit to, trajectory inversions. In [12], these two apparently independent fluctuating phenomena have been treated as realization of a unique Langevin stochastic dynamics with an bi-stable longitudinal velocity potential. In other words, the dynamics was treated in terms of a longitudinal velocity, u , exhibiting small fluctuations around a stable state, $u = u_p$, plus occasional velocity inversion events, $u \rightarrow -u$ (for which the dynamics stabilizes on $u = -u_p$).

Here we provide a twofold extension of the Langevin model in [12] for the wider, longer and less constrained walking area considered (cf. Fig. 2). For the sake of completeness, we first present the extended model and then we discuss it in view of our previous work [12].

For convenience, we adopt a coordinate system (x, y) , where x is a longitudinal coordinate along the walking direction, i.e. along the intended path, which we consider as a straight line parallel to the longitudinal direction of the corridor, and parametrized by the variable y_p . The variable y accounts for transversal position, so that $y - y_p$ identifies the fluctuation around the intended path. We model the longitudinal and transversal dynamics as

uncorrelated Langevin motions satisfying

$$\frac{dx}{dt} = u(t) \quad (4)$$

$$\frac{dy}{dt} = v(t) \quad (5)$$

$$\frac{du}{dt} = f(u) + \sigma_x \dot{W}_x \quad (6)$$

$$\frac{dv}{dt} = -2\nu v(t) + \beta g(y) + \sigma_y \dot{W}_y \quad (7)$$

where u and v are, respectively, the transversal and longitudinal velocity components, ν and β are positive model parameters, \dot{W}_x and \dot{W}_y are independent, δ -correlated in time Gaussian noise scaled by the positive coefficients σ_x, σ_y (we assume, consistently with [12], $\sigma_x = \sigma_y$, c.f. Tab. II. Our choice for the noise is common and made for simplicity, yet it is not mandatory. See e.g. [5]). The features of the dynamics are finally incorporated in the two functions $f(u)$ and $g(y)$.

As in [12], we choose $f(u)$ as possibly the simplest smooth model for a bi-stable dynamics, i.e. as the gradient of a double well (velocity) potential. In formulas it reads

$$f(u) = -4\alpha_i u(u^2 - u_{p,i}^2) = -\partial_u \alpha_i (u^2 - u_{p,i}^2)^2, \quad (8)$$

with $\pm u_{p,i}$ being the expected stable velocities, and α_i as the modulating factor of the force. As a first extension of the model in [12], we introduce the subscript, i , to enable multiple populations all behaving identically except for the stable velocity value. This allows one to distinguish e.g. people walking at usual speed and runners.

The function $g(y)$ models the restoring impulse towards the intended path. In formulas, it reads

$$g(y) = -2(y - y_p) = -\partial_y (y - y_p)^2. \quad (9)$$

This marks a second, yet fundamental, extension to the model in [12]. In fact, a wide corridor enables a continuous choice of straight intended paths that remain unchanged during the motion (in formulas, $\dot{y}_p = 0$). In turn, in Sect. V, we describe interactions considering a dynamics also for the variable y_p .

In Fig. 7, we compare the measured and modeled pedestrian motion in terms of probability distribution functions of longitudinal and transversal velocity and transversal fluctuations with respect to the intended path. The figures include data from $N = 47122$ trajectories of average time length 2 s (i.e. 31 frames). Approximately 34 % of the trajectories are from undisturbed pedestrians walking towards the bus terminal (with the rest are from undisturbed pedestrians walking towards the city center). The comparison is performed with 47122 trajectories simulated via (4)-(7), and calibrating the parameters as in [12] (values reported in Tab. II).

In the longitudinal velocity (u) probability distribution (Fig. 7(A)) we observe different regimes: most likely people walk with speed fluctuating around 1.29 m/s. Moreover, about 4 % of the pedestrians run across the walkway: this results in the hump at the right hand side of the distribution. Finally, rare events such as turning backs trajectories and stopping are present which provide, respectively, contributions in the left tail and at around 0 m/s. By adopting the measured ratio of walkers and runners, simulations quantitatively reproduce the observed velocity distribution. We observe Gaussian transversal fluctuations of the velocity (v) that Eq. (5) and (7) capture. Slight deviations from the predicted Gaussian fluctuations in transversal position (y) are instead observed.

V. PAIRWISE AVOIDANCE

In this section we model the dynamics of the pairwise avoidance and of the related changes in intended path (cf. conceptual sketch in Fig. 1 and measured cases in Fig. 6). We consider these dynamics in the simplest condition involving exclusively two pedestrians walking in opposite direction and avoiding each other while remaining sufficiently far (i.e. not influenced) from any other individuals. In this sense, we deal with avoidance in diluted conditions. We compare with our measurements selected through the (connected components of the) subgraph $\tilde{G}_{2,a}$ (cf. Sect. III B –III C. Each of the two nodes of the dyads in $\tilde{G}_{2,a}$ corresponds to one of the two pedestrians involved). This scenario represents for us the first building block to treat quantitatively interaction dynamics on top of the undisturbed motion (Sect. IV). In the following we first describe our model, then we compare it with the measurements in terms of probability distributions.

To model the pairwise avoidance we consider two individuals, each modeled following Eq. (4)-(7) plus coupling terms affecting both individual positions (x, y) and indi-

vidual planned paths y_p . In other words, the individual state is now described by the triplet (x, y, y_p) (and derivatives), with y_p entering in the dynamics as a variable and not as a constant parameter. We model the coupling terms as social forces [10, 31], acting on the whole triple (x, y, y_p) .

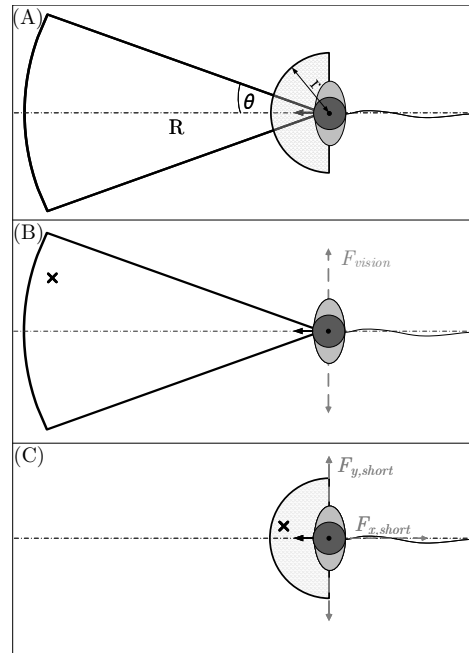


FIG. 8. Schematics of the interaction forces considered. Sketch (A): The intended path of a pedestrian is modified on a twofold basis: by long-range, sight-based (thus anisotropic) forces (cf. Eq. (16)) and by short-range contact avoidance forces (cf. Eq. (17)). Long range forces are bounded within a circular sector of radius R and angular semi-amplitude θ located in front of the individual (i.e. aligned with the intended path). Short-range forces are frontal and bounded within a circular region of radius r . Sketch (B): Long-range sight-based interactions, e.g. with the pedestrian marked with a “ \times ”, yield forcing F_{vision} in orthogonal direction with respect to the intended path. Sketch (C): Short-range forces provide isotropic $F_{short,x} = F_{short,y}$, although frontal only, contact avoidance, e.g. of the pedestrian marked with a “ \times ”.

Let p_1, p_2 be two pedestrians in an avoidance event. Adopting the point of view of one of the two, say p_1 , and using the same (x, y) reference system used in Sect. IV,

we model the dynamics as

$$\frac{dy_p}{dt} = \dot{y}_p(t) \quad (10)$$

$$\frac{d\dot{y}_p}{dt} = F_{vision} - 2\mu\dot{y}_p(t) \quad (11)$$

$$\frac{dx}{dt} = u(t) \quad (12)$$

$$\frac{dy}{dt} = v(t) \quad (13)$$

$$\frac{du}{dt} = -4\alpha_i u(u^2 - u_{p,i}^2) + \sigma_x \dot{W}_x - e_x F_{short} \quad (14)$$

$$\frac{dv}{dt} = -2\nu v - 2\beta(y - y_p) + \sigma_y \dot{W}_y - e_y F_{short} + F_{vision} \quad (15)$$

where the unit vector of components (e_x, e_y) is directed from p_1 to p_2 and μ is a positive model parameter. We superimpose to the undisturbed dynamics in Eq. (4)-(7) two (social) forces: F_{short} and F_{vision} , encompassing respectively for two influencing elements of the interaction dynamics. F_{short} is a short-ranged contact avoidance force; it mimics one's immediate and strong collision-avoidance reaction to individuals in the very vicinity and acts on the velocity variables u, v . F_{vision} , in turn, mimics the sight based avoidance maneuvers having longer and anisotropic range. F_{vision} acts in the transversal direction only, affecting both, and equally, the transversal velocity v and the intended path y_p . This modeling choice follows the idea confirmed from measurements that avoidance not only yields lateral motion, but also provides a persistent change of our intended paths.

We model both forces with decaying exponential of the squared distance between pedestrians (as common practice in the pedestrian dynamics community [10]). In formulas, they read

$$F_{vision} = -\text{sign}(e_y) A \exp(-d^2/R^2) \chi_1(\tilde{\theta}) \quad (16)$$

$$F_{short} = B \exp(-d^2/r^2) \chi_2(\tilde{\theta}), \quad (17)$$

where A and B are positive parameters, d is the (scalar) distance between the two considered pedestrians (cf. Fig. 1), r and R are scaling factors for the interaction ranges, $\tilde{\theta}$ is the angle between the line joining the two pedestrians and the horizontal and $\chi_j(\tilde{\theta}) = 1$ for $|\tilde{\theta}| < \theta_j$ and 0 otherwise ($j = 1, 2$).

The coupled systems of Langevin equations (Eq. (10)-(15)) for p_1 and p_2 feature, as a whole, a one-dimensional translational symmetry group. Let $(x_1, y_1, y_{p,1})$ and $(x_2, y_2, y_{p,2})$ be the state, respectively, of p_1 and p_2 , the symmetry reads

$$y_1, y_{p,1}, y_2, y_{p,2} \rightarrow y_1 + c, y_{p,1} + c, y_2 + c, y_{p,2} + c$$

for any real number c . In other words, the dynamics is invariant modulo a rigid translation of the transversal position and planned path of both individuals.

We compare model and data first in terms of the absolute transversal distance between p_1 and p_2 : $|\Delta y| =$

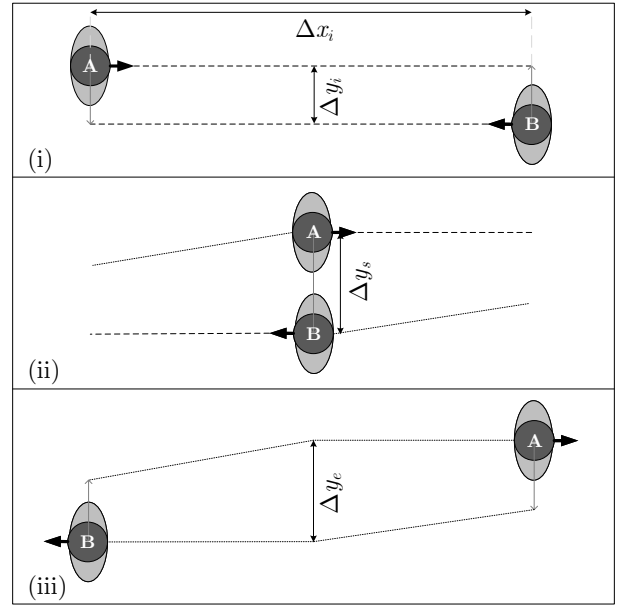


FIG. 9. Considered phases of the counter-flowing pairwise dynamics for the scatter plots in Fig. 10 and 11. Sketch (i): Entrance, i.e. the first moment of simultaneous appearance of the pedestrian pair in our observation window. Sketch (ii): side-by-side walking. It occurs when the two pedestrians have the same longitudinal position. Sketch (iii): exit, i.e. the last moment in which the two pedestrians appear together. $|\Delta y_i|$, $|\Delta y_s|$ and $|\Delta y_e|$ indicate the absolute lateral distance between the two pedestrians in phases (i), (ii) and (iii), respectively.

$|y_1 - y_2|$ (cf. Fig. 9). Similarly to the undisturbed case discussed in Appendix B, pairs of measured trajectories underwent also a rotation procedure to align with our coordinate system. Details are reported in App C). We expect $|\Delta y|$ to well approximate the transversal distance between the intended paths $|y_{p,1} - y_{p,2}|$ once considered at the ensemble level, i.e.

$$\langle \Delta y \rangle_{\text{ens}} = \langle |y_1 - y_2| \rangle_{\text{ens}} \approx \langle |y_{p,1} - y_{p,2}| \rangle_{\text{ens}}, \quad (18)$$

where $\langle \cdot \rangle_{\text{ens}}$ denotes an ensemble average over the measurements (we indicate with $\mathbb{E}_{\text{ens}}[\cdot|E]$, the conditioned ensemble average, where E is the conditioning event). We expect, in fact, individual fluctuations with respect to the intended paths be negligible after the (ensemble-)average.

We measure $|\Delta y|$ at three phases of the interaction:

- the first appearance of p_1 and p_2 in our observation window ($|\Delta y_i|$ in Fig. 9(i))
- the time instant, in the following referred to as t_s , when the pair is side-by-side ($|\Delta y_s|$ in Fig. 9(ii))
- the last simultaneous appearance of the pair in our observation window ($|\Delta y_e|$ in Fig. 9(iii)).

We report our measurements and simulations results in terms of two scatter plots targeting two halves of the interaction dynamics: S1, the avoidance maneuvers until

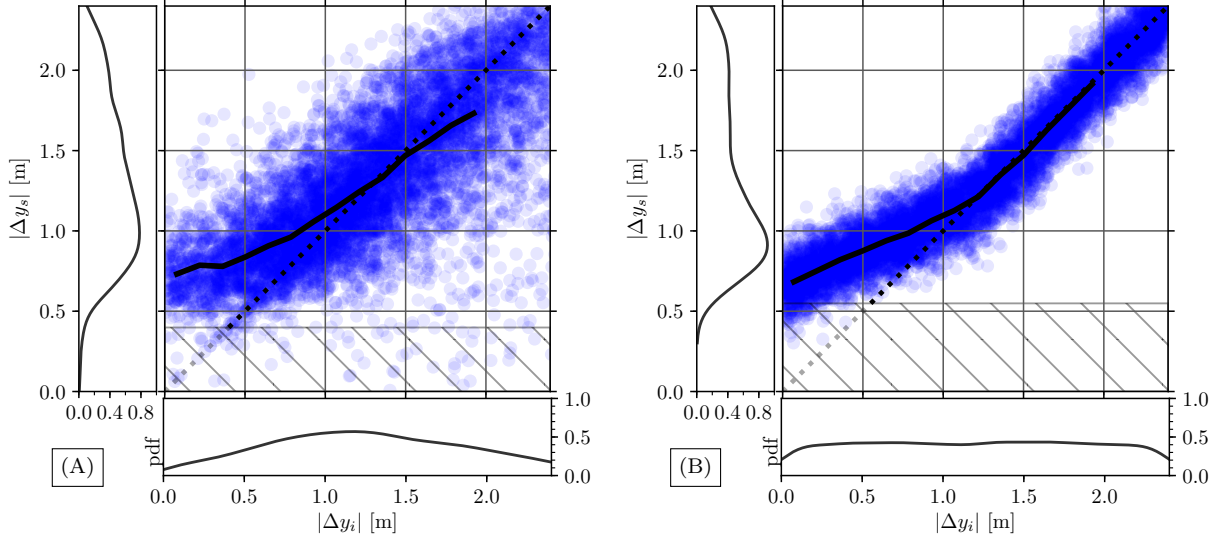


FIG. 10. Absolute lateral distance at entrance ($|\Delta y_i|$, x-axis, cf. Scenario (i) in Fig. 9) vs. absolute lateral distance when side-by-side ($|\Delta y_s|$, y-axis, cf. Scenario (ii) in Fig. 9). Each sample in the scatter plot represents a measured or a simulated pair of pedestrians in counterflow (respectively in panels (A) and (B)). The function $e(|\Delta y_s|)$ (i.e. the ensemble average value of $|\Delta y_s|$ conditioned to $|\Delta y_i|$, cf. Eq. (19)) is reported as a solid line. The diagonal $|\Delta y_s| = |\Delta y_i|$ represents dynamics for which the lateral distance of a pedestrian pair remains unchanged between scenarios (i) and (ii) (in formulas $\frac{d|\Delta y|}{dt} = 0$). In other words, both pedestrians walked straight (modulo a constant lateral offset). $e(|\Delta y_s|)$ departs from the diagonal for low $|\Delta y_i|$ which identifies pedestrians walking towards each other thus avoiding each other. As $|\Delta y_i|$ grows, interactions/collisions vanish, thus the asymptotic tendency toward the diagonal line. A synthetic comparison limited to the average trends (Eq. (18)) is reported in Fig. 12(A). The bottom and left subpanels in (A) and (B) report the (marginal) distributions of $|\Delta y_i|$ and $|\Delta y_s|$.

the side-by-side moment (plane $(|\Delta y_i|, |\Delta y_s|)$, Fig. 10), and S2, the regime following (plane $(|\Delta y_s|, |\Delta y_e|)$, Fig. 11).

For S1 (and analogously for S2), a synthetic view of the data can be obtained by computing the ensemble average of $|\Delta y_s|$ conditioned to $|\Delta y_i|$, namely

$$e(|\Delta y_s|) = \mathbb{E}_{ens} [|\Delta y_s| \mid |\Delta y_i|] \quad (19)$$

Considering the approximation in Eq. (18), we expect this function to represent the deviation of the intended paths. The scatter plots in Fig. 10-12 include data from 9089 avoidance events (i.e. pairs of pedestrians) either experimentally measured (left panels) or simulated (right panels). In Fig. 12(A-B) we compare data and simulations in terms of the average conditioned distances (Eq. (19)), respectively for scenarios S1 and S2.

We observe the following

- S1. We expect avoidance maneuvers, especially when collision is imminent, i.e. for $|\Delta y_i| \lesssim s_b$, s_b being the size scale of the human body. In this condition, we expect a modification of intended paths to yield $\langle |\Delta y_s| \rangle_{ens} > \langle |\Delta y_i| \rangle_{ens}$, which is consistent with our measurements in Fig. 10(A). From the experimental measurements we have

$$\langle |\Delta y_s| \rangle_{ens} \approx 0.75 \text{ m} \quad \text{for } |\Delta y_i| \rightarrow 0 \quad (20)$$

and similarly in the case of simulations (Fig. 10(B)). On the contrary, a decreasing influence of $|\Delta y_i|$ on $|\Delta y_s|$ is expected as the former increases, since no interaction is at play at large transversal distances. As a consequence, we expect the average trend

$$\langle |\Delta y_s| \rangle_{ens} \approx \langle |\Delta y_i| \rangle_{ens} \quad \text{for } |\Delta y_i| \gg s_b, \quad (21)$$

i.e. a relaxation of $\langle |\Delta y_s| \rangle_{ens}$ towards the diagonal of the plane $(|\Delta y_i|, |\Delta y_s|)$. We observe such expected trend (that we obtain in simulations per the scaling and anisotropy in Eq. (16)) only for $|\Delta y_i| < 1.4 \text{ m}$. In case $|\Delta y_i| > 1.4 \text{ m}$, $\langle |\Delta y_s| \rangle_{ens}$ lays slightly below the diagonal line, suggesting an average “end-distance contraction”. As the distance increases, false positive and false negative cases emerge in the selection operated by $\tilde{G}_{2,a}$. In this case, these determine the overweight of the region below the diagonal in Fig. 10(A), thus the inflection of the $\langle |\Delta y_s| \rangle_{ens}$ curve.

- S2. The interaction dynamics in Fig. 1 conjectures that the change in intended path mostly occurs to ensure avoidance, hence before the two pedestrians are closest in space. Afterwards it plays negligible role. In formulas the conjecture reads

$$y_{p,1} - y_{p,2} \approx \text{const} \quad \text{post-interaction.} \quad (22)$$

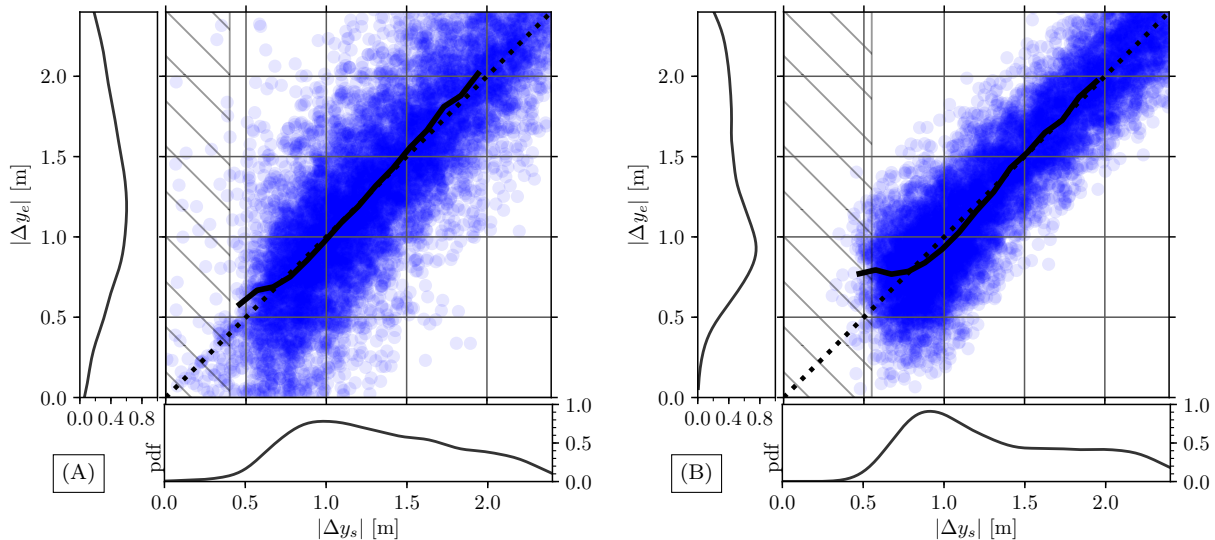


FIG. 11. Absolute lateral distance when side-by-side ($|\Delta y_s|$, x-axis, cf. Scenario (ii) in Fig. 9) vs. absolute lateral distance at the exit ($|\Delta y_e|$, y-axis, cf. Scenario (iii) in Fig. 9). Each sample in the scatter plot represents a measured or a simulated pair of pedestrians in counterflow (respectively in panels (A) and (B)). Once avoidance is ensured the lateral distance is maintained until the exit from our observation window, as the scatter samples concentrates around the diagonal $|\Delta y_s| = |\Delta y_e|$. A synthetic comparison including only the average trends (Eq. (18)) is reported in Fig. 12B.

Considering the approximation in Eq. (18), Eq. (22) is consistent with our measurements and simulations, reported in Fig. 11(A) and in Fig. 11(B), respectively. In these, it holds

$$\langle |\Delta y_e| \rangle_{\text{ens}} \approx \langle |\Delta y_s| \rangle_{\text{ens}} \text{ post-interaction}, \quad (23)$$

for $|\Delta y_s| > 0.8$ m, while at lower $|\Delta y_s|$, i.e. for very close passing distances (observed very rarely), we measure a small tendency to increase the transversal distance in the post-interaction stage. This can be an inertial phenomenon: pedestrians avoiding each other, yet passing by each other at very close distance, keep on increasing their mutual distance. This aspect is modeled via the frontal isotropic short range contact avoidance force in Eq. (17).

Avoidance impacts further on the walking speed $s = \sqrt{u^2 + v^2}$, which we adopt as a second comparison term between model and experimental measurements. Around the time instance t_s of minimum distance (Fig. 9(ii)) speed is temporarily adjusted and reduced from the undisturbed flow regime (Fig. 7). Considering a time window spanning 0.66 s before t_s (i.e. $[t_s - 0.66 s, t_s]$) and a time window spanning 0.66 s after t_s (i.e. $[t_s, t_s + 0.66 s]$), in Fig. 13(A) and Fig. 13(B), respectively, we compare the speed distributions measured and predicted by the model. Also in this case we find excellent agreement.

Pairwise avoidance, finally, is not always a successful operation. As a rare event, two persons can “bump” into each other, having their minimum distance $\min(d)$

becoming comparable to their diameter. It is important that such rare events remain captured – in statistic terms – by the model, e.g. for their implication in safety. In Fig. 13(C) we report the cumulative distribution of “collisions” as a function of $\min(d)$. In the range $[0.3, 0.6]$ m the distribution measured and the distribution predicted by the model present an exponential growth in perfect agreement, with about 40 cases recorded in both cases for $\min(d) \leq 0.5$ m.

VI. DISCUSSION

In this paper we investigated quantitatively the pedestrian-pedestrian avoidance interactions occurring in diluted conditions comparing with measurements obtained in an unprecedented real-life pedestrian tracking campaign. As two individuals walk in opposite directions on a shared space, avoidance maneuvers become necessary should a collision be avoided - these maneuvers affect, at the same time, the path observed and the intended path. We modeled this scenario in terms of a sight-dependent interaction force and a collision-detering force, which we superimposed to a Langevin model for the undisturbed pedestrian motion. Overall the state of each individual was treated as a triple of variables including the components of the position plus a spatial variable representing the intended path.

We performed the experimental campaign employing state-of-the-art pedestrian tracking method, which in a period of over 6 months, enabled us to collect a dataset

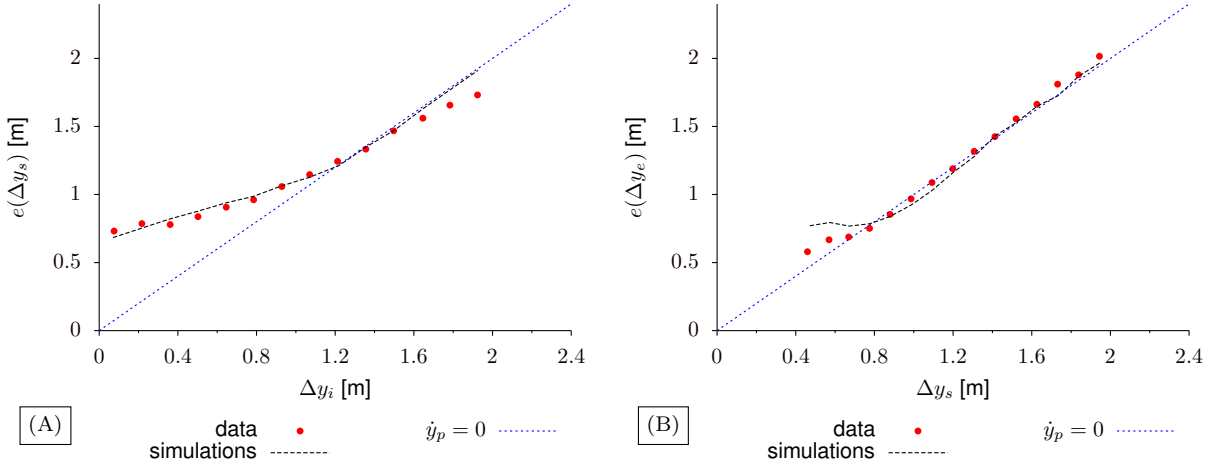


FIG. 12. Average absolute lateral distance: comparison between data and simulations. (A) Absolute lateral distance when at the entrance ($|\Delta y_i|$, x-axis) vs. side-by-side (conditioned average $e(|\Delta y_s|)$, y-axis). (B) Absolute lateral distance when side-by-side ($|\Delta y_s|$, x-axis) vs. at the exit (conditioned average $e(|\Delta y_e|)$, y-axis).

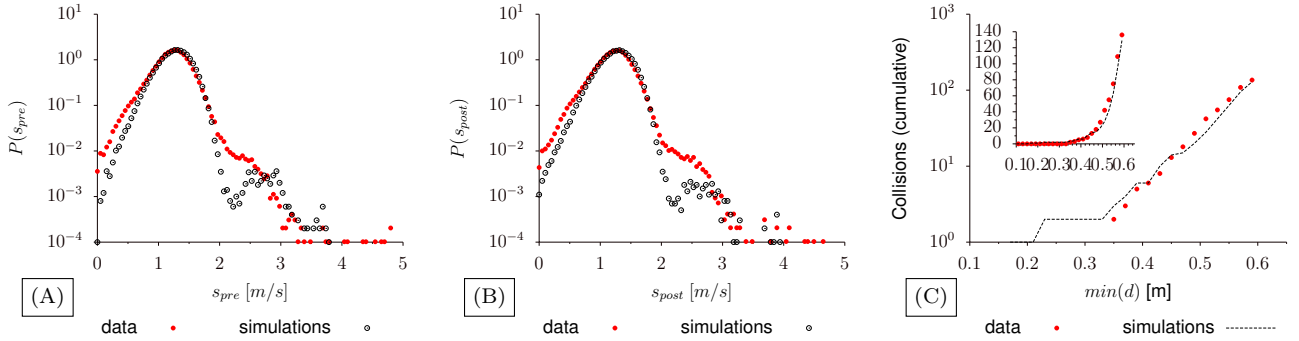


FIG. 13. (A, B) Speed distribution (i.e. distribution of the velocity modulus s) before and after the encounter. Each time frame contributes one measurement per pedestrian. In (A) frames in the time interval $[t_s - 0.66\text{ s}, t_s]$, where t_s is the time instant of the side-by-side encounter, are considered. In (B) the considered time interval is $[t_s, t_s + 0.66\text{ s}]$. Note that for the pedestrians that are interacting, we have a reduced number of runners (0.2%), and this is shown in the smaller percentage of speed values that are larger than 2 m/s. (C) Cumulative distribution of the minimum distance $\min(d)$ between the two pedestrians of the pair. Data and simulation are compared; the inset reports the same distribution in linear scale. This cumulative distribution expresses the number of collisions occurred vs. predicted. Effectively a collision happens for $\min(d)$ smaller or equal than the body diameter (about 0.5 m). Experimental data and simulations agree quantitatively on the exponential decaying trend.

of about five million high-resolution individual trajectories. Using real-life data acquired from 24/7 tracking allows us, at the same time, to accurately quantify characteristic fluctuations and rare events in the dynamics (as events appearing only once in one thousand or once in ten thousand cases can be measured) and avoid potential biases related e.g. to the construction of laboratory/artificial experimental conditions (in which the dynamics to measure has been pre-defined and enforced by the experimenter). Acquiring data in a real-life scenario, however, is somehow similar to acquire data from different laboratory experiments, each having different experimental parameters, that follow one another in random order. Ideally one wants to retain only the measurements pertaining to the occurrences of a single virtual experi-

ment (i.e. a single scenario) of interest, and aggregate them to perform ensemble statistical analyses. As operating a manual selection of measurements (as done in the past) would be impossible at the scale of our dataset, in the first half of the paper we propose a novel method efficiently automatizing the selection. Representing the measurement through a graph we could formally define scenarios of interest as well as efficiently identify them within the dataset. Selecting pairwise avoidance events in diluted conditions implies, in a naive perspective, a non-linear scan of the dataset: we are searching for pairs of trajectories that are mutually close while being far from any other at any time. With the method proposed a single pass of the dataset first, and a linear pass of the graph edges then, are sufficient to identify all the target

events.

We analyzed the dynamics considering probability distribution functions that, thanks to our extensive dataset, result very well resolved even in the tails (rare events). Our models target and reproduce quantitatively the stochastic behavior observed. At the level of the undisturbed motion, considering a mixture of walkers and runners, we could reproduce the non-trivial longitudinal dynamics which shows fluctuations around two average speed values, one for walkers and one for runners, plus rare U-turning events. This was possible via considering a double-well, i.e. bi-stable, velocity potential for each of the two populations. The interplay by the white noise excitations and the gradient-type velocity dynamics captures both small fluctuations around the average velocity, as well as rare velocity inversions, that occur with a transition to the negative velocity stable state.

We addressed pairwise avoidance considering a social force-like interactions between undisturbed pedestrians, which we extended to affect an hidden variable of the system introduced in this work: the individual intended path. Despite hidden for single realizations, we believe that the variations in intended path can be measured on the basis of ensemble averages, that we computed on the transversal distances between the pedestrians. Should pedestrians be in possible collision (initial transversal distance below 1.4 m), their intended paths are deflected, such that when passing by one another the mutual distance is no lower than 0.75 m. After the moment the passing occurs, no further modifications in intended paths were recorded. By including the intended path in the dynamics and subjecting it to the social force, we could reproduce quantitatively the observed dynamics including speed reductions in the proximity of the passing as well as the number of collision events.

We consider this work as a first methodological and modeling step to treat quantitatively, in a statistically accurate sense, interactions in crowd dynamics. We believe that the present approach can be extended to analyze situations characterized by higher complexity and density, increasingly common in civil infrastructures.

ACKNOWLEDGMENTS

We acknowledge the Brilliant Streets research program of the Intelligent Lighting Institute at the Eindhoven University of Technology, Nederlandse Spoorwegen, and the technical support of A. Muntean, T. Kanters, A. Holten, G. Oerlemans and M. Speldenbrink. During the development of the infrastructure, AC has been partly funded by a Lagrange Ph.D. scholarship granted by the CRT Foundation, Turin, Italy and by the Eindhoven University of Technology, the Netherlands. This work is part of the JSTP research programme Vision driven visitor behaviour analysis and crowd management with project number 341-10-001, which is financed by the Netherlands Organisation for Scientific Research (NWO). Sup-

port from COST Action MP1305 “Flowing Matter” is also kindly acknowledged.

Appendix A: Pedestrian tracking at Eindhoven Train Station: technicalities

Our data collection employed an array of four overhead KinectTM sensors in order to obtain our depth-maps streams at VGA resolution (640×480 pixels) and at 15 frames per second (fps). The four views were in partial overlap and were merged into one large canvas as those in Fig. 6. The merging algorithm and registration algorithms, treated in [14], rely on the fact that a depth map is an overhead perspective view containing (by definition) the height of each pixel. Such information is sufficient to obtain an axonometric view (i.e. an aerial view in the limit of a far observer) from each of the four streams. Considering a depth map via the cylindrical coordinates (θ, ρ, h) , where ρ is a radial coordinate (i.e. $\rho = 0$ is the image central axis), θ is an angle spanning the image space around the image axis and h is the altitude from the ground (normalized such that $h = 1$ is the floor and $h = 0$ is the camera plane), we employed the mapping

$$(\theta, \rho, h) \mapsto (\theta, \rho h, h) \quad (\text{A1})$$

that displaces each point to its vertical line. Note that $\rho h \leq \rho$ holds and $\rho h = \rho$ is true only at the ground level (i.e. the ground level is invariant under this transformation). Extracting the lowest depth value (top-most) for each vertical line yields the desired axonometric view. Axonometric views can be merged by simple superposition which requires just the knowledge of the reciprocal positions of the cameras. Such registration and calibration steps have been performed manually after sliding a cart endowed with elements of known size underneath the cameras (cf. [14] and appendix in [32]).

The four KinectTM sensors were connected in pairs to two computers whose system time has been synchronized with $O(1)$ ms precision through *Network Time Protocol* (NTP). To the best of our knowledge the moment at which a depth image is taken by a KinectTM is not controllable or triggerable. Hence, we let the four sensors record (maintaining 15 fps), then we associated simultaneous images *a posteriori*. This yields a maximum error of 33 ms i.e. approximately 3 cm considering an average walking speed of 1 m/s, i.e. less than 7 pixels (where the conversion $230 \text{ px} \approx 1 \text{ m}$ holds).

Merged depth images were processed to detect pedestrian positions via the stochastic clustering algorithm proposed independently in [25] and [26]. We employed the same implementation of our previous works [12, 23, 33], to which we refer for further details.

Differently from [12, 23, 33], we revised the tracking approach for increased robustness. As in [12, 23, 33] pedestrians are tracked employing the classical particle tracking velocimetry (PTV) approach (e.g. [34]) and specifi-

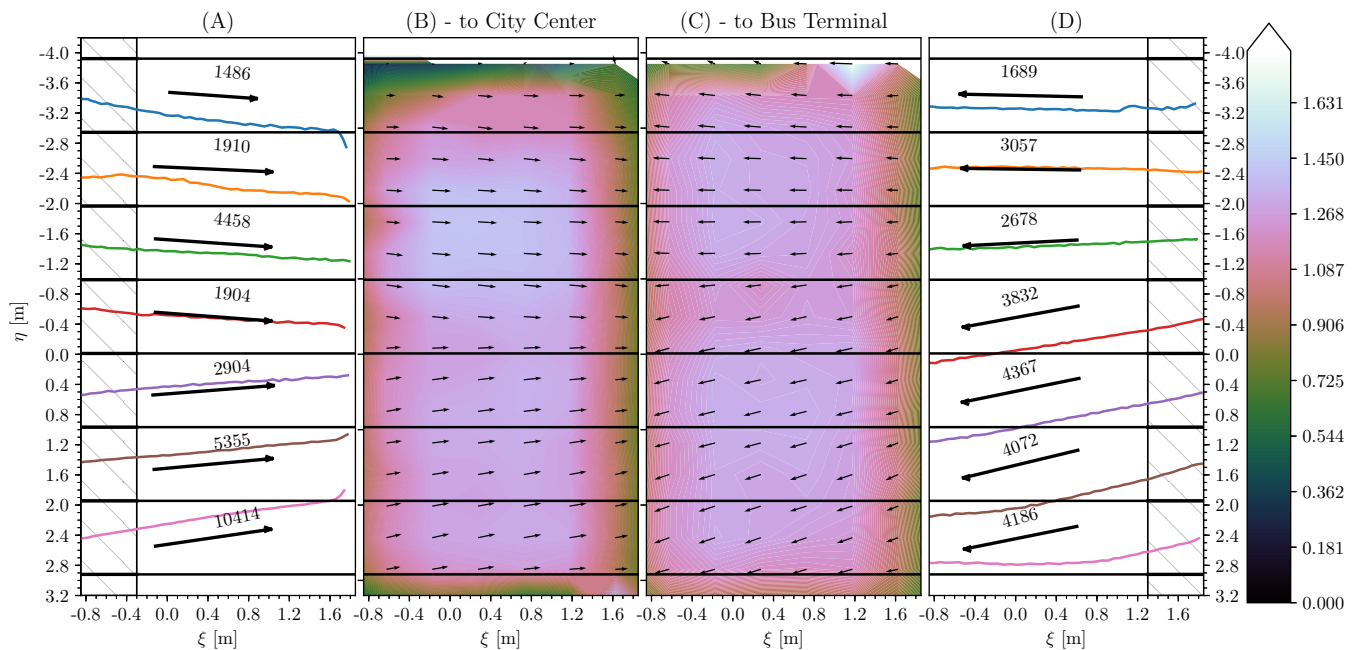


FIG. 14. Average paths (A, D) and velocity (B, C) of undisturbed pedestrians going respectively to the city center (A, B) and to the the bus terminal (C, D) (cf. sketch in Fig. 2(A)). Average paths (A, D) are computed by binning the trajectories by their initial point and then by averaging them in time (the number of trajectories per bin is reported). Average velocities (B, C) are computed employing a grid of 10×5 tiles. The background colormap reports the average speed in m/s, according to the colorbar on the right.

cally through the OpenPTV library [35]. However each detected pedestrian is considered via five different points: 1. the centroid of the body; 2. the estimated head top position (centroid of the points within the 5th depth percentile); 3. the estimated head-neck position (centroid of the points within the 10th depth percentile); 4. the estimated head-neck-torso centroid (centroid of the points within the 20th depth percentile); 5. the upper half of the body (centroid of the points within the 50th depth percentile).

We performed five independent tracking considering only one of these five positions at a time and for all pedestrians. Hence, we compared the five tracking results for consistency considering reliable the tracks for which at least 3 out of 5 tracking results were in agreement.

We smoothed the obtained trajectories for noise reduction with the Savisky-Golay algorithm [36], a common approach in PTV (e.g. [37]), with window size 5 and polynomial degree 2.

Appendix B: Coordinate transformation for undisturbed pedestrian trajectories

In Fig. 14 we include different average measurements of the undisturbed motion. We observe that pedestrian trajectories although generally straight, are not parallel to the axis of the station walkway (i.e. the horizontal direction in Fig. 14). To employ the x, y coordinate system

introduced in Sect. IV, we rotate each trajectory to have the longitudinal direction aligned with the x axis. To this aim, we perform a 2nd order polynomial fitting of the two components of each trajectory (in the horizontal-vertical reference of Fig. 14, say (ξ, η)) as a function of time. In formulas, we fit

$$t \mapsto (\xi, \eta)$$

via

$$t \mapsto (a_\xi t^2 + b_\xi t + c_\xi, a_\eta t^2 + b_\eta t + c_\eta). \quad (\text{B1})$$

Hence, we rotate each trajectory to align the tangent line of the polynomial fit at $t = 0$ to the x axis, i.e.

$$(x, y)^T = \frac{1}{b_\eta^2 + b_\xi^2} \begin{pmatrix} b_\xi & b_\eta \\ -b_\eta & b_\xi \end{pmatrix} (\xi, \eta)^T.$$

Performing such a transformation, trajectories that are straight are simply aligned to the x axis. In turn, U-shaped trajectories, the most common example of inversion dynamics, get just their first (and possibly last) portions aligned with the x axis.

a. Quasi-rectilinear trajectories. We use a similar fitting approach to distinguish trajectories that are quasi-rectilinear (straight but small fluctuations) from trajectories that exhibit large curvature or even turn-backs. We split each trajectory in blocks of 7 frames (i.e. about half a second, starting from the first frame), that we independently fit as in Eq. (B1). See Fig. 15(A). In case the

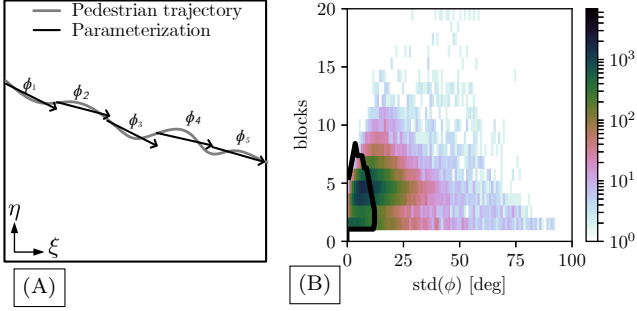


FIG. 15. (A) The analysis of the diluted motion assumes the trajectory to be a fluctuation around a straight intended path, which we call “quasi-rectilinear”. In order to isolate quasi-rectilinear trajectories, each track is divided into sets of 7 contiguous frames (e.g. indexed by i). For each set the angle ϕ_i between the average velocity and the longitudinal direction in the corridor (ξ) is evaluated. Quasi-rectilinear trajectories (as in the panel) feature low variance within the set $\{\phi_i\}$. Trajectories exhibiting instead significant drifts (high curvature, i.e. high $\{\phi_i\}$ variance) are neglected. (B) Joint distribution of $\text{std}(\phi)$ (x -axis, cf. Eq. (B2)) and the number of blocks (y -axis, one block gathers 7 consecutive frames) for undisturbed pedestrians. The number of measurements per bin ($1^\circ \times 1$ block) follows the logarithmic colorbar. The region marked identifies the trajectories employed.

last block of a trajectory contains less than 7 frames we neglect it. We estimate the angular slope of each block with reference to the horizontal direction as

$$\phi = |\arctan(b_\eta/b_\xi)|. \quad (\text{B2})$$

Rectilinear trajectories satisfy $\text{std}(\phi) \approx 0^+$, where we evaluated the standard deviation (std) on a block basis. In Fig. 15(B) we report the joint distribution of $\text{std}(\phi)$ and the number of blocks per trajectory (i.e. a measure of the trajectory length). Neglecting the very short trajectories (1 block case), we notice that most of our measurements lay in the low- $\text{std}(\phi)$ region having between 2 and 6 blocks. These trajectories are mostly straight and encompass normal walking velocities. These feature Gaussian transversal fluctuations as discussed in Fig. 7(B).

Appendix C: Coordinate transformation for pedestrian pairs in avoidance

In the analysis of pairwise avoidance interaction we performed a coordinate transformation, in similar spirit to Appendix B, to bring the pairs of trajectories to a coordinate system convenient for the analysis and removed of average motions. The rationale for the transformation followed (i) the minimum distance between pedestrian cannot be altered; (ii) the intended path of a pedestrian entering in a given position is the same of an undisturbed pedestrian entering in the same position. The deviations

from such intended paths are what determines the Δy variables. In algorithmic terms we proceeded as follows:

1. given a (ξ, η) grid (coarse) as in Fig. 16, we calculated the average motion of undisturbed pedestrians directed both to the city center and to the bus terminal. Let $\theta^{1,C}(\xi, \eta)$ and $\theta^{1,T}(\xi, \eta)$ be the angle of the average velocity with the longitudinal axis of the corridor (ξ direction).
2. trajectories for pairs in interactions are rotated around their entering point (ξ_0, η_0) of an angle $-\theta^{1,C}(\xi_0, \eta_0)$ or $-\theta^{1,T}(\xi_0, \eta_0)$ (in dependence on the direction). This compensates for intended paths that are straight but not parallel to the ξ axis to respect (ii).
3. trajectories are translated apart to respect (i).

The quantities Δy_i , Δy_s , Δy_e are finally calculated after these roto-translations.

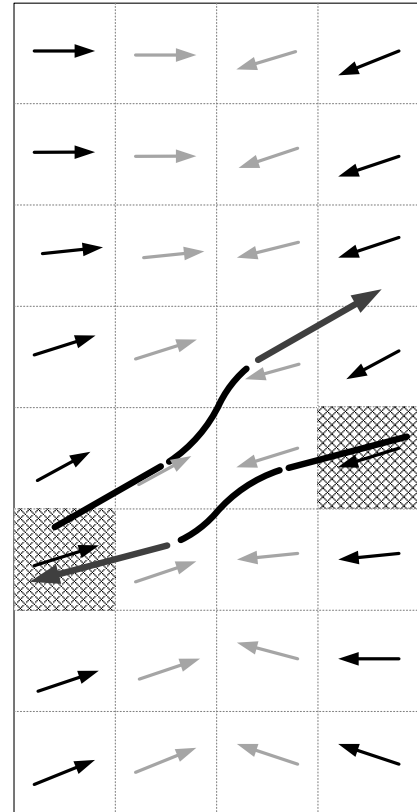


FIG. 16. Coordinate transformation for pedestrian pairs in avoidance for analysis convenience. Trajectories get rotated around the entrance point to compensate for intended paths not parallel to the corridor axis and then individually translated to conserve the minimum pedestrian distance. Cf. the algorithm in Appendix C.

Appendix D: Sensitivity of the graph-based selection

The parameters that we employed to sparsify the graph G , and select pairs of pedestrians avoiding each other, have been chosen considering a typical size scale of the interaction. Yet, it is reasonable to expect a sensitivity of the distributions in Fig. 10(A) and Fig. 11(A) with respect to these parameters. This sensitivity appears minimum, considering, for instance, average trends from Eq. (19). In Fig. 17(A) and 17(B), corresponding respectively to Fig. 10(A) and Fig. 11(A), we plot Eq. (19) in dependence of the parameters d_m and $d_{y,m}$. For computational reasons the data are restricted to only one day of measurements (27th November 2014).

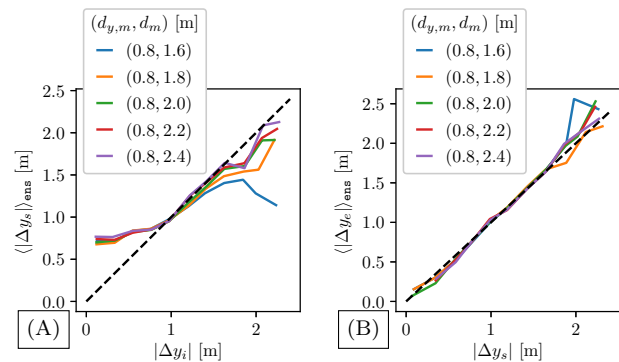


FIG. 17. Average transversal distance for cases S1 (A) and S2 (B) (cf. Sect. V) as a function of the parameter d_m used to sparsify the graph G . In case S1 (A) a dependence on d_m can be observed for $|\Delta y_i| > 1$ m. Notably and consistently with the points (ii)-(iii) in Sect. V, as the region \mathcal{I}_p grows in size, i.e. more and more pairs are included, the asymptotic behavior in Eq. (21) is recovered with increased accuracy. In case S2 (B) no particular dependency on the parameters is observed.

-
- [1] E. Cristiani, B. Piccoli, and A. Tosin, *Multiscale Modeling of Pedestrian Dynamics*, Modeling, Simulation and Applications, Vol. 12 (Springer, 2014).
- [2] M. Moussaïd, D. Helbing, and G. Theraulaz, P. Natl. Acad. Sci. Usa **108**, 6884 (2011).
- [3] M. Moussaïd, S. Garnier, G. Theraulaz, and D. Helbing, Top. Cogn. Sci. **1**, 469 (2009).
- [4] M. Moussaïd, D. Helbing, S. Garnier, A. Johansson, M. Combe, and G. Theraulaz, Proc. R. Soc. Lond., B, Biol. Sci. (2009), 10.1098/rspb.2009.0405.
- [5] P. Romanczuk, M. Bär, W. Ebeling, B. Lindner, and L. Schimansky-Geier, Eur. Phys. J. Special Topics **202**, 1 (2012).
- [6] N. Bellomo, B. Piccoli, and A. Tosin, Mathematical Models and Methods in Applied Sciences **22**, 1230004 (2012).
- [7] A. U. K. Wagoum, A. Seyfried, and S. Holl, Advances in Complex Systems **15**, 1250029 (2012).
- [8] D. C. Duives, W. Daamen, and S. P. Hoogendoorn, Transportation Research Part C: Emerging Technologies **37**, 193 (2013).
- [9] R. L. Hughes, Annual Review of Fluid Mechanics **35**, 169 (2003).
- [10] D. Helbing and P. Molnár, Phys. Rev. E **51**, 4282 (1995).
- [11] M. C. Marchetti, J. F. Joanny, S. Ramaswamy, T. B. Liverpool, J. Prost, M. Rao, and R. A. Simha, Rev. Mod. Phys. **85**, 1143 (2013).
- [12] A. Corbetta, C. Lee, R. Benzi, A. Muntean, and F. Toschi, Phys. Rev. E **95**, 032316 (2017).
- [13] M. Moussaïd, N. Perozo, S. Garnier, D. Helbing, and G. Theraulaz, PLoS ONE **5**, 1 (2010).
- [14] A. Corbetta, J. Meeusen, C. Lee, and F. Toschi, in *Pedestrian and Evacuation Dynamics 2016* (University of Science and Technology of China press, 2016) pp. 18–24.
- [15] T. Kretz, A. Grünebohm, M. Kaufman, F. Mazur, and M. Schreckenberg, J. Stat. Mech.-Theory E. **2006**, P10001 (2006).
- [16] J. Zhang and A. Seyfried, in *17th International IEEE Conference on Intelligent Transportation Systems (ITSC)* (2014) pp. 542–547.
- [17] F. Zanlungo, T. Ikeda, and T. Kanda, Phys. Rev. E **89**, 012811 (2014).
- [18] Y. Tamura, Y. Terada, A. Yamashita, and H. Asama, Int. J. Adv. Robot. Syst. **10** (2013), 10.5772/56668.
- [19] M. Seitz, S. Seer, S. Klettner, O. Handel, and G. Köster, in *Traffic and Granular Flows '15*, edited by W. Daamen and V. Knoop (Springer, 2016).
- [20] S. Kosiantis, I. Zaharakis, and P. Pintelas, in *Emerging artificial intelligence applications in computer engineering*, Vol. 160 (2007) pp. 3–24.
- [21] Microsoft Corp., “Kinect for Xbox 360,” (2012), Redmond, WA, USA.
- [22] W. T. Coffey, Y. P. Kalmykov, and J. T. Waldron, *The Langevin Equation: with Applications to Stochastic Problems in Physics, Chemistry and Electrical Engineering* (World Scientific, 2004).
- [23] A. Corbetta, L. Bruno, A. Muntean, and F. Toschi, Transportation Research Procedia **2**, 96 (2014).
- [24] A. Corbetta, C. Lee, A. Muntean, and F. Toschi, in *Traffic and Granular Flows '15*, edited by W. Daamen and V. Knoop (Springer, 2016) Chap. 7.
- [25] S. Seer, N. Brändle, and C. Ratti, Transport. Res. C-Emer. **48**, 212 (2014).
- [26] D. Bršćić, T. Kanda, T. Ikeda, and T. Miyashita, IEEE Trans. Human-Mach. Syst. **43**, 522 (2013).
- [27] A. Corbetta, C. min Lee, A. Muntean, and F. Toschi, Collective Dynamics **1**, 1 (2017).
- [28] D. Helbing and A. Johansson, in *Encyclopedia of Complexity and Systems Science*, Vol. 16, edited by R. A.

- Meyers (Springer New York, 2009) pp. 6476–6495.
- [29] M. Ballerini, N. Cabibbo, R. Candelier, A. Cavagna, E. Cisbani, I. Giardina, V. Lecomte, A. Orlandi, G. Parisi, A. Procaccini, M. Viale, and V. Zdravkovic, *Proc. Natl. Acad. Sci.* **105**, 1232 (2008).
- [30] G. Arechavaleta, J. Laumond, H. Hicheur, and A. Berthoz, *IEEE Trans. Robot* **24**, 5 (2008).
- [31] D. R. Parisi, M. Gilman, and H. Moldovan, *Phys. A* **388**, 3600 (2009).
- [32] A. Corbetta, *Multiscale crowd dynamics: physical analysis, modeling and applications*, Ph.D. thesis, Technische Universiteit Eindhoven (2016).
- [33] A. Corbetta, A. Muntean, and K. Vafayi, *Math. Biosci. Eng.* **12**, 337 (2015).
- [34] J. Willneff, *A Spatio-Temporal Matching Algorithm for 3D Particle Tracking Velocimetry*, Ph.D. thesis, Institut für Geodäsie und Photogrammetrie an der Eidgenössischen Technischen Hochschule (2003).
- [35] The OpenPTV Consortium, “OpenPTV: Open source particle tracking velocimetry,” (2012–).
- [36] A. Savitzky and M. J. Golay, *Analytical chemistry* **36**, 1627 (1964).
- [37] U. Glan, B. Lüthi, M. Holzner, A. Liberzon, A. Tsinober, and W. Kinzelbach, *Experiments in Fluids* **53**, 1469 (2012).