

Mechanism and structure of turbulence predicted by statistical state dynamics is verified in Couette flow by DNS

Brian F. Farrell

School of Engineering and Applied Science, Harvard University

Petros J. Ioannou* and Marios-Andreas Nikolaidis

Department of Physics, National and Kapodistrian University of Athens

(Dated: April 27, 2022)

The no-slip boundary condition results in a velocity shear forming in fluid flow near a solid surface. This shear flow supports the turbulence characteristic of fluid flow near boundaries at Reynolds numbers above ≈ 1000 by making available to perturbations the kinetic energy of the externally forced flow. Understanding the physical mechanism underlying transfer of energy from the forced mean flow to the turbulent perturbation field that is required to maintain turbulence poses a fundamental question. Although qualitative understanding that this transfer involves nonlinear destabilization of the roll-streak coherent structure has been established, identification of this instability has resisted analysis. The reason this instability has resisted comprehensive analysis is that its analytic expression lies in the Navier–Stokes equations (NS) expressed using statistical rather than state variables. Expressing NS as a statistical state dynamics (SSD) at second order in a cumulant expansion suffices to allow analytical identification of the nonlinear instability underlying turbulence in wall-bounded shear flow. In this nonlinear instability the turbulent perturbation field is identified by the SSD with the Lyapunov vectors of the linear operator governing perturbation evolution about the time dependent streamwise mean flow. In this work predictions of SSD analysis that this parametric instability underlies the dynamics of turbulence in Couette flow and that the perturbation structures are the associated Lyapunov vectors and that suppressing only the top few of these vectors results in laminarization are verified using DNS.

Analogy with the conventional interpretation of the dynamics of isotropic homogeneous turbulence forced stochastically at large scale suggests that in the turbulence of wall bounded shear flows nonlinear interactions lead to a cascade of energy from the large scales, where energy is input by pressure gradients or boundary motions, to small scales, where it is dissipated, and that the turbulence field should be incoherent and essentially structureless. However, experimental studies over the last half century [1–6] and analysis of flow fields from direct numerical simulations (DNS) [7], especially in the maximally restricted domains that sustain turbulence [8], have revealed distinct coherent structures in wall-bounded shear flow turbulence which are believed to be essential to the process maintaining the turbulence by some form of nonlinear regeneration cycle [3, 9, 10]. This cycle involves a specific coherent structure rather than unstructured fluctuations and is referred to as the self-sustaining process (SSP) [10–12]. These coherent structures are streaks, that is localized regions of increased or decreased velocity in the streamwise direction, and quasi-cylindrical vortices with axis oriented in the streamwise direction, called rolls, which are collocated with the low and high speed streaks. The SSP is associated with the low-speed streak which is produced by lift-up of low speed fluid by the roll resulting in streaks which vacillate in space and time [13]. Mechanistic explanations for this process posit either that a component of the perturbations from the streamwise mean flow directly comprise the roll that forces the streak [6, 12, 14, 15] or alternatively the roll is forced by

perturbation Reynold’s stresses that induce torques collocated correctly to maintain the rolls that in turn force the streaks through the lift-up process [10]. A number of physical mechanisms have been invoked to address the origin of the perturbations and their mechanism of action in producing this cycle. In one view the perturbations arise due to hydrodynamic instability of the streak [11] in another they are ascribed to growth of highly amplifying transient perturbations in the flow [15]. However, simply invoking such mechanisms by itself only allows qualitative descriptions to be made for hypothesized processes rather than constituting an analytical formulation that would provide a theory based directly on the equations of motion with the property of making specific testable predictions for observational correlates.

Another approach invokes exact static and periodic solutions of the Navier–Stokes equations [16–18]. These solutions have been found at low Reynolds numbers and shown to be at times approached by turbulent state trajectories (cf. [19]). They provide heuristic examples of the SSP process but these solutions are not themselves fully turbulent states and they are not physically realizable as they are unstable and their physical significance to fully developed turbulence has not been established.

The SSP was isolated recently directly from the equations of motion by showing it to be inherent to and contained in a highly simplified second order closure of the Navier–Stokes equations for wall-bounded shear turbulence [20, 21]. This SSD isolates the nonlinear instability that underlies the SSP and the turbulence that develops

under this second order closure has been demonstrated to be realistic and to capture the large scale dynamics of Navier–Stokes turbulence [21–26]. This closure constitutes a quasi-linear dynamics that greatly simplifies analysis while having the attribute of not only allowing identification of the dynamics supporting the large scale roll-streak coherent structures but also analytically characterizing the perturbation structures responsible for maintaining the cycle. This closure constitutes a theory for wall-bounded shear turbulence in the sense that it is derived from the NS, allows identification of an analytical solution for the dynamical mechanism underlying the turbulence as well as making verifiable predictions for the structure of both the mean flow and perturbations as well as their specific roles in the turbulence dynamics.

In this Letter we demonstrate that the perturbation structure predictions of this second order closure are verified by DNS of Navier–Stokes turbulence, that these analytically characterized perturbations are responsible for maintaining the turbulent state and that their removal leads to laminarization. One remarkable aspect of this identification of the perturbation structure in NS turbulence is that it is contrary to the common assumption that the bulk of the perturbation variance arises in association with an energy cascade to small scale. The present work identifies the perturbation structures with the analytically fully characterized Lyapunov vectors sustained by the parametric growth process associated with the fluctuating mean flow. We will demonstrate these results using DNS for the case of Couette flow turbulence at Reynolds number $R = 600$ ($R = U_w h / \nu$ where $\pm U_w$ is the velocity at the channel walls at $y = \pm h$, and ν is the coefficient of kinematic viscosity). The laminar Couette flow is in the x -direction (the streamwise direction) and is given by $\mathbf{u} = (U_w y / h, 0, 0)$, y , the second component, is the cross-stream direction, and z , the third component, is the spanwise direction. The details of the direct numerical simulation are given in Table I.

TABLE I: $[L_x, L_z]/h$ is the domain size in the streamwise, spanwise direction. N_x, N_z are the number of Fourier components after dealiasing with the 1/3 rule and N_y is the number of equally spaced points in the wall-normal direction. $Re_\tau = u_\tau h / \nu$ is the Reynolds number based on the friction velocity $u_\tau = \nu du/dy|_{y=h}$, and $[L_x^+, L_z^+]$ is the channel size in wall units ν/u_τ .

abbreviation	$[L_x, L_z]/h$	$N_x \times N_z \times N_y$	Re_τ	$[L_x^+, L_z^+]$
NL50	$[1.75\pi, 1.2\pi]$	$33 \times 33 \times 35$	48.8	$[268, 184]$

We first formulate the second order SSD equations by decomposing the flow field into its streamwise mean

component, denoted by $\langle \cdot \rangle_x$ or alternatively by capital letters, and the deviations from the streamwise mean, referred to as perturbation components and denoted with a dash, or equivalently into the $k_x = 0$ and the $k_x \neq 0$ components of the Fourier decomposition of the flow field, where k_x is the streamwise wavenumber:

$$\mathbf{u} = \mathbf{U}(y, z, t) + \mathbf{u}'(x, y, z, t), \quad \mathbf{U}(y, z, t) \stackrel{\text{def}}{=} \langle \mathbf{u} \rangle_x. \quad (1)$$

The Navier–Stokes equations for incompressible flow expressed using this mean and perturbation partition are:

$$\partial_t \mathbf{U} + \mathbf{U} \cdot \nabla \mathbf{U} + \nabla P / \rho - \nu \Delta \mathbf{U} = -\langle \mathbf{u}' \cdot \nabla \mathbf{u}' \rangle_x, \quad (2a)$$

$$\begin{aligned} \partial_t \mathbf{u}' + \mathbf{U} \cdot \nabla \mathbf{u}' + \mathbf{u}' \cdot \nabla \mathbf{U} + \nabla p' / \rho - \nu \Delta \mathbf{u}' \\ = -\underbrace{(\mathbf{u}' \cdot \nabla \mathbf{u}' - \langle \mathbf{u}' \cdot \nabla \mathbf{u}' \rangle_x)}_N, \end{aligned} \quad (2b)$$

$$\nabla \cdot \mathbf{U} = 0, \quad \nabla \cdot \mathbf{u}' = 0, \quad (2c)$$

where P is the pressure and ρ the constant density. We study a turbulent Couette flow confined in a doubly periodic channel in x and z satisfying no-slip boundary conditions in the cross-stream direction: $\mathbf{U}(\pm h, z, t) = (\pm U_w, 0, 0)$, $\mathbf{u}'(x, \pm h, z, t) = (0, 0, 0)$. The mean velocity has three components $\mathbf{U}(y, z, t) = (U, V, W)$, with the cross-stream velocity V and spanwise velocity W expressible by a streamfunction as $V = -\partial_z \Psi$, $W = \partial_y \Psi$.

The SSD we use is closed at second order by simply setting the third cumulant to zero which is equivalent to ignoring the perturbation-perturbation nonlinearity, N , in (2b) when formulating the SSD [27, 28]. If the same term is ignored in the partition of the NS into mean and perturbations this produces what is referred to as the restricted nonlinear (RNL) system [21, 22]:

$$\partial_t \mathbf{U} + \mathbf{U} \cdot \nabla \mathbf{U} + \nabla P / \rho - \nu \Delta \mathbf{U} = -\langle \mathbf{u}' \cdot \nabla \mathbf{u}' \rangle_x, \quad (3a)$$

$$\partial_t \mathbf{u}' + \mathbf{U} \cdot \nabla \mathbf{u}' + \mathbf{u}' \cdot \nabla \mathbf{U} + \nabla p' / \rho - \nu \Delta \mathbf{u}' = 0 \quad (3b)$$

$$\nabla \cdot \mathbf{U} = 0, \quad \nabla \cdot \mathbf{u}' = 0. \quad (3c)$$

This RNL system has the same quasi-linear structure as the second order SSD and can be regarded as an approximation to the second-order SSD in which one ensemble member is used to obtain the second cumulant and it has a number of interesting properties [29]. One of these is that this system supports realistic turbulence despite the absence of nonlinearity N , which provides a constructive proof that this explicit perturbation nonlinearity is not responsible for maintaining turbulence. A second remarkable implication is that analytical identification of the perturbation structure and dynamics follows directly from analysis of (3b). Consider a self-sustaining turbulent solution of (3) with mean flow $\mathbf{U}(y, z, t)$. The associated perturbation field consistently satisfies (3b) with this $\mathbf{U}(y, z, t)$, which means that the perturbations evolve according to the time-dependent linear operator

(3b), or symbolically: $\partial_t \mathbf{u}' = \mathbf{A}(\mathbf{U})\mathbf{u}'$, with \mathbf{A} this time dependent linear operator. This allows complete identification of the perturbation field with the Lyapunov vectors of $\mathbf{A}(\mathbf{U})$. Moreover, because the turbulence supported by (3b) is bounded and nonzero it follows that \mathbf{u}' must lie in the restricted subspace spanned by the Lyapunov vectors of $\mathbf{A}(\mathbf{U})$ with zero Lyapunov exponent because if the Lyapunov exponent is positive the associated vector would become unbounded and if negative it would vanish. Integration of the RNL system (3) reveals that even at moderately high Reynolds numbers this subspace is supported by a small set of streamwise harmonics [30], and consequently RNL turbulence is supported solely by these few harmonics, which provides a constructive identification of the active subspace underlying this turbulence. For example, the RNL turbulence of Couette flow at $R = 600$ in the present channel is supported by a single Lyapunov vector with the gravest non-zero streamwise wavenumber $k_x = 2\pi/L_x$ [29]. Consistently, in a realization of RNL turbulence only this perturbation component survives. In summary, we have obtained a full analytic characterization of the perturbation field that sustains RNL turbulence: it is the subspace of the Lyapunov vectors of $\mathbf{A}(\mathbf{U})$ with zero Lyapunov exponent. It is important to note that each of the ingredients of this turbulence are characterized: the coherent structures are the streamwise mean streaks, defined as the streamwise mean velocity that obtains after removal of its spanwise average: $U_s \stackrel{\text{def}}{=} U(y, z, t) - \langle U(y, z, t) \rangle_z$, the rolls with streamfunction Ψ collocated with the streaks and finally the Lyapunov vectors of operator $\mathbf{A}(\mathbf{U})$ with zero exponent, which are analogous to neutral modes of a time independent linear operator. In RNL removal of the subspace of the Lyapunov vectors of $\mathbf{A}(\mathbf{U})$ with zero Lyapunov exponent leads immediately to laminarization [31]. We now show that removing only a few of the least stable LVs of the streamwise mean flow in a DNS suffice to laminarize the turbulence in our channel at $R = 600$.

The six least stable LVs of the linear operator \mathbf{A} about of the mean flow $\mathbf{U}(y, z, t)$ of the turbulent state at $R = 600$ have Lyapunov exponents: $(0.02, 0.007, -0.0002, -0.0056, -0.013, -0.017) U_w/h$. The Lyapunov vectors and exponents are calculated by evolving in parallel with the DNS simulation Eq. (3b) with the $\mathbf{U}(y, z, t)$ obtained from the DNS. Using the standard power method and successive orthogonalizations using the energy inner-product we obtain the Lyapunov vectors of the $\mathbf{U}(y, z, t)$ and their characteristic exponents.

As in the RNL turbulence all of these least stable LVs are found to be supported by the gravest streamwise wavenumber permitted in the channel $k_x = 2\pi/L_x$ [32]. The perturbation structure in a DNS can be projected on the basis of the orthogonalized LVs. Doing so we find that the perturbations in the DNS have significant

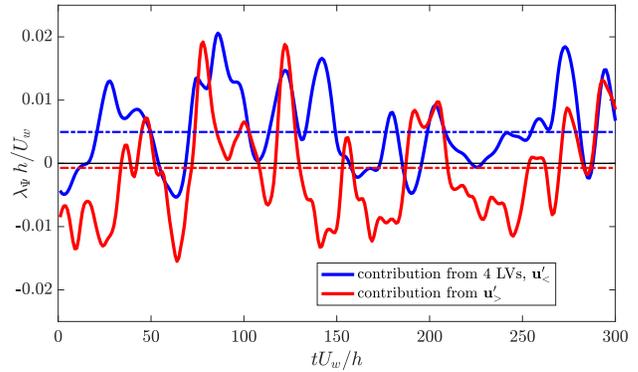


FIG. 1: Time evolution of the contribution of the torques arising from the Reynolds stresses produced by $\mathbf{u}'_{<}$ to maintenance of Ψ^2 , which largely consists of the rolls (blue). The torques from $\mathbf{u}'_{>}$ (red) make no net contribution to the rolls in this measure. Their time mean is indicated with dashed lines. This figure identifies the perturbation subspace responsible for maintaining the roll against dissipation to be the subspace spanned by the four least stable LVs.

projection on the first LV (11% on average) and about 20% on average on the subspace spanned by the four least stable LVs. These least stable Lyapunov vectors also dominate the others in the rate of energy extraction from the streamwise flow $U(y, z, t)$, so we anticipate that removal of these vectors should produce a severe restriction of the flow of energy from the mean flow to the perturbations. More remarkable for our study than dominance of the energetics of the perturbations by these four least stable LVs is that they account fully for the forcing of the roll and therefore the SSP cycle. In order to assess the contribution of the Lyapunov vectors to the roll forcing consider the equation for the streamwise component $\Omega_x = \Delta_h \Psi$ with $\Delta_h \stackrel{\text{def}}{=} \partial_y^2 + \partial_z^2$, of the mean vorticity equation:

$$\partial_t \Omega_x = - \underbrace{(V \partial_y + W \partial_z) \Omega_x}_A + \underbrace{\nu \Delta_h \Omega_x}_D - \underbrace{[(\partial_y^2 - \partial_z^2) \langle vw \rangle_x + \partial_{yz} (\langle w^2 \rangle_x - \langle v^2 \rangle_x)]}_{G_{\Omega_x}}, \quad (4)$$

Terms A and D represent advection and dissipation of Ω_x in the $(y - z)$ plane and if it were not acted upon by the streamwise mean torque from the perturbation Reynolds stresses, G_{Ω_x} , the roll would decay. The contribution of perturbation Reynolds stresses to the rate of change of the normalized streamwise square vorticity can be measured by $\lambda_{\Omega_x} = \int_V \Omega_x G_{\Omega_x} dV / (2 \int_V \Omega_x^2 dV)$, and similarly, if more emphasis is to be given to the large scales, we could use as a measure the contribution of the perturbation Reynolds stresses to the maintenance of the square of the streamfunction. This normalized measure

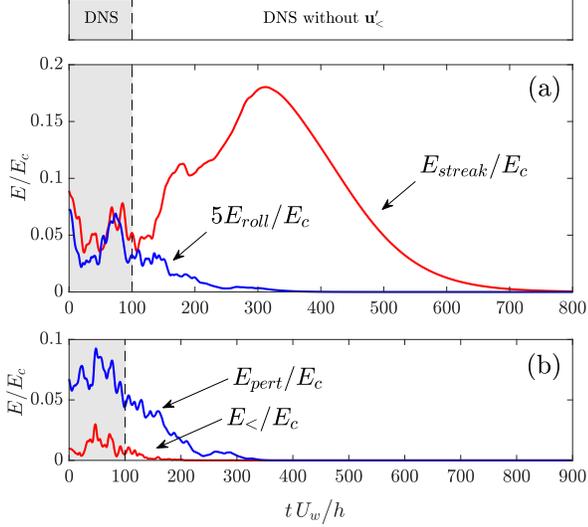


FIG. 2: (a): Evolution of the streak energy $E_{streak} = \int_V U_s^2 dV/2$, of the roll energy $E_{roll} = \int_V (V^2 + W^2) dV/2$ (multiplied by 5). At $t = 100h/U_w$ the component, $\mathbf{u}'_{<}$, that projects on the subspace spanned by the four least stable LVs is gradually removed. (b): Evolution of the perturbation energy $E_{pert} = \int_V |\mathbf{u}'|^2 dV/2$ and the energy of the component that lies in the subspace of the four least stable LVs $E_{<} = \int_V |\mathbf{u}'_{<}|^2 dV/2$. All energies are normalized by the energy of the laminar Couette flow, E_c .

of contribution to Ψ^2 is $\lambda_\Psi = \int_V \Psi G_\Psi dV / (2 \int_V \Psi^2 dV)$, where $G_\Psi \stackrel{\text{def}}{=} \Delta_h^{-1} G_{\Omega_x}$ and Δ_h^{-1} is the inverse cross-stream/spanwise Laplacian. In this work we decompose the perturbation field \mathbf{u}' into its component, $\mathbf{u}'_{<}$, projected on the subspace spanned by the 4 least damped energy orthonormal LVs, denoted \mathbf{u}'_i , $i = 1, 2, 3, 4$ and the projection on the complement $\mathbf{u}'_{>}$:

$$\mathbf{u}'_{<} \stackrel{\text{def}}{=} \sum_{i=1}^4 (\mathbf{u}' \cdot \mathbf{u}'_i) \mathbf{u}'_i, \quad \mathbf{u}'_{>} \stackrel{\text{def}}{=} \mathbf{u}' - \mathbf{u}'_{<}, \quad (5)$$

and estimate G_Ψ produced by $\mathbf{u}'_{<}$ and $\mathbf{u}'_{>}$. The contribution of these subspaces to λ_Ψ is shown in Fig. 1. It can be seen that the first four least stable LVs contribute 100% on average to the roll maintenance [33].

This identification of a small subset of the least stable LVs as the perturbation structures that support the SSP anticipates laminarization of the turbulence in the DNS upon removal of this subspace. A long integration of the DNS of Couette turbulence at $R = 600$ has been used to obtain the converged structures of the four least stable LVs. At a specified time the perturbation field, \mathbf{u}' , of the DNS is projected on the $\mathbf{u}'_{<}$. We remove this component of the perturbation field at an increasing rate $f(t)$ so that the perturbation field at each time step be-

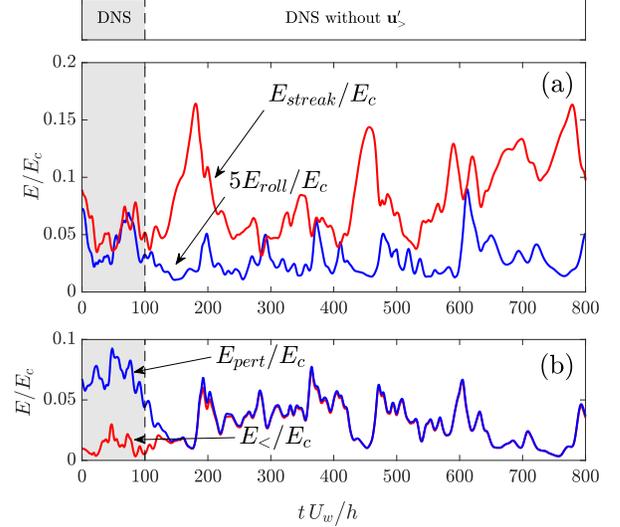


FIG. 3: (a): Same as Fig. 2 but now the complement $\mathbf{u}'_{>}$ is removed with the same protocol. The turbulence sustains in DNS with the full perturbation field converging to a single Lyapunov vector of the fluctuating mean flow.

comes $\mathbf{u}' - f(t)\delta t \mathbf{u}'_{<}$, where δt is the integration time step. In the example shown in Fig. 2 this process of gradual removal of the first four Lyapunov vectors starts at $t = 100h/U_w$, so that $f(t) = 0$ for $t < 100h/U_w$ and the rate $f(t)$ increases linearly from 0 to 1 at $t = 300h/U_w$, with $f = 1$ after this time. With the gradual removal of this subspace the entire perturbation field as well as the rolls decay leading to laminarization. The streak is seen to increase in magnitude before eventually decaying, as is typical of laminarization events due to the energy extraction from the streak having been suppressed by the loss of the perturbations while the roll remains relatively more effective at continuing the lift-up process forcing the streak. An alternative experiment was performed in which the complement $\mathbf{u}'_{>}$ of the four least damped Lyapunov vectors was removed with the same protocol and the turbulence was shown to sustain in DNS with the perturbation structure thus constrained to lie in the subspace of the four least damped LVs. The corresponding evolution of the energies of this experiment are shown in Fig. 3. The turbulence that results approaches the corresponding RNL turbulence, differing only in that the perturbation-perturbation nonlinearity introduces an additional sink for the perturbation energy. The perturbation field collapses to the single top LV of the fluctuating mean flow, as is the case for RNL turbulence in the same channel and Reynolds number [29]. The turbulence that results supports rolls of approximately the same magnitude while the streaks become stronger as the streak is embedded in an environment of reduced eddy viscosity with the removal of the higher LVs. In the supplemental material we have included video showing the turbulence of Fig. 3

and the laminarization of Fig. 2.

Conclusions. In this work we have verified in a DNS of turbulent Couette flow a number of the predictions of a second order SSD comprising the streamwise mean flow and the second cumulant of the perturbation field closed by neglecting the third cumulant. These predictions include identification of the mean and perturbation structures as well as of the physical mechanism supporting the mean flow and the perturbations. The mechanistic component of the SSP that is responsible for supporting the perturbation field and collocating it with the streak so as to maintain the fluctuating streak SSP is identified with the parametric instability of the fluctuating streak and while the first four Lyapunov vectors of this instability have been verified to account for 20 % of the energy of the perturbation field it is more significant for our purposes that they account for all of the torque supporting the roll component of the roll-streak structure underlying the SSP maintaining the turbulence. Consistently, removal of this small subset of structures is verified to laminarize the turbulence in the DNS.

It is a common assumption that the structure and maintenance of the perturbation field at scales smaller than the integral can be ascribed to a nonlinear cascade and therefore that these scales can be characterized solely by their spectrum. In this work we have shown that in Couette flow turbulence this is not the case and that these perturbations are primarily maintained by parametric interaction with the mean flow and that their structure rather than being random can be identified with the Lyapunov vectors associated with this parametric growth process.

This work was done during the 2018 Center for Turbulence Research Summer Program with financial support from Stanford University and NASA Ames Research Center. We would like to thank Professor Parviz Moin, Professor Javier Jiménez, Dr. Adrián Lozano-Durán, Dr. Michael Karp and Dr. Navid Constantinou for their useful comments and discussions. Marios-Andreas Nikolaidis gratefully acknowledges the support of the Hellenic Foundation for Research and Innovation (HFRI) and the General Secretariat for Research and Technology (GSRT). Brian F. Farrell was partially supported by NSF AGS-1246929.

* pjioannou@phys.uoa.gr

- [1] S. J. Kline, W. C. Reynolds, F. A. Schraub, and P. W. Runstadler, *J. Fluid Mech.* **30**, 741 (1967).
- [2] H. P. Bakewell Jr. and L. Lumley, *Phys. Fluids* **10**, 1880 (1967).
- [3] J. Kim, S. J. Kline, and W. C. Reynolds, *J. Fluid Mech.* **50**, 133 (1971).
- [4] R. F. Blackwelder and H. Eckelmann, *J. Fluid Mech.* **94**, 577 (1979).
- [5] S. K. Robinson, *Anu. Rev. Fluid Mech.* **23**, 601 (1991).
- [6] R. J. Adrian, *Phys. Fluids* **19**, 041301 (2007).
- [7] J. Kim, P. Moin, and R. Moser, *J. Fluid Mech.* **177**, 133 (1987).
- [8] J. Jiménez and P. Moin, *J. Fluid Mech.* **225**, 213 (1991).
- [9] J. Jiménez, *Phys. Fluids* **6**, 944 (1991).
- [10] K. Hamilton, J. Kim, and F. Waleffe, *J. Fluid Mech.* **287**, 317 (1995).
- [11] F. Waleffe, *Phys. Fluids* **9**, 883 (1997).
- [12] J. Jiménez and A. Pinelli, *J. Fluid Mech.* **389**, 335 (1999).
- [13] For the purpose of formulating the SSD used in this work we partition the flow into its streamwise mean component and perturbations. In this streamwise mean partition the roll-streak structure is included in the mean flow. From the point of view of a partition into time or ensemble means the roll-streak would be included with the perturbation field. However, the latter partitions do not result in expression in their associated SSD of the fundamental dynamics of turbulence in wall-bounded shear flow.
- [14] W. Schoppa and F. Hussain, *Fluid Dyn. Res.* **26**, 119 (2000).
- [15] W. Schoppa and F. Hussain, *J. Fluid Mech.* **453**, 57 (2002).
- [16] F. Waleffe, *Phys. Rev. Lett.* **81**, 4140 (1998).
- [17] F. Waleffe, *J. Fluid Mech.* **435**, 93 (2001).
- [18] G. Kawahara and S. Kida, *J. Fluid Mech.* **449**, 291 (2001).
- [19] N. B. Budanur, K. Y. Short, M. Farazmand, A. Willis, and P. Cvitanović, *J. Fluid Mech.* **883**, 274 (2017).
- [20] B. F. Farrell and P. J. Ioannou, *J. Fluid Mech.* **708**, 149 (2012).
- [21] B. F. Farrell, D. F. Gayme, and P. J. Ioannou, *Phil. Trans. R. Soc. A* **375**, 20160081 (2017).
- [22] V. Thomas, B. K. Lieu, M. R. Jovanović, B. F. Farrell, P. J. Ioannou, and D. F. Gayme, *Phys. Fluids* **26**, 105112 (2014).
- [23] V. Thomas, B. F. Farrell, P. J. Ioannou, and D. F. Gayme, *Phys. Fluids* **27**, 105104 (2015).
- [24] J. U. Bretheim, C. Meneveau, and D. F. Gayme, *Phys. Fluids* **27**, 011702 (2015).
- [25] B. F. Farrell, P. J. Ioannou, J. Jiménez, N. C. Constantinou, A. Lozano-Durán, and M.-A. Nikolaidis, *J. Fluid Mech.* **809**, 290 (2016).
- [26] M. Pausch, Q. Yang, Y. Hwang, and B. Eckhardt, *Fluid Dyn. Res.* (2018), 10.1088/1873-7005/aaadcc, (In press).
- [27] J. R. Herring, *J. Atmos. Sci.* **20**, 325 (1963).
- [28] B. F. Farrell and P. J. Ioannou, *J. Atmos. Sci.* **60**, 2101 (2003).
- [29] B. F. Farrell and P. J. Ioannou, *Phys. Rev. Fluids* **2**, 084608 (2017).
- [30] Because \mathbf{U} is independent of x each Lyapunov vector is supported by a single streamwise wavenumber. For a discussion of the streamwise harmonic support of the Lyapunov vectors cf. [23, 25].
- [31] Note that these are not the Lyapunov vectors of the trajectory of the full non-linear system governing the mean and the perturbations.
- [32] Although in RNL the Lyapunov exponents are necessarily ≤ 0 when (3b) is used with the \mathbf{U} of the RNL, inclusion of the N term in (3b) produces a small component of energy loss by these vectors so that consistently the top Lyapunov exponent exceeds zero by this amount [34].
- [33] The first LV contributes to λ_Ψ on average 60%, while inclusion of the second LV adds another 26%. The corresponding contribution to λ_{Ω_x} by \mathbf{u}_ζ is 20% consistent

with more emphasis being placed on small scale vorticity by the square vorticity measure.

[34] M.-A. Nikolaidis, B. F. Farrell, and P. J. Ioannou, *J. Phys.: Conf. Ser.* **1001**, 012014 (2018).