Advanced Simulation of Droplet Microfluidics

ANDREAS GRIMMER, Johannes Kepler University Linz, Austria MEDINA HAMIDOVIĆ, Johannes Kepler University Linz, Austria WERNER HASELMAYR, Johannes Kepler University Linz, Austria ROBERT WILLE, Johannes Kepler University Linz, Austria

The complexity of droplet microfluidics grows with the implementation of parallel processes and multiple functionalities on a single device. This poses a serious challenge to the engineer designing the corresponding microfluidic networks. In today's design processes, the engineer relies on calculations, assumptions, simplifications, as well as his/her experiences and intuitions. In order to validate the obtained specification of the microfluidic network, usually a prototype is fabricated and physical experiments are conducted thus far. In case the design does not implement the desired functionality, this prototyping iteration is repeated – obviously resulting in an expensive and time-consuming design process. In order to avoid unnecessary debugging loops involving fabrication and testing, simulation methods could help to initially validate the specification of the microfluidic network before any prototype is fabricated. However, state-of-the-art simulation tools come with severe limitations, which prevent their utilization for practically-relevant applications. More precisely, they are often not dedicated to droplet microfluidics, cannot handle the required physical phenomena, are not publicly available, and can hardly be extended. In this work, we present an advanced simulation approach for droplet microfluidics which addresses these shortcomings and, eventually, allows to simulate practically-relevant applications. To this end, we propose a simulation framework which directly works on the specification of the design, supports essential physical phenomena, is publicly available, and easy to extend. Evaluations and case studies demonstrate the benefits of the proposed simulator: While current state-of-the-art tools were not applicable for practically-relevant microfluidic networks, the proposed solution allows to reduce the design time and costs e.g. of a drug screening device from one person month and USD 1200, respectively, to just a fraction of that.

Additional Key Words and Phrases: Simulation, Droplet Microfluidics, 1D Analysis Model

1 INTRODUCTION

Droplet microfluidics is a highly dynamic and fast evolving field, whose applications target the fields of chemistry, biology, and material science [6]. These high dynamics in droplet microfluidics are demonstrated by the rapidly growing number of publications as demonstrated in [8]. For droplet microfluidics, two different platforms exist: in the platform which is most frequently used in the microfluidics domain, droplets flow through closed microfluidic channels [27], while in the *digital microfluidics* platform the droplets are moved on a hydrophobic surface using electrowetting-on-dielectric [26]. In this work, we focus on the first platform.

Here, a pump produces a force which causes a flow of a continuous fluid through the microfluidic network. Into this continuous fluid, another immiscible fluid is injected (using e.g. T- or Y-junctions [17]) which forms droplets. Then, the continuous flow transports the droplets through the microfluidic system consisting of channels and modules. When the microfluidic system consists of multiple paths through which the droplet can flow, the resulting designs are called *microfluidic networks*.

The design and realization of microfluidic networks is a complex task which involves the consideration of various aspects such as the geometry of the channels, the used phases, the applied pressure, and the effects of droplets. Engineers consider these aspects by conducting calculations (in the best case, they use custom scripts for this), by trusting their experience, or even rely on their intuition. Moreover, in order to tackle the complexity, they frequently apply simplifications and assumptions, e.g. to ignore the hard to grasp effects of droplets and their corresponding collective hydrodynamic feedback. Once a complete specification has been derived, a prototype is fabricated next, which is used to evaluate whether the resulting design indeed implements the desired functionality or not. If this is not the case (which is likely in the first iterations), the engineer

Authors' addresses: Andreas Grimmer, Johannes Kepler University Linz, Austria, andreas.grimmer@jku.at; Medina Hamidović, Johannes Kepler University Linz, Austria; Werner Haselmayr, Johannes Kepler University Linz, Austria; Robert Wille, Johannes Kepler University Linz, Austria.

has to refine the design and continue the entire process again – including another fabrication and evaluation. This prototyping cycle is repeated until the engineer obtains a design which realizes the desired behavior. As reported e.g. in works such [7, 11], this can be a difficult, time-consuming, and expensive process.

In order to address this problem, simulation approaches utilizing the *one-dimensional (1D) analysis model* have been proposed (see e.g. [1, 3, 9, 14, 16, 18, 19, 21–24]), which aim to allow for an evaluation of the specification of the design prior to fabrication¹. More precisely, they allow to predict (a) the droplets' paths/trajectories through the network (this can decide which assay is executed on the droplet), (b) the flow changes caused by all droplets and the resulting impacts (e.g. distance changes between droplets, droplet patterns, etc.), and (c) the time a droplet takes to pass through the network. Using these functionalities, the design could initially be validated before the first prototype is fabricated, alternative designs could be explored (i.e. to test different dimensions of channels, applied pressures, etc.), and the design could be optimized.

However, none of the existing solutions got established in practice yet. This is caused by the fact that, despite their promises, currently available simulation solutions

- (1) are not dedicated to microfluidics and, therefore, first require to manually map the design to an electrical circuit or can only determine a single, static state of the microfluidic network, but do not allow to simulate the time-dynamic behavior caused by the flow of droplets as it is the case for Spice [19],
- (2) target only networks which consist of channels which branch and merge [3, 16, 21] or are even limited to networks consisting of a symmetric/asymmetric loop [1, 9, 14, 18, 22–24], but ignore essential physical phenomena such as trapping droplets, checking whether droplets are squeezed through any gaps, and clogging of channels,
- (3) are not publicly available (in fact, no tool is publicly available), and
- (4) are static, i.e. do not allow for further extensions which is essential in order to support the broad range of application scenarios engineers in the microfluidic domain are faced with.

As a consequence, the design of microfluidic devices still follows the costly and time-consuming "trial-and-error" approach reviewed above.

In this work, we are introducing an advanced simulation approach which addresses these shortcomings. To this end, we propose a simulation framework which (1) directly works on the specification of the design and considers the interdependencies caused by all droplets, (2) extends the current state of the art with important physical phenomena which are required for practical designs, (3) is publicly available at http://iic.jku.at/eda/research/microfluidics_simulation/, and, (4) due to the availability of the source code and the event-based algorithm, can easily be extended to support further applications.

In the following, the proposed simulation approach is introduced and demonstrated as follows: Section 2 provides an overview of the simulation framework and describes the respectively applied 1D analysis model it is based on. In Section 3, we consider physical phenomena which cannot be simulated by the previously proposed approaches covered above and discuss how support for them can easily be added to the proposed framework. In Section 4, we evaluate how the simulation framework advances the state of the art (where no simulations at all are applied) and demonstrate by means of a case study the application of the proposed framework for the design of a practically-relevant microfluidic network. More precisely, we show that using the proposed framework allows to reduce the design time and costs e.g. of the drug screening device proposed in [7] from one person month and USD 1200, respectively, to just a fraction of that. Finally, we compare the proposed simulation framework to related work and especially to simulations on other abstraction levels (e.g. CFD-simulations) in Section 5 and conclude the paper in Section 6.

¹Note that, also simulation approaches utilizing Computational Fluid Dynamics (CFD) are available. They, however, focus more on details such as droplet deformation and splitting and are usually not capable to simulate entire microfluidic networks. This is discussed later in Section 5.

2 SIMULATION FRAMEWORK

This section introduces the main working principle of the proposed simulation framework for droplet microfluidics. The framework is based on the *one-dimensional (1D) analysis model* as described in [21], which reduces the microfluidic network (i.e. an object in the 3D-space) to the 1D-space. In the following, we describe the general idea of the approach, i.e. how this abstraction is utilized for a fast (i.e. computationally inexpensive) simulation of droplet microfluidic networks. Based on that, the remainder of this work covers how, based on that, further physical phenomena can be added to make the simulation framework applicable for more practically-relevant microfluidic networks.

The framework describes the microfluidic network as a directed graph consisting of *nodes* and *edges*. The edges represent channels, modules, and pumps. Their direction represents the counting direction of the flow. The nodes connect the edges to each other.

The *flow state* of all the channels and the modules within such a network is then described by the Hagen-Poiseuille equation [4], i.e. by $\Delta P = RQ$, where ΔP is the *pressure difference* (in [*mbar*]) between the two end nodes of the channel/module, Q is the *volumetric flow rate* (in [$\mu l/min$]) through the channel/module, and R is the *fluidic resistance* (in [$mbar/(\mu l/min)$]) posed by the channel/module. A low Reynolds number allows to reduce the resistance of channels/modules (which is defined by their geometry and the viscosity of the continuous phase μ_{cont}) to a constant value (i.e. a reduction from the 3D-space into the 1D-space). For example, the resistance R_c of a rectangular channel c (with length l_c , width w_c , and height h_c), where the ratio h_c/w_c is less than 1, is defined by [12]

$$R_c = \frac{a\,\mu_{cont}\,l_c}{w_c\,h_c^3},\tag{1}$$

where a denotes a dimensionless parameter defined as

$$a = 12 \left[1 - \frac{192 h_c}{\pi^5 w_c} \tanh\left(\frac{\pi w_c}{2 h_c}\right) \right]^{-1}.$$
 (2)

Also the pumps producing the flow through the microfluidic networks can be described in the 1D-space: A syringe pump produces a constant volumetric flow rate Q_{in} and a peristaltic pump produces a pressure gradient ΔP_{in} .

The presence of droplets in channels/modules change the flow state as they cause additional resistances. Current state-of-the-art simulation tools track the droplets as infinitely small points in the channel/module (later in Section 3.2 a more comprehensive model for droplets is introduced and applied) and a sufficient large distance between droplets (typically a few channel sections/diameters) prevent that their flow perturbations interact [21]. These assumptions allow to model each droplet by an additional resistance, which is again a value in the 1D-space. When *n* droplets flow through a channel/module, the overall resistance can be calculated by

$$R^{\star} = R_c + n R_d. \tag{3}$$

The droplet resistance R_d has been experimentally studied in several works as e.g. [2, 12, 15]. For example, [15] established the rule that each droplet increases the resistance of the segment of channel it occupies by 2-5 times. When using a factor of 3, the droplet resistance is described by

$$R_d = \frac{3 \, a \, \mu_{cont} L_d}{w_c \, h_c^3},\tag{4}$$

where L_d is the droplet length.

In order to determine the flow states in all edges, the framework automatically applies the mass conservation at each node of the graph and the relation described by the Hagen-Poiseuille equation [21]. The obtained equations are similar to the well-known Kirchhoff's law and can be directly transferred when we map the Hagen-Poiseuille equation to the *Ohm's law* with V = RI (where the voltage *V* corresponds to the pressure gradient ΔP , the current *I* corresponds to the volumetric flow rate *Q*, and the resistance *R* of a conductor corresponds to the fluidic resistance *R*). More precisely,

• the sum of flow rates into a node is equal to the sum of flow rates out of that node and

• the directed sum of pressure gradients around any closed cycle in the graph is zero.

By solving the obtained equation system, the framework derives the flow state (i.e. ΔP and Q) in every channel and module for the *current* droplet positions. The obtained flow rates in the channels/modules determine the *current* speed of the droplet by $v_d = \alpha \cdot Q/(w_c h_c)$, where α is the slip factor. Under the conditions where the droplet length is between 1.5 and 7.2 $\cdot w_c$, the viscosity ratios 0.03 or 0.88, and the capillary number between 0.001 and 0.01 without surfactant, Vanapalli et al. [28] found the slip factor to be constant and equal to $\alpha = 1.28$.

Using this model, the framework can predict the traffic of droplets, i.e. when a droplet arrives at a bifurcation it chooses the branch with the instantaneous highest flow rate [10, 14, 18] and does not split (this is true at a low capillary number because the surface tension dominates the viscous stress).

The introduced equations allow to determine the flow state as well as droplet velocities for a certain droplet state and, hence, update the system state including the droplet positions. The respectively obtained flow state is valid until

- a new droplet is injected (adds a resistance),
- any droplet leaves the network (removes a resistance), or
- any droplet enters another edge (causes a shift of the resistance).

Hence, as soon as any of those *events* occurs, the current flow state becomes invalid and the simulation framework re-calculates the flow state (i.e. newly added, removed, or changed resistances are incorporated into the equation system which, afterwards, is re-solved). These event-based calculations make the framework suitable to efficiently simulate large microfluidic networks.

Overall, this provides the basic principle of an efficient simulation of droplet-based microfluidic networks (abstracting the channels and droplets to 1D values, use the Hagen-Poiseuille and mass conversation laws to determine the flow state in all channels/modules, update the droplet positions, and adjust/re-evaluate the equation system for the next event). However, this state of the art simulation approach only provides the basics for simulating droplets flowing through networks consisting of channels which branch and merge (exploiting the fact that a droplet always flows into the branch with the highest instantaneous flow rate). But it does not yet support the simulation of droplets on which actual operations are executed. How this framework can be extended with the correspondingly required physical phenomena is covered in the next section.

3 ADVANCED SIMULATION FRAMEWORK

This section describes how more advanced physical phenomena can be simulated using the proposed framework. We are illustrating that by representative (and practically-relevant) examples from the literature, i.e. proposed designs introduced in the recent past which have been designed without simulation support (as current simulators were not suited). To this end, we first review those designs and what phenomena were missing in existing simulation approaches to properly simulate them. Afterwards, we describe how support for those phenomena are integrated into the framework eventually allowing for simulating these designs.

3.1 Unsupported Phenomena

An important operation in experiments is to *trap* droplets as these trapped droplets allow to precisely control the reaction time or to observe particle-particle interactions [7, 30]. Figure 1a shows a passive realization (i.e. only hydrodynamic effects and no external components for control are used) of two connected trapping well pairs, which have been proposed in [7]. If a trapping well does not yet contain a droplet (which is the case for the second trapping well pair), the first arriving droplet is trapped. As soon as it contains a droplet, all following droplets do not enter the trapping well anymore and are bypassed. Therefore, the design ensures that the trapped droplet clogs the two narrow channels so that the flow into the bypass channel is higher. Additionally, in order to analyze the trapped droplet, it must not be squeezed through the narrow channels.

Besides trapping wells, switches are essential in many applications in order to control the path of droplets. In [5], the switch shown in Figure 1b has been recently proposed, which is capable to

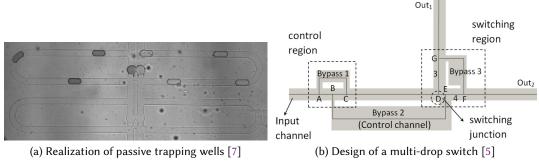


Fig. 1. Physical designs which have been designed without simulation support

route multi-droplet frames. This switch uses the effect that the presence of a droplet at the input of a narrow channel causes a blocking of the flow into this channel (i.e. the droplet *clogs* the channel). If a droplet flows through the "control region" shown in Figure 1b, it clogs the flow into the channel downwards named "Bypass 2". This flow change caused by the clogging is used to route other droplets in the "switching region" to one of the outputs named "Out₁" and "Out₂".

However, in order to simulate these operations, the simulation of further physical phenomena is required, namely whether droplets

- are *trapped* in the microfluidic network,
- are squeezed through any gap, or
- are *clogging* a channel.

Using the "basic" framework introduced in the previous section, none of these phenomena and, hence, none of the operations can properly be simulated. Since also all related work proposed thus far does not provide support for that, the practically-relevant applications discussed in [5, 7] cannot be simulated thus far.

3.2 Implementation of the Phenomena

In order to support these physical phenomena and, by this, allow for the simulation of practicallyrelevant applications such as those discussed above, we extend the introduced framework with new equations and events. These new events demonstrate how the presented framework allows for easy extensions – here in form of the following three events:


Droplet Trapped Event: A droplet is trapped in the microfluidic network, when it stops in an edge. As long as a trapped droplet is not pushed further (e.g. by a change of the pressure), it stays in the edge (potentially until the end of the simulation). In the framework, this event is triggered when a droplet is contained in an edge (i.e. a channel or module), which does not have a successor edge through which the droplet can leave this edge (cf. the next event implements the check whether a droplet is pushed out of an edge).

EXAMPLE 1. Figure 2 shows a schematic of a trapping well with two narrow successor channels (i.e. having small widths), which prevent the trapped droplet to enter. When a droplet is fully contained in the trapping well, the respective event is triggered.

Droplet Squeezed Through Gap Event: A droplet is squeezed through a gap, when the *Young-Laplace* equation is not fulfilled. This Young-Laplace equation determines whether the resulting pressure deforms the droplet and squeezes the droplet through the gap. More precisely, the Young-Laplace equation is defined as

$$\Delta P_{Lap} < \gamma \left[\left(\frac{2}{w_{gap}} + \frac{2}{h} \right) - \left(\frac{1}{r_d} + \frac{2}{h} \right) \right],\tag{5}$$

where γ is the interfacial tension (in [mN/m]), w_{gap} is the width of the gap, and r_d the droplet radius. That means, when the pressure acting on the droplet is smaller than the right term, the droplet is not squeezed through any gap (and, therefore, e.g. stays in the trap).






Fig. 3. Clogging time span

As the pressure acting on the droplet changes in each system state (i.e. it depends on all other droplets), checking whether a droplet is squeezed through any gap has to be done for all system states. Therefore, the simulation framework is extended so that every time a new system state is determined, the obtained pressures are checked whether they exceed the Young-Laplace pressures. If so, a corresponding event is triggered.

EXAMPLE 2. Consider again the example shown in Figure 2. When the pressure ΔP_{Lap} acting on the droplet is smaller than the Young-Laplace pressure, the droplet stays in the trap. As this pressure ΔP_{Lap} is part of the current system state, it has to be checked for all system states. In case the pressure exceeds the Young-Laplace pressure, the simulation framework reports this to the engineer and terminates the simulation.

Droplet Starts/Ends Clogging Event: A droplet clogs the flow into an edge when it blocks the input of this edge but does not enter this edge. In both of the microfluidic networks discussed in Section 3.1, droplets are used to clog the flow: In the network proposed in [7], a trapped droplet is pushed by the pressure against two narrow gaps and, hence, clogs the flow into these narrow gaps (cf. the trapping well in Figure 2). In the switch proposed in [5], the flow into the perpendicular channel (cf. the channel arrangement in Figure 3) is clogged when a droplet passes.

However, the geometric information which is required to decide whether a droplet can clog a channel is not available in the applied model as it abstracts the 3D-network to 1D-values. Therefore, we extend the simulator with a new edge type, i.e. with *cloggable edges*. These cloggable edges allow to model that a passing or trapped droplet blocks the flow into this edge. More precisely, the flow into a cloggable edge is blocked in the following two cases: First, when a cloggable edge and an edge containing a trapped droplet are connected to the same node (i.e. the trapped droplet clogs the flow, cf. the trapping well). Second, when a cloggable edge is connected to a node through which a droplet passes (i.e. the droplet temporary clogs the flow, cf. the switch).

In order to implement this clogging in the simulation framework, information about the time span when the droplet clogs the channel is required. However, this information is not yet available in the framework as presented in Section 2 because the underlying model tracks the droplets as infinitely small points. This is a disadvantage of this model and, therefore, also of state-of-the-art simulation tools, which limits the practicality of the state of the art.

In order to allow clogging in the proposed simulation framework, we extend the model with position information of droplets, i.e. the framework tracks the position of the "head" and the "tail" of the droplet. More precisely, this additional position information allows to extend the framework with two new events which are triggered when a droplet starts or stops clogging a channel.

EXAMPLE 3. Figure 3 shows two states of a droplet flowing along a channel. During these two states, the narrow channel is clogged by the droplet and, therefore, the flow into this channel is blocked. Here, the framework first triggers an event when the "head" of the droplet is located over the narrow channel, which starts the clogging. Later, when the "tail" of the droplet is over the narrow channel, the framework triggers another event which stops the clogging. For these two events, the enriched model containing the position information of droplets is used.

These two events give the time span when a droplet clogs a channel. In order to implement the blocking of the flow into the clogged edge, the underlying graph representing the microfluidic network needs to be dynamically changed. More precisely, when an event is triggered to start the clogging, the respective edge is removed from the graph. Similarly, when an event is triggered to




Fig. 4. The framework simulates a trapped droplet, checks the Young-Laplace pressure, and clogs the flow into the gaps.




Fig. 5. The framework simulates the clogging using the "head" and "tail" position information of the droplet.

stop the clogging, the respective edge is again added to the graph. These dynamic changes require a re-analysis of the underlying graph, the derivation of a new equation system, and the re-calculation of the flow states.

4 EVALUATION AND CASE STUDY

The simulation framework proposed above as well as a corresponding graphical user interface has been implemented in Java (which makes the framework platform-independent) and made publicly available at http://iic.jku.at/eda/research/microfluidics_simulation/. The resulting tool addresses the main shortcomings of the current state of the art (reviewed in Section 1) e.g. by being

- dedicated to droplet microfluidics (it allows to simulate the time-dynamic behavior caused by the flow of droplets as well as it directly uses the specification of the microfluidic network, which is both unsupported by Spice),
- applicable for practically-relevant networks as the framework now supports important physical phenomena,
- publicly available, and
- easily accessible and extendible.

By this, the resulting framework has the potential to establish simulation in the design of droplet microfluidics – eventually allowing to avoid unnecessary "trial-and-error" iterations with costly and time-consuming physical fabrications.

In order to confirm that, intensive evaluations have been conducted, which consist of tests for the unsupported phenomena and the application of the framework for a case study using the microfluidic network of [7]. In the following, we summarize the most important evaluations.

4.1 Evaluation of the Phenomena

A main characteristic of the proposed simulation framework (which is essential to make the approach broadly applicable for practically-relevant applications as discussed in Section 3.1) is its direct support of several physical phenomena which have not been supported yet. To demonstrate the working principle of the proposed simulator, we set up small networks to be simulated which require the corresponding features. More precisely, we consider (1) a network composed of a channel connected to a single trapping well and (2) a network composed of a channel to which a perpendicular channel is connected. For both networks, we used similar specifications, which are summarized in Table 1.

The accordingly obtained simulation results are respectively provided in Figure 4 and Figure 5 for selected time steps. The figures show the determined position of a droplet at each particular time as well as the instantaneous flow rates (provided in $\mu l/min$) in each channel.

We can observe in Figure 4 that the droplet is successfully trapped in the trapping well. Then, the droplet stays in the trapping well, since the Young-Laplace pressure is equal to 50.4*mBar* (i.e. as the droplet entirely fills the trapping well, the trapping well radius is equal to the droplet radius), which is larger than the applied pressure of 30*mBar*. Hence, the droplet is not squeezed out through

Channel height	53µm	ID $L_{bypass} w_{gap}$ Simulation results
Channel width	100µm	1 3000 μm 15 μm No reliable trapping
Trapping well radius	75µm	2 4000µm 15µm –
Gap width	15µm	$\frac{1}{3}$ $\frac{1}{5000 \mu m}$ $\frac{15 \mu m}{15 \mu m}$ Bypass length decreases throughput
Perpendicular channel width	30µm	4 $3000\mu m 25\mu m$ Sensitive to high input pressures
Applied pressure	30mBar	5 4000 μ m 25 μ m Sensitive to high input pressures
Continuous phase (silicone oil)		
Dispersed phase (water)	1 <i>mP</i> s	$6 5000 \mu m 25 \mu m$ Sensitive to high input pressures, bypass length decreases throughput
Interfacial tension	42mN/m	
Table 1 Constitution		Table 2. Reliability

Table 1. Specification

any of the two gaps. Furthermore, as soon as the droplet is fully contained in the trapping well (i.e. after 14 *ms*), it blocks the flow into the two narrow channels.

Figure 5 shows that a droplet over a perpendicular channel blocks the flow into this channel. The simulation framework uses the position of the droplet's "head" and "tail" in order to determine the time span when the droplet clogs the channel.

Overall, these two small networks confirm the correct implementation of the phenomena, which is heavily utilized in the following case study.

4.2 Case Study

In this case study, we demonstrate the applicability of the proposed simulation framework to a practically-relevant application. More precisely, we consider the design of the microfluidic network proposed in [7]. This microfluidic network is developed to screen drug compounds that inhibit the tau-peptide aggregation, which is a phenomenon related to neurodegenerative disorders such as Alzheimer's disease [25]. For the drug screening, the droplets of different content have to be trapped and merged on demand, which eventually allow a precise control of the reaction time. The working principle is purely passive (i.e. no valves or other active components are used) and it is illustrated by means of videos available at https://doi.org/10.1039/C7RA02336G. In the following, we first review the design process of this microfluidic network which has been conducted without any simulations (according to [7]). Afterwards, we show how the proposed simulation framework can help here.

For deriving the specification (i.e. the channel dimensions, applied pressures, etc.), the engineer conducted calculations and applied simplifications as well as assumptions. For example, the engineer simplified the effects of droplets because it is impossible to consider those by hand. As the effects of all simplifications and assumptions cannot be assessed, the engineer came up with six different specifications, which have three different bypass channel lengths (i.e. droplets pass this channel when the respective trapping well already contains a droplet) and two different gap sizes. Table 2 shows the resulting specifications. In order to validate the functionality of these specifications, the engineer fabricated prototypes and conducted physical experiments. In fact, the engineer had no other choice as no simulation tools were available which would have been capable to handle the required phenomena (CFD simulations are too computationally expensive for complete microfluidic networks, cf. Section 5, and other state-of-the-art simulations are not applicable). Finally, the engineer picked the specification and testing of these six prototypes resulted in one person month of manual labor and financial costs of USD 1200.

In our case study, we revisited this design process and additionally applied the proposed simulation framework. Therefore, the different designs were validated and tested using the framework *before* any physical experiments are conducted. We set up simulations of the six different specifications (cf. Table 2). Then, we analyzed the obtained simulation results with respect to the taken path of droplets, the flow rates, whether droplets are unintentionally squeezed through any gap, and how long it takes until a droplet is trapped. For all specifications, we observe the intended paths of the droplets. But for the specification with ID 1, the simulation shows that the flow rates do not allow a reliable trapping of droplets (i.e. the flow into the trapping well was hardly larger than the flow into the bypass). Next, we simulated different input pressures. Generally, too high input pressures cause the droplet to be squeezed out of the trapping wells. But we found that especially the specifications with the larger gap widths (specified with ID 4-6) are more sensitive to higher pressures (i.e. a larger gap width reduces the Young-Laplace pressure). Finally, we measured the time until a droplet is trapped as this is especially relevant for bio-assays with cells. Here, the simulations show that, the longer the bypass channel, the longer the time until a droplet is trapped. All those effects have also been observed in the physical experiments (but, therefore, six prototypes were necessary).

Table 2 summarizes the obtained results, which show a clear preference for the second specification. This specification is the one which was eventually realized in [7]. For this specification, we provide a video showing the output of the simulator under http://iic.jku.at/eda/research/microfluidics_simulation/. Additionally, we compare the simulator's output with photos of a physical experiment captured with a frequency of 50 f ps. This simulation predicts the same functionality as the corresponding physical experiment, which finally allows the utilizing of the simulator to evaluate different specifications. Overall, the use of the simulation framework in the design process can reduce the number of fabricated designs to a single one, and hence, would allow to reduce the design time and costs of this drug screening device from one person month and USD 1200, respectively, to just a fraction of that.

5 COMPARISON TO RELATED WORK

In this section, we compare the proposed framework to other simulation tools and levels. Basically, simulation approaches for droplet microfluidics can be classified into two abstraction levels:

- Simulations using Computational Fluid Dynamics (CFD): Tools like Comsol Multiphysics, Ansys, or OpenFoam employ CFD simulations. Comprehensive reviews of the methods and tools are provided in [13, 31]. These tools simulate the fluid flow in the most accurate way, i.e. allow to simulate turbulences and effects like droplet deformation and splitting. But therefore, they require a complex simulation setup (e.g. the generation of a mesh based on the physical design). Furthermore, the high level of physical details causes significant computational costs, which yield simulation results of high precision but also limits their applicability to small designs and single components. For example, these methods are inappropriate to quickly simulate practically large-scale microfluidic networks [20] and therefore, recently a hybrid solution was presented in [29], which queries precomputed results from a database and combines it with simulations based on the 1D analysis model.
- *Simulations on the 1D analysis model:* This model is applied in the presented simulation framework and was introduced in Section 2. The model is valid when the flow is laminar, viscous, and incompressible [21]. The abstraction of the microfluidic network to 1D values makes the simulation efficient as only linear equations need to be solved, which makes corresponding simulators most suitable for practical large-scale microfluidic networks. These simulations are especially useful for determining the paths and position of droplets, the time a droplet takes to pass through the network, as well as for parametric analysis needed to validate and optimize designs. However, as discussed in Section 1, existing methods within this category (e.g. [1, 3, 9, 14, 16, 18, 21–24]) suffer from limitations such as poor applicability to the microfluidic domain, missing support for essential physical phenomena, their non-availability, and their rather static and, hence, not extendible nature. In this work, these shortcomings have been addressed by the advanced simulation framework.

6 CONCLUSION

In this paper, we presented an advanced simulation framework which addresses severe limitations of state-of-the-art simulators by being dedicated to droplet microfluidics and by addressing essential physical phenomena, which are required for practically-relevant applications. Furthermore, the open-source implementation allows for a broad application of the framework and even further extensions. The resulting framework can be applied by engineers in order to validate their design before even the first prototype is made. That simulations can save costs as well as time has been shown in a case study for a microfluidic network which is used to screening drug compounds that inhibit the tau-peptide aggregation, a phenomenon related to neurodegenerative disorders such as Alzheimer's disease.

REFERENCES

- Mehran Djalali Behzad, Hamed Seyed-Allaei, and Mohammad Reza Ejtehadi. 2010. Simulation of droplet trains in microfluidic networks. *Phys. Rev. E* 82, 3 (2010), 037303.
- [2] Andrea Biral and Andrea Zanella. 2013. Introducing purely hydrodynamic networking functionalities into microfluidic systems. Nano Commun. Netw. 4, 4 (2013), 205–215.
- [3] Andrea Biral, Davide Zordan, and Andrea Zanella. 2015. Modeling, Simulation and Experimentation of Droplet-Based Microfluidic Networks. Mol. Biol. Multi-scale Commun. 1, 2 (2015), 122–134.
- [4] Henrik Bruus. 2008. Theoretical microfluidics. Vol. 18.
- [5] G Castorina, M Reno, L Galluccio, and A Lombardo. 2017. Microfluidic networking: Switching multidroplet frames to improve signaling overhead. Nano Commun. Netw. 14 (2017), 48–59.
- [6] Krishnendu Chakrabarty and Jun Zeng. 2005. Design automation for microfluidics-based biochips. ACM J. Emerg. Tech. Com. 1, 3 (2005), 186–223.
- [7] Xiaoming Chen and Carolyn L Ren. 2017. A microfluidic chip integrated with droplet generation, pairing, trapping, merging, mixing and releasing. RSC Adv. 7, 27 (2017), 16738–16750.
- [8] Wei-Lung Chou, Pee-Yew Lee, Cing-Long Yang, Wen-Ying Huang, and Yung-Sheng Lin. 2015. Recent advances in applications of droplet microfluidics. *Micromachines* 6, 9 (2015), 1249–1271.
- [9] Olgierd Cybulski and Piotr Garstecki. 2010. Dynamic memory in a microfluidic system of droplets traveling through a simple network of microchannels. Lab Chip 10, 4 (2010), 484–493.
- [10] Wilfried Engl, Matthieu Roche, Annie Colin, Pascal Panizza, and Armand Ajdari. 2005. Droplet traffic at a simple junction at low capillary numbers. *Phys. Rev. Lett.* 95, 20 (2005), 208304.
- [11] David Erickson. 2005. Towards numerical prototyping of labs-on-chip: modeling for integrated microfluidic devices. Microfluid. Nanofluid. 1, 4 (2005), 301–318.
- [12] Michael J Fuerstman, Ann Lai, Meghan E Thurlow, Sergey S Shevkoplyas, Howard A Stone, and George M Whitesides. 2007. The pressure drop along rectangular microchannels containing bubbles. *Lab Chip* 7, 11 (2007), 1479–1489.
- [13] Thomas Glatzel, Christian Litterst, Claudio Cupelli, Timo Lindemann, Christian Moosmann, Remigius Niekrawietz, Wolfgang Streule, Roland Zengerle, and Peter Koltay. 2008. Computational fluid dynamics (CFD) software tools for microfluidic applications–A case study. Comp. Fluids 37, 3 (2008), 218–235.
- [14] Tomasz Glawdel, Caglar Elbuken, and Carolyn Ren. 2011. Passive droplet trafficking at microfluidic junctions under geometric and flow asymmetries. Lab Chip 11, 22 (2011), 3774–3784.
- [15] Tomasz Glawdel and Carolyn L Ren. 2012. Global network design for robust operation of microfluidic droplet generators with pressure-driven flow. *Microfluid. Nanofluid.* 13, 3 (2012), 469–480.
- [16] Nils Gleichmann, Daniéll Malsch, Peter Horbert, and Thomas Henkel. 2015. Toward microfluidic design automation: a new system simulation toolkit for the in silico evaluation of droplet-based lab-on-a-chip systems. *Microfluid. Nanofluid.* 18, 5-6 (2015), 1095–1105.
- [17] Hao Gu, Michel HG Duits, and Frieder Mugele. 2011. Droplets formation and merging in two-phase flow microfluidics. Mol. Sci. 12, 4 (2011), 2572–2597.
- [18] Fabien Jousse, Robert Farr, Darren R Link, Michael J Fuerstman, and Piotr Garstecki. 2006. Bifurcation of droplet flows within capillaries. Phys. Rev. E 74, 3 (2006), 036311.
- [19] Kwang W Oh, Kangsun Lee, Byungwook Ahn, and Edward P Furlani. 2012. Design of pressure-driven microfluidic networks using electric circuit analogy. Lab Chip 12, 3 (2012), 515–545.
- [20] Kwang W Oh, Kangsun Lee, Byungwook Ahn, and Edward P Furlani. 2012. Design of pressure-driven microfluidic networks using electric circuit analogy. *Journal on Lab on a Chip* 12, 3 (2012), 515–545.
- [21] Michael Schindler and Armand Ajdari. 2008. Droplet traffic in microfluidic networks: A simple model for understanding and designing. Phys. Rev. Lett. 100, 4 (2008), 044501.
- [22] DA Sessoms, Axelle Amon, Laurent Courbin, and Pascal Panizza. 2010. Complex dynamics of droplet traffic in a bifurcating microfluidic channel: Periodicity, multistability, and selection rules. *Phys. Rev. Lett.* 105, 15 (2010), 154501.
- [23] DA Sessoms, Malika Belloul, Wilfried Engl, M Roche, L Courbin, and P Panizza. 2009. Droplet motion in microfluidic networks: Hydrodynamic interactions and pressure-drop measurements. *Phys. Rev. E* 80, 1 (2009), 016317.
- [24] Bradford J Smith and Donald P Gaver III. 2010. Agent-based simulations of complex droplet pattern formation in a two-branch microfluidic network. *Lab Chip* 10, 3 (2010), 303–312.
- [25] Claudio Soto. 2003. Unfolding the role of protein misfolding in neurodegenerative diseases. Nat. Rev. Neurosci. 4, 1 (2003), 49.
- [26] Fei Su and Krishnendu Chakrabarty. 2008. High-level synthesis of digital microfluidic biochips. ACM J. Emerg. Tech. Com. 3, 4 (2008), 1.
- [27] S.-Y. Teh, R. Lin, L.-H. Hung, and A. P. Lee. 2008. Droplet microfluidics. Lab Chip 8 (2008), 198-220. Issue 2.
- [28] Siva A Vanapalli, Arun G Banpurkar, Dirk van den Ende, Michel HG Duits, and Frieder Mugele. 2009. Hydrodynamic resistance of single confined moving drops in rectangular microchannels. Lab Chip 9, 7 (2009), 982–990.
- [29] Junchao Wang, Victor GJ Rodgers, Philip Brisk, and William H Grover. 2017. Instantaneous simulation of fluids and particles in complex microfluidic devices. *PLOS ONE* 12, 12 (2017), 1–14.
- [30] Wei Wang, Chun Yang, and Chang Ming Li. 2009. On-demand microfluidic droplet trapping and fusion for on-chip static droplet assays. Lab Chip 9, 11 (2009), 1504–1506.
- [31] Martin Wörner. 2012. Numerical modeling of multiphase flows in microfluidics and micro process engineering: a review of methods and applications. *Microfluid. Nanofluid.* 12, 6 (2012), 841–886.