

# The rôle of adhesion in contact mechanics

M.Ciavarella<sup>1,3</sup>, J.Joe<sup>2</sup>, A.Papangelo<sup>1,3</sup>, and JR Barber<sup>2</sup>

<sup>1</sup>*Polytechnic of Bari, Department of Mechanics, Mathematics and Management, Viale Japigia  
182, 70126 Bari, Italy*

<sup>2</sup>*University of Michigan, Department of Mechanical Engineering, Ann Arbor, MI 48109-2125,  
USA*

<sup>3</sup>*Hamburg University of Technology, Department of Mechanical Engineering, Am  
Schwarzenberg-Campus 1, 21073 Hamburg, Germany*

---

## Abstract

Adhesive [e.g. van der Waals] forces were not generally taken into account in contact mechanics until 1971, when Johnson, Kendall and Roberts (JKR) generalized Hertz' solution for an elastic sphere using an energetic argument which we now recognize to be analogous to that used in linear elastic fracture mechanics. A significant result is that the load-displacement relation exhibits instabilities in which approaching bodies 'jump in' to contact, whereas separated bodies 'jump out' at a tensile 'pull-off force'. The JKR approach has since been widely used in other geometries, but at small length scales or for stiffer materials it is found to be less accurate. In conformal contact problems, other instabilities can occur, characterized by the development of regular patterns of regions of large and small traction. All these instabilities result in differences between loading and unloading curves and consequent hysteretic energy losses. Adhesive contact mechanics has become increasingly important in recent years with the focus on soft materials [which generally permit larger areas of the interacting surfaces to come within the range of adhesive forces], nano-devices and the analysis of bio-systems. Applications are found in nature, such as insect attachment forces, in nano-manufacturing, and more generally in industrial systems involving rubber or polymer contacts. In this paper, we review the strengths and limitations of various methods for analyzing contact problems involving adhesive tractions, with particular reference to the effect of the inevitable roughness of the contacting surfaces.

*Keywords:* Adhesion, contact mechanics, adhesion and fracture, rough contact, patterned surfaces

---

## 1. Introduction

Classical contact mechanics is typically characterized by the *Signorini inequalities*, which demand that the tractions between interacting solid bodies be non-tensile, and that interpenetration of material is inadmissible. We can then partition the surface of a body into regions of *contact*, where the gap between the bodies is zero and the normal component of traction is compressive, and *separation*, where there are no tractions and the gap is positive. However, at very small length scales, this dichotomy is an oversimplification. The local tractions between the bodies will be a continuous function of relative approach and van der Waals forces and other physical mechanisms can cause regions of tensile [or *adhesive*] tractions. Most authors assume that the Lennard-Jones 6–12 law [1] defines the relation between the force and separation of two individual molecules, and if a continuum is approximated as a uniform distribution of molecules, the resulting traction  $\sigma$  [tensile positive] between two half spaces is then found to be [2]

$$\sigma(g) = \frac{8\Delta\gamma}{3\varepsilon} \left[ \frac{\varepsilon^3}{g^3} - \frac{\varepsilon^9}{g^9} \right] \quad \text{where} \quad \Delta\gamma = \int_{\varepsilon}^{\infty} \sigma(g) dg \quad (1)$$

is the *interface energy* or the work done per unit area of interface in separating the two bodies from the equilibrium position  $g = \varepsilon$ , at which  $\sigma = 0$ . This expression is shown in Figure 1. The maximum tensile traction occurs at a separation  $g = 3^{1/6}\varepsilon$  and is  $\sigma_0 = 16\Delta\gamma/9\sqrt{3}\varepsilon$ .

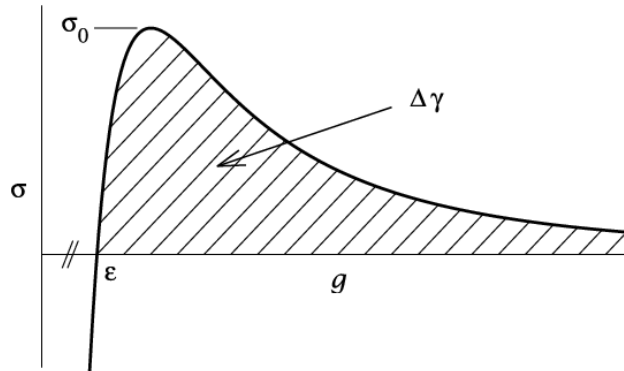


Figure 1: The Lennard-Jones traction law between two half spaces. The interface energy  $\Delta\gamma$  corresponds to the shaded area.

## 2. Contact of a sphere on a plane

Equation (1) can be integrated to determine the force transmitted between two rigid bodies of known shape and relative position. Bradley [3] used this method to determine the force between a rigid sphere of radius  $R$  and a rigid half plane. In particular, he showed that the maximum tensile force [the *pull-off force*] occurs when the point of closest approach is equal to  $\varepsilon$  and is of magnitude  $2\pi R\Delta\gamma$ . This approach was extended by Rumpf [4] and Rabinovich *et al.* [5] to estimate the adhesive force between a small spherical particle and a rough surface, characterized as a set of spherical asperities. These equations showed that even small amplitude of roughness decreases pull-off by large factors.

### 2.1. The JKR theory

If the contacting bodies are deformable, equation (1) can be combined with an analysis of the deformation, but the resulting boundary-value problem is highly non-linear and generally can only be solved by numerical methods. An approximation introduced by Johnson *et al.* [6] retains the dichotomy between regions of contact and separation, but then computes the total potential energy  $\Pi = U + \Omega - \Gamma$  as the sum of elastic strain energy  $U$ , potential energy of external forces  $\Omega$  and interface energy  $\Gamma = A_c\Delta\gamma$ , where  $A_c$  is the total contact area. The partition into areas of contact and separation is then determined so as to minimize  $\Pi$ . This is now generally known as the *JKR solution*. Conceptually, it is identical to Griffith's theory of fracture and hence is equivalent to linear elastic fracture mechanics [LEFM], with  $\Delta\gamma$  playing the rôle of the critical energy release rate  $G_c$ . It follows that an alternative formulation is to demand that the contact traction be square-root singular at all edges of the contact area, with stress intensity factor

$$K_I = \sqrt{2E^*\Delta\gamma} \quad \text{where} \quad \frac{1}{E^*} = \frac{1-\nu_1^2}{E_1} + \frac{1-\nu_2^2}{E_2} \quad (2)$$

and  $E_i, \nu_i$  are Young's modulus and Poisson's ratio respectively for the two bodies, with  $i = 1, 2$ . For the sphere, the relation between [compressive] indentation force  $P$  and indentation depth  $\Delta$  can be expressed for all cases in terms of the dimensionless parameters

$$\hat{P} = \frac{P}{\pi R\Delta\gamma}; \quad \hat{\Delta} = \left(\frac{E^*R}{\Delta\gamma}\right)^{2/3} \frac{\Delta}{R}, \quad (3)$$

the resulting relation being shown in Fig. 2.

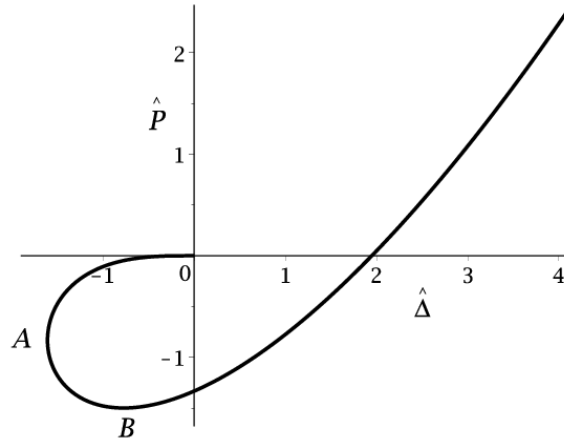


Figure 2: JKR solution for the relation between dimensionless compressive force  $\hat{P}$  and indentation  $\hat{\Delta}$  for the contact of a sphere and a plane.

In this figure, the pull-off force under force control is defined by point  $B$  and corresponds to  $P = -3\pi R\Delta\gamma/2$ , which differs from Bradley's rigid-body value only by a factor  $3/4$ . Under force control, only points to the right of  $B$  are stable, whereas under displacement control, stability is retained to the maximum negative indentation at  $A$ . In either case, once the limiting point is reached, the sphere will jump out of contact and some energy will be dissipated, presumably in the form of elastodynamic waves. Similarly, if the sphere is slowly brought to approach the half space, it will jump into contact from the origin to point  $B$ , again with a loss of energy. A sequence of contact and separation cycles therefore implies a hysteretic loss of energy.

The original JKR solution considered only the contact of a sphere on a plane, but the same technique can be applied to any geometry for which the corresponding boundary-value problem can be solved. For example, Johnson [7] gave the solution for a body with a sinusoidal surface in partial contact with a plane. Also, the energetic argument can be used to obtain numerical solutions using a boundary-element approach. For example, Popov *et al.* [8] used this approach to determine the pull-off force displacement relation for flat rigid punches of various planforms. They showed that under displacement control, final detachment occurs from a contact area approximately identified with a circle inscribed in the planform, but that the maximum tensile force occurs before this state is reached.

## 2.2. A generalization of the JKR calculation

Johnson *et al.* [6] determined the elastic strain energy  $U$  for the sphere problem by following the two-step scenario shown in Figure 3. The contact is first loaded in compression to load  $P_1$  establishing a contact area  $A_1$ . The contact area is then held constant whilst the load is reduced to  $P_2$ . During this second phase, the load displacement relation is linear as shown in the figure, and hence

$$P_2 = P_1 - (\Delta_1 - \Delta_2) \left( \frac{\partial P}{\partial \Delta} \right)_{\Delta_1} \quad (4)$$

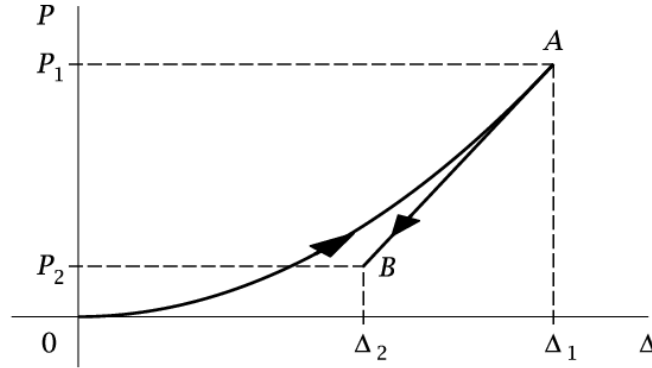


Figure 3: Two-step loading scenario. (i) “repulsive” loading without adhesive forces until a given contact area is reached (point A in the figure); (ii) Unloading at constant total contact area up point B.

If the final value of displacement  $\Delta_2$  is prescribed [displacement control], the contact area  $A_1$  and hence  $\Delta_1$  must be chosen so as to minimize the total potential energy

$$\Pi = U - A_1 \Delta \gamma \quad (5)$$

We obtain

$$\frac{\partial \Pi}{\partial A_1} = 0 \quad \text{and hence} \quad \frac{\partial U}{\partial A_1} = \frac{\partial U}{\partial \Delta_1} \frac{\partial \Delta_1}{\partial A_1} = \Delta \gamma \quad (6)$$

Using Figure 3 to determine  $U$  as a function of  $\Delta_1, \Delta_2$ , we finally obtain

$$\Delta_2 = \Delta_1 - \sqrt{2\Delta\gamma \frac{\partial A_1}{\partial \Delta_1} / \frac{\partial^2 P_1}{\partial \Delta_1^2}} \quad (7)$$

[9], which defines a general relation between the adhesive solution and that without adhesion. Strictly, the argument requires that the contact area be such as to

give a uniform stress-intensity factor around the perimeter as in axisymmetric problems, but it might reasonably be expected to give good approximations in other cases.

### 2.3. The Tabor parameter

A numerical solution [10] of the problem for a sphere using the Lennard-Jones traction law of equation (1) shows that the pull-off force  $P_0$  is a continuous function of the *Tabor parameter*

$$\mu = \sqrt[3]{\frac{R(\Delta\gamma)^2}{E^* 2\varepsilon^3}}, \quad (8)$$

[11], tending to the Bradley rigid-body value of  $2\pi R\Delta\gamma$  at  $\mu = 0$  and to the JKR value of  $(3/2)\pi R\Delta\gamma$  as  $\mu \rightarrow \infty$ . Equation (8) contains the radius  $R$  and hence is specific to the spherical contact problem. However, since the JKR solution is formally identical to Linear Elastic Fracture Mechanics, a more general expression can be obtained by analogy with the ‘small-scale yielding’ criterion. In particular, we can identify the width of the region in which the predicted tensile traction exceeds the theoretical strength  $\sigma_0$  as

$$s_0 = \frac{E^* \Delta\gamma}{\pi\sigma_0^2}. \quad (9)$$

As in LEFM, the JKR solution is expected to provide a good approximation if  $s_0 \ll a$ , where  $a$  is the smallest length scale associated with the geometry of the problem — e.g. the smallest width of the contact region, or of the separation region. We can then define a generalized Tabor parameter

$$\mu = \sqrt{\frac{0.21a}{s_0}}, \quad (10)$$

where the numerical factor is included to ensure that it reduces to the conventional definition in the case of the sphere, with  $a$  then being the radius of the circular contact area.

### 2.4. Solutions for small $\mu$

When elastic effects are small, JKR solution is no longer appropriate and there is a transition towards the rigid behaviour. Derjaguin *et al.* [13] gave an approximate solution of the spherical contact problem by (i) finding the gap in the separation region for the classical Hertz problem and then (ii) using the van der Waals

[attractive] term from equation (1) to find the additional adhesive tractions and hence modify the indenting force. This approach, known as the DMT solution, tends to the rigid-body solution in the limit  $\mu \rightarrow 0$  and hence is often regarded as an appropriate strategy when  $\mu \ll 1$ . However, Pashley [14] showed that the DMT approach can give unrealistic predictions [notably that the pull-off force increases with  $\mu$ , and occurs at separations larger than zero, which contradicts the results of rigorous numerical solutions], and Greenwood [15] offers an alternative approach based on determining the elastic displacements due to the tractions predicted by the rigid theory. We could also consider DMT as a first step of a more general iterative strategy where the computed adhesive forces are allowed to generate some deformation.

An alternative strategy is to approximate the traction law (1) to make the resulting boundary-value problem more tractable. Maugis [16] used a law in which the tractions are assumed to be constant and equal to the maximum value  $\sigma_{\max}$  from (1) over a range  $0 < g < g_{\max}$ , beyond which they are zero. The value of  $g_{\max}$  is chosen such that the interface energy  $\Delta\gamma = \sigma_{\max}g_{\max}$ . This reduces the contact problem to a linear three-part boundary-value problem which can be solved in closed form for the case of the sphere. Alternatively, Greenwood and Johnson [17] showed that the superposition of two axisymmetric Hertzian traction distributions, one tensile and one [over a smaller circle] compressive, could be chosen so as to satisfy the contact condition in the smaller circle. The traction in the surrounding annulus is then a single-valued function of gap and parameters can be chosen so as to ensure that the maximum tensile traction is  $\sigma_{\max}$  and the implied interface energy is  $\Delta\gamma$ . Both these approaches predict a dependence of pull-off force on  $\mu$  qualitatively similar, but this may be due to the fact that for the sphere, in the rigid limit there is no dependence on the form of the force-separation law. Even for the sphere, the results are not identical to the numerical solution [10].

#### 2.4.1. Bearing Area Method [BAM]

A much simpler approximation [18] appropriate for  $\mu \ll 1$  is to use the Maugis-Dugdale force law [16], but to estimate the attractive area  $A_{\text{att}}$  [i.e. the area in which there is separation, but where  $0 < g < g_{\max}$ ] as

$$A_{\text{att}}(\Delta) \approx B(\Delta + g_{\max}) - B(\Delta), \quad (11)$$

where  $B(\Delta)$  is the *bearing area* — i.e. the area over which the bodies would need to interpenetrate each other if they were moved together through a distance

$\Delta$  and there were no elastic deformation. The total compressive force applied to the indenter is then estimated as

$$P(\Delta) = P_C(\Delta) - \sigma_{\max} A_{\text{att}}(\Delta) , \quad (12)$$

where  $P_C(\Delta)$  is the compressive force in the corresponding elastic contact problem without adhesion. For the sphere, this procedure gives exactly the same force-displacement relation as that denoted by DMT-M by Maugis [2].

### 2.5. Effect of plastic deformation

If plastic deformation occurs during compressive loading, the effective (unloaded) profile of the contacting bodies is modified and this affects the pull-off force. If there is extensive plastic deformation, a crude approximation can be obtained by assuming that contact pressure  $p_0$  at maximum compressive load  $P_0$  is approximately uniform and equal to the hardness  $H$ , so the contact area is a circle of radius  $a_0$  (larger than the Hertzian radius) where

$$P_0 = \pi a_0^2 H . \quad (13)$$

We also note that  $H \approx 3\sigma_Y$ , where  $\sigma_Y$  is the uniaxial yield stress. Johnson [19] used this result to estimate an equivalent radius  $R'$  for the sphere after elastic unloading as

$$R' = \frac{4E^* a_0}{3\pi H} , \quad (14)$$

by assuming that unloading is approximately defined by the Hertzian analysis from load  $P_0$  and contact radius  $a_0$ . Using this value in the JKR solution (3) he then obtained an increased pull-off force

$$P'_c = \frac{3\pi R' \Delta\gamma}{2} = \frac{2E^* \Delta\gamma a_0}{H} = 2E^* \Delta\gamma \sqrt{\frac{P_0}{\pi H^3}} . \quad (15)$$

Notice that the pull-off force now depends on the material properties  $H, E^*$  and also increases with the square root of the maximum load during initial compression.

A more precise solution requires a full analysis of the elastic-plastic loading process, in particular to determine the exact contact radius and traction distribution at maximum compressive load, followed by the exact elastic solution corresponding to unloading from this condition. Mesarovic and Johnson [20] showed that even at large compressive preloads, Johnson's approximation (15) underestimates



the JKR pull-off force by a factor of  $3\pi/4$  due to Johnson's unrealistic Hertzian assumption during unloading.

They also presented results using the Maugis-Dugdale cohesive-zone model, which they characterized in a space defined by the dimensionless parameters

$$\chi = \frac{\pi}{(2\pi - 4)} \frac{E^* \Delta\gamma}{p_0^2 a_0} ; \quad S = \frac{\sigma_0}{p_0} . \quad (16)$$

The pull-off force is always close to the JKR value, to which it tends asymptotically when  $\chi^{2/3}/S^2 \rightarrow 0$ .

### 3. Thin elastic layers

Many engineering and scientific applications involve thin deformable layers supported by a relatively rigid foundation. Examples include rubber layers bonded to steel components and cartilage layers attached to bones. If an elastic layer of thickness  $h$  is bonded to a rigid foundation and then subjected to a uniform tensile traction  $\sigma$ , the only non-zero strain will be that in the thickness direction and the surface will move outwards through a distance

$$u = \frac{\sigma}{k} \quad \text{where } k = \frac{E(1 - \nu)}{(1 + \nu)(1 - 2\nu)h} . \quad (17)$$

Johnson [21] argued that this remains a good approximation under more general spatially-varying tractions as long as the layer is 'sufficiently thin' meaning that  $h$  is small compared with the linear dimensions of the loaded area. The layer then acts like a Winkler foundation of 'modulus'  $k$ , with proportionality between local displacement and local traction. In particular, in non-conformal contact problems [such as indentation by a sphere], the contact pressure then goes to zero at the edge of the contact area.

Johnson's argument was extended to problems involving adhesive tractions by Yang [22] and Argatov *et al.* [23], using an energy argument analogous to that in the JKR theory [6]. They showed that the effect of interface energy was to change the boundary condition at the edge of the contact area from  $\sigma = 0$  to  $\sigma = \sqrt{2k\Delta\gamma}$ , which is independent of the contact geometry [as is the stress intensity factor (2) in the JKR theory].

If  $\nu \rightarrow 0.5$ , the modulus  $k \rightarrow \infty$ , since the layer becomes incompressible. Deformation is still possible under non-uniform tractions, but involves the displacement of material in the plane of the layer [21]. Approximate solutions for the case with adhesive tractions are given by Yang [24], Argatov *et al.* [23] and Papangelo [25].

### 3.1. Instabilities

The Lennard-Jones traction law  $\sigma(g)$  of equation (1) and Figure 1 can be regarded as a non-linear spring [with ranges of negative stiffness] in series with the linear spring associated with the modulus  $k$  of equation (17). For example, if  $\Delta$  denotes the gap that would exist between a layer and a plane surface in the absence of elastic deformation, the actual gap will be  $g$  where

$$\Delta = g + \frac{\sigma(g)}{k} \quad \text{and hence} \quad \frac{\partial \Delta}{\partial g} = 1 + \frac{1}{k} \frac{\partial \sigma}{\partial g} . \quad (18)$$

The gap  $g$  and hence the traction  $\sigma(g)$  will be multivalued functions of rigid-body approach  $\Delta$  if there exist ranges where  $\partial \Delta / \partial g < 0$ . Notice [for example from Figure 1] that any traction law involving adhesive tractions must exhibit a range of values of  $g$  in which the slope  $\partial \sigma / \partial g < 0$ , and from (18), instability is most likely to occur at the point where the magnitude of this negative slope is maximum. For the Lennard-Jones traction law of equation (1), this maximum occurs at  $g = (15/2)^{1/6} \varepsilon$  and is of magnitude  $1.253 \Delta \gamma / \varepsilon^2$ .

A typical case involving instability is illustrated in Figure 4, where  $\nu = 0.25$  and the dimensionless parameter

$$\beta = \frac{E \varepsilon^2}{h \Delta \gamma} \quad (19)$$

is equal to 0.5. If the bodies are initially widely separated, the tractions will be defined by the lower branch of the curve, but if  $\Delta$  is reduced below  $\Delta_A$ , there must then be a jump to the point  $B$ . A jump in the opposite direction from  $C$  to  $D$  is anticipated during subsequent separation, so that during an approach-separation cycle, there will be a hysteretic energy loss defined by the area  $ABCD$ .

### 3.2. Sinusoidal instabilities

The uniform state defined by equation (18) can be unstable to non-uniform perturbations even where jumps are not predicted. It is convenient to define a dimensionless coordinate  $\xi = x/h$  in the plane of the layer. For a linear elastic layer, a sinusoidal traction distribution  $\sigma(\xi) = S \cos(\zeta \xi)$  will produce a surface displacement

$$u(\xi) = \frac{S}{k(\zeta)} \cos(\zeta \xi) , \quad (20)$$

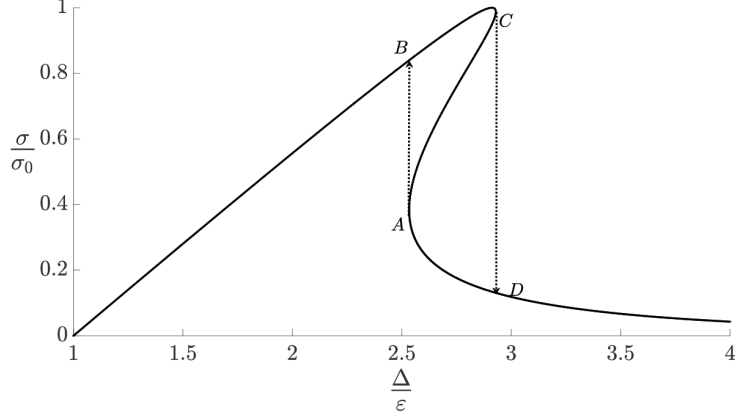


Figure 4: Adhesive traction  $\sigma$  as a function of rigid-body approach  $\Delta$  for a layer with  $\nu = 0.25$  and  $\beta = 0.5$ . Jumps occur during approach from  $A$  to  $B$  and during separation from  $C$  to  $D$  as indicated by the dotted lines.

where  $k(\zeta)$  is a wavenumber-dependent stiffness. For a uniform elastic layer bonded to a rigid foundation, we have

$$k(\zeta) = \frac{E\zeta [(3 - 4\nu) \cosh(2\zeta) + 2\zeta^2 + 5 - 12\nu + 8\nu^2]}{2h(1 - \nu^2) [(3 - 4\nu) \sinh(2\zeta) - 2\zeta]} \quad (21)$$

[26], which reduces to (17) in the limit  $\zeta \rightarrow 0$ . However, similar arguments can also be applied to more complex elastic systems such as multilayers or functionally graded layers, the only change being in the function  $k(\zeta)$ .

If the layer is placed such that the uniform solution of Section 3.1 involves a gap  $g_1$ , energetic arguments can be used to show that infinitesimal sinusoidal perturbations on this solution of wavenumber  $\zeta$  will then be unstable if

$$\left( \frac{\partial \sigma}{\partial g} \right)_{g=g_1} < -k(\zeta). \quad (22)$$

With the Lennard-Jones traction law, the uniform traction state will be unconditionally stable provided

$$k(\zeta) > \frac{1.253\Delta\gamma}{\varepsilon^2} \quad \text{or equivalently} \quad \frac{E}{hk(\zeta)} < 1.253\beta \quad (23)$$

for all  $\zeta$ , from equations (19, 22).

Non-linearity of the traction law (1) places limits on the growth of such a perturbation, but if the condition (22) is satisfied for some range of values of  $g_1, \zeta$ , we might then anticipate the development of a spatially-periodic deformation pattern during approach of the layer to a plane surface.

Patterns of this kind have been predicted theoretically [27, 28] and observed experimentally [29, 30] mainly for incompressible layers for which the ‘uniform’ instability of Section 3.1 is suppressed. Gonuguntla *et al.* [29] have shown how this self-patterning behaviour can be used in the manufacture of patterned layers using lithography.

### 3.3. Periodic deformation patterns

Figure 5 shows contours of the gap  $g(x, y)$  for four stages of approach  $\Delta$  for a layer with  $\beta = 5, \nu = 0.5$ . These results were obtained using the Green’s Function Molecular Dynamics [GFMD] algorithm of Persson and Scaraggi [31]. Since the material is incompressible, uniform instabilities of the type discussed in Section 3.1 cannot occur. The contours are defined as multiples of  $\varepsilon$  and the scale bar in Figure 5(a) represents the layer thickness  $h$ .

During approach [ $\Delta$  decreasing] the morphology is first defined by pillars of ‘contact’ [values of  $g$  close to  $\varepsilon$ ] surrounded by regions of much larger gap (a). Further reduction in  $\Delta$  leads to the labyrinth pattern (b) and then an inverted labyrinth (c) where regions of contact are connected. The last stage (d) comprises a pattern of approximately circular separation regions surrounded by contact. The red line in Figure 5(d) represents wavelength corresponding to the most unstable sinusoidal perturbation [see Section 3.5 and Figure 7 below].

Theoretically, instability starts at the value of  $\Delta$  at which an infinitesimal sinusoidal perturbation first becomes unstable. However, once a pattern is established, it persists beyond the range of linear instability and hence the traction curves for loading and unloading are different, as shown in Figure 6. During progress from contact to separation, patterns develop before the theoretical point, presumably due to the use of finite increments in the iterative algorithm.

### 3.4. Determination of patterns using series methods

An alternative approach for approximating these patterns is to represent the elastic deformation as a finite Fourier series and use the Rayleigh-Ritz method for determining the coefficients. For example, in two dimensions we write

$$u(\xi) = \sum_{n=0}^N u_n \cos(n\zeta_0\xi) , \quad (24)$$

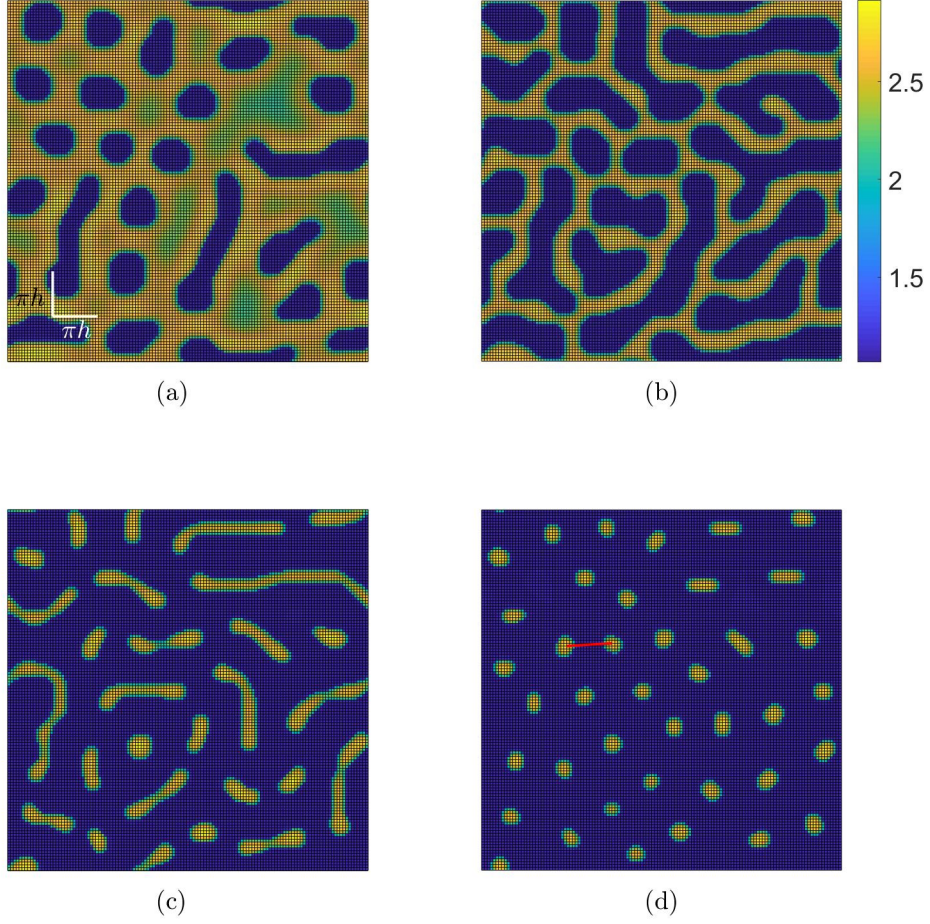


Figure 5: Contours of dimensionless local gap  $g(x, y)/\varepsilon$  during approach of a uniform incompressible layer to a plane surface.  $\Delta = 2.1\varepsilon$  (a),  $1.7\varepsilon$  (b),  $1.4\varepsilon$  (c),  $1.2\varepsilon$  (d). The contour scale applies to all four figures.

where  $\zeta_0$  is a fundamental wavenumber that might be related to the finite dimension of the contact surface. The elastic strain energy per unit area is then

$$U = \frac{1}{2}k(0)u_0^2 + \frac{1}{4} \sum_{n=1}^N k(n\zeta_0)u_n^2 . \quad (25)$$

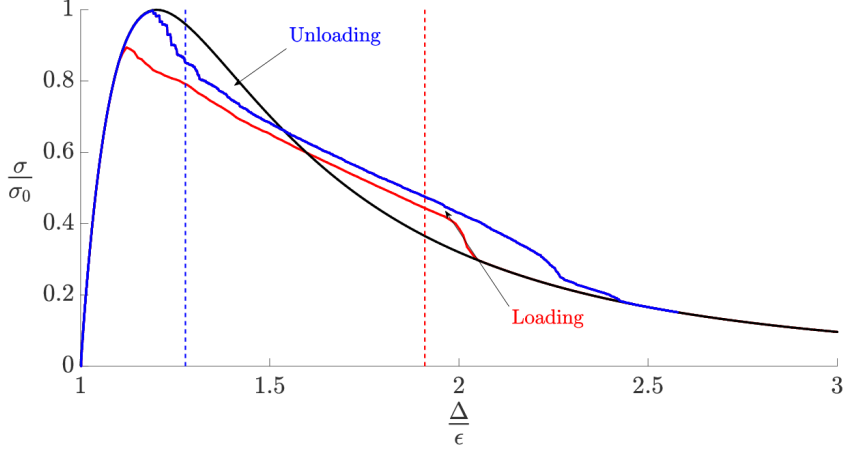


Figure 6: Relation between mean traction and rigid-body separation  $\Delta$  for  $\beta = 5, \nu = 0.5$ . The uniform solution is unstable between the vertical dashed lines.

and the interface energy per unit area is defined by

$$\Gamma = \frac{1}{2\pi} \int_0^{2\pi/\zeta_0} d\xi \int_{\Delta-u(\xi)}^{\infty} \sigma(g) dg . \quad (26)$$

The coefficients  $u_n$  are then determined using an appropriate optimization algorithm so as to minimize the total energy  $\Pi = U - \Gamma$  for a given value of approach  $\Delta$  [28]. The same technique was extended to three-dimensional patterns by Goungunla *et al.* [29] using a double Fourier series.

### 3.5. Effect of material parameters

Figure 7 shows the dimensionless layer compliance [reciprocal of stiffness]  $E/hk(\zeta)$  as a function of wavenumber  $\zeta$  for the bonded layer defined by equation (21) for various values of Poisson's ratio  $\nu$ .

We notice from Figure 7 that the curves for  $\nu > 0.25$  exhibit a maximum at some value  $\zeta = \zeta_0 > 0$ , whereas for  $\nu \leq 0.25$ , the maximum occurs at  $\zeta = 0$ . In both cases, instability will commence when the gap  $g = g_1$  in the uniform solution reaches the value at which  $\partial\sigma/\partial g$  first satisfies (22). For  $\nu \leq 0.25$  the first unstable condition corresponds to a uniform perturbation [ $\zeta = 0$ ] and hence occurs at the point *A* during loading and *C* during unloading in Figure 4. The unstable response comprises a sudden change [jump] in uniform traction as indicated.

For  $\nu > 0.25$ , the maximum compliance occurs at a non-zero wavenumber  $\zeta_0$  and we anticipate the development of a pattern with this periodicity, at least near

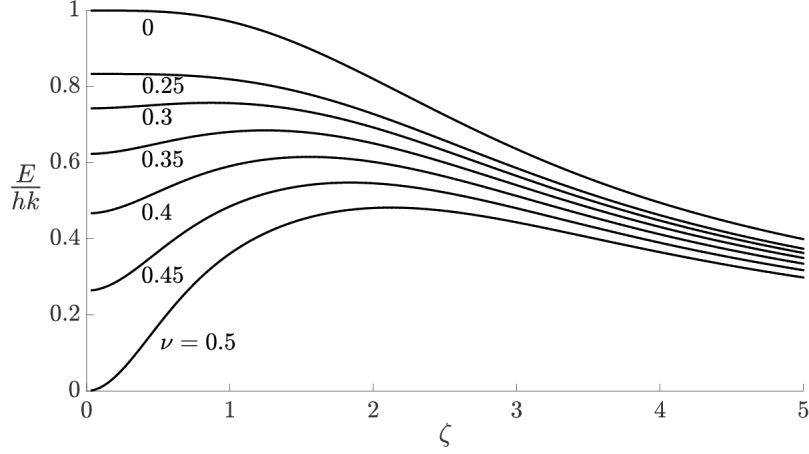


Figure 7: Dimensionless layer compliance as a function of wavenumber for an elastic layer bonded to a rigid foundation.

the value of  $g$  at which (22) is first satisfied. This behaviour is shown schematically in Figure 8 for the Lennard-Jones traction law.

The dashed line in this figure defines the value of  $\beta$  below which a uniform perturbation [ $\zeta = 0$ ] is also unstable. In this region, the non-uniform instability is triggered before the uniform one and generally dominates the subsequent behaviour. However, this requires that a representative in-plane dimension  $L$  of the layer be large enough to accommodate at least one wavelength of an unstable sinusoidal perturbation. In most practical cases  $h \ll L$  and which ensures that this condition is satisfied except for values of  $\nu$  quite close to 0.5.

Similar calculations can be performed for more complex layers. In particular, we note that for a bi-material layer, the dimensionless compliance may exhibit two distinct maxima [32]. In such cases, the absolute maximum of the curve defines the first instability during either approach or separation and generally dominates the subsequent pattern development.

#### 4. Effect of roughness on adhesion

If surfaces were perfectly plane, van der Waals forces would imply that two such bodies brought into contact would be indistinguishable from a single monolithic body and could only be separated by a fracture process involving the application of tractions equal to the theoretical strength  $\sigma_0$ . The fact that this doesn't

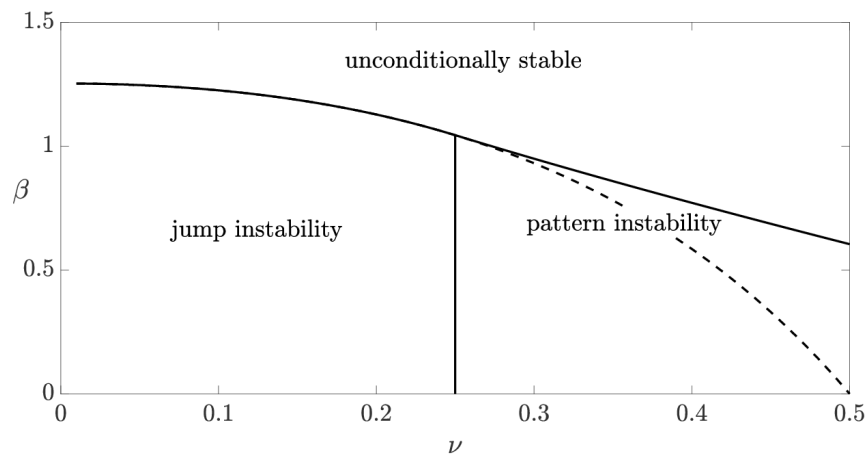


Figure 8: Dependence of stability behaviour on  $\nu$  and  $\beta$ .

generally happen is due to the microscopic roughness of practical surfaces. Numerous authors [33] have developed models to characterize and quantify the effect of surface roughness on solid contact, often motivated by the attempt to explain Amontons’ law of friction. However, most of these models are based on the Signorini dichotomy between contact and separation, and do not include adhesive [tensile] tractions. For ‘stiff’ materials such as metals, with macroscopic roughness (typically much larger in amplitude than the range of attractive tractions), this assumption is reasonable, but recent emphasis on flexible materials such as polymers and biotissues makes the interaction between adhesion and roughness particularly relevant.

#### 4.1. Fuller and Tabor

The first theoretical investigation of the effect of roughness on adhesion was that of Fuller and Tabor [34], who followed Greenwood and Williamson [GW] [35] in modelling the rough surface as a set of identical spherical asperities of radius  $R$  whose peak heights follow a Gaussian distribution with standard deviation  $h_{\text{rms}}$ , but who used the JKR solution of Section 2.1 to describe the individual asperity contacts. They predicted that the pull-off force should decrease drastically with  $h_{\text{rms}}$  and that this effect is characterized by the dimensionless parameter

$$\theta_{FT} = \frac{h_{\text{rms}}^{3/2} \Delta\gamma}{R^{1/2} E^*} \quad (27)$$



where we note that  $\Delta\gamma/E^*$  defines a characteristic adhesion length which for contact of similar materials is related to  $\varepsilon$  of equation (1).

Fuller and Tabor also conducted experiments with rubber spheres contacting a perspex plane with varying roughness amplitudes and obtained results that correlate well with the theory (see Fig. 9). This is surprising in view of the fact that the Fuller and Tabor theory suffers from even more limitations than the original GW theory [36] and the theory was developed for the contact of nominally plane bodies, rather than for a sphere on a plane. Strictly speaking therefore, the good qualitative experimental agreement might be considered fortuitous.

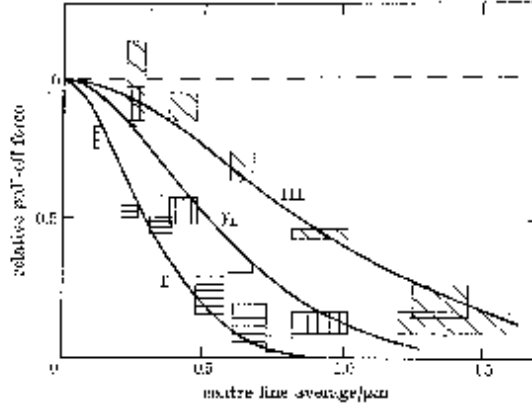


FIGURE 9. Relative pull-off force for rough rubber spheres in contact with a flat Perspex surface as a function of the roughness (s.l.a.) of the Perspex. Elastic modulus,  $E$ , of the rubber: curve I,  $2.4 \times 10^8 \text{ N m}^{-2}$ ; curve II,  $6.8 \times 10^8 \text{ N m}^{-2}$ ; curve III,  $2.2 \times 10^9 \text{ N m}^{-2}$ .

Figure 9: Relative pull-off decay force for three different elastic moduli and increasing center line average roughness in Fuller and Tabor experiments (from [34])

#### 4.2. Fractal surfaces

A not obvious aspect of Fuller and Tabor's adhesion parameter (27) is that it contains the asperity radius  $R$ , which for random rough surfaces is proportional to  $m_4^{-1/2}$  [37], where  $m_4$  is the fourth moment of the Power Spectral Density (PSD) of the profile. However, modern studies of nominally flat rough surfaces often assume a Gaussian isotropic 2D roughness with a PSD of the power-law form

$$C(\zeta) = \begin{cases} C_0, & \zeta_L < \zeta < \zeta_0 \\ C_0 \left(\frac{\zeta}{\zeta_0}\right)^{-2(H+1)}, & \zeta_0 < \zeta < \zeta_1 \\ 0, & \zeta > \zeta_1 \end{cases} \quad (28)$$

as shown in Fig. 10, where  $\zeta$  is the wavenumber and to make the surface more closely Gaussian, we have introduced a ‘roll-off’ region of constant PSD. The power-law segment in equation (28) typically extends over three or four decades so the roughness has a profound ‘multiscale’ character. The slope in this range is characterized by the Hurst exponent  $H$ , or equivalently by the fractal dimension  $D = 3 - H$ . With this PSD,  $m_4$  depends heavily on the choice of the abrupt truncation at  $\zeta = \zeta_1$  which in the case of measured surfaces is determined by the resolution or the sampling interval of the measuring instrument. Thus the asperity radii continue to decrease down to atomic scales, where asperities are defined by only a few atoms. This resolution-dependence has been much criticized, and in the fractal limit it means that no real surface should be sticky independently on the rms amplitude of roughness, a result which looks paradoxical. However, we shall see that even many more recent models predict paradoxical resolution dependence of stickiness, and the subject is still controversial.

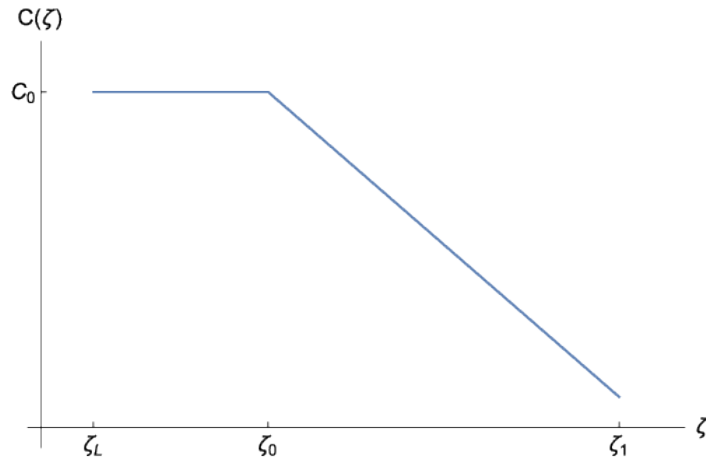


Figure 10: Log-log plot of the typical spectrum of surface roughness which is used today to model idealized nominally flat Gaussian rough fractal surfaces.

#### 4.3. Contact of multiscale surfaces without adhesion

Curiously, a true multiscale model of rough surfaces was originally discussed (without reference to adhesion) by Archard [38] as long ago as 1957. Ciavarella *et al.* [39] extended these concepts to a true fractal profile (the Weierstrass series), and found a paradoxical fractal ‘limit’ in which the contact is restricted to an infinite number of infinitesimal contact areas, each sustaining an infinite contact pressure. This anticipated Persson’s ‘resolution-dependent’ solution [40] of

the adhesionless rough contact problem which at low nominal pressures  $p_{\text{nom}}$  predicted that the total actual contact area  $A_c$  is given by

$$\frac{A_c}{A_{\text{nom}}} \sim \frac{p_{\text{nom}}}{E^*} \frac{1}{\sqrt{m_2}} \quad (29)$$

where  $A_{\text{nom}}$  is the ‘nominal’ or ‘apparent’ contact area and  $m_2$  is the second moment of the height PSD which also coincides with the slope variance. This dependence on rms slope is sensitive to the PSD truncation, so [e.g.]  $A_c \rightarrow 0$  as  $\zeta_1 \rightarrow \infty$  in eq. (28) [41]. Surprisingly, an identical result is obtained from asperity models [42] except for the exact prefactor, and this result caused quite a discussion in the literature [43, 44].

An arguably more important conclusion for adhesionless contact due to Persson [45] is that some macroscopic relationships, notably that between load and displacement, tend to a converged result in the fractal limit, whereas asperity model theories remain ill-posed as a result of neglecting interaction effects unless these are introduced numerically [46]. Particularly rapid convergence is found for the important case of low fractal dimension. Specifically, for  $D \simeq 2.2$  Persson [45] gives

$$\frac{p_{\text{nom}}(g)}{E^*} \simeq \zeta_0 h_{\text{rms}} \exp\left(\frac{-\bar{g}}{\gamma h_{\text{rms}}}\right) \quad (30)$$

where  $\bar{g}$  is the mean separation,  $\gamma \simeq 0.5$  and  $h_{\text{rms}} = \sqrt{m_0}$  is the rms height, which depends only weakly on the truncation  $\zeta_1$ . Notice that the height variance  $m_0$  coincides with the zeroth moment of the PSD. Another relationship that is only weakly dependent on fine scale roughness is that between electrical contact resistance and nominal pressure [47].

Equations (30, 29) are exemplary of two types of result in the contact of fractal rough surfaces: those that are determined primarily at the coarse scale and that are therefore not sensitive to measurement resolution, and those that are not convergent and indeed that give paradoxical predictions when ultrafine scale features are included.

#### 4.4. DMT-type solutions

We first remark that both JKR and DMT solutions of Sections 2.1 and 2.4 respectively retain a dichotomy between regions of contact and separation and hence can be expected to give results that are sensitive to the truncation limit  $\zeta_1$ . Of the two approaches, the DMT method seems to be the more appropriate, since we anticipate large numbers of small contact areas. However, it should be

emphasized that the Tabor parameter of Section 2.3 cannot be directly applied to rough surface contact. Attempts to define a generalized Tabor parameter for rough surface contact [31, 48, 49] generally predict that this parameter will tend to zero in the fractal limit [ $\zeta_1 \rightarrow \infty$ ], seeming to imply that a rigid-body [Bradley] solution would be appropriate in this limit. However, elastic deformation occurs on all length scales and is not rendered negligible by the presence of additional arbitrarily short wavelength roughness.

Persson and Scaraggi [31] developed a DMT-type solution for contact of nominally flat rough surfaces, where the adhesionless Persson’s solution could be used since it contains an approximate expression for the probability distribution  $\Phi(g)$  for the local gap  $g$  between the surfaces in regions of separation which could then be convoluted with any desired traction-separation law to obtain the nominal traction, as in the ‘force’ version of the DMT theory. Their results show a large dependence on the exact shape of the force-separation law when amplitude of roughness is low, which is to be expected since in the limit of no roughness, the traction-separation law itself should be re-obtained. However, comparison with a previous (JKR-based) theory [50] seem to indicate large discrepancies, and there was no detailed investigation of the effect of increasing truncation at  $\zeta = \zeta_1$ .

#### 4.4.1. Numerical solutions

Persson and Scaraggi compared their theoretical predictions with a numerical solution using a ‘Green’s Function Molecular Dynamics’ [GFMD] algorithm, a method which has been extensively used for such studies. Essentially, the elastic deformation is related to the discretized normal traction using an appropriate Green’s function, but the resulting set of non-linear equations at nodal points is solved using a molecular dynamics algorithm. Solutions are typically obtained over a rectangular grid with initial nodal heights chosen to approximate a surface with the PSD of equation (10). However, computational considerations place limits on the practical mesh refinement, so that even the most sophisticated codes such as those of Pastewka and Robbins [48] and that used in Müser’s recent ‘Contact Challenge’ [51] can only describe surfaces with PSDs spanning about three decades — e.g. nanometer to micrometer scales.

Pastewka and Robbins [48] developed a numerical model in which the nodes are identified with the atoms at the plane [100] surface of an fcc crystal in a square region with sides in the range  $512a_0$  to  $8192a_0$ , the latter corresponding to around one micrometer with typical interatomic spacings  $a_0$ . Periodic boundary conditions were imposed at the edges of the modelled region and the interaction of surface atoms with a rigid indenting rough surface was governed by a force law

approximating [and truncating] the Lennard-Jones law [1].

#### 4.4.2. *Pastewka and Robbins' theory*

In their numerical solution, Pastewka and Robbins define the contact area  $A_{\text{rep}}$  as comprising those atoms experiencing repulsive [compressive] forces and observe that at small applied loads  $N$ , it remains approximately linear with load [compare with the adhesionless equation (30)] even in the presence of adhesion. Indeed the morphology of the regions defining  $A_{\text{rep}}$  at appropriate force levels was found to be only weakly dependent on adhesion, suggesting that we are in the DMT régime. If this is assumed to be exactly true, we can construct a DMT solution by (i) finding the relation between  $A_{\text{rep}}$  and  $N$  without adhesion, and then (ii) modifying  $N$  by summing the tensile tractions in regions close to the perimeter of  $A_{\text{rep}}$ . Based on their numerical observations, Pastewka and Robbins estimate this correction by assuming the existence of a ‘boundary layer’ of tractions, leading to a term proportional to the perimeter, and on the basis of this calculation they define a criterion for ‘stickiness’ such that as we move from the condition  $A_{\text{rep}} = 0$  [complete separation], the normal load initially becomes tensile, implying that there must be another state with  $N = 0$  but  $A_{\text{rep}} > 0$ . They also make the interesting observation that the fractal dimension of  $A_{\text{rep}}$  is the same as that of its perimeter.

Pastewka and Robbins’ stickiness criterion contains the slope and curvature variances of the surface and if these parameters are expressed in terms of the PSD (10), it can be shown that stickiness requires that

$$\zeta_1^{(1-5H/3)} < C , \quad (31)$$

where  $C$  is a positive constant. Hence, in the fractal limit  $\zeta_1 \rightarrow \infty$ , *all* surfaces with  $D < 2.4$  should be sticky, and no surfaces with  $D > 2.4$  should be sticky. This conclusion seems quite counterintuitive and we shall find it in contrast with two more recent theories we discuss in the next two sections, which define stickiness based on ‘pull-off’. There seems to be a possibly conflict in the definition of stickiness, but recent investigations [103] have clarified that this is contradicted even by Persson and Scaraggi’s model [31].

#### 4.4.3. *BAM solution*

Ciavarella [18] applied the BAM approximation [discussed in the context of the spherical contact problem in Section 2.4.1] to the case of nominally flat bodies with Gaussian random roughness. This approach has the advantage of resulting in a closed form solution and has similarities with DMT-like models in that

some parts of the repulsive solution are used for the adhesive problem. However, rather than estimating local separations and convoluting them with a given force-separation law (as done by Persson and Scaraggi [31]), BAM assumes the simplified Maugis-Dugdale force-separation law and makes an independent estimate for the repulsive and adhesive components of the load. The results [18] show that the pull-off traction is principally determined by  $h_{rms}$ ,  $\zeta_0$  and becomes independent of the short wavelength truncation  $\zeta_1$ , as in the adhesionless load-separation relation (30). Therefore, we can easily construct counterexamples to the predictions of the Pastewka-Robbins criterion (31).

#### 4.4.4. Joe and Barber's theory

Persson's adhesionless theory [40] tracks the evolution of the probability distribution  $\Phi(p)$  for contact pressure as infinitesimal increments of the roughness PSD are added. Joe and Barber [52] adapted this approach using instead the distribution  $\Phi(g)$  of the local gap  $g$ , the evolution of which was determined by performing a linear perturbation on the interaction between elastic deformation and the Lennard-Jones force law. The results agree well with those from the GFMD algorithm due to Persson & Scaraggi [31] for a relatively narrow-band PSD, and in particular they exhibit convergence of the relation between mean traction  $\bar{\sigma}$  and mean gap  $\bar{g}$  as the truncation wavenumber  $\zeta_1$  is increased without limit.

This method can be applied only to relatively fine-scale [short wavelength] roughness, since longer wavelengths interacting with the Lennard-Jones force law exhibit instabilities of the kind discussed in Section 3.2. However, if a broader PSD is partitioned into two tranches, the theory can be used to determine the relation  $\bar{\sigma}(\bar{g})$  for the fine-scale tranche alone, and the complete contact problem can then be regarded as one for the coarse-scale tranche alone, but with  $\bar{\sigma}(\bar{g})$  functioning as a modified force law that accounts for the presence of the fine scale roughness. Joe and Barber [53] exploited this idea using an iterative approach to predict the relation  $\bar{\sigma}(\bar{g})$  for broadband PSDs of the form (28). They also presented contour plots for pull-off traction and effective [reduced] interface energy as functions of  $m_0$  and the lower truncated wave number  $\zeta_0$  for PSDs without the 'roll-off' range below  $\zeta_0$ . Sinusoidal instabilities are still possible [and indeed are physically reasonable] for relatively smooth surfaces with long wavelength content, but in the stable range, the pull-off traction is predominantly determined by the height standard deviation  $h_{rms}$  or equivalently  $m_0$ . Fig. 11 shows a comparison between the prediction of pull-off traction for three different values of  $\zeta_0$  using this theory [points] and using the BAM approximation from Section 2.4.1 [lines].

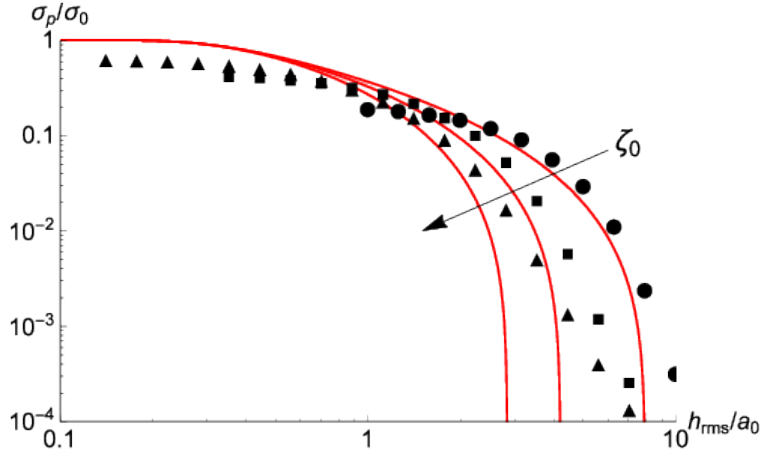


Figure 11: Comparison between BAM [lines] and Joe and Barber's theory [points] for the normalized pull-off traction as a function of height standard deviation for the three cases  $E^* \varepsilon \zeta_0 / \sigma_0 = 0.053, 0.213$  and  $0.53$ .

#### 4.5. JKR models

If we substitute typical a asperity radius for  $R$  in the definition of the Tabor parameter (8), the resulting value will generally imply that a JKR formulation is inappropriate for rough surface contact, unless an unrealistically small value is taken for the truncation wavenumber  $\zeta_1$ . With this in mind, Maugis [2] modified Fuller and Tabor's theory [34] to replace the JKR force-displacement law for an individual asperity by a DMT-Maugis law, and showed that the predicted adhesion reduction was still dependent on the parameter  $\theta$  of equation (27), with very minor differences. This is however most likely due to the very strong assumption of independent asperities behaviour.

Despite the limitation to coarse-scale roughness, the mathematical simplicity of the JKR approach has tempted many authors to use it, but reported results need to be interpreted with caution. Persson and Tosatti [54] defined an effective interface energy as the difference between the theoretical interface energy  $\Delta\gamma$  and the elastic strain energy in a state of full contact. This is essentially the work per unit area needed to separate the interface from a state of full contact. The elastic interface energy for full contact is unbounded for surfaces with fractal dimension  $D \geq 2.5$ , so this theory would predict that such surfaces could never adhere, even for arbitrarily small height variance  $m_0$ . By contrast, for  $D < 2.5$  full contact is predicted to be possible regardless of  $m_0$ . These results are inconsistent with the results of Joe and Barber [52] and the BAM theory [18]. Persson and Tosatti

also considered a possible enhancement of effective interface energy due to the fact that the area of a rough surface exceeds that of the projected plane, but if slopes are sufficiently large to make this term significant, the original basis of the calculation of  $\Delta\gamma$  from the interaction of adjacent atoms is itself questionable. In a later paper [50], Persson adapted his adhesionless contact theory by modifying the boundary condition at zero traction to include a scale-dependent finite *detachment stress* [the meaning of this stress is not very clear, and seems related to a "remote" stress rather than a local one: clearly, in a JKR model, infinite negative stresses should be allowed]. The predictions of these theories show both qualitative and quantitative discrepancies relative to numerical solutions, even when the latter are based on the JKR assumptions [55, 56].

Afferrante et al. [57] extended the Weierstrass-Archard model [39] to include JKR adhesion, and found a similar conclusion: namely that for low fractal dimension, the contact area converges to a finite limit and full contact can occur at all scales. On the other hand, Ciavarella [9] showed that the [approximate] generalized JKR solution of Section 2.2 introduces a dependence on surface slopes even in the load-separation relationship, and predicts no adhesion in the fractal limit for all fractal dimensions, contrary to the theories of Sections 4.4.3, 4.4.4. The JKR formulation also leads to erroneous conclusions when applied in the limit 'almost complete contact', as we shall see in the next Section.

#### 4.5.1. Almost complete contact

In Tribology it is conventional to assume that the actual contact area is much smaller than the nominal area — in other words that  $A_c/A_{\text{nom}} \ll 1$  in equation (29). This view dates back to the pioneering studies of friction due to Bowden and Tabor [58], who argued that full contact ( $A_c = A_{\text{nom}}$ ) is impossible, at least for rough metal surfaces, due to work hardening. The condition  $A_c/A_{\text{nom}} \ll 1$  is also a fundamental requirement for asperity models, since these clearly only make sense when contact is restricted to the highest points on the surface. However, with increased interest in flexible materials such as rubber and polymers, the possibility of larger contact ratios must be considered, even in the elastic régime, including cases where actual contact occurs everywhere except at the deepest depressions.

A good starting point for this discussion is Johnson's JKR solution [7] for the partial contact of bodies with one- and two-dimensional sinusoidal profiles. Johnson first determines the elastic contact traction required for full contact and then constructs the partial contact solution by superposing a correction comprising a set of 'pressurized cracks' opened by pressures equal and opposite to the tractions at full contact. This idea was extended by Xu *et al.* [59] for a rough surface in



the absence of adhesion. In the case of full contact, the PSD for contact traction can be written down in terms of that for surface heights [e.g. equation (28)]. In particular, the moments  $m_n^p$  of the traction PSD are related to those of the height PSD through

$$m_0^p = \frac{1}{2}E^{*2}m_2, \quad m_2^p = \frac{1}{3}E^{*2}m_4, \quad m_4^p = \frac{3}{10}E^{*2}m_6 \quad (32)$$

[60, 61], and Nayak's random surface theory [62] can then be used to determine the distribution and properties of tensile 'peaks' of this distribution. Each of these peaks defines a possible separation region and the total separation area is then determined by a summation analogous to that used in classical asperity model theories.

We note from equation (32) that the moments  $m_n^p$  of the traction distribution are related to higher moments  $m_{n+2}$  of the height distribution, which suggests that the results might be very sensitive to the truncation limit  $\zeta_1$ . However, results show that the normalized total separation area depends only on the Nayak bandwidth parameter

$$\alpha^p = \frac{m_0^p m_4^p}{(m_2^p)^2} = \frac{27}{20} \frac{m_2 m_6}{m_4^2} \quad (33)$$

for the traction PSD, which is only weakly dependent on the truncation. Also, Ciavarella [63] has shown that if a bearing-area argument is used to estimate the separation area from the full contact pressure, and if a corrective factor 4/3 is used for the this area, the Xu model leads exactly to Persson's well-known solution [40]. A very detailed numerical investigation is difficult under almost full contact, but the comparisons in Ciavarella [63] seem to indicate that Persson's solution, although asymptotically correct in full contact, may indeed more less accurate than the 'traction asperity' theory.

Ciavarella [60] extended this method to include adhesion using the JKR approach, and found that there is now a dependence on  $m_6$  independently of the bandwidth parameter. For low fractal dimensions, adhesion enhancement in the form of larger and larger contact area seems to be obtained as  $\zeta_1$  is increased. However, if the more realistic Maugis-Dugdale traction law is assumed in the separated region, a transition to a non-hysteretic régime is found [49], depending on the rms surface slope  $\sqrt{m_2}$ . Hence, in the fractal limit, the contact normalized contact area tends to the value without adhesion. This transition can be characterized by a generalized Tabor parameter, where however the process zone dimension  $s_0$  of equation (9) is compared with characteristic dimensions of distinct separation areas, rather than of contact areas.

#### 4.6. Tabor parameter for multiscale surfaces

For the contact of spheres, we have seen that the exact solution [using the Lennard-Jones traction law] is well described by the JKR theory when the Tabor parameter  $\mu$  is large, and by the DMT theory [or even Bradley’s rigid body solution] when  $\mu$  is small. Several authors [31, 48, 49] have defined ‘scale-dependent’ Tabor parameters, all of which tend to zero in the fractal limit  $\zeta_1 \rightarrow \infty$ . A naïve comparison with the sphere problem would then suggest that the solution in this limit could be obtained by assuming the contacting bodies to be rigid, but this is clearly in error, since a Gaussian surface has no highest point, so a rigid-body solution would imply infinite separation. By contrast, theories based on an interfacial traction law, such as those described in Sections 4.4.3, 4.4.4 exhibit progressively weaker dependence on  $\zeta_1$  and indeed converge on a meaningful result in the fractal limit. Thus, although we can argue rigorously, as in Section 2.3, that the JKR solution tends asymptotically to the exact solution when  $\mu \rightarrow \infty$ , no such proof exists for the case where  $\mu \rightarrow 0$ .

In general, both DMT and JKR solutions (including numerical solutions e.g. [55, 56]) for the contact of randomly rough surfaces should be regarded with some caution, not to say skepticism, since the appropriateness of these approximations depends on parameters which are often not well characterized, such as the smallest width of a representative contact area. At present there is no well-defined ‘map’ of the regions of rough-surface parameter space in which these theories might reasonably be applied, not least because numerical solutions are computationally demanding and hence necessarily limited in scope. In this regard, the iterative approach used by Joe and Barber [53] defines a method for spanning a broad spectrum PSD without necessitating a choice between the two classical approximations.

#### 4.7. Adhesion enhancement

Experiments by Briggs & Briscoe [64] with rough perspex cylinders rolling on a flat rubber surface showed an interesting result: adhesion energy apparently *increased* with submicron roughness amplitude as compared with the nominally smooth case. In pure rolling, the resistance must be a combination of viscous losses and adhesive hysteresis, but these authors also reported cases the results of pull-off experiments some of which also showed enhancement due to roughness.

We recall that Persson and Tosatti [54] have suggested that enhancement may result from the fact that the area of a rough surface exceeds that of the projected plane. An alternative model was suggested by Guduru [65] who considered the contact of a sphere with a rough surface modelled as a set of concentric waves.

Using the JKR model and assuming that the contact area is simply connected (i.e. a circle), he obtained the load-indentation plot of Fig. 12, which exhibits oscillations about the ‘smooth’ curve (shown dotted) as the sphere contacts with each successive wave. The maximum tensile force occurs at  $B$  and clearly exceeds the value for a smooth sphere, but also loading and unloading under displacement control involve unstable jumps, such as those indicated by the arrows in Fig. 12, implying that toughness as well as pull-off is enhanced. Kesari and Lew [66] provided an elegant solution for the envelope of Guduru’s curve, and Ciavarella [67] showed that in fact Kesari’s solution corresponds to an increased value of interface energy on unloading (whereas it is reduced during loading), which depend on the parameter introduced by Johnson [7] to characterize the adhesive contact of bodies with two-dimensional sinusoidal roughness. These models predict that enhancement continues to increase with larger roughness amplitudes, which is clearly unrealistic. In particular, a simply-connected contact area would then be difficult to achieve, even with a large preload, and the corresponding spatial oscillations would imply the existence of extended regions where the tensile tractions exceed  $\sigma_0$ , thus invalidating the JKR assumption.

Kesari et al. [68] investigated a more realistic Gaussian form of microscale roughness, and reported AFM experiments showing a marked difference between loading and unloading, with the force on unloading depending on the maximum indentation depth (depth-dependent hysteresis (DDH)). Deng & Kesari [69] have also suggested that energy dissipation comes from two sources, one independent of maximum indentation depth and the other mainly due to roughness, which for large enough roughness amplitude essentially comprises dissipation in asperity contacts.

#### 4.8. *Effect of roughness on hysteresis*

If in a contact problem the load-displacement relation is multi-valued, then different branches will generally be followed during loading and unloading, resulting in hysteretic energy loss. We have reported several cases of this kind in the preceding pages, including for example in Sections 3.1, 3.3, and 4.7. For the sphere, hysteresis is predicted using the JKR approximation, but not with the DMT approximation. Indeed, the DMT solution of any geometrically defined problem predicts a single-valued relation between force and displacement, since we first solve the adhesionless problem, which has a unique solution, and we then modify the resulting force by a convolution of the interface-traction law with the gap from this same unique solution.

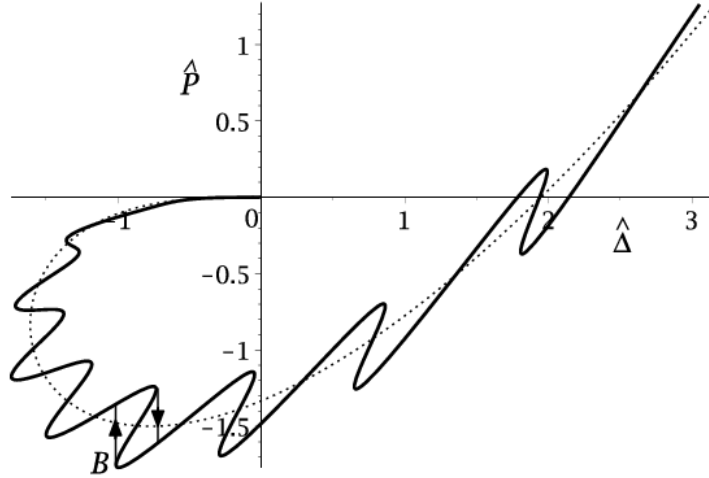


Figure 12: Force-indentation curve for a sphere with axisymmetric waves (solid curve) compared with the classical JKR curve (dotted line). Due to unstable jumps the dissipated energy is highly increased for the wavy surface (from [65]).

It is then tempting to argue that since fine-scale roughness generally pushes us into the DMT regime, rough surface contact should not involve hysteresis. However, this is not the case. Rough-surface contact theories generally (i) assume that the nominal pressure is statistically uniform over an infinite area, and (ii) eliminate the ‘zeroth-order’ [uniform] elastic deformation of the contacting bodies, since for half spaces, this would be infinite except in the special case of an incompressible material. The uniform term is also generally eliminated in numerical models. In effect, these theories generate the properties of a fictitious ‘non-linear layer’ which, if attached to the surface of a smooth body, would then mimic the effect of roughness in the actual body. This process essentially decouples the roughness scale from the necessarily finite dimensions of the actual contacting bodies and can be seen as a form of homogenization.

The mechanical behaviour of the layer can be described by a relation  $\bar{\sigma}(\bar{g})$  between mean traction and mean gap, which would reduce to [e.g.] the Lennard-Jones law in the limit of vanishing roughness, but which in general will have a lower maximum [pull-off] traction and a larger range of effectiveness [53]. As long as  $\bar{\sigma}(\bar{g})$  exhibits a tensile range, there must be a range with negative slope, so instabilities and associated multi-valued force-displacement relations are possible under force or displacement control. These may involve ‘jumps’ between states with uniform tractions, or the development of patterns as discussed in Section 3.3.

In discussing Figure 6, we noted that solutions even of the smooth contact problem are very sensitive to numerical perturbations in and just outside the unstable range. This effect is of course even more pronounced if the surfaces have random roughness, provided this is not of such large amplitude as to suppress the instability. The patterns developed analogous to those of Figure 5 are now irregular and significant differences are observed between different realizations of the same roughness statistics.

If the JKR approximation is used to describe the roughness scale, the relation  $\bar{\sigma}(\bar{g})$  may itself be multi-valued, as in the case of the Fuller and Tabor model. Greenwood [36] showed that the unloading curve then depends on the maximum compressive traction achieved during loading, which is a form of history-dependence. Guduru’s solution [see Section 4.7] exhibits similar behaviour. However, since length scales cannot be too small for the JKR approach to be valid, there is some question as to whether the micro- and macro-scales can then be effectively decoupled. This question also arises in the broad spectrum results of Joe and Barber [53] which show an unstable range at small lower wavenumber  $\zeta_0$  that might reasonably be interpreted as a macroscale effect.

#### 4.9. *Effect of plasticity in rough surface contact*

In Section 4.3, we showed that for the elastic contact of multiscale rough surfaces without adhesion, the predicted actual contact area decreases without limit as  $\zeta_1$  increases, implying a corresponding increase in mean contact pressure. Clearly this process must eventually be limited by inelastic effects. Gao and Bower [70] extended the Weierstrass solution of Ciavarella *et al.* [39] to an elastic rigid-plastic material and showed that in this case the total actual contact area tends to a finite limit, corresponding to a mean contact pressure close to  $6\sigma_Y$ . Similar results were reported by Pei *et al.* [71] based on a finite-element solution for a random rough surface, and these authors also noted an approximately linear relation between total contact area and force — a result that was postulated by Bowden and Tabor [72] as early as 1939.

The present authors are unaware of any investigation of the contact of elastic-plastic rough bodies including adhesion, but based on the arguments in Section 2.5, we might anticipate that plastic deformation would increase the ‘comformability’ of the surfaces and hence increase [for example] the pull-off traction, and make it strongly *load-dependent* [that is, in addition to the load-dependence which may already arise in elastic adhesive contacts]. In support of this claim, we note that Mesarovic and Johnson [20] predict an increase in pull-off force due to plasticity for a single sphere, and their results might reasonably be incorporated in a

modified asperity model theory. Also, Pei *et al.* [71] reported an increase in the total actual contact area during unloading relative to that during loading which would also conduce to increased pull-off. However, notice that roughness spectra generally extend to the nanometer scale and on this length scale conventional plasticity may not provide a good description of the inelastic material behaviour, and this itself needs to be investigated more.

## 5. Bio-inspired adhesion

While we have so far concentrated in theories about idealized geometries, Nature has developed efficient mechanisms to adhere to almost any kind of surface with a lot more freedom of choice, and indeed theoretical solutions based on a perfectly homogeneous, nominally flat geometry fails to explain many of these effects. Indeed, non-patterned surfaces exhibit too weak adhesion capabilities, because roughness stress concentrations and defects easily destroy the effect of interface energy. What makes bio-adhesive systems exceptional is their anisotropy, and their self-cleaning and wear resistance properties. The literature on this topic has largely expanded in recent years, and here we shall cover only a very limited amount of material, far less detailed than in some of the previous topics.

Synthetic pressure sensitive adhesives commonly used in domestic or industrial applications deliver either strong or weak adhesion, but require similar energy for detachment. Strong synthetic adhesives are difficult to detach, whereas weak adhesives detach easily. Systems of this kind are unsuitable for locomotion. By contrast, a gecko is able to sustain several times its weight, but is also able to detach its foot in 15 ms and with negligible detachment force [73, 74]. Gecko adhesion relies on non-specific van der Waals forces [75] and its pads are covered by millions of hairy setae of characteristic dimension of hundred microns, which split in finer endpoints, called spatulae, of nanometric dimension, leading to a multiscale hierarchical structure.

One of the keys to this impressive performance is indeed ‘contact splitting’. Hensel *et al.* [74] found that in general, the pull-off force  $P_n$  for a micropattern with  $n$  contacts is related to that for a contact without splitting,  $P_0$ , by

$$P_n = n^s P_0 \quad (34)$$

where  $s$  is called the ‘contact splitting efficiency’, which for hemispherical tips is equal to  $1/2$ . Further, if one applies fracture mechanics arguments to the detachment of an elastic flat-ended pillar of diameter  $D_p$  perfectly bonded to a rigid

substrate, the energy release rate is found as

$$G \sim \frac{\sigma}{E} D_p^{0.81} l^{0.19} \quad (35)$$

where  $l$  is the length of a small crack that advances at the interface. Equating  $G$  the work of adhesion  $\Delta\gamma$  leads to a pull-off stress

$$\sigma_P \sim \frac{\sqrt{E\Delta\gamma}}{D_p^{0.406} l^{0.094}} \quad (36)$$

For the length scales involved, Equation (36) gives a scaling very close to that for a crack ( $-1/2$ ), and indeed the sum of the two powers is  $1/2$ . The weak power in crack length  $l$  is due to the assumption of  $l \ll D_p$ . When the pillar diameter is small, there is a cohesive failure régime, with detachment occurring at the theoretical strength of the material  $\sigma_0$ . Notice that this analysis predicts that higher modulus pillars have higher pull-off stress, but this needs to be balanced by the effect of roughness, for which lower modulus pillars adapt better.

Although contact splitting provides an explanation for adhesion enhancement in some bio applications, we are still far for a complete understanding of how adhesion is effectively controlled at the interface. While Artz *et al.* [76] showed a strong correlation in flies, beetles, spiders, and lizards between the areal density of attachment hairs and the body mass, later Peattie and Full [77] surveyed 81 species with hierarchical fibrillar structures and found no such correlation when the data are analyzed within the same taxa (see also [78]). Indeed Bartlett *et al* [79] proposed a more general criterion based on total energy minimization, which predicted that the maximum adhesion force would scale according to the relationship

$$P_0 \sim \sqrt{\Delta\gamma} \sqrt{\frac{A_c}{C_{\parallel}}} \quad (37)$$

where  $A_c$  is the area of intimate contact and  $C_{\parallel}$  is the compliance in the direction of the applied load. Figure 13 shows an impressive correlation between equation (37) and results for both natural and synthetic adhesives over 14 orders of magnitudes.

Since  $\Delta\gamma$  is an uncontrollable parameter that depends on the interface properties, an optimal design requires that we maximize the ratio  $A_c/C_{\parallel}$ , but this is not an easy task. The system must be soft enough to maximize the contact area and adapt well on any kind of substrate, but also rigid enough in the direction of the applied load. In this respect, hierarchical fibrillar structures are likely to

be one of the more promising designs (perhaps the most successful), but not the only one. Indeed, Bullock *et al.* [80] compared hairy (*Gastrophysa viridula*) and smooth (*Carausius morosus*) pads finding comparable adhesive performance, except that hairy pads can exhibit more anisotropy due to the ability to control each seta individually.

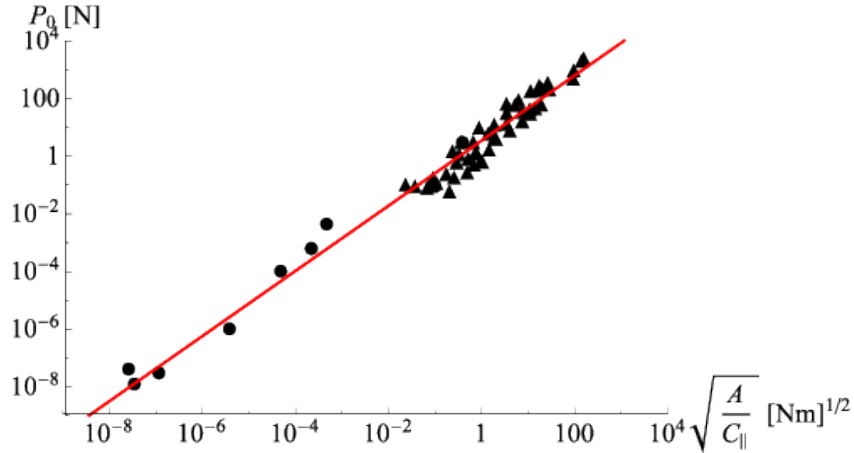


Figure 13: Scaling relationship for natural and synthetic adhesives. Data align over 14 orders of magnitude. (form [79])

### 5.1. Patterned surfaces

Inspired by biological design solutions, micro- and nano-patterned surfaces have been developed. These rely on pillars or dimples of various shapes, whose individual small scale makes it possible to have them defect-tolerant and reach high values of strength, close to  $\sigma_0$ . Several authors have attempted to replicate solutions in Nature with micropatterned dry adhesives to obtain reversible capabilities to grip, position, and release objects [81, 82, 83, 84, 85].

For an arrangement of pillars, a simple argument is that the elastic strain energy stored in a single pillar is effectively dissipated during pull-off [74]. The remaining load then has to be redistributed over the remaining surface and the crack needs to nucleate again at the next pillar for pull-off to proceed. Hence ‘crack trapping’ enhances the effective work of separation at the next pillar by  $\pi D^2 \sigma_p^2 L / 2E$ , where  $L$  is the pillar height. Therefore, a small elastic modulus with long pillars having high individual pull-off stresses is beneficial for this effect to be maximized.



Barreau and co-authors [86] have shown that one strategy for better adaptation to surface roughness is to use a small pillar diameter to take advantage of the contact splitting effect, but not smaller than the mean spacing between local peaks on the substrate, insofar as this can be defined for a multiscale surface. The problem is that when diameter is too small compared with this criterion, bending and buckling events occur, storing strain energy, which effectively reduce adhesion.

An alternative strategy is to design the contact geometry to include mushroom or funnel-shaped tips. These shapes can increase the pull-off stress even by an order of magnitude because of the shift from the severe singular edge stresses of the flat punch to the more uniform stresses with almost no singularity at the edge of the mushroom flaps [87]. More precisely, the singular stress multiplier is determined by the thickness of the flaps, rather than the diameter of the fibril.

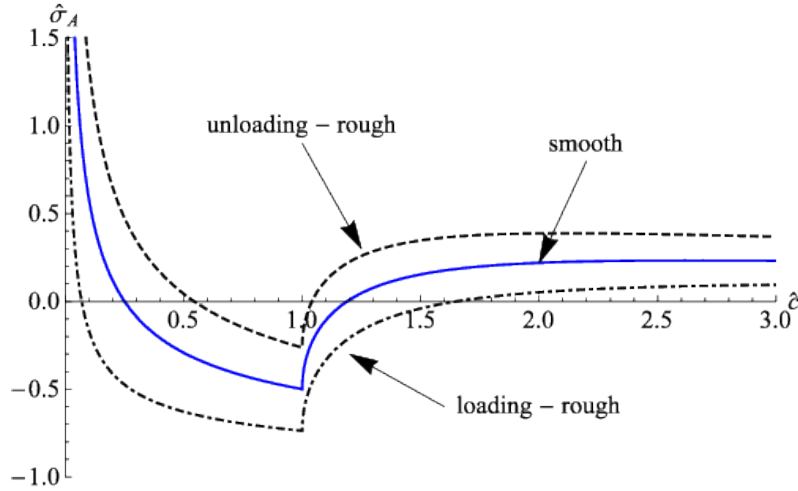


Figure 14: Loading curves for smooth (solid lines) and rough dimple (dashed lines).

For surfaces with nano/micro-dimples, McMeeking *et al.* [88] proposed an elegant model comprising essentially the JKR solution for a single depression in one of the surfaces. Interestingly a bi-stable pressure-sensitive adhesive mechanism was obtained, with two distinct states of weak or strong adhesion. As in Johnson's solution for the sinusoid [7], the model suffers from the weakness that with the JKR assumption a theoretically infinite traction is needed to detach the surface from a state of full contact (see the solid line in Fig. 14) unless an initial perturbation such as air entrapment as assumed. Papangelo & Ciavarella [89] extended the McMeeking analysis using a Maugis cohesive model to account for the adhesive interaction. The analysis showed that the adhesive behaviour depends

not only on the work of adhesion but also on a generalized Tabor parameter  $\mu$ . Low  $\mu$  leads to the rigid solution which shows no hysteretic behaviour, while for large  $\mu$  the cohesive solution tends to the JKR limit.

More recently, Papangelo & Ciavarella [90] studied the effect of an axisymmetric single-scale sinusoidal roughness superimposed on an otherwise smooth dimple, in the JKR régime. As in [65] (see Section 4.7), the contact area is assumed to be connected, in this case comprising the region outside a single circle. The results show that the nominal compressive traction required to reach the full contact state is increased by the added roughness, but when this is reached, the resistance to pull-off is increased relative to the ‘smooth’ case (see the dashed lines in Fig. 14). In effect, the rough dimple behaves similarly to the smooth dimple, except that the effective work of adhesion is increased during loading and decreased during unloading. These results are analogous to those of Guduru [65] for the case of a sphere with added a sinusoidal axisymmetric waviness.

## 6. Adhesion and friction

Recently, there has been a large interest in the interplay between adhesion and friction. In many insects, for example, it has been found that the normal force needed to detach adhesive pads is approximately a linear function of the shear force simultaneously applied [73, 91, 92]. This recalls Amonton’s law for friction, and indeed the model of “frictional adhesion” introduced by Autumn [73], is a modification of the classical Amonton law, with two “friction coefficients”, one for compressive, and the other for tensile loads.

Classical contact mechanics models for adhesion and friction interaction date back to the seminal work of Savkoor & Briggs [93] who extended the JKR solution for a smooth sphere to friction. They assumed a singular stress field also in tangential direction (mode II), and combined the energy release rate  $G$  as

$$G = \frac{1}{2E^*} [K_I^2 + K_{II}^2] = \Delta\gamma \quad (38)$$

where  $K_I$  and  $K_{II}$  are respectively the mode I and II stress intensity factors.

However, Savkoor & Briggs [93] found that the contact area reduction was *greatly overestimated* by this “purely brittle” model, which, in other words, assumes no frictional resistance when the crack advances. Instead, the interface “toughness”  $G_c$  should be considered a function of the phase angle

$$\psi = \arctan \left( \frac{K_{II}}{K_I} \right) \quad (39)$$

and, although physical models have been advanced [94], essentially a mode-mixity function  $f(\psi)$  that includes a fitting parameter is introduced [95]

$$G_c = \Delta\gamma f(\psi) \quad (40)$$

Johnson [96] was the first to reconsider Savkoor & Briggs [93] model adding a single empirical constant  $0 < \alpha < 1$  to tune the "interaction" between modes, where  $\alpha = 0$  corresponds to the 'ideally brittle' behavior of Savkoor & Briggs [93] which implies no frictional resistance in the relative tangential motion of the two surfaces, and  $\alpha = 1$  corresponds to the mode uncoupling with no sensitivity to the tangential load. Later, Johnson [97] introduced more complex cohesive models in both mode I and mode II (mode III was removed by "averaging around the periphery of the contact to maintain axisymmetry in the model), and the number of constants increased. Waters & Guduru [98] came back on this argument proposing their fracture mechanics model and comparing with extensive experimental results, which showed good agreement at least until the contact area remained circular. The possibility of cycles of slip instability and reattachment especially for compressive normal loads appear in some authors, which have some similarities with Schallamach waves [99], and at the moment there is no complete understanding about when, depending on the particular experimental testing apparatus, method and materials used, they should appear or not (see discussion [98]). Finally, Sahli et al. [100] suggest a quadratic decay of the contact area with tangential load,  $A_c = A_0 - \alpha_A T^2$ , where  $A_0$  is the contact area at null tangential load  $T = 0$  and  $\alpha_A$  is a fitting area reduction coefficient. They find that the latter parameter scales with power  $-3/2$  with  $A_0$  over about 4 orders of magnitude (Fig. 15), for both smooth (sphere vs plane) and rough contact and that sliding corresponds to the condition when the contact area has reduced such that the tangential load corresponds to the product of a material constant shear strength and the reduced contact area.

## 7. Conclusions

We have seen that a wide range of interesting physical phenomena can result from the interaction of adhesive [i.e. tensile] tractions between contacting bodies and the underlying contact mechanics. These include, for example, various kinds of instability involving jumping into and out of contact, and also the development of self-generated patterns in systems where one would otherwise expect a nominally uniform state. The 'JKR' energetic approach provides a convenient and

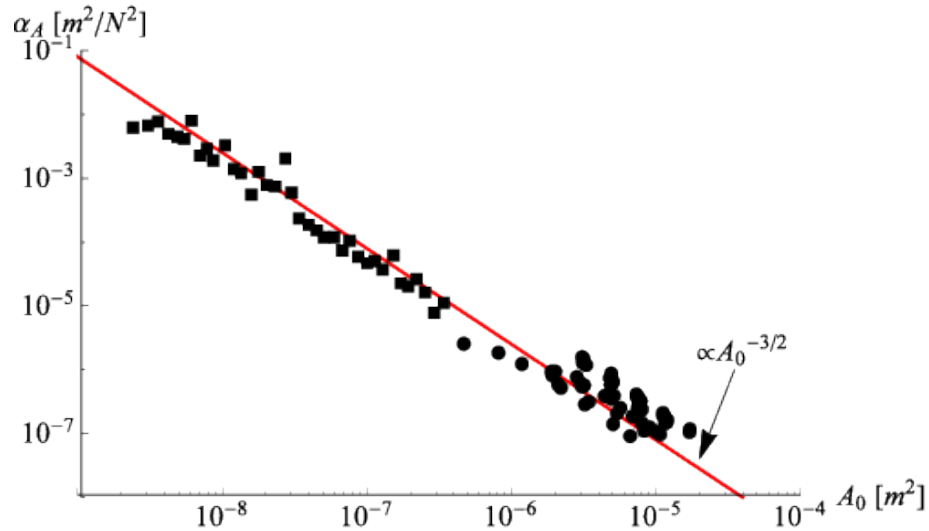


Figure 15: Contact area reduction coefficient  $\alpha_A$  as a function of the initial apparent contact area  $A_0$  for both sphere and rough contact. (from [100])

reliable approximation to the solution in such cases provided that the problem is ‘macroscopic’ — i.e. that the resulting contact and separation regions are large relative to the length scale defined by equation (9) — but many modern applications of adhesive contact mechanics fail this test, either because the contacting bodies are themselves small, as in many biological and nano-structural problems, or because the more or less inevitable existence of surface roughness causes the contact area to bifurcate into a morphology defined at the nanoscale.

Various approximations have been suggested and used in these cases, including the approximation of the traction law by a piecewise constant function, and the so-called ‘DMT’ approach, where it is assumed *a priori* that the region where the contact tractions are compressive is unaffected by surrounding regions of tensile traction, which therefore only affect the calculation of the total force. The reliability of such approaches can only be assessed by comparison with non-linear numerical solutions using the exact form of the interface traction law, but unfortunately computational limitations generally restrict the dimensions of the system that can be so modelled, typically to not exceed the micrometre scale. This problem is particularly challenging when surface roughness is taken into account, since roughness often spans a spectrum covering four or five orders of magnitude, and additional complication is introduced by the fact that the surface is then defined only in a statistical sense. We describe and compare various attempts at treating

this challenging multiscale problem.

In summary, adhesive contact mechanics is an extraordinarily rich source of challenging problems, in which significant advances are regularly being made.

### **Author contribution statement**

MC generally designed the review, JJ provided some numerical analysis for the patterns in very smooth soft surfaces, and all authors contributed to the organization and text of the final MS.

### **Acknowledgements**

A.P. is thankful to the German Research Foundation (DFG) for funding the projects HO 3852/11-1 and PA 3303/1-1.

### **References**

- [1] J. E. Jones, (1924), On the determination of molecular fields. II. From the equation of state of a gas, *Proceedings of the Royal Society of London*, Vol. 106 (738), pp. 463–477 [213]. doi: 10.1098/rspa.1924.0082
- [2] D. Maugis, *Contact, Adhesion and Rupture of Elastic Solids*, Springer, New York (2000).
- [3] R.S. Bradley, (1932). The cohesive force between solid surfaces and the surface energy of solids. *Phil Mag*; 13:853–862.
- [4] H. Rumpf, *Particle Technology*, Chapman & Hall, London (1990).
- [5] Y.I. Rabinovich, J.J. Adler, A. Ata, R.K. Singh and B.M. Moudgil, (2000), Adhesion between nanoscale rough surfaces: I. role of asperity geometry; II. measurement and comparison with theory, *Journal of Colloid and Interface Science*, Vol. 232, pp. 10–16, 17–24.
- [6] K.L. Johnson, K. Kendall, A.D. Roberts, (1971), Surface energy and the contact of elastic solids. *Proc R Soc Lond*;A324:301–313. doi: 10.1098/rspa.1971.0141
- [7] K. L. Johnson, (1995), The adhesion of two elastic bodies with slightly wavy surfaces, *International Journal of Solids and Structures*, Vol. 32 (3–4), pp. 423–430. doi: 10.1016/0020-7683(94)00111-9

- [8] V. L. Popov, R. Pohrt and Q. Li, (2017), Strength of adhesive contacts: Influence of contact geometry and material gradients. *Friction*, Vol. 5(3), pp. 308–325. doi: 10.1007/s40544-017-0177-3
- [9] M. Ciavarella, (2018), An approximate JKR solution for a general contact, including rough contacts. *Journal of the Mechanics and Physics of Solids*, 114, 209-218.
- [10] V. M. Muller, V. S. Yushchenko and B. V. Derjaguin, (1980), On the influence of molecular forces on the deformation of an elastic sphere and its sticking to a rigid plane, *Journal of Colloid and Interface Science*, Vol. 77 (1), pp. 91–101. doi: 10.1016/0021-9797(80)90419-1
- [11] D. Tabor, (1977), Surface forces and surface interactions, *J. Colloid Interface Sci*; 58:2–13. doi: 10.1016/0021-9797(77)90366-6
- [12] M. Ciavarella, J.A. Greenwood and J.R. Barber, (2017), Effect of Tabor parameter on hysteresis losses during adhesive contact, *Journal of the Mechanics and Physics of Solids*, Vol. 98, pp. 236–244.
- [13] B. V. Derjaguin, V. M. Muller and Yu. P. Toporov, (1975), Effect of contact deformations on the adhesion of particles, *Journal of Colloid and Interface Science*, Vol. 53 (2), pp. 314–326. doi: 10.1016/0021-9797(75)90018-1.
- [14] M. D. Pashley, (1984), Further consideration of the DMT model for elastic contact. *Colloids and Surfaces*, Vol. 12 [1-2], pp. 69–77. doi: 10.1016/0166-6622(84)80090-6
- [15] J.A. Greenwood, (2007), On the DMT theory. *Tribol Lett*; 26:203–211. doi: 10.1007/s11249-006-9184-7
- [16] D. Maugis, (1992), Adhesion of spheres: The JKR-DMT transition using a Dugdale model, *Journal of Colloid and Interface Science*, Vol. 150 (1), pp. 243–269. doi: 10.1016/0021-9797(92)90285-T
- [17] J. A. Greenwood and K. L. Johnson, (1998), An alternative to the Maugis model of adhesion between elastic spheres, *Journal of Physics, D: Applied Physics*, Vol. 31 (22), pp. 3279–3290. doi: 10.1088/0022-3727/31/22/017
- [18] M. Ciavarella, (2018), A very simple estimate of adhesion of hard solids with rough surfaces based on a bearing area model, *Meccanica*, Vol. 53, pp. 241–250. doi: 10.1007/s11012-017-0701-6

- [19] K. L. Johnson, (1976), Adhesion at the contact of solids. In: Koiter, W.T. (Ed.), *Theoretical and Applied Mechanics*, Proc. 4th IUTAM Congress. North Holland, Amsterdam, p. 133.
- [20] S. D. Mesarovic, K. L. Johnson, (2000), Adhesive contact of elastic–plastic spheres. *Journal of the Mechanics and Physics of Solids*, 48(10), 2009–2033.
- [21] K. L. Johnson, (1985), *Contact Mechanics*, Cambridge University Press, Cambridge.
- [22] F. Yang, (2006), Asymptotic solution to axisymmetric indentation of a compressible elastic thin film, *Thin Solid Films* Vol. 515 (4), pp. 2274–2283. doi: 10.1016/j.tsf.2006.07.151
- [23] I. I. Argatov, G. S. Mishuris and V. L. Popov, (2016), Asymptotic modelling of the JKR adhesion contact for thin elastic layer, *Quarterly Journal of Mechanics and Applied Mathematics*, Vol. 69 (2), pp. 161–179. doi: 10.1093/qjmam/hbw002
- [24] F. Yang, (2002), Adhesive contact between a rigid axisymmetric indenter and an incompressible elastic thin film, *Journal of Physics D, Applied Physics*, Vol. 35 (20), pp. 2614–2620. doi: 10.1088/0022-3727/35/20/322
- [25] A. Papangelo, (2018), Adhesion between a power-law indenter and a thin layer coated on a rigid substrate. *Facta Universitatis, Series: Mechanical Engineering*, 16(1), 19–28.
- [26] M. Hannah, (1951), Contact stress and deformation in a thin elastic layer. *Quarterly Journal of Mechanics and Applied Mathematics*, Vol. 4 (1), pp. 94–105. doi: 10.1093/qjmam/4.1.94
- [27] V. Shenoy, A. Sharma, (2001), Pattern formation in a thin solid film with interactions, *Physical Review Letters* 86 (1) 119.
- [28] J. Sarkar, V. Shenoy, A. Sharma, (2004), Patterns, forces, and metastable pathways in debonding of elastic films, *Physical Review Letters* 93 (1) 018302.
- [29] M. Gonuguntla, A. Sharma, R. Mukherjee, S. A. Subramanian, (2006), Control of self-organized contact instability and patterning in soft elastic films, *Langmuir* 22 (16) 7066–7071.

- [30] W. Mönch, S. Herminghaus, (2001), Elastic instability of rubber films between solid bodies, *EPL (Europhysics Letters)* 53 (4) 525.
- [31] B. N. J. Persson and M. Scaraggi (2014), Theory of adhesion: Role of surface roughness, *Journal of Chemical Physics*, Vol. 141 (12), Art. 124701. doi: 10.1063/1.4895789
- [32] R. Mukherjee, R. Pangule, A. Sharma, and G. Tomar, (2007), Contact instability of elastic bilayers: Miniaturization of instability patterns *Advanced Functional Materials*, Vol. 17(14), pp. 2356–2364. doi: 10.1002/adfm.200600896
- [33] A.I. Vakis, *et al.*, (2018), Modeling and simulation in tribology across scales: An overview. *Tribology International*, Vol. 125, pp 169-199. DOI: 10.1016/j.triboint.2018.02.005
- [34] K.N.G. Fuller, D. Tabor, (1975), The effect of surface roughness on the adhesion of elastic solids. *Proc. R. Soc. Lond. A*, 345(1642), 327-342.
- [35] J.A. Greenwood, J.B.P. Williamson, (1966), *Proc. R. Soc. London A* 295, 300.
- [36] J. A. Greenwood, (2017), Reflections on and Extensions of the Fuller and Tabor Theory of Rough Surface Adhesion. *Tribology Letters*, 65(4), 159.
- [37] J.I. McCool, (1987), Relating Profile Instrument Measurements to the Functional Performace of Rough Surfaces, *ASME J. Tribol.* 109, 264-270.
- [38] J. F. Archard, (1957), “Elastic Deformation and the Laws of Friction,” *Proc. R. Soc. London A*, 243(1233), pp. 190–205.
- [39] M. Ciavarella, G. Demelio, J.R. Barber, and Y.H. Jang, (2000), “Linear Elastic Contact of the Weierstrass Profile,” *Proc. R. Soc. London A*, 456(1994), pp. 387–405.
- [40] B.N. Persson, (2001), Theory of rubber friction and contact mechanics. *The Journal of Chemical Physics*, 115(8), 3840-3861.
- [41] M. Ciavarella & A. Papangelo, (2017), Discussion of “Measuring and Understanding Contact Area at the Nanoscale: A Review”(Jacobs, TDB, and Ashlie Martini, A., 2017, *ASME Appl. Mech. Rev.*, 69 (6), p. 060802). *Applied Mechanics Reviews*, 69(6), 065502.



- [42] A.W. Bush, R. D. Gibson & T.R. Thomas, (1975), The elastic contact of a rough surface. *Wear*, 35(1), 87–111.
- [43] C. Putignano, L. Afferrante, G. Carbone, & G. Demelio, (2012), A new efficient numerical method for contact mechanics of rough surfaces. *International Journal of Solids and Structures*, 49(2), 338-343.
- [44] G. Carbone, & F. Bottiglione, (2008), Asperity contact theories: Do they predict linearity between contact area and load?. *Journal of the Mechanics and Physics of Solids*, 56(8), 2555-2572.
- [45] B. N. J. Persson, (2007), Relation between interfacial separation and load: a general theory of contact mechanics. *Physical review letters*, 99(12), 125502.
- [46] A. Papangelo, N. Hoffmann, M. & Ciavarella, (2017), Load-separation curves for the contact of self-affine rough surfaces. *Scientific reports*, 7(1), 6900.
- [47] J.R. Barber, (2003), Bounds on the electrical resistance between contacting elastic rough bodies. *Proceedings of the Royal Society of London*, 459(2029), 53–66.
- [48] L. Pastewka, M.O. Robbins, (2014), Contact between rough surfaces and a criterion for macroscopic adhesion. *Proceedings of the National Academy of Sciences*, 201320846.
- [49] M. Ciavarella, Y. Xu, & R.L. Jackson, (2018), Some Closed-Form Results for Adhesive Rough Contacts Near Complete Contact on Loading and Unloading in the Johnson, Kendall, and Roberts Regime. *Journal of Tribology*, 140(1), 011402.
- [50] B. N. J. Persson, (2002), Adhesion between elastic bodies with randomly rough surfaces. *Physical review letters*, 89(24), 245502.
- [51] M. H. Müser, W. B. Dapp, R. Bugnicourt, P. Sainsot, N. Lesaffre, T. A. Lubrecht,... & S. Rohde, (2017), Meeting the contact-mechanics challenge. *Tribology Letters*, 65(4), 118.
- [52] J. Joe, M. Scaraggi, J.R. & Barber, (2017), Effect of fine-scale roughness on the tractions between contacting bodies. *Tribology International*, 111, 52-56.

- [53] J. Joe, M.D. Thouless, & J.R. Barber, (2018), Effect of roughness on the adhesive tractions between contacting bodies. *Journal of the Mechanics and Physics of Solids*, 118, pp. 365-373.
- [54] B. N. J. Persson, E. Tosatti, (2001), The effect of surface roughness on the adhesion of elastic solids. *The Journal of Chemical Physics*, 115(12), 5597-5610.
- [55] G. Carbone, M. Scaraggi, & U. Tartaglino, (2009), Adhesive contact of rough surfaces: comparison between numerical calculations and analytical theories. *The European Physical Journal E*, 30(1), 65.
- [56] G. Carbone, E. Pierro, & G. Recchia, (2015), Loading-unloading hysteresis loop of randomly rough adhesive contacts. *Physical Review E*, 92(6), 062404.
- [57] L. Afferrante, M. Ciavarella, & G. Demelio, (2015), Adhesive contact of the Weierstrass profile. *Proc. R. Soc. A*, 471(2182), 20150248.
- [58] F.P Bowden, & D. Tabor, (1950), *The Friction and Lubrication of Solids*, Clarendon Press, Oxford.
- [59] Y. Xu, R.L. Jackson, and D.B. Marghitu, (2014), Statistical model of nearly complete elastic rough surface contact, *Int J Solids Struct*, 51, 1075-1088.
- [60] M. Ciavarella, (2015), Adhesive rough contacts near complete contact. *International Journal of Mechanical Sciences*, 104, 104-111.
- [61] Y. Xu, & R.L. Jackson, (2017), Statistical models of nearly complete elastic rough surface contact-comparison with numerical solutions. *Tribology International*, 105, 274-291.
- [62] P. R. Nayak, (1971), Random process model of rough surfaces, *ASME Journal of Lubrication Technology*, 93 (3), 98-407. doi: 10.1115/1.3451608
- [63] M. Ciavarella, (2016), Rough contacts near full contact with a very simple asperity model. *Trib Int*, 93, 464-469.
- [64] G. A. D. Briggs, & B. J. Briscoe, (1977), The effect of surface topography on the adhesion of elastic solids. *Journal of Physics D: Applied Physics*, 10(18), 2453.

- [65] P. R. Guduru, (2007), Detachment of a rigid solid from an elastic wavy surface: theory. *Journal of the Mechanics and Physics of Solids*, 55(3), 445-472.
- [66] H. Kesari, & A. J. Lew, (2011), Effective macroscopic adhesive contact behavior induced by small surface roughness. *J. Mech.Phys. Solids* 59, 2488–2510.
- [67] M. Ciavarella, (2016), On roughness-induced adhesion enhancement. *The Journal of Strain Analysis for Engineering Design*, 51(7), 473-481.
- [68] H. Kesari, J.C. Doll, B.L. Pruitt, W. Cai, & A.J. Lew, (2010), Role of surface roughness in hysteresis during adhesive elastic contact. *Philos. Mag. Lett.* 90, 891-902.
- [69] W. Deng, H. & Kesari, (2018), Depth-dependent hysteresis in adhesive elastic contacts at large surface roughness. *arXiv preprint arXiv:1803.08581*.
- [70] Y. F. Gao, & A. F. Bower, (2006), Elastic–plastic contact of a rough surface with Weierstrass profile. In *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* (Vol. 462, No. 2065, pp. 319-348). The Royal Society.
- [71] L. Pei, S. Hyun, J.F. Molinari, & M.O. Robbins, (2005), Finite element modeling of elasto-plastic contact between rough surfaces. *Journal of the Mechanics and Physics of Solids*, 53(11), 2385-2409.
- [72] F. P. Bowden, & D. Tabor, (1939), The area of contact between stationary and moving surfaces. *Proc. R. Soc. Lond. A*, 169(938), 391-413.
- [73] K. Autumn, A. Dittmore, D. Santos, M. Spenko, & M. Cutkosky, (2006), Frictional adhesion: a new angle on gecko attachment. *Journal of Experimental Biology*, 209(18), 3569-3579.
- [74] R. Hensel, K. Moh, & E. Arzt, (2018), Engineering Micropatterned Dry Adhesives: From Contact Theory to Handling Applications. *Advanced Functional Materials*, 1800865.
- [75] K. Autumn, M. Sitti, Y.A. Liang, A.M. Peattie, W.R. Hansen, S. Sponberg, ... & R.J. Full, (2002), Evidence for van der Waals adhesion in gecko setae. *Proceedings of the National Academy of Sciences*, 99(19), 12252-12256.

- [76] E. Arzt, S. Gorb, & R. Spolenak, (2003), From micro to nano contacts in biological attachment devices. *Proceedings of the National Academy of Sciences*, 100(19), 10603-10606.
- [77] A. M. Peattie, & R.J. Full, (2007), Phylogenetic analysis of the scaling of wet and dry biological fibrillar adhesives. *Proceedings of the National Academy of Sciences*, 104(47), 18595-18600.
- [78] N.B. Webster, M.K. Johnson, and A.P. Russell, (2009), Ontogenetic scaling of scansorial surface area and setal dimensions of *Chondrodactylus bibronii* (Gekkota: Gekkonidae): testing predictions derived from cross-species comparisons of gekkotans. *Acta Zoologica (Stockholm)* 90: 18-29.
- [79] M. D. Bartlett, A. B. Croll, D. R. King, B. M. Paret, D. J. Irschick, & A. J. Crosby, (2012), Looking beyond fibrillar features to scale gecko-like adhesion. *Advanced Materials*, 24(8), 1078-1083.
- [80] J. M. Bullock, P. Drechsler, & W. Federle, (2008), Comparison of smooth and hairy attachment pads in insects: friction, adhesion and mechanisms for direction-dependence. *Journal of Experimental Biology*, 211(20), 3333-3343.
- [81] S. Akerboom, J. Appel, D. Labonte, W. Federle, J. Sprakel, & M. Kamperman, (2015), Enhanced adhesion of bioinspired nanopatterned elastomers via colloidal surface assembly. *Journal of The Royal Society Interface*, 12(102), 20141061.
- [82] M. Kamperman, E. Kroner, A. del Campo, R.M. McMeeking, & E. Arzt, (2010), Functional adhesive surfaces with “gecko” effect: The concept of contact splitting. *Advanced Engineering Materials*, 12(5), 335-348.
- [83] D. G. Hwang, K. Trent, & M.D. Bartlett, (2018), Kirigami-inspired Structures for Smart Adhesion. *ACS applied materials & interfaces*, 10(7), 6747-6754.
- [84] D.R. King, M.D. Bartlett, C.A. Gilman, D. J. Irschick, & A. J. Crosby, (2014), Creating Gecko-Like Adhesives for “Real World” Surfaces. *Advanced Materials*, 26(25), 4345-4351.

- [85] M. Benz, K.J. Rosenberg, E. J. Kramer, & J.N. Israelachvili, (2006). The deformation and adhesion of randomly rough and patterned surfaces. *The Journal of Physical Chemistry B*, 110(24), 11884-11893.
- [86] V. Barreau, R. Hensel, N.K. Guimard, A. Ghatak, R.M. McMeeking, & E. Arzt, (2016), Fibrillar elastomeric micropatterns create tunable adhesion even to rough surfaces. *Advanced Functional Materials*, 26(26), 4687-4694.
- [87] R. G. Balijepalli, M. R. Begley, N. A. Fleck, R. M. McMeeking, & E. Arzt, (2016), Numerical simulation of the edge stress singularity and the adhesion strength for compliant mushroom fibrils adhered to rigid substrates. *International Journal of Solids and Structures*, 85, 160-171.
- [88] R. M. McMeeking, L. Ma, & E. Arzt, (2010), Bi-Stable Adhesion of a Surface with a Dimple. *Advanced Engineering Materials*, 12(5), 389-397.
- [89] A. Papangelo, & M. Ciavarella, (2017). A Maugis-Dugdale cohesive solution for adhesion of a surface with a dimple. *Journal of The Royal Society Interface*, 14(127), 20160996.
- [90] A. Papangelo, & M. Ciavarella, (2018), Adhesion of surfaces with wavy roughness and a shallow depression. *Mechanics of Materials*, 118, 11-16.
- [91] D. Labonte, & W. Federle, (2016), Biomechanics of shear-sensitive adhesion in climbing animals: peeling, pre-tension and sliding-induced changes in interface strength. *Journal of The Royal Society Interface*, 13(122), 20160373.
- [92] N. Gravish, M. Wilkinson, & K. Autumn, (2008), Frictional and elastic energy in gecko adhesive detachment. *Journal of The Royal Society Interface*, 5(20), 339-348.
- [93] A. R. Savkoor, & G. A. D. Briggs, (1977), The effect of tangential force on the contact of elastic solids in adhesion. *Proc. R. Soc. Lond. A*, 356(1684), 103-114.
- [94] J. W. Hutchinson, (1990), Mixed mode fracture mechanics of interfaces. *Metal-ceramic interfaces*, 295-306.

- [95] J. W. Hutchinson, & Z. Suo, (1992). Mixed mode cracking in layered materials. In *Advances in applied mechanics*, vol. 29 (eds J. W. Hutchinson & T. Y. Wu), pp. 63-191. Boston, MA: Academic Press.
- [96] K. L. Johnson, (1996), Continuum mechanics modeling of adhesion and friction. *Langmuir*, 12(19), 4510-4513.
- [97] K. L. Johnson, (1997), Adhesion and friction between a smooth elastic spherical asperity and a plane surface. In *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* (Vol. 453, No. 1956, pp. 163-179). The Royal Society.
- [98] J. F. Waters, & P. R. Guduru, (2010), Mode-mixity-dependent adhesive contact of a sphere on a plane surface. In *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* (Vol. 466, No. 2117, pp. 1303-1325). The Royal Society.
- [99] A. Schallamach, (1971), How does rubber slide?. *Rubber Chemistry and Technology*, 44(5), 1147-1158.
- [100] R. Sahli, G. Pallares, C. Ducottet, I.B. Ali, S. Al Akhrass, M. Guibert, & J. Scheibert, (2018), Evolution of real contact area under shear and the value of static friction of soft materials. *Proceedings of the National Academy of Sciences*, 115(3), 471-476.
- [101] M. Ciavarella, & A. Papangelo, (2018), A generalized Johnson parameter for pull-off decay in the adhesion of rough surfaces. *Physical Mesomechanics*, 21(1), 67-75.
- [102] M. Ciavarella, A. Papangelo, & L. Afferrante, (2017), Adhesion between self-affine rough surfaces: Possible large effects in small deviations from the nominally Gaussian case. *Tribology International*, 109, 435-440.
- [103] G. Violano, L. Afferrante, & M. Ciavarella, (2018), On the qualitative conflicts between stickiness criteria for hard multiscale randomly rough surfaces, submitted.

## Nomenclature

- $A_{att}$ , attractive contact area
- $A_c$ , total contact area
- $A_{nom}$ , "nominal" or "apparent" contact area
- $A_{rep}$ , repulsive contact area
- $A_0$ , contact area at null tangential load
- $B(\Delta)$ , bearing area
- $C(\zeta)$ , surface heights Power Spectral Density (PSD).
- $C_{||}$ , compliance in the direction of the applied load
- $C_0$ , power spectrum value within the roll-off bandwidth
- $D$ , fractal dimension
- $D_p$ , pillar diameter
- $E_i$ , Young modulus
- $E^*$ , plain strain elastic modulus.
- $G$ , energy release rate
- $G_c$ , interfacial toughness
- $H$ , Hurst parameter
- $K_i$ , stress intensity factor
- $L$ , pillar height
- $P$ , compressive indentation force
- $\hat{P}$ , dimensionless compressive indentation force
- $P_C(\Delta)$ , compressive force in the corresponding elastic contact problem without adhesion

- $P_n$ , pull-off force of a micropattern with  $n$  contacts
- $P_0$ , pull-off force
- $R$ , sphere radius
- $R^p$ , full contact pressure "asperity" radius
- $S$ , amplitude of the sinusoidal traction distribution
- $T$ , tangential load
- $U$ , elastic strain energy
- $a$ , the smallest length scale associated to the geometry
- $d_{rep}$ , characteristic diameter of repulsive contact areas
- $f(\psi)$ , mode mixity function
- $g$ , separation
- $g_{max}$ , critical separation in Maugis potential,  $g_{max} = \Delta\gamma/\sigma_0$
- $h$ , layer thickness
- $h_{rms}, h'_{rms}, h''_{rms}$  respectively surface height, slope, curvature root mean square
- $k$ , Winkler foundation modulus
- $k(\zeta)$ , wavenumber-dependent stiffness.
- $k_{rep}$ , repulsive Area-load slope
- $l$ , interfacial crack advancing at the interface
- $l_a = \Delta\gamma/E^*$ , characteristic adhesion length
- $m_n$ , n-th order moment of height PSD
- $m_n^p$ , n-th order moment of traction PSD
- $p_{nom}$ , nominal pressure
- $s$ , contact splitting efficiency



- $s_0$ , length scale associated with the singular traction field
- $u$ , elastic deformation
- $u_n$ , Fourier series coefficients
- $\Gamma$ , interface energy
- $\Delta$ , indentation depth, or (for the layer) gap that would exist between a layer and a plane surface in the absence of elastic deformation
- $\hat{\Delta}$ , dimensionless indentation depth
- $\Delta\gamma$ , interface energy per unit area
- $\Delta r$ , range of attractive forces in PR theory.
- $\Pi$ , total potential energy
- $\Omega$ , potential energy of external forces
- $\alpha$ , interaction parameter
- $\alpha_A$ , fitting area reduction coefficient
- $\beta = \frac{E\varepsilon^2}{h\Delta\gamma}$ , dimensionless parameter for layer instability
- $\gamma$ , fitting parameter in Persson load-separation theory
- $\varepsilon$ , equilibrium position
- $\zeta = \frac{2\pi}{\lambda}$ , wavenumber, with  $\lambda$  the corresponding wavelength
- $\zeta_L$ , low wavenumber truncation
- $\zeta_0$ , roll-off wavenumber
- $\zeta_1$ , high wavenumber truncation
- $\theta_{FT}$ , Fuller and Tabor parameter
- $\mu$ , Tabor parameter
- $\nu_i$ , Poisson's ratio

- $\xi = x/h$ , dimensionless coordinate
- $\sigma$ , traction [tensile positive]
- $\sigma_P$ , pull-off stress
- $\sigma_y$ , yield strength
- $\sigma_0$ , maximum tensile traction [theoretical strength]
- $\psi$ , phase angle