

Advancing Strategic Planning and Dynamic Control of Complex Projects

L.G. Teuber^{a,*}, H.J. van Heukelum^b, A.R.M. Wolfert^a

^a*Data Science & Engineering, Boskalis, Rosmolenweg 20, Papendrecht, 3356 LK, Zuid-Holland, The Netherlands*

^b*Corporate R&D, Boskalis, Rosmolenweg 20, Papendrecht, 3356 LK, Zuid-Holland, The Netherlands*

Abstract

Strategic project planning and dynamic control is essential for ensuring complex projects to be executed best-fit for common purpose. When best-for-project strategies are no longer conceivable for humans, there is a need for effective and efficient computer-aided decision support. To this end, standard simulation-driven evaluation and *a-posteriori* decision-making is often used instead of a combined simulation and optimisation approach that *a-priori* integrates the stakeholders goal orientation and risk management into a best-fit design solution. However, recently developed state-of-the-art planning and control methodologies that do already incorporate this integration still lack a stochastic representation and/or an associative multi-objective approach. This paper presents a new project management methodology, called Odycon (Open design and dynamic control), which dissolves the aforementioned shortcomings. To enable this, a generic mathematical statement is first formulated for project planning and dynamic control uniting technical (logistical) capabilities, human goal-oriented behaviour, and stakeholders interests. Then, both Monte-Carlo simulation (MCS) and the Integrative Maximisation of Aggregated Preferences (IMAP) optimisation method are combined, resulting in a best-fit strategic planning and dynamic control methodology. Odycon's use and added value are demonstrated for two applications: (1) a pure strategic planning of an offshore wind installation project, and (2) a pure dynamic control of a highway infrastructure construction project. Both

*Corresponding author

Email address: lukas.teuber@boskalis.com (L.G. Teuber)

applications demonstrate Odycon’s advances in concurrent and associative design and decision-making, offering best-fit for common purpose synthesis for different complex project phases.

Keywords: Project management, Project scheduling, Project control, Risk management, Multi-objective optimisation, Monte Carlo simulation, Preference function modelling

1. Introduction

Successful project delivery is traditionally attempted through project planning and control, answering *what* is going to be done *when* and *how much* does it cost. Planning is referred to the process of deciding how to execute a project, while project control reflects the process of ensuring execution as planned. Establishing a robust and reliable project schedule is fundamental for preliminary cost and time estimates, as well as for effective and efficient project management (Smith et al., 2014). However, with increasing size and degree of uncertainty, initial estimates of costs and timelines tend to be fraught with inherent risks and uncertainty that cannot be completely eliminated. These uncertainties often results in discrepancies between early predictions and stakeholder objectives, complicating the decision-making process and may result in unmet expectations. Initial project planning and execution control is often approached by individual optimisation or simulation methods, resulting in a one-sided point of view and neglecting the multifaceted nature of projects where the technical capabilities, the human goal-oriented behaviour, and the stakeholders desirability are interconnected. It requires a systems-oriented approach to acknowledge these complexities and recognise the need for stakeholder-oriented decision-making to answer *what* should be accomplished *why* and *how* (Reschke and Schelle, 2013).

The role of well-informed human decision-making is crucial in project management, where decision-makers must understand the rationale behind their chosen project planning or control strategies towards risk management, maximum effectiveness, and ultimately stakeholder satisfaction. When evaluating the overall project’s success, it becomes clear that factors beyond just cost and timely completion play a significant role (Van Gunsteren, 2011). Trade-offs between quality, costs, and schedule are a constant reality in construction projects and are typically determined by the involved stakeholders.

These trade-offs are reflected by the socio-technical interplay between the stakeholders preference (human domain) and the capability of the project (technical domain), see Van Heukelum et al. (2024). However, the traditional best practice recommends solely adhering to the contract and making a plan without considering the actual project reality, often following the rule to make a plan and stick to it. This practice can be conceived as 'pseudo-reality', as project success is created by the dynamic adaptation to issues that arise (most often not defined in a contract) and dynamic interaction between stakeholders towards associative solutions. Despite this reality, the traditional managerial focus in construction projects often leans heavily towards costs and schedule and their individual interest, thus neglecting the interplay with stakeholder-oriented concurrent objectives in the process. When stakeholders are willing to go beyond their pure self-interest, joint project success can be enhanced. Stakeholders do have to relinquish their identified individual goals, ultimately enabling a synthesis solution that best fits the common purpose and outperforms single-sided project or even compromise solutions (Glasl, 1998; Scharmer, 2016; Van den Doel and Van Velthoven, 1993; Wolfert, 2023).

Traditional planning & control methods lack to explicitly express the relationship and influence of all participating stakeholder interests towards the decision-making process in project or operations management (Blanchard and Fabrycky, 2011; Del Pico, 2023; Slack et al., 2010). Usually (both in science and in industry), these methods are simulation and analysis oriented (*a-posteriori*) and do not take an (*a-priori*) design approach to effectively and efficiently generate a best-fit management solution. However, state-of-the-art methods that are optimisation-based often do not reflect a best-fit for common purpose consideration. These are most often being limited to a single objective optimisation (SOO) approach, relying on monetisation to reflect multiple objectives and neglecting the complexity of stakeholder satisfactory project management. While the benefit of multi-objective optimisation (MOO) in project management has been acknowledged (Guo and Zhang, 2022), there has been no methods developed towards adapting MOO in strategic project planning and dynamic project control integrating probabilistic risk management (Kammouh et al., 2022). Well-informed decision-making is facilitated by removing overconfidence bias through the use of structured and data-driven decision-making processes (Kahneman, 2011). Considering the inclusion of the goal-orientation of all involved stakeholders and their desired expectations, the increasing complexity of construction

projects necessitates effective and efficient computer-aided decision support for stakeholder-oriented project management.

To address the lack of consideration for human control and adaptive behaviour in standard probabilistic scheduling methods using Monte-Carlo simulation (MCS) (Del Pico, 2023), research by Kammouh et al. (2022, 2021) has proposed the mitigation controller (MitC), a current state-of-the art project control software. It automates the project manager’s selective nature to only apply the most effective and efficient control measures on-the-run, based on the unique circumstances of each possible project realisation. The MitC, is designed as a SOO control tool, optimising for cost-effectiveness given a project delivery date (target constraint). As a result, there is no understanding of how the most optimal set of control measures impacts other project objectives from relevant decision-makers. While other objectives can be assessed independently, there is no guarantee that an optimal project planning and control strategy is derived that represents a best-fit for common purpose synthesis. Moreover, with increasing project complexity, the impact of individual planning & control variables related to all stakeholder objectives becomes cumbersome to be evaluated in a manual trial-and-error approach.

Associative project planning and control enabling a stakeholder-oriented behaviour can be introduced by utilising the advances developed in the Open Design Systems (Odesys) methodology (Wolfert, 2023), that enables the association of the individual stakeholder interests (desirability) into the technical design optimisation (capability) using integrative maximisation of aggregated preferences (IMAP). This Odesys/IMAP approach proves to be an effective methodology to arrive at best-fit for common purpose design solutions where all stakeholder interest are accounted for and translated to a common preference domain to find an overall group optimum. The introduced IMAP method enables iterative group design and decision-making in a deterministic manner. However, to effectively utilise these advancements for project planning and control, it is crucial to incorporate traditional probabilistic project planning and control methods that can precisely capture and represent the project’s schedule capabilities, such as the Program Evaluation and Review Technique (PERT). Additionally, these tools should employ stochastic simulation methods to reflect the inherent uncertainties and unpredictability encountered both in the planning and execution phases.

Utilising and combining these advances in simulation and optimisation

can notably reduce inefficient and misinformed decision-making in project planning and control, particularly with increasing size of projects, where it becomes virtually impossible to account for all possible scenarios. In this context, the focus of this paper is to introduce a methodology that integrates (1) the physical and logistical capability of the project ('network performance domain'), with (2) the human goal-oriented behaviour ('decision-maker objective domain') and extends it towards (3) the desirability of the project stakeholders ('associative preference domain') enabling best-fit for common purpose project management. This is required as the current state-of-the-art methodologies for project planning or control exhibit the above-mentioned shortcomings that make them unsuitable for delivering the necessary integrative & associative behaviour to successfully execute the project so that it best meets all stakeholder interests. To achieve such a best-for-project fit, the project management practice PII introduced by Van Gunsteren (2011) and based on Schön and Argyris (1996) can be further improved to a PIII level. This advancement goes beyond the integrative double-loop learning approach, which involves making decisions *for* the stakeholder or project client. Instead, PIII emphasizes open-loop learning by working closely in association *with* all project stakeholders to achieve the best possible overall project result. A step from stakeholder oriented, but static 'self'-planning and control, to pure dynamic 'group'-planning and organisation where an integrative maximization of associated preferences is achieved Wolfert (2023).

Based upon the identified development gap and utilisation needs, this paper presents a new integrative stochastic simulation and multi-objective planning & control optimisation methodology, named Odycon (an acronym of open design and dynamic control). Odycon enables best-fit for common purpose generation of both strategic planning and/or dynamic control applications. Odycon is a decision-support methodology that automates the selection of planning and control variables, taking into consideration multiple stakeholder objectives and constraints. Building upon the MitC introduced by Kammouh et al. (2021) and the IMAP optimisation method introduced by Wolfert (2023) and Van Heukelum et al. (2024), this paper aims to advance open and dynamic project planning and control of complex construction projects, fostering multi-objective stakeholder-oriented decision-making. The following advances are presented:

- (1) A general framework for an integrated strategic planning and dynamic control problem, which combines probabilistic project schedule simulations with a multi-objective design optimisation. This allows for dynamic

adaptation to project-specific needs and stakeholder objectives, enhancing associative decision-making in complex construction projects.

(2) A direct representation between the project feasibility, project management objectives, and stakeholder decisions, achieving a unified integration of network performance, stakeholder objectives, and associative decision-making.

(3) A pure preference-based aggregation for multi-objective decision-making for project management, which translates various objectives and resources into a common preference domain to achieve an optimised group synthesis. This resolves the need for monetisation of non-cost-related objectives and does not go for the lowest cost but for the highest value.

This paper first introduces the general mathematical statement of the multi-objective project planning & control optimisation. Following this, the underlying framework and concept of the stochastic simulation & optimisation methodology are described, with a detailed elaboration on the design of the method, in which the IMAP optimisation is implemented. The methodology is then demonstrated using a pure strategic planning example (no control variables) for an offshore wind installation project, where a service provider and a marine contractor are the key decision-makers. In contrast to the example focusing on pure strategic planning, the paper also demonstrates a pure dynamic control example (no planning variables) for a highway infrastructure project. This example includes associative control by both a contractor and a highway agency, showcasing the application of the methodology for two distinct project management phases. Finally, recommendations for further development are provided, and the added value of the newly developed stochastic simulation and optimisation methodology is concluded.

2. Mathematical formulation of the multi-objective optimisation

To address the mentioned shortcomings of project planning & control, a new stochastic optimisation & simulation methodology is established that enables the intricate representation of all stakeholders interests towards the different project objectives. Reflecting the goal-oriented behaviour of involved stakeholders is achieved by integrating the human preference domain (associated stakeholder interests) and the physical planning performance domain using the Odesys methodology embedded within a stochastic simulation framework (Wolfert, 2023; Van Heukelum et al., 2024). In other words, design-oriented

stakeholder behaviour needs to be integrated into probabilistic planning performance. To this end, the integrative multi-objective design optimisation method IMAP, as part of the Odesys methodology, must first be formulated for a multi-objective planning & control optimisation problem. This three-fold integration of performance-, objective- and preference functions, reads as follows:

$$\begin{aligned} \underset{\mathbf{x}}{\text{Maximise}} \quad U = A [P_{k,i}(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_1(\mathbf{x}, \mathbf{y}), F_2(\mathbf{x}, \mathbf{y}), \dots, F_J(\mathbf{x}, \mathbf{y}))), w'_{k,i}] \quad \text{for} \\ k = 1, 2, \dots, K \\ i = 1, 2, \dots, I \end{aligned} \quad (1)$$

Subject to:

$$g_p(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})) \leq 0 \quad \text{for } p = 1, 2, \dots, P \quad (2)$$

$$h_q(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})) = 0 \quad \text{for } q = 1, 2, \dots, Q \quad (3)$$

With:

- U : Utility function that needs to be maximized for a best-fit configuration, is addressed using the Genetic Algorithm software tool, **preferendus** (Van Heukelum et al., 2024).
- A : Aggregated preference score determined as part of the IMAP optimisation method (see Appendix A).
- $P_{k,i}(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})))$: Preference functions that describe the preference stakeholder k has towards objective function i , which are functions of different performance functions and dependent on planning and/or control variables and physical variables ($i \leq k$ and K is the maximum number of stakeholders).
- $O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y}))$: Objective functions that describe the objective i , functions of different performance functions, planning and/or control variables and physical variables.

- $\mathcal{N}(\mathbf{x}, \mathbf{y})$: Performance function that describes the project network, depending on planning and/or control variables \mathbf{x} and physical variables \mathbf{y} . Here \mathcal{N} is a logical representation of a physical project planning network, composed of nodes (activities) and edges (logical links).
- $F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})$: Performance functions that describe the object behaviour, depending on the planning and/or control variables \mathbf{x} and (constant) physical variables \mathbf{y} .
- \mathbf{x} : A vector containing the available planning & control variables (i.e. endogenous design variables) x_1, x_2, \dots, x_N . These variables are bounded such that $lb_n \leq x_n \leq ub_n$, where lb_n is the lower bound, ub_n is the upper bound.
- \mathbf{y} : A vector containing the physical variables (i.e. exogenous 'non-design' variables) y_1, y_2, \dots, y_M .
- $g_p(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y}))$: Inequality constraint functions, which can be either objective function and/or performance function constraints.
- $h_q(O_i(\mathcal{N}(\mathbf{x}, \mathbf{y}), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y})), F_{1,2,\dots,J}(\mathbf{x}, \mathbf{y}))$: Equality constraint functions, which can be either objective function and/or performance function constraints.
- $w'_{k,i}$: Weights for each of the preference functions (sum of the number of preference functions equals $K * I$). The global weights for the relative importance of stakeholders is defined as w_k . The local weight stakeholder k gives to objective i is defined as $w_{k,i}$. The following formula holds: $w'_{k,i} = w_k \cdot w_{k,i}$, given that $\sum w'_{k,i} = \sum w_{k,i} = \sum w_k = 1$. Note that in case of equivalent stakeholder decision-making $w_k = 1/K$.

To further elaborate on this mathematical formulation, several important remarks are made which are discussed below.

Remark 1: Preference aggregation

The preference aggregation is performed using the principles of the PFM theory (Barzilai, 2022). It is an integral part of the integrative preference maximisation method (IMAP), see Wolfert (2023). To arrive at an aggregated preference for individual objectives, the IMAP method employs the

mathematical operator, A , which determines the aggregated preference score using an algorithm called the A-fine Aggregator (see Appendix A).

Remark 2: Preference functions

The preference functions describe the relation of a stakeholders satisfaction towards a certain objective on a defined scale. The elicitation of the preference functions and associated individual weights is essential to reflect the relationship of the stakeholders interest towards a certain objective. As an initial estimation for both the preference functions input and local and global the weights the Conjoint Analysis (CA) method can be used. For more information regarding the process of preference elicitation, the reader is referred to Arkesteijn et al. (2017). As mentioned in Van Heukelum et al. (2024) objective O_i can be associated with multiple stakeholder preference functions $P_{k,i}$ (as $k \geq i$). Therefore, it is not required that a stakeholder expresses a preference for all objectives.

Remark 3: Network

Optimisation requires representing the network planning as a Directed Acyclic Graph (DAG), which is a structure composed of nodes (project activities) and directed edges (activity interdependencies: i.e, logical links) that do not form any cycles, ensuring all paths from the initial node to any other node are open-ended and loop-free.

Remark 4: Planning & control variables

In the context of a pure project planning optimisation (no control measures), the variables x_n are defined as stated above, allowing to take any form (e.g. integer, float, binary, etc.). However, for a pure project control optimisation (no planning variables), the variables \mathbf{x} are redefined as $\mathbf{x} = \mathbf{a}\mathbf{c}_i$, that is the product of the allocation of a control variables vector \mathbf{a} (which takes binary value $a_n \in \{0, 1\}$, where 0 reflects not allocated, or 1 reflects allocated) and the control impact vector \mathbf{c}_i towards objective i , containing the impact of control variables c_1, c_2, \dots, c_N directly related towards control variables x_1, x_2, \dots, x_N .

3. Odycon’s stochastic simulation & optimisation methodology

This section describes the conceptual functioning of the Odycon methodology, with its underlying stochastic simulation & optimisation framework

combining probabilistic MCS and IMAP multi-objective optimisation to enable associative project control for best-fit for common purpose project execution. The essence is to account for the inherent uncertainties of a project combined with the goal-oriented objectives of all stakeholders. The following two sections elaborate on the integrated MCS and the utilised IMAP optimisation method.

3.1. Probabilistic MCS approach

To accurately reflect uncertainties and unpredictability encountered during project execution, the core of the Odycon methodology is build upon a probabilistic MCS frequently used for modelling uncertainties and capturing the stochastic behaviour of variables in project scheduling (Del Pico, 2023). The duration uncertainty of activities, impact of risks, impact of other external influences, or control measures is quantified by the Beta-PERT distribution. This distribution is widely recognised for modelling uncertainties in project scheduling. Accordingly, the probability density functions for the varying parameters are denoted as $f(z_i; a_i, m_i, b_i)$, where a_i , m_i , and b_i represent the optimistic, most likely, and pessimistic time estimates, respectively.

Within an MCS iteration, random values z_i will be sampled according to the given respective probability distributions. The occurrence of a risk is modelled by a binary variable X , where a risk occurs $X = 1$ with probability p_e , and a risk does not occur $X = 0$ with probability $1 - p_e$. In deterministic project scheduling (using the critical path method), time estimates are fixed, resulting in one static project network realisation. In contrast, with MCS used in probabilistic project planning (PERT), the structure of the project network \mathcal{N} changes with each iteration based on random sampling, creating various realisations of project networks. This variability reflects the inherent uncertainty and stochastic nature modelled in the MCS, allowing for a comprehensive analysis of frequency distribution of optimal project planning and control strategies. This approach also aids in identifying the most probable project paths, critical activities, thereby enhancing decision-making and risk management strategies in project planning and execution.

The framework enables decision-making through the MCS given the steps provided in Figure 1. (1) First, the Project network data is read, and the network $\mathcal{N}(\mathbf{x}, \mathbf{y})$ is established given the project activities, risk event and any other relevant data. Note, to that extent any network planning or simulation method can be integrated, that is able to reflect the necessary logical links in the network. (2) Next, the MCS is initiated by a loop of n runs. (3) Step

3 is to sample random duration's for the project activities, risk and other external influences (like weather). To establish the optimisation, first the type of variables must be defined. If control variables are not considered, the planning variables are defined and the optimisation initiated (continues with step 6). (4) If control variables are included, the impact \mathbf{c}_i towards objective i needs is calculated given the duration capacity of the control measure. (5) Next, the network is compiled and the delay with respect to the target duration evaluated. In case of a delay, the optimisation is initiated. (6) The optimisation is run by defining the objective functions, the preference functions and their related weights, in accordance with the prior established mathematical formulation for the optimisation (see section 2). Once defined, the optimisation is performed utilising the IMAP method. To arrive at the highest aggregated preference score A , the values of the objectives functions are calculated and with that the corresponding value of the preference functions. Once established, the aggregated preference score can be determined according to the principles of references aggregation with preference maximisation (more information see the section on the optimisation below). (7) After every iteration of the MCS the result is stored. (8) Once the MCS reaches the n^{th} iteration, the results of the individual optimisations can be presented with the criticality index (how often does a certain variable or a combination of variables occur). Given the collected data, detailed statistical analysis are enabled.

3.2. Integrative multi-objective optimisation approach

To integrate the human goal-oriented behaviour in project management, and associative decision-making the multi-objective optimisation formulation (defined in section 2) is integrated into the MCS as part of the IMAP optimisation method. The optimisation is executed within every iteration of the probabilistic MCS, aiming to select the most effective set of project planning variables and or control measures given the specific realisation of the network within that iteration.

The essence of the IMAP method lies in combining preferences aggregation (reflecting associative decision-making) with preference maximisation (reflecting human goal-oriented behaviour). To arrive at the highest aggregated preferences the weighted (or relative) scores of the individual preference functions ($P_{k,i}$) are aggregated in their affine space according to the basic principles of PFM theory. The final preference score aggregation is performed using the weighted least squares method. The preference score aggregation

as part of the IMAP optimisation is described in Appendix A. To facilitate the application of the IMAP method in practice, the Python-based software tool, **preferendus**, is incorporated into the framework (Van Heukelum et al., 2024).

With utilising the IMAP optimisation method the shortcoming of classical MOO methods that consider the Pareto front as a valid outcome is addressed. MOO methods using the Pareto front result in a large set of multiple possible solution points, with the need to evaluate these solution points *a posteriori*. Moreover, given the complexity of a project the set of planning & control variables and objectives can become very large, consider a for example a project with 4 stakeholders and 40 control variables. In such a case, project managers and stakeholder are interested in a single best design solution. We want to avoid cumbersome *a posteriori* evaluations of possible suboptimal solutions, resulting from a trial-and-error approach. Classical Pareto front based methods are in this planning & control approach case inappropriate (see Van Heukelum et al. (2024)). IMAP instead results in an integrative *a priori* optimisation with a single best-fit result from a multidimensional solution space.

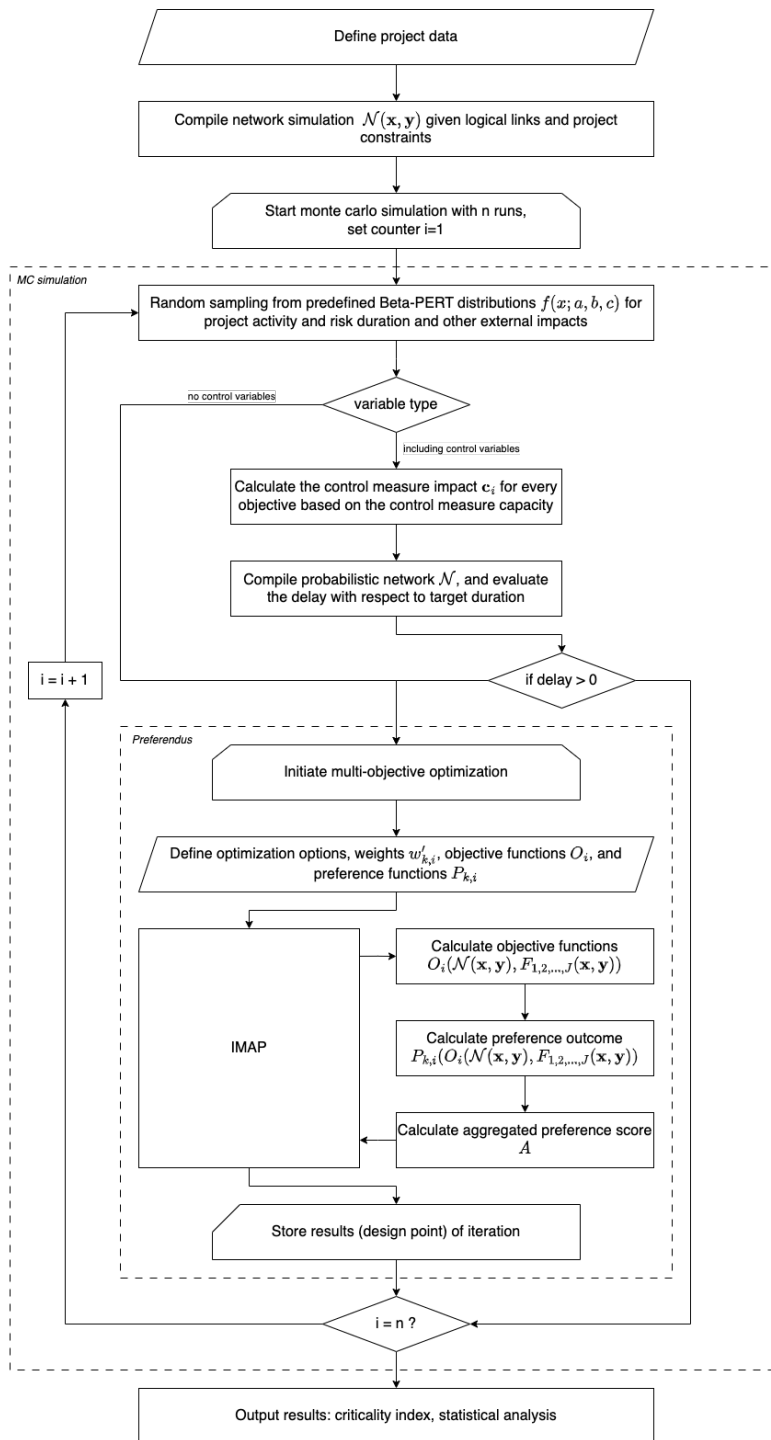


Figure 1: Odycon concept diagram.

4. Demonstrative planning & control applications

The introduced Odycon methodology is demonstrated in this section upon two real-life multi-stakeholder construction projects. To demonstrate the Odycon advances towards concurrent and associative design and decision-making, two examples are presented: (1) a pure strategic planning application (no control variables) for an offshore wind installation project, and (2) a pure dynamic control application (no planning variables) of a highway infrastructure construction project.

To legitimise the choice of these two examples, the following is considered. In general, two types of project management approaches are defined. For projects governed by strict procedural continuity with limited flexibility to deviate from planned tasks (the so-called Toothpaste model), management tends to prioritise strategic planning in advance. In contrast, for projects that allow considerable flexibility and adjustments during implementation (the so-called Viking model), management strategies allow primarily for dynamic control on-the-run (Reschke and Schelle, 2013).

Unlike inland highway projects where extra assets are often readily available and can be mobilised during project execution, offshore projects require detailed front-end planning due to the limited possibility of on-the-run control. For this reason, a pure planning scenario for this 'Toothpaste' project is considered where the focus is to select the most impactful strategies upfront, reducing the potential risk during execution. To show the effect of dynamic control on-the-run, a pure control scenario for a 'Viking' project is chosen, which is demonstrated on the basis of a transport infrastructure project. These demonstrative applications illustrate how the introduced Odycon methodology can support optimal decision-making for execution and mitigation strategies. The complexity of these projects demands computer aided design and decision-making, where the participating stakeholders together decide to arrive at best-fit for common project purpose.

To this end, two Python based models were developed: one for a purely strategic planning case (SYPL, an acronym of strategic planning) and another for a purely dynamic control case (MICO, an acronym of mitigation control). The source code, project data, and results of these demonstrative applications are available on GitHub, as detailed in the data availability statement.

Final note, both application examples are based upon previous publications, all of which one of the authors of this paper was involved in, see

Van Heukelum et al. (2024) and/or Kammouh et al. (2022). To read these examples here independently, the project descriptions are partly repeated.

4.1. Strategic planning application

Technical context: Offshore floating wind (OFW) technologies are considered a solution for wind energy production in deep waters and regions with stronger wind velocities (Spring, 2020). Contrary to the conventional method of employing fixed monopiles for bottom-founded installations, these turbines are mounted on platforms that are anchored to the seabed using mooring lines. The OFW site consists of 36 floating wind turbines (FWT) and 108 suction anchors (i.e., 3 anchors per FWT). OFW projects are executed by a set of highly specialised vessels, where the installation of the individual foundations or floaters is often performed in an iterative or cyclic process (serial installation). The cyclic installation process is often constrained by a singular, inflexible execution path, leaving little room for deviation in the face of delays from adverse weather, technical issues, or operational risks. This rigidity necessitates direct resolution of problems, pausing the project if needed, rather than employing alternative strategies.

Social context: This application includes the following concurrent stakeholder objectives both from an energy service provider (Stakeholder 1) and a marine contractor (Stakeholder 2): (1) minimising project duration, (2) reducing installation costs, (3) optimising fleet utilisation, and (4) lowering CO2 emissions. While the energy service provider prioritises fast project completion to expedite revenue generation and aims to decrease CO2 emissions for better environmental and societal acceptance, the marine contractor focuses on cutting costs to enhance competitiveness and seeks to improve fleet utilisation for greater operational efficiency.

We will now first describe the integrative planning optimisation problem by working through the mathematical statement (see section 2), resulting in performance-, objective-, and preference functions.

4.1.1. Performance functions

Planning variables

The installation of OFW turbines requires specialised types of installation vessel. The performance of the planning sequence is dependent on the utilisation of these vessels during construction. The type of vessels and their properties used in the project are defined in Table 1. The boundaries are the

(integer) number of possible vessel to be utilised. The utilisation refers to the probability of a vessel being better utilised in a different project of the contractor.

Table 1: Strategic planning application: Planning variables (OCV refers to offshore construction vessel).

Variables	Description	Boundaries	Anchor deck space	Day rate R_i	utilisation prob. p_i	CO ₂ emissions E_i
$F1 = x1$	small OCV	$0 \leq x1 \leq 3$	8	47k€	0.7	30 t/day
$F2 = x2$	large OCV	$0 \leq x1 \leq 2$	12	55k€	0.8	40 t/day
$F3 = x3$	barge	$0 \leq x1 \leq 2$	16	35k€	0.5	35 t/day

Project activities

The installation process involves strategically placing and securing mooring anchors using a combination of vessels, adjusted for efficiency based on available deck space and potential risk event delays. Two distinct activities can be defined: (1) installing the available anchors on deck of the vessels; and (2) bunkering, which occurs after the installation sequence once all available anchors have been installed. Bunkering refers to the transfer of additional anchors to the vessels when the condition that the number of anchors left to install is zero or less is met.

The duration of these two activities are defined in Table 2 and represented by the pessimistic a_i , most-likely m_i , and optimistic b_i time estimates. These values are usually obtained either from experience or past data of similar projects and make up the three-point estimates of the activities duration's, which are used to define the Beta-PERT distributions (see section 3).

Table 2: Strategic planning application: Project activities

Activity description	Activity Duration (days)		
	Optimistic a_i	Most-likely m_i	Pessimistic c_i
Installation	0.80	1.00	1.20
Bunkering small OCV	1.20	1.50	1.80
Bunkering large OCV	1.60	2.00	1.40
Bunkering barge	2.00	2.50	3.00

Risk events

The offshore installation sequence increases in complexity due to uncertainties in the execution. External weather impacting the workability window of

vessels, and project specific constraint often disrupt the execution, making completion according to initial forecast difficult to achieve. In probabilistic planning, risk events are included by considering their occurrence probability. Table 3 defines the risk events identified with their corresponding three-point duration estimates. The probability density $f(z_i; a_i, m_i, b_i)$ can be built using the three-point estimate. For every risk event, an occurrence probability p_r is defined.

Table 3: Strategic planning application: Risk events.

Risk Event	Risk duration [<i>days</i>]			Affected Activity	Probability p_r
	a_i	m_i	b_i		
Weather Delay	0.50	1.00	1.50	Installation	0.20
Supply Chain Issue	1.00	1.50	2.00	Bunkering	0.10
Technical Failure	0.50	1.00	1.50	Installation	0.15
Logistical Constraints	1.00	1.50	3.00	Bunkering	0.20
Marine Traffic	0.50	0.75	2.00	Installation	0.05
Environmental Restrictions	2.00	3.50	5.00	Bunkering	0.10
Lack of Skilled Personnel	1.00	2.00	3.00	Installation	0.08
Equipment Shortage	1.00	2.00	4.00	Installation	0.12

The installation sequence (network) is represented and established using a discrete event simulation (DES), which depends on the planning variables, activities and risks defined above. The probabilistic network with the underlying logical links is expressed as follows:

$$\mathcal{N}(x_1, x_2, x_3, \mathbf{y}) \quad (4)$$

where the physical variables \mathbf{y} contain the information on the respective vessel deck space. To ensure that the project is executed by at least one vessel, the sum of all vessels on the project must be greater than one. The technical feasibility is guaranteed by a constraint ensuring the anchor’s resistance meets or exceeds the applied forces defined by further performance functions (F_4, \dots, F_7). For a thorough exposition of these formulations and their underlying principles, the reader is referred to Wolfert (2023) or Van Heukelum et al. (2024).

4.1.2. Objective functions

The optimisation framework considers the following four objectives that form the link between the network performance function and the preference func-

tions. For a thorough exposition of these formulations and their underlying principles, the reader is referred to Wolfert (2023) or Van Heukelum et al. (2024). The following objective functions are rewritten based upon to suit the needs of the Odycon framework.

1. Project duration: the project duration Δ extracted from the network performance function expressed as:

$$O_1 = O_{PD} = \Delta(\mathcal{N}(x_1, x_2, x_3, \mathbf{y})) \quad (5)$$

2. Installation cost: the project cost depends on the day rates of the vessels R_i multiplied with their active duration on the project t_i given the network performance function, and the cost of the installed anchors, expressed as:

$$O_2 = O_C = (815M_a + 40,000)n_a + \sum_{i=1}^3 x_i R_i t_i(\mathcal{N}(x_1, x_2, x_3, \mathbf{y})) \quad (6)$$

3. Fleet utilisation: utilisation is represented by the probability of a vessel being better utilised in another project and is defined as:

$$O_3 = O_F = \prod_{i=1}^3 p_i^{x_i} \quad (7)$$

4. Sustainability (CO₂ emissions): emissions are defined as the daily vessel emissions E_i multiplied with their active duration on the project t_i given the network performance function:

$$O_4 = O_S = \sum_{i=1}^3 x_i E_i t_i(\mathcal{N}(x_1, x_2, x_3, \mathbf{y})) \quad (8)$$

4.1.3. Preference functions

The preference functions for this demonstrative application are defined based on the input from industry project management professionals. The maximum preference ($P_{1,PD} = 100$) towards the objective O_{PD} is defined as the target duration $T_{tar} = 90$ days. A Beta-PERT distribution is employed to model the preference towards project duration. This unique preference modelling

reflects that, in principle, the project manager in reality is somewhat interested in an earlier project delivery than the exact target duration, but certainly not much later than this duration with a bit of slack. If there is a greater interest to deliver earlier, then the area under the preference function should be increased so that a more asymmetric function is resulting. This approach enables a continuous evaluation of preferences towards the project duration, facilitating more informed and balanced management decisions amidst uncertainty. The other three preference functions for cost, fleet utilisation and CO₂ emissions are respectively convex or concave functions with the max preference value ($P_{1,C} = P_{2,F} = P_{2,S} = 100$) for the lowest respective objective values ($\min O_i$) and with the lowest preference value ($P_{1,C} = P_{2,F} = P_{2,S} = 0$) for the highest possible objective values ($\max O_i$) respectively. The resulting preference functions, describing the relations between the different preferences and the objectives, are depicted in Figure 2.

4.1.4. Results

To retrieve outcomes, we will first have to estimate the weights to generate IMAP solutions as part of the simulation & optimisation framework. The global weights w_k are split equally between the energy provider ($w_1 = 0.5$) and the marine contractor ($w_2 = 0.5$). To reflect the objectives of their interest, their individual local weights are respectively: $w_{1,PD} = 0.60$ for project duration, $w_{1,S} = 0.40$ for CO₂ emissions, $w_{2,C} = 0.70$ for the installation costs, and $w_{2,F} = 0.30$ for fleet utilisation. Table 4 defines the weights of each of the preference functions.

Table 4: Weights for each of the preference functions, according to $w'_{k,i} = w_k \cdot w_{k,i}$. Note, stakeholders can also reflect interest to all four objectives while the global weight distribution is constant.

Stakeholder k	$w'_{k,PD}$	$w'_{k,S}$	$w'_{k,C}$	$w'_{k,PD}$	w_k
Energy provider	0.30	0.20	0.00	0.00	0.50
Marine contractor	0.00	0.00	0.35	0.15	0.50
Total	0.30	0.20	0.35	0.15	1.00

The final outcomes of the Odycon framework, are displayed in the form of frequency distribution diagrams referred to as criticality index. Within every MCS iteration, a new set of vessel combinations (planning variables)

is derived through the IMAP optimisation. Given the unique realisation of the network, the vessel combinations change from one iteration to another. To identify the most critical set of planning variables, Figure 3 gives insight into the frequency of number of vessels per vessel type and the frequency distribution of optimal planning variables during the optimisation for both evaluation cases. The outcome reflects the percentage of MCS iterations of which a specific set of vessel combinations is derived. Table 5 compares the numerical results for the different evaluations given defined target-percentiles. The outcomes of the different percentiles per optimisation method are plotted in the different preference functions showing the respective preference given the percentile (see Figure 2). Note, as the MCS is stochastic in nature, it is not possible to provide a single (deterministic) outcome.

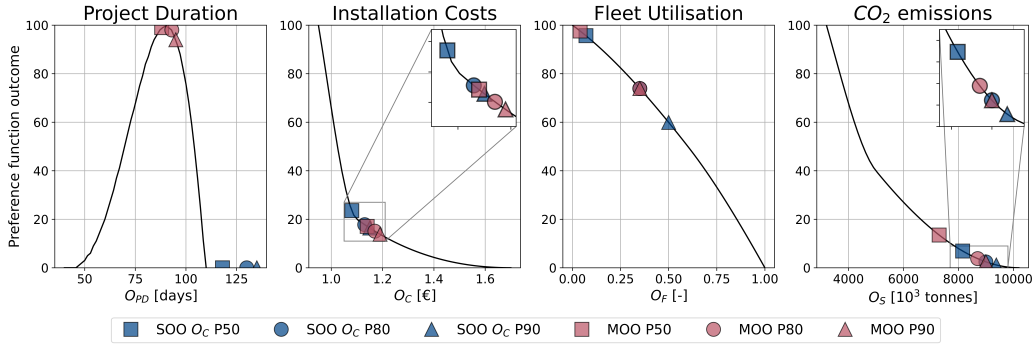


Figure 2: The four preference functions ($P_{1,PD}, P_{1,C}, P_{2,F}, P_{2,S}$) with respect to objectives (O_{PD}, O_C, O_F, O_S), including the preference score of the different optimisations and percentiles. The numerical results can be found in Table 5.

Table 5: Evaluation of cases with 2000 MCS iterations (O_{PD} in days, O_C in 10^7 €, O_F in number of vessels [-], O_S in tonnes). Where the MOO case considers $w'_{1,PD} = 0.30, w'_{1,S} = 0.20, w'_{2,C} = 0.35, w'_{2,F} = 0.15$.

Case	P50				P80				P90			
	O_{PD}	O_C	O_F	O_S	O_{PD}	O_C	O_F	O_S	O_{PD}	O_C	O_F	O_S
SOO O_C	118	1.08	0.07	8152	130	1.13	0.35	9000	135	1.15	0.50	9380
MOO	88	1.14	0.04	7300	93	1.17	0.35	8700	95	1.19	0.35	9000
abs. diff.	30	-0.06	0.03	852	37	-0.04	0.00	300	40	-0.04	0.15	380
rel. diff.	25.4	-5.6	42.9	10.5	28.5	-3.5	0.0	3.3	29.6	-3.5	30.0	4.0

For comparative evaluation purposes, the MOO with the earlier defined weights and preferences is compared to a traditional SOO approach towards minimal cost (SOO O_C). The following conclusions can be made from the outcome:

1. The SOO O_C approach results in slightly lower costs for all percentiles (avg. 4% lower) compared to the MOO approach by utilising no small OCV in 80 % of the simulations, suggesting the cost-efficiency of the small OCV to be low (see Table 5). It becomes evident that more vessels lead to higher costs.
2. Comparing the SOO O_C with the MOO approach, it becomes evident that considering project cost alone will not result in configurations that lead to overall favourable outcomes. While the project costs differ very little between the approaches, the MOO outperforms the SOO O_C for all other objectives and percentiles leading to lower project duration's (avg. 28% lower), lower probability of the fleet being better utilised elsewhere (avg. 24% lower), and lower emission rates (avg. 6% lower). This can be achieved by introducing small OCVs. This is explained by the reflection of interests towards the sustainability and fleet utilisation in the MOO. This comparison highlights that focusing solely on cost (single objective approach) does not accurately capture the complexities of stakeholder-oriented project planning. In contrast, utilising the MOO approach offers a more balanced perspective by taking into account all stakeholder interests and achieves a higher aggregated preference compare to the SOO O_C approach, including the inherent uncertainties and stochastic nature of the project leading to overall favourable project realisations.
3. Figure 2 illustrates that as the percentile increases, the preference for both cases decreases concerning their respective objectives. This trend indicates that decision-makers encounter lower preference outcomes when aiming for higher objective probabilities. The target probability can thus not only be reflected by the unit of the individual objectives but also directly in the common preference domain. By examining the target-preference values, decision-makers can identify the probability of achieving a particular outcome.
4. The criticality index (see Figure 3) aids decision-making by clarifying the utilisation of specific types of vessels and their combinations, thereby identifying the most effective vessel configurations given the

underlying uncertainties and stochastic factors. For instance, in both optimisation scenarios, large OCVs are not utilised in 80% of the simulations. These observations provide project managers with actionable insights, enabling them to allocate their planning and tendering budgets more effectively towards solutions that are both efficient and feasible.

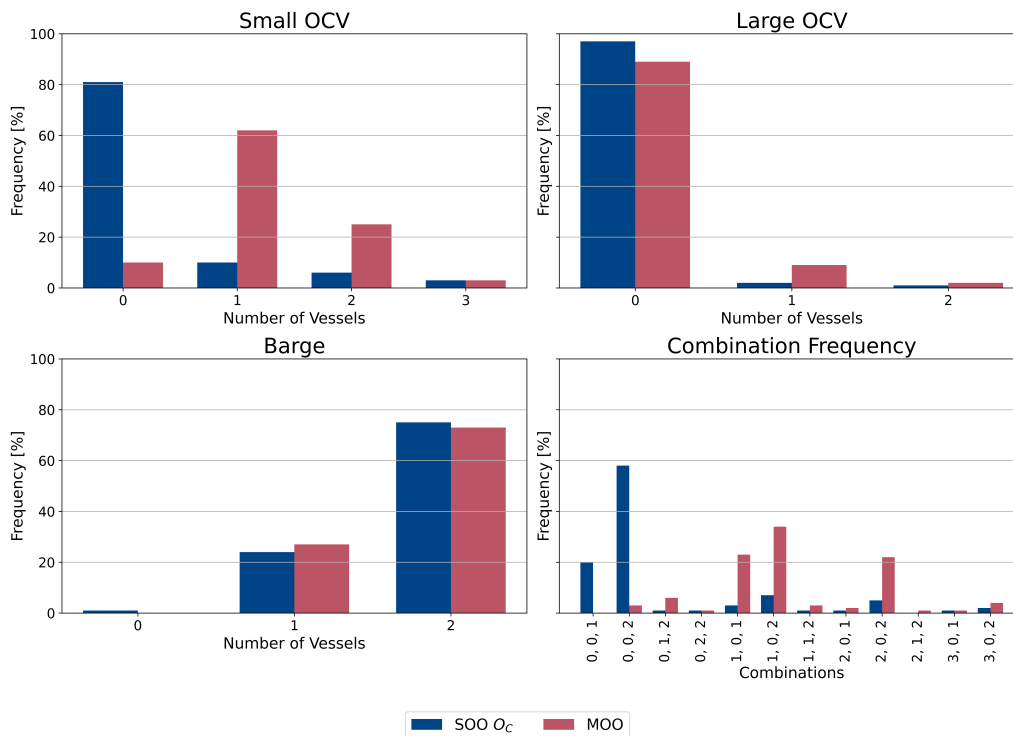


Figure 3: Criticality index of number of small OCV's (top left), large OCV's (top right), barges (bottom left) and vessel combinations (bottom right) for both optimisation cases. Note, only combinations that stored during the simulation & optimization are considered in this figure.

4.2. Dynamic control application

Technical context: The Schiphol-Amsterdam-Almere (SAA) Project is the largest road construction project in the Netherlands in the period from 2012 to 2024. It realises an expansion of the capacity of the Dutch national highways A6, A1, A10-east and A9 and thus aims to improve the accessibility of the northern part of the Randstad (Schiphol, Amsterdam, Almere). Project

SAA includes 63 kilometres of motorway, the construction of two tunnels, two large bridges and an aqueduct; the modification of five interchanges, and about 100 engineering structures. As part of this project, the SAAone consortium (Boskalis, Volker-Wessels, Hochtief and DIF), together with the Dutch highways agency Rijkswaterstaat, provided the design, construction, maintenance and operation. The major construction project took more than four years and consisted of a massive schedule that could be regularly adjusted on the run.

Social context: This application includes the following concurrent stakeholder objectives both from SAAone and RWS: (1) meeting target completion, (2) managing project control costs, and (3) minimising the traffic nuisance. In order to manage the project in the best possible way, the costs of the extra control measures to be allocated, which are possibly not part of SAAone’s risk budget, are at odds with the opening of the new highway on time (interest RWS). Even more, steering solely on the completion date from RWS’s project delivery department perspective may also be of opposite interest to minimising traffic nuisance during construction, which RWS’s service operations department is responsible for. That is what makes this example a dynamic multi-objective control and tripartite stakeholder problem.

We will now first describe the dynamic control optimisation problem by working through the mathematical statement (see section 2), resulting in performance-, objective-, and preference functions.

4.2.1. Performance functions

Project activities

The project consists of a number of distinct activities, as detailed in Table B.8. For each activity, the durations are presented by an optimal a_i , most likely m_i , and pessimistic b_i time estimate. These values contribute to the three-point estimates for the activity duration’s, forming the basis for the Beta-PERT distributions. Additionally, the sequence of activities is defined by specifying predecessors for each activity, thereby integrating the dependencies among activities into the network model.

Next to the individual uncertainty of activity duration’s a set of shared uncertainties is considered to model activity duration correlations arising from common factors (e.g., weather, labour skills). The implementation of stochastic activity correlation was implemented in accordance with the methodology and underlining example presented in Kammouh et al. (2022).

For further information regarding the evaluation of networks under correlated uncertainty, see Wang and Demsetz (2000). Table B.9 defines the uncertainty factors, their three-point estimates and relationships with the project activities.

Risk events

The project is affected by many possible risk events that add an additional source of uncertainty that can negatively affect the desired project outcome (see Table B.10). The impact of these risks is defined by their risk duration (three-point duration estimates) in the same manner as done for the activities and control measures. Every risk is characterised by a given probability of occurrence (p_e) and the relations between the risk events and activities.

Control measures

Based on the project database, a number of possible control measures x_n are identified (see Table B.11), that can increase the probability of finishing the project at the target completion time. These control measures, identified by the project manager, take into account limitations on material and human resources. These control measures are characterised by their impact towards the three identified objectives: (1) the number of days reducing the duration of the affected activities, (2) the cost of a measure, and (3) the impact on traffic nuisance, each given by a three-point estimate (minimum, most-likely, and maximum). The correlation factor (η) is defined for accurately determining mitigation effects in construction delays by accounting for the nonlinear relationship between mitigated duration and effects, varying from direct proportional effects for additional personnel or equipment to non-proportional one-off expenses.

The SAAone construction sequence (see Figure B.7), is established using a logical network model and build upon the planning project activities and risks, depending on the control measures. The probabilistic network with the underlying logical links is expressed as follows:

$$\mathcal{N}(a_n * c_{i,n}, \mathbf{y}) \tag{9}$$

As noted in remark 4 of section 2 the methodology defines the implementation of a control measure to be represented by allocation of a measure a_n multiplied with its impact $c_{i,n}$ towards objective i as following:

$F_n = x_n = a_n * c_{i,n}$ (see the set of control measures in Table B.11).

4.2.2. Objective functions

The optimisation framework considers the following four objectives that form the link between the network performance function and the preference functions.

Objective project duration

The project duration Δ is extracted from the network performance function and can be expressed as follows:

$$O_1 = O_{PD} = \Delta(\mathcal{N}(a_n * c_{1,n}, \mathbf{y})) \quad (10)$$

where O_{PD} is expressed in days.

Objective project control cost

The project control cost is defined as the sum of the cost impact of active control measures. As the demonstrative case is defined according to a *Design, Build, Finance and Maintain-contract* (DBFM) contract, the objective function is extended by a penalty and reward scheme (contractual project completion performance scheme), it reads as:

$$O_2 = O_C = \sum_{n=1}^N (a_n \cdot c_{2,n}) + \Delta_1 \cdot P_c - \Delta_2 \cdot R_c \quad (11)$$

Subject to:

$$\Delta_1 = \begin{cases} \Delta - T_{tar}, & \text{if } \Delta > T_{tar} \\ 0, & \text{otherwise} \end{cases} \quad (12)$$

$$\Delta_2 = \begin{cases} T_{tar} - \Delta, & \text{if } \Delta < T_{tar} \\ 0, & \text{otherwise} \end{cases} \quad (13)$$

where O_C is expressed in €, Δ_1 is the project delay after implementing the control measures, Δ_2 is the duration reduction beyond target duration, T_{tar} is the target (i.e., desired/planned) project duration specified by the involved stakeholders, P_c is the daily penalty, and R_c is the daily reward. It holds that a penalty and reward cannot occur simultaneously, thus $\Delta_1 * \Delta_2 = 0$. Note,

the project duration after implementation of control measures Δ is extracted from the network performance function $\mathcal{N}(a_n * c_{2,n}, \mathbf{y})$, see Equation 9.

Objective traffic nuisance

During construction, the experience of a road user (considered as traffic nuisance) is heavily impacted. The impact on road user experience during construction is becoming an increasingly important aspect within infrastructure project execution. Currently, most service operations departments measures the effect on car traffic in terms of Lost Vehicle Hours (LVHs), which is then converted into a monetary value and considered in a contractual performance scheme. However, this approach overlooks the actual impact on the user which can not be monetised, respectively maximising their experience during construction becomes essential for improving service operations during construction. Similar to the penalty and reward scheme of the objective cost, a scheme is implemented to account for nuisance increase with the factor P_e in case of a delay and decrease in traffic nuisance with the factor I_e in case of early completion. Δ_1 and Δ_2 are considered according to Equation 12 and Equation 13. Again, it holds that a penalty and reward cannot occur simultaneously, thus $\Delta_1 * \Delta_2 = 0$. The objective traffic nuisance reads as follows:

$$O_3 = O_N = \left(\frac{1}{\sum_{n=1}^N (c_{3,n})} \sum_{n=1}^N (a_n \cdot c_{3,n}) \right) * S + \Delta_1 * P_n - \Delta_2 * R_n \quad (14)$$

where S is the scaling factor of 10. Since there is no standard method on how to represent the traffic nuisance, a scale from 0 (baseline nuisance during construction) to 10 (worst possible traffic nuisance during construction) is introduced.

4.2.3. Preference functions

The preference functions for this project control application were developed with one of the co-authors who was involved in the project during the execution phase. In accordance with the project RWS delivery department and the SAAone consortium, the preference curve for project duration (Time) is defined by three duration estimates using a Beta-PERT distribution. The maximum preference ($P_{1,PD} = P_{2,PD} = 100$) towards objective O_{PD} is set at the contract target duration, $T_{tar} = 1466$ days. The minimum preference ($P_{1,PD} = P_{2,PD} = 0$) is determined by two points: the target duration

plus the maximum allowable delay, and a minimum duration of 966 days. Note, the preference towards the project delivery time is expressed by the joint contract of RWS and SAAone, therefore the one preference curve is defined towards the objective target duration. Similar to the prior example, the preference curve is established using a Beta-PERT distribution to accurately reflect the project manager’s preferences for the project duration. This unique preference modelling reflects that, in principle, the project manager in reality is somewhat interested in an earlier project delivery than the exact target duration (blue vertical line), but certainly not much later than this duration with a bit of slack (red vertical line). If the project manager has a ‘fixed’ project delivery with no slack, the red and blue line should coincide, essentially reflecting no preference for any delay. If there is an increased interest to deliver earlier, then either the target duration can be changed or the area under preference function should be increased to create an extremely asymmetric function. Since the delay of the project changes with every iteration of the MCS, the preference curve is adapted accordingly for every realisation of the project network. The preferences for lowest project control cost and lowest nuisance are considered to have the highest value ($P = 100$). Conversely, the lowest preference value ($P = 0$) is considered for the total sum of all control measures’ cost and for the worst possible level of traffic nuisance. For an initial estimate, both preference functions (cost and nuisance) are linear between these lowest and highest preference values. The three resulting preference functions, which describe the relations between different values for $P_{1..3,1..3}$ with respect to objectives $O_{1..3}$, are shown in Figure 4.

4.2.4. Results

To retrieve Odycon outcomes, we will first have to estimate the weights to generate IMAP solutions as part of the MCS results. Within a concurrent discussion between the two (global) stakeholders RWS ($w_1 = 0.5$) and the SAAone consortium ($w_2 = 0.5$) the three individual weights are discussed to reflect their shared objectives. RWS internal interests are represented by the project delivery department with $w_{1,PD} = 0.70$ for the project duration and the service operations departments with $w_{1,N} = 0.30$ for traffic nuisance. SAAone expressed their individual (local) weights to be $w_{2,PD} = 0.70$ for project duration and $w_{2,C} = 0.30$ for the control costs. Table 6 reflects the resulting weights of each of the preference functions. As mentioned before, the preference towards the project delivery time is expressed by the joint contract of RWS and SAAone, therefore the one preference curve is defined

Table 6: Weights for each of the preference functions, according to $w'_{k,i} = w_k \cdot w_{k,i}$. Note, stakeholders can also reflect interest to all objectives while the global weight distribution is constant.

Stakeholder k	$w'_{k,PD}$	$w'_{k,C}$	$w'_{k,N}$	w_k
RWS	0.35	0.00	0.15	0.50
SAAone consortium	0.35	0.15	0.00	0.50
Total	0.70	0.15	0.15	1.00

towards the project duration.

For comparative evaluation purposes, three scenarios are considered. First, there is a SOO focused on minimising costs (SOO O_C). Second, another SOO targets minimising nuisance (SOO O_N). Finally, a MOO is conducted using a defined set of weights (see Table 6) to reflect all stakeholder's interests. To ensure convergence towards the project target date T_{tar} a penalty of $P_c = 10k\text{€}$ and $P_n = 0.1$ is defined for SOO costs and SOO nuisance case respectively. Without these "constraints" the SOO would result in no used control measures due to the missing incentive to utilise them. This is however not needed for the MOO, as it solved the aforementioned need for direct time-cost trade-off techniques.

The final outcomes of the Odycon framework (integration of IMAP and MCS) are displayed in the form of frequency distribution diagrams referred to as criticality index. Similar to the strategic planning application, the criticality index of control measures is derived. Within every MCS iteration a new set of control measures is derived. To identify the most critical set of control variables Figure 5 gives insight into the frequency of control measures and Figure 6 on the frequency of combined occurrence of control measures. Table 7 compares the numerical results for the different evaluation cases given defined target-percentiles. The results of the different percentiles and cases are respectively displayed in the different preference functions showing the respective preference given the percentile (see Figure 4).

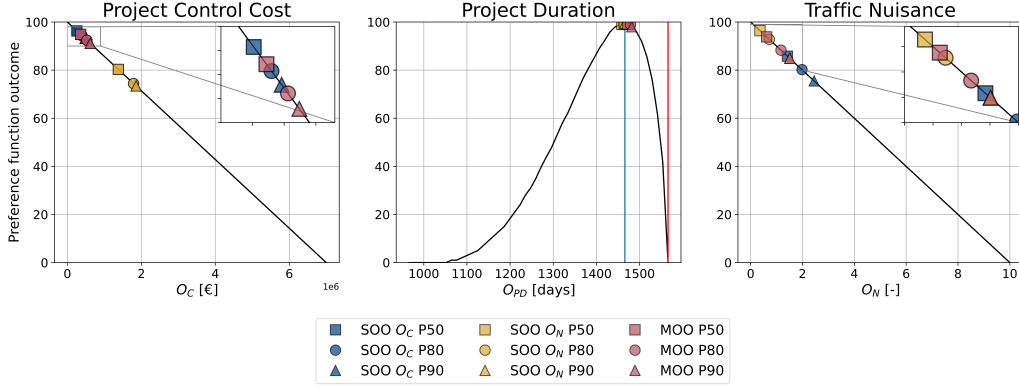


Figure 4: Preference functions $(P_{1,PD}, P_{2,C}, P_{1,N})$ with respect to objectives (O_{PD}, O_C, O_N) , including the preference score of the different optimisation scenarios and percentiles. The numerical results can be found in Table 7. The blue line represents the target duration $T_{tar} = 1466$ days and the red line an exemplary maximum delay of 100 days. Note that, as previously mentioned, since the project delay changes with each iteration of the MCS, the preference curve is adapted accordingly for each realisation of the project network. However, this adaptation cannot be visualised.

Table 7: Evaluation of cases with 2000 MCS iterations (O_{PD} in days, O_C in 10^6 €, O_N in nuisance level $[0,10]$). Where the MOO case considers $w'_{1,PD} = 0.70, w'_{2,C} = 0.15, w'_{1,N} = 0.15$.

Case	P50			P80			P90		
	O_{PD}	O_C	O_N	O_{PD}	O_C	O_N	O_{PD}	O_C	O_N
SOO O_C (C)	1463	0.26	1.42	1468	0.40	1.98	1471	0.48	2.45
SOO O_N (N)	1459	1.38	0.36	1464	1.79	0.72	1466	1.86	0.98
MOO (M)	1473	0.36	0.62	1479	0.53	1.17	1482	0.62	1.51
abs. diff. (C - N)	4	-1.12	1.06	4	-1.39	1.26	5	-1.38	1.47
abs. diff. (C - M)	-10	-0.10	0.80	-11	-0.13	0.81	-11	-0.14	0.94
abs. diff. (N - M)	-14	1.02	-0.26	-15	1.26	-0.45	-16	1.24	-0.53
rel. diff. (C - N)	0.3	-430.8	74.6	0.3	-347.5	63.6	0.3	-287.5	60.0
rel. diff. (C - M)	-0.7	-38.5	56.3	-0.7	-32.5	40.9	-0.7	-29.2	38.4
rel. diff. (N - M)	-1.0	73.9	-72.2	-1.0	70.4	-62.5	-1.1	66.7	-54.1

The following conclusions can be made from the comparative evaluation outcome:

1. Comparing the three cases it becomes evident that for all percentiles the relative difference in the project duration (O_{PD}) is very little (1%)

difference between cases) suggesting that all cases perform well with optimising towards meeting the target duration. However, the SOO O_C and SOO O_N are only able to achieve this by the implemented contractual penalty (considered as a trade-off technique). The outcome is thus highly influenced by the defined penalty, limiting the reflection of actual project reality but instead only the contractual "pseudo-reality". The MOO approach achieves similar results given the desired preference of all involved stakeholders allowing for an independent representation towards the project duration and control cost, overcoming the need for monetisation techniques. Moreover, these monetisation techniques are limited with regard to "soft" objectives (as traffic nuisance) where direct cost relation and quantification is not possible.

2. As expected, larger relative differences in case of project planning costs and traffic nuisance are visible. The SOO O_C results in an average of 33% lower cost compared to the MOO approach. The SOO O_N results in an average of 63% lower traffic nuisance compared to the MOO approach. However, when considering a stakeholder-oriented behaviour, it becomes evident that the two SOO cases reflect a narrow and one-sided view not accounting for other set of project goals. With the SOO approaches no synthesis that benefits the overall project outcome is achieved, revealing a significant drawback. The MOO outcome however resulting in acceptable levels of all respective objectives and the overall highest aggregated preference for the respective percentiles. This clearly demonstrates that the synthesis towards all project objectives can result in overall group satisfaction. Similar to the strategic planning application, utilising the MOO approach offers a more balanced perspective by taking into account multiple objectives, including the inherent uncertainties and stochastic nature of the project leading to overall favourable project realisations. Similar to the prior example it becomes evident in Figure 4 that with increasing percentile, the preference decreases concerning their respective objectives. As expected, this trend indicates that decision-makers face lower preference outcomes when targeting higher objective probabilities.
3. The criticality index (see Figure 5 and Figure 6) aids decision-making by clarifying the utilisation of specific control measures and their combinations, thereby identifying the effectiveness of certain control measures and combinations given the underlying uncertainties and stochastic factors. Comparing the three cases, the criticality index differs sig-

nificantly where certain measures seem to have clear positive impact towards certain objectives. For example measure 18 is utilised in 80% of the iterations in the SOO O_C however shows little impact for the SOO O_N or MOO case. The results suggest that some corrective measures (i.e. with low occurrence frequency, e.g.: 14, 15, 16, 17) can be ignored, while others should be prioritised. The frequency of measures given SOO O_N and SOO O_N do not consider the impact a certain measure has towards other objectives, neglecting associative decision-making. The MOO approach reflects the frequency of measures that have the highest aggregated group preference towards all objectives revealing their actual impact. However, to arrive at effective project control strategies, it is important not to rely solely on the most critical corrective measure as a standalone solution. Instead, these measures should be combined to form a comprehensive mitigation strategy selected by the project manager. To this extent, the criticality index of measure combinations gives insight into the correlated impact of measures. The likelihood of timely project completion should then be verified through a simulation allocating these specific measures. Similar critically analysis can be performed for the project activities and project paths (see Kammouh et al. (2021)).

These observations provide project managers with actionable insights, enabling them to define the most effective project control measures given all the project objectives. A dynamic adaption and verification thought the project stages is enabled with the ability to adapt the set of feasible measures.

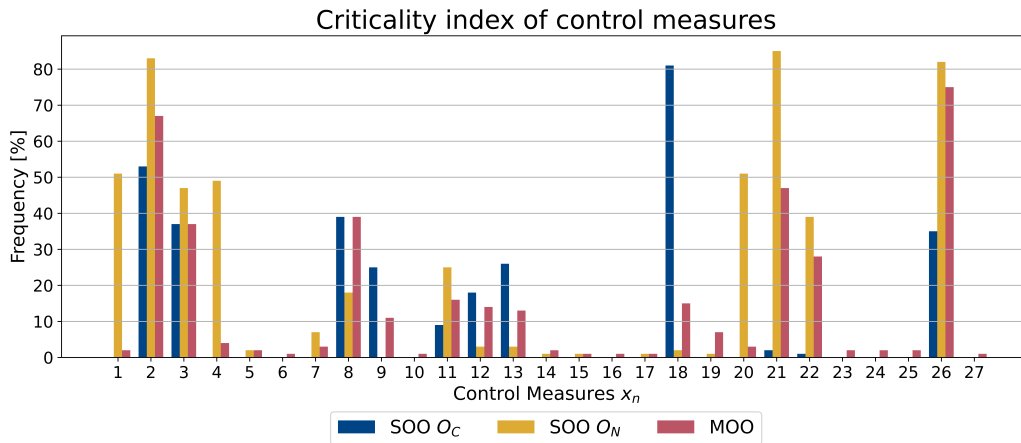


Figure 5: Criticality index of mitigation measures for all three optimisation scenarios.

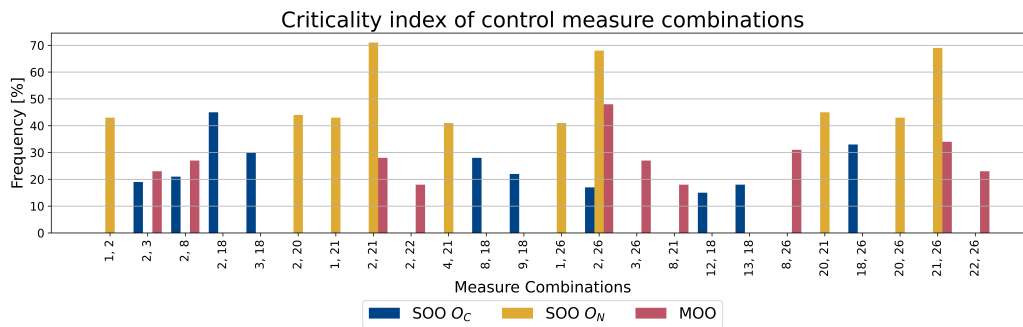


Figure 6: Criticality index of mitigation measures combinations for all three optimisation scenarios.

5. Discussion & next steps for further development

The two example application demonstrate the advances and added benefit of the introduced Odycon methodology. Facilitating associative decision-making in uncertain projects come with limitations towards the technical and social integration. The challenge lies in the combined complexity of synthesising the concurrent interests of all stakeholders while managing intricate technical interdependencies effectively. The methodology is built for computer-aided and data-driven decision-making, relying heavily on the availability and accessibility of large project performance information and stakeholder

preferences mapping. For example, estimates for activity durations, technical performance data of engineering assets, occurrence probabilities of risks, and data on external environmental influences significantly impact the interdependency and workability of a project. To achieve reproducible and consistent outputs, the variability in data quality from different sources must be minimal. Moreover, accurately representing stakeholder preferences and their relative individual weights significantly impacts Odycon's outcomes. Consequently, well-informed project decision-making is fundamentally limited by the availability and quality of both preference and performance information.

While the introduced Odycon methodology is adaptable to various project specifics and constraints, the inflexibility of existing contracts may hinder the accommodation of dynamic changes. Legal constraints and compliance issues could limit the effectiveness of this open and cooperative decision-support methodology, impeding adaptive and associative project management.

Towards that extent, the following further research and development is recommended:

1. As demonstrated in the example applications, the results depends on a good reflection of human objectives and their preferences & weights (social integration). Further research is needed towards establishing a Structured Stakeholder Judgement model to improve and refine the preference elicitation to estimating the preference functions and weight distributions. This type of model could improve cooperative decision-making, promoting a collective mindset shift among all involved parties to fully utilize the benefits of the Odycon methods for the advantage of all project associated stakeholders. As a first step, the so-called choice-based conjoint analysis method can be introduced to generate an initial estimate for this.
2. To improve the accurate reflection of uncertainty (technical integration) the implementation of Structured Expert Judgment (e.g. Cooke's model) should be considered when decision-makers are confronted with insufficient data availability (Leontaris et al., 2019). In case of large sets of available field-data, the use of real-time data methods like non-parametric Bayesian Networks could be integrated to model uncertainty without relying on predefined distributions (Leontaris et al., 2018).
3. The example applications considered Beta-PERT modelling, neglecting other simulation-based models. To improve the simulation of the network, the impact of models that consider the integration of different

types of activity links and automated changes in the network structure should be explored (Wang, 2005).

4. Constraints regarding resources limitation (e.g., personnel, material, assets) are currently neglected. However, for more realistic applications, the availability of certain resource pools during the project execution should be incorporated to give project managers a more accurate representation of feasible project planning and control strategies.
5. Both postmortem analysis and real life projects research can further support the effect of using Odycon and add confidence to contractor-client relationships so that the current rigid forms of contract may become more open.
6. Further research can be done to use Odycon in stalemate projects as a transparent and objective mediator to 'confront project conflicts into yes'.
7. The Odycon methodology can be further extended for project portfolio optimisation to reduce inefficiencies.

6. Conclusion

The increasing complexity of projects comes with the need for stakeholder and goal-oriented decision-making, and is addressed by following a systems-oriented approach.

This paper presents Odycon, a pure *a-priori* stochastic simulation & optimisation methodology integrating the capability of the project (technical domain), the human goal-oriented behaviour (human domain), and the association of stakeholder-oriented behaviour (social domain). To this extent, the IMAP optimisation method is integrated into a probabilistic MCS, accurately reflecting project uncertainties while enabling best-fit for common-purpose project management. The advances towards strategic planning and dynamic control were demonstrated with two distinct examples demonstrating the utilisation during up-front planning and on-the-run project control. The following general conclusions can be drawn.

First, the complex reality of project management is addressed by identification of the most effective and desired set of project planning & control variables given the uncertainties and stochastic factors while considering overall group satisfaction. The interplay with stakeholder-oriented concurrent objectives is addressed by the integration of the 'associative preference domain', enabling an optimal solution that best fits the common purpose,

using *a-priori* optimization. This approach supports satisfactory project planning and control, allowing stakeholders to meet their individual needs through collective performance. The model results of both demonstrative applications show that joint project success, in alignment with the defined common purpose, will increase when individual stakeholders relinquish their pure self-interest, ultimately enabling an optimal solution that benefits the whole group. Here, Odycon aligns with previous empirical results of management studies, as mentioned in the introduction. The developed methodology allows for the integration and combination of variables from different project phases, as well as flexible adaptation and development tailored to project and stakeholder specific needs.

Second, Odycon opens the possibility to reflect all types of project goals, with no need for cost or resource trade-off techniques, thus providing flexibility and better insight into different objectives and system behaviour. It enables adaption towards project specific circumstances where numerous important factors may not be covered by contractual specifications or budget, leading to a decline in quality under the conventional management practice. This consideration is essential for enhancing project planning and control strategies while maintaining project integrity in terms of quality, budget, and timeline. While the budget of a project is determined by its financial limits, other objectives describing the quality or impact of a project should be evaluated based on their degree of 'satisfaction,' which reflects the utility or value they offer.

Third, Odycon provides clear guidance in budget and resource allocation before and during project execution, making it an essential tool to support decision-making. Project managers and associated stakeholders are able to jointly create actionable insights into the system behaviour and decision-making impact of planning and/or control variables given the underlying uncertainties a project faces. This enables to jointly allocate planning and control budgets more effectively towards solutions that are both feasible and desired.

Fourth, Odycon enables well-informed and deliberative decision-making by removing bias from the decision-making process. Manual trial-and-error approaches are time-consuming and inefficient, relying on 'gut instinct' and human judgment on uncertainties, which can be biased and limited. In contrast, Odycon's computer-aided decision-support framework uses simulation and optimisation models to explore numerous solutions systematically, reducing human biases, enhancing efficiency, and acknowledging solution spaces no

longer conceivable for humans. Odycon thus facilitates a shift within complex project management from unsubstantiated trial-and-error to transparent and data-driven decision modelling, optimizing over large numbers of variables and objectives, within a multidimensional solution space.

With this methodology, Odycon takes a next step in computer-aided data-driven decision-making for project and operations management through significantly improving the efficiency and effectiveness of decision-making, thereby enabling an associative ideal within reach.

Disclosure statement

The authors report that there are no competing interests to declare.

Data availability statement

The two demonstrative applications for strategic project planning and dynamic project control are available via a GitHub repository online in accordance with confidentiality agreements. The repository is located here: <https://github.com/Boskalis-python/ODYCON>. Note, for preference aggregation as part of the optimisation, the following algorithm is used: <https://github.com/Boskalis-python/a-fine-aggregator>.

Appendix A. Preference score aggregation

The following describes the aggregation algorithm for use in preference-based design and decision-making. In short, the following two starting principles apply to this algorithm (see Barzilai (2022) or Wolfert (2023)):

1. it should reflect relative scoring as encountered in actual design and decision-making practice.
2. it should adhere to the governing mathematics in a one-dimensional affine space, which is the mathematical model applicable to preference score(s).

The algorithm therefore consists of two operations: (1) normalising the preference scores of all alternatives per criterion, and (2) finding the representative aggregated preference score P^* for each alternative using the weighted least squares method. These two operations are further elaborated mathematically below.

Appendix A.1. Normalisation

For normalisation, the standard score (z-score) method is used. This yields a normalisation that preserves information about the population of preference scores and reads as follows:

$$z_{i,j} = \frac{p_{i,j} - \mu_j}{\sigma_j} \text{ for } i = 1, 2, \dots, I; j = 1, 2, \dots, J \quad (\text{A.1})$$

Here $z_{i,j}$ is the normalised score of alternative i for criterion j ; $p_{i,j}$ is the preference score of alternative i for criterion j ; μ_j is the mean of all preference scores p for criterion j ; σ_j is the standard deviation of all preference scores p for criterion j . By performing this normalisation for all criteria J , the preference scores are transformed to a single scale with the same properties ($\mu_J = 0, \sigma_J = 1$).

Appendix A.2. Weighted least squares

Since all $z_{i,j}$ scores are now on a single scale, it is possible to compare all normalised scores per alternative with each other. To find the representative aggregated preference score of an alternative that provides a best fit of all (weighted and relative) scores for each criterion, a minimisation of the weighted least squares difference between this aggregated score and each of the (normalised) individual scores on all criteria is applied. This is expressed mathematically as follows:

$$\text{Minimise } S_i = \sum_{j=1}^J w_j * (z_{i,j} - P_i^*)^2 \quad (\text{A.2})$$

Note that since the search is for a single representative aggregated preference score, the model function $f(x_{i,j}, \beta_i)$ from the classical weighted least square method is replaced by P_i^* . The solution to this minimisation can be found by differentiating with respect to P_i^* and equating it to zero. Since $\sum_{j=1}^J w_j = 1$, this results in the following analytical expression for the representative aggregated preference score:

$$P_i^* = \sum_{j=1}^J w_j * z_{i,j} \quad (\text{A.3})$$

Appendix B. Dynamic control application data

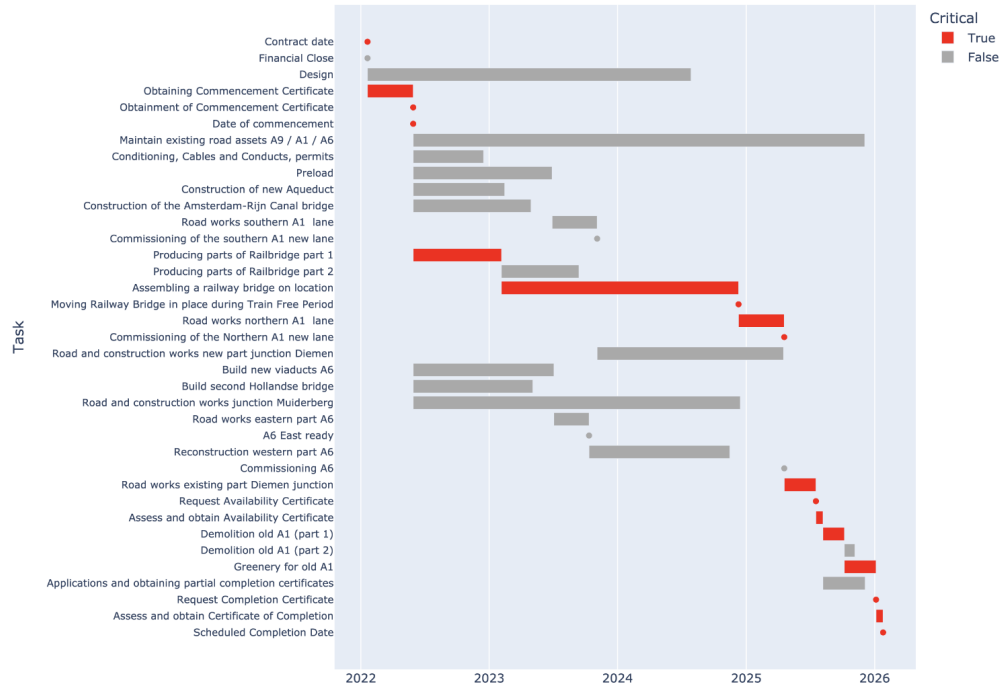


Figure B.7: Simplified project planning and SAAone’s construction sequence (logical network model) represented as a Gantt chart, a (deterministic) critical path is represented in red. This was also assumed as the base project planning in Kammouh et al. (2022).

Table B.8: Dynamic control application: Project Activities.

ID	Activity description	Activity duration (days)			Predecessors
		a_i	m_i	b_i	
1	Contract date	0	0	0	0
2	Financial Close	0	0	0	0
3	Design	819	920	1435	1
4	Acquiring the certificate of commencement	105	130	194	1
5	Commencement certificate is acquired	0	0	0	2,4
6	Date of commencement	0	0	0	5
7	Maintain existing road assets A9 / A1 / A6	976	1284	1836	6
8	Conditioning, Cables and Conducts, permits	168	200	268	6
9	Preload	324	395	525	6
10	Constructing a new Aqueduct	200	260	341	6
11	Constructing a Canal bridge	285	335	492	6
12	Construction works in the southern A1 lane	113	128	189	9,10,11
13	Commissioning of the southern A1 new lane	0	0	0	12
14	Producing parts of Railbridge part 1	223	251	366	6
15	Producing parts of Railbridge part 2	194	220	350	14
16	Assembling a railway bridge on location	559	674	971	14
17	Moving Railway Bridge in place during Train Free Period	0	0	0	16
18	Road works northern A1 lane	109	130	191	17
19	Commissioning of the Northern A1 new lane	0	0	0	18
20	Road and construction works new part junction Diemen	477	530	848	13
21	Build new viaducts A6	304	400	532	6
22	Build second Hollandse bridge	286	340	459	6
23	Road and construction works junction Muiderberg	716	930	1237	6
24	Road works eastern part A6	90	100	130	21,22
25	A6 East ready	0	0	0	24
26	Reconstruction western part A6	324	400	532	25
27	Commissioning A6	0	0	0	18,23,26
28	Road works existing part Diemen junction	71	90	130	19,20
29	Request Availability Certificate	0	0	0	28
30	Assess and obtain Availability Certificate	16	20	27	29
31	Demolition old A1 (part 1)	54	61	91	30
32	Demolition old A1 (part 2)	23	30	48	31
33	Greenery for old A1	77	90	129	31
34	Applications and obtaining partial completion certificates	104	120	161	30
35	Request Completion Certificate	0	0	0	33
36	Obtaining the Certificate of Completion	17	20	27	35
37	Scheduled Completion Date	0	0	0	36

Table B.9: Strategic control application: Shared uncertainty factors.

ID	Shared uncertainty factor	Shared uncertainty (days)			Relations with activities
		a_i	m_i	b_i	
1	Weather condition 1	-45	0	72	10,11
2	Soil composition	-50	0	100	21, 22, 23, 7
3	Crew performance	-10	0	50	12,23
4	Soil composition	-45	0	110	20,26
5	Equipment availability 1	-20	0	100	15,16
6	Site availability	-5	0	100	16,20
7	Procurement, fabrication or assembly	-1	0	55	7,20
8	Project control and management	-20	0	50	8,9
9	Design or documentation accuracy	-5	0	15	32,33
10	Owner-driven changes	0	0	45	18,20
11	Issues with contractor	-20	0	50	3,4
12	Issues with supplier	-20	0	100	7,14
13	Equipment availability 2	-80	0	90	7,16
14	Weather condition 2	-140	0	100	7,23

Table B.10: Dynamic control application: Risk events.

ID	Risk event description	Risk duration (days)			Relation	p_e
		a_i	m_i	b_i		
1	Preliminary design rejection, including extra scope of works	96	105	119	3	0.20
2	EDP audit failure	13	14	15	4	0.05
3	Condition deviates from plan	63	70	78	7	0.15
4	Unexpected gas conducts	35	35	41	8	0.20
5	Lower consolidation rate than calculated for	34	35	40	9	0.10
6	Piling machines break down	14	14	15	10	0.10
7	Late delivery of prefab elements	19	21	25	11	0.20
8	Dynamic traffic management equipment/software not functioning	20	21	22	12	0.25
9	Production equipment failure	20	21	23	14	0.05
10	Construction site subsides	13	14	15	15	0.05
11	Ancillary equipment failure	33	35	41	16	0.10
12	Dynamic traffic management equipment/software not functioning	20	21	21	18	0.25
13	Discovery of polluted soil	13	14	14	20	0.05
14	Concrete casting failure	13	14	14	21	0.05
15	Main pillar subsides	65	70	71	22	0.02
16	Discovery of polluted soil	25	28	32	23	0.05
17	Insufficient quality of base layer	39	42	47	26	0.02
18	Discovery of asphalt with too high PAK percentage	13	14	17	28	0.05
19	Additional scope of work (miscellaneous)	130	140	160	30	0.01

Table B.11: Dynamic control application: Corrective measures (variables).

ID	Mitigation description	Capacity [<i>days</i>]			Cost [€] ($\eta = 0.5$)			Nuisance			Relation
		a_i	m_i	b_i	a_i	m_i	b_i	a_i	m_i	b_i	
x_1	Extra engineering design office personnel	99	101	101	118k	120k	120k	0.00	0.00	0.00	3
x_2	Extra software design capacity	14	14	14	30k	30k	30k	0.00	0.00	0.00	4
x_3	Extra maintenance engineers	103	127	127	136k	150k	150k	0.91	1.00	1.00	7
x_4	Extra administrators for permitting	43	51	57	44k	48k	50k	0.00	0.00	0.00	8
x_5	Applying extra preloading material	41	51	51	677k	750k	750k	5.42	6.00	6.00	9
x_6	Adding extra onsite construction flow	92	101	107	190k	200k	205k	9.52	10.00	10.00	10
x_7	Extra prefab construction capacity	117	127	129	144k	150k	151k	0.96	1.00	1.01	11
x_8	Extra M&E engineers	51	51	51	60k	60k	60k	3.00	3.00	3.00	12
x_9	Extra welding equipment and personnel	53	64	64	90k	100k	100k	5.45	6.00	6.00	14
x_{10}	Extra temporary soil measures	45	51	53	235k	250k	254k	5.65	6.00	6.12	15
x_{11}	Ancillary on standby	201	203	222	199k	200k	209k	4.98	5.00	5.24	16
x_{12}	Extra M&E engineers	14	14	14	30k	30k	30k	3.00	3.00	3.00	18
x_{13}	Extra excavation capacity	96	101	101	121k	125k	125k	9.71	10.00	10.00	20
x_{14}	Extra concrete workers/carpenters	82	101	107	67k	75k	77k	5.42	6.00	6.17	21
x_{15}	Temporary ancillary construction and rework	70	76	84	1,442k	1,500k	1,576k	7.69	8.00	8.41	22
x_{16}	Extra excavation capacity	60	76	82	134k	150k	155k	7.18	8.00	8.31	23
x_{17}	Extra asphalt equipment and personnel	101	101	107	200k	200k	205k	8.00	8.00	8.23	26
x_{18}	Extra removal works	43	51	53	69k	75k	76k	9.23	10.00	10.00	28
x_{19}	Extra equipment and personnel	10	14	16	214k	250k	267k	6.86	8.00	8.57	30
x_{20}	Applying extra preloading material during the night	41	51	51	1,084k	1,200k	1,200k	0.90	1.00	1.00	9
x_{21}	Automation of M&E workflows	30	30	30	120k	120k	120k	0.00	0.00	0.00	12
x_{22}	Welding operation during the night	45	53	53	166k	180k	180k	1.85	2.00	2.00	14
x_{23}	Extra temporary soil measures during the night	32	40	42	315k	350k	358k	0.90	1.00	1.03	15
x_{24}	Night shifts for concrete work	67	80	91	91k	100k	106k	3.68	4.00	4.28	21
x_{25}	Excavation during the night	40	56	62	257k	300k	316k	0.86	1.00	1.05	23
x_{26}	Removal works during the night	33	41	43	81k	90k	92k	0.90	1.00	1.02	28
x_{27}	Lane by lane asphalt work	30	30	30	430k	430k	430k	3.00	3.00	3.00	26

References

- Arkesteijn, M., Binnekamp, R., De Jonge, H., 2017. Improving decision making in cre alignment, by using a preference-based accommodation strategy design approach. *Journal of Corporate Real Estate* 19, 239–264. doi:10.1108/JCRE-10-2016-0033.
- Barzilai, J., 2022. *Pure Economics*. FriesenPress.
- Blanchard, B.S., Fabrycky, W.J., 2011. *Systems engineering and analysis*. Pearson.
- Del Pico, W.J., 2023. *Project control: Integrating cost and schedule in construction*. John Wiley & Sons.
- Van den Doel, H., Van Velthoven, B., 1993. *Democracy and Welfare Economics*. 2nd ed., Cambridge University Press.
- Glasl, F., 1998. *The Enterprise of the Future*. Hawthorn Press, Stroud, UK.

- Guo, K., Zhang, L., 2022. Multi-objective optimization for improved project management: Current status and future directions. *Automation in Construction* 139, 104256. doi:10.1016/j.autcon.2022.104256.
- Kahneman, D., 2011. *Thinking, Fast and Slow*. Macmillan.
- Kammouh, O., Nogal, M., Binnekamp, R., Wolfert, A.R.M., 2021. Mitigation controller: Adaptive simulation approach for planning control measures in large construction projects. *Journal of Construction Engineering and Management* 147. doi:10.1016/j.autcon.2021.103698.
- Kammouh, O., Nogal, M., Binnekamp, R., Wolfert, A.R.M., 2022. Dynamic control for construction project scheduling on-the-run. *Automation in Construction* 141, 104450. doi:10.1016/j.autcon.2022.104450.
- Leontaris, G., Morales-Nápoles, O., Dewan, A., Wolfert, A.R., 2019. Decision support for offshore asset construction using expert judgments for supply disruptions risk. *Automation in Construction* 107, 102903. doi:10.1016/j.autcon.2019.102903.
- Leontaris, G., Morales-Nápoles, O., Wolfert, A.R.M., 2018. Probabilistic decision support for offshore wind operations: a bayesian network approach to include the dependence of the installation activities, in: *Probabilistic Safety Assessment and Management PSAM 14*, Los Angeles, CA.
- Reschke, H., Schelle, H., 2013. *Dimensions of Project Management: Fundamentals, Techniques, Organization, Applications*. Springer Science & Business Media.
- Scharmer, C.O., 2016. *Theory U: Leading from the Future as It Emerges*. 2nd ed., Berrett-Koehler.
- Schön, D., Argyris, C., 1996. *Organizational learning II: Theory, method and practice*. 2nd ed., Addison Wesley.
- Slack, N., Chambers, S., Johnston, R., 2010. *Operations Management*. Pearson Education.
- Smith, N.J., Merna, T., Jobling, P., 2014. *Managing risk in construction projects*. John Wiley & Sons.

- Spring, M.J.J., 2020. Global expansion of offshore wind power depends on overcoming significant challenges facing floating wind turbines, in: Offshore Technology Conference, OnePetro.
- Van Gunsteren, L., 2011. Stakeholder-oriented Project Management Tools and Concepts. volume 6 of *Research in Design Series*. IOS Press.
- Van Heukelum, H.J., Binnekamp, R., Wolfert, A.R.M., 2024. Socio-technical systems integration and design: a multi-objective optimisation method based on integrative preference maximisation. *Structure and Infrastructure Engineering* doi:10.1080/15732479.2023.2297891.
- Wang, W.C., 2005. Impact of soft logic on the probabilistic duration of construction projects. *International Journal of Project Management* 23, 600–610. doi:10.1016/j.ijproman.2005.05.008.
- Wang, W.C., Demsetz, L.A., 2000. Model for evaluating networks under correlated uncertainty—netcor. *Journal of Construction Engineering and Management* 126, 458–466. URL: [https://doi.org/10.1061/\(ASCE\)0733-9364\(2000\)126:6\(458\)](https://doi.org/10.1061/(ASCE)0733-9364(2000)126:6(458)), doi:10.1061/(ASCE)0733-9364(2000)126:6(458).
- Wolfert, A.R.M., 2023. Open Design Systems. volume 10. IOS Press. doi:10.3233/RIDS10.