

InversionNet: A Real-Time and Accurate Full Waveform Inversion with CNNs and continuous CRFs

Yue Wu¹ and Youzuo Lin^{1,*}

Abstract—Full-waveform inversion problems are usually formulated as optimization problems, where the forward wave propagation operator f maps the subsurface velocity structures to seismic signals. The existing computational methods for solving full-waveform inversion are not only computationally expensive, but also yields low-resolution results because of the ill-posedness and cycle skipping issues of full-waveform inversion. To resolve those issues, we employ machine learning techniques to solve the full-waveform inversion. Specifically, we focus on applying the convolutional neural network (CNN) to directly derive the inversion operator f^{-1} so that the velocity structure can be obtained without knowing the forward operator f . We build a convolutional neural network with an encoder-decoder structure to model the correspondence from seismic data to subsurface velocity structures. Furthermore, we employ the conditional random field (CRF) on top of the CNN to generate structural predictions by modeling the interactions between different locations on the velocity model. Our numerical examples using synthetic seismic reflection data show that the propose CNN-CRF model significantly improve the accuracy of the velocity inversion while the computational time is reduced.

Index Terms—Inversion, Full-Waveform Inversion, Convolutional Neural Network, Conditional Random Field

1 INTRODUCTION

FULL-waveform inversion (FWI) plays an important role in various applications such as subsurface characterization in geoscience [52, 53], breast cancer detection in medicine [28, 30], etc. The numerical implementations of FWI can be in either the time domain or the frequency domain [10, 14, 25, 27, 51]. FWI is a non-linear and ill-posed inverse problem and computationally expensive to solve [53]. There may exist many local minima when solving the minimization problem of inversion, making the technique less robust. To mitigate the ill-posedness of the problem, many approaches have been proposed and developed in recent years. The popular methods include: regularization-based techniques [4, 10, 14, 23, 24, 28, 30, 42], dynamic warping techniques [36, 40], prior information-based methods [35, 37, 58], multiscale inversion approaches [3, 50], and preconditioning methods [11, 49].

In recent years, with the largely increased computational power and the revitalization of deep neural networks [12, 21, 48], there is a surging trend of using data-driven methods for solving inverse problems in many scientific domains [17, 34]. Meanwhile, machine learning and deep learning methods have also drawn much attention in inverse problems applications [18, 31, 32, 34, 47, 56]. In general, those different deep-learning based methods for solving inverse problems can be categorized into four types: to learn an end-to-end regression with vanilla convolutional neural network (CNN), to learn higher-level representation, to gradual refinement of inversion procedure, and to in-

corporate with analytical methods and to learn a denoiser. The idea behind the first category is that a fully-connected neural network with a large number of neurons in its hidden layer has the ability to represent any functions, which is also known as the universal approximation theorem [13]. Examples of works that use the vanilla CNN include the work from Jain and Seung [16], where they use a five-layer CNN to denoise an image subjected to Gaussian noise. More recently, Eigen et al. [7] trained a CNN with three layers for denoising photographs that showed windows covered with dirt and rain. A common use of CNNs is to learn a compressed representation prior to constructing an output image. Several existing works use the effectiveness of autoencoders to learn relevant features to solve inverse problems in imaging. As an example, Zeng et al. [57] employ the autoencoder's representation-learning capability to learn useful representations of low-resolution and high-resolution images. A shallow neural network is then trained to learn a correspondence between the learned low-resolution representation and the high-resolution representation. In the third category, CNNs are used to learn a residual between two or more layers by the skip connection from the input of the residual block to its output. This network structure is particularly well suited to inverse problems such as image restorations when the input and the output images share similar content. The work of Yao et al. [56] and Kim et al. [18] both belong to this category. Another type of research effort to solve inverse problems using neural networks is to incorporate analytical solutions. An example of this idea is LISTA [9]. Its basic idea is to start with an analytical approach and an associated inference algorithm and unfold the inference iterations as layers in a deep network.

Provided with all the above relevant work, there are some similarities between our inverse problems and the

• Y. Wu and Y. Lin are with the Geophysics Group, Earth and Environmental Sciences Division, Los Alamos National Laboratory, Los Alamos, NM, 87544 USA.

• * Correspondence to: Y. Lin, ylin@lanl.gov.

mentioned inverse problems. All these work including ours are to infer the unknown from the known data. However, there are some unique characteristics associated with our inverse problems. In our inverse problems, the governing equation relating the recorded data and the velocity model is a wave equation, which describes the wave phenomenon and its propagation in the medium. To our knowledge, there are limited research works employing neural networks to solve FWI for a reconstruction. The only research works demonstrating the potential of deep learning in solving FWI problems include the work of Lewis and Vigh [22] and Richardson [43]. Specifically, Lewis and Vigh [22] utilizes neural networks to generate some prior knowledge, which is used to inject into the conventional FWI iteration. Richardson [43] uses recurrent neural network (RNN) to solve the forward wave propagation modeling. Different from both of those research, in this work we developed a novel deep convolutional neural networks architecture (called “InversionNet”) for the direct reconstruction of full-waveform inversion provided with seismic measurements.

Our InversionNet is a data-driven model that learns a mapping from seismic waves to the subsurface velocity models. The architecture of our InversionNet is built upon CNNs due to the fact that CNNs have made substantial breakthroughs in processing image data. Considering the discrepancy of dimension size between seismic datasets and subsurface velocity models, we design an encoder-decoder CNN such that the encoder learns an abstract representation of the seismic data, which is then used by the decoder to produce a subsurface velocity model. Similar ideas can be found in biomedical image segmentation [45].

One major challenge of FWI is to capture the subsurface structure, that is, the location of boundaries of layers and faults. Such structures can be reflected by the velocity model where values within each layer and the fault are nearly constant. However, these physics characteristics are difficult to capture by CNNs trained with per-pixel losses (e.g., L1 or L2 losses). To address this issue, we couple the CNN with a conditional random field (CRF) to generate velocity models with enhanced structural details. The potential of CRFs has been demonstrated in several computer vision domains including semantic segmentation [5, 20, 59], depth estimation [33, 55] and remote sensing applications [41, 44]. CRFs are composed of a unary potential on individual nodes (pixels or superpixels) and a pairwise potential on nodes that are connected. The nodes in the graph are usually enriched with low-level features such as color vectors and color histogram vectors. In our problem, low-level features of the input seismic data cannot translate to the velocity model so we instead use deep features from the decoder to represent nodes. Meanwhile, different strategies can be applied to build edges in the graph. [33, 41, 55] model pairwise potential on neighboring nodes to enforce smoothness. [5, 20, 44, 59] construct fully connected graphs where each node is connected to all other nodes in the graph so that long-range dependencies can also be captured. We find that the long-range dependencies on velocity models are not as significant as it is on image data. For effectiveness and efficiency considerations, we propose a *locally connected* setting where each node is connected with all other nodes within a $d \times d$ window.

We apply our methods to synthetic velocity models and seismic reflection data to numerically validate the performance of our InversionNet. As baseline methods, we compare our methods to the physics-driven FWI methods with advanced regularization techniques, which are recently developed in Lin and Huang [26, 27, 29]. Through comparison, we observe that our novel data-driven inversion method not only yields accurate inversion results but also significantly improves the computational efficiency.

In the following sections, we first briefly describe the fundamentals of physics-driven versus data-driven methods, and deep neural networks (Section 2). We then develop and discuss our novel inversion method - inversionNet (Section 3). Section 4 describes the data we tested on, experimental setup, and experimental results we obtained. Finally, concluding remarks are presented in the Conclusions Section.

2 BACKGROUND

2.1 Physics-Driven Techniques

The physics-driven methods are those to infer subsurface model provided with governing physics and equations. Take the seismic exploration as an example. Seismic waves are mechanical perturbations that travel in the medium at a speed governed by the acoustic/elastic impedance of the medium in which they are traveling. In the time-domain, the acoustic-wave equation is given by

$$\left[\frac{1}{K(\mathbf{r})} \frac{\partial^2}{\partial t^2} - \nabla \cdot \left(\frac{1}{\rho(\mathbf{r})} \nabla \right) \right] p(\mathbf{r}, t) = s(\mathbf{r}, t), \quad (1)$$

where $\rho(\mathbf{r})$ is the density at spatial location \mathbf{r} , $K(\mathbf{r})$ is the bulk modulus, $s(\mathbf{r}, t)$ is the source term, $p(\mathbf{r}, t)$ is the pressure wavefield, and t represents time.

The forward modeling problems in Eq. (1) can be written as

$$P = f(\mathbf{m}), \quad (2)$$

where P is the pressure wavefield for the acoustic case or the displacement wavefields for the elastic case, f is the forward acoustic or elastic-wave modeling operator, and \mathbf{m} is the velocity model parameter vector, including the density and compressional- and shear-wave velocities. We use a time-domain stagger-grid finite-difference scheme to solve the acoustic- or elastic-wave equation. Throughout this paper, we consider only constant density acoustic or elastic media.

The inverse problem of Eq. (2) is usually posed as a minimization problem [52, 53]

$$E(\mathbf{m}) = \min_{\mathbf{m}} \left\{ \|\mathbf{d} - f(\mathbf{m})\|_2^2 + \lambda R(\mathbf{m}) \right\}, \quad (3)$$

where \mathbf{d} represents a recorded/field waveform dataset, $f(\mathbf{m})$ is the corresponding forward modeling result, $\|\mathbf{d} - f(\mathbf{m})\|_2^2$ is the data misfit, $\|\cdot\|_2$ stands for the L_2 norm, λ is a regularization parameter and $R(\mathbf{m})$ is the regularization term. The Tikhonov regularization and total-variation (TV) regularization are the most commonly used. The Tikhonov regularization is formulated as

$$E(\mathbf{m}) = \min_{\mathbf{m}} \left\{ \|\mathbf{d} - f(\mathbf{m})\|_2^2 + \lambda \|H\mathbf{m}\|_2^2 \right\}, \quad (4)$$

where the matrix H is usually defined as a high-pass filtering operator, or an identity matrix. The Tikhonov regularization is an L_2 -norm-based regularization and is best suited for a smooth model \mathbf{m} . Waveform inversion with the Tikhonov regularization produces blurred interfaces for piecewise-constant velocity models. To help preserve sharp interfaces in subsurface structures, total-variation (TV) regularization [46] has been incorporated into FWI, leading to

$$E(\mathbf{m}) = \min_{\mathbf{m}} \left\{ \|\mathbf{d} - f(\mathbf{m})\|_2^2 + \lambda \|\mathbf{m}\|_{\text{TV}} \right\}, \quad (5)$$

where the TV-norm for a 2D model is defined as

$$\|\mathbf{m}\|_{\text{TV}} = \sum_{1 \leq i,j \leq n} \sqrt{|\nabla_x \mathbf{m}|_{i,j}^2 + |\nabla_z \mathbf{m}|_{i,j}^2}, \quad (6)$$

where $(\nabla_x \mathbf{m})_{i,j} = m_{i+1,j} - m_{i,j}$ and $(\nabla_z \mathbf{m})_{i,j} = m_{i,j+1} - m_{i,j}$ are the spatial derivatives at a spatial grid point (i, j) in a Cartesian coordinate (x, z) . The regularization parameter λ in eq. (4) and eq. (5) plays an important role of balancing the trade-off between the regularization term and the data-misfit term. Too much regularization may be imposed on inversion if λ is too large. Conversely, too small λ may produce under-regularized inversion results. Lin and Huang [26] further developed a FWI with a modified total-variation (MTV) regularization, which yields supreme results comparing to the FWI with conventional TV regularization term. The formulation of FWI with MTV regularization can be posed as

$$E(\mathbf{m}, \mathbf{u}) = \min_{\mathbf{m}, \mathbf{u}} \left\{ \|\mathbf{d} - f(\mathbf{m})\|_2^2 + \lambda_1 \|\mathbf{m} - \mathbf{u}\|_2^2 + \lambda_2 \|\mathbf{u}\|_{\text{TV}} \right\}. \quad (7)$$

The current physics-driven computational techniques to infer the velocity model is based on gradient-based optimization methods, which are computationally expensive and often yield unsatisfactory resolution in identifying small structures [27, 29]. In recent years, with the significantly improved computational power, machine learning and data mining have been successfully employed to various domains from science to engineering. In the next section, we provide a different perspective (data-driven approach) of obtaining velocity models from seismic measurements.

2.2 Data-Driven Techniques

In this paper, we adopt a data-driven approach, which means that we employ machine learning techniques directly to infer the velocity model and that no underlying physics is utilized. Specifically, suppose one has historical *seismic measurement*. Overall, the idea of data-driven approach independent of applications can be illustrated as

$$\text{Seismic Measurements} \xrightarrow{f^{-1}} \text{Velocity Models.}$$

For FWI problems, we feed a large amount of seismic data into the machine and train them to predict the corresponding velocity models. When the size of the training dataset is sufficiently large, the mapping from the seismic data to the velocity model can be correctly learned. Once the training phase is completed, the machine can predict the velocity model from new seismic data.

With two different categories of methods introduced (“Data-Driven Methods” V.S. “Physics-Driven Methods”), it is worthwhile to mention the distinct differences between these two approaches. The problem of recovering the inherent parameters of a system (i.e. inverse problem) can be posed as the problem of regressing those parameters (even thousands) from the input measurements. However, unlike conventional optimization solutions, machine learning solutions have a strong data dependency, which is more severe when the regressing parameters are statistically independent. Though in practice the parameters exhibit strong correlations, the data requirement even for that case is quite high. In contrast, physics-driven methods are usually formulated as inverse problems where a solution vector can be calculated, without an explicit need for training data.

3 METHODOLOGY

The forward modeling of full-waveform inversion can be posed as

$$f(m) = d, \quad (8)$$

where f is the forward wave propagation operator, m is the subsurface model, and d is the seismic data. In this work, our InversionNet is to directly obtain an approximation of f^{-1} mapping from d to m . We design our network to have an encoder-decoder architecture since our goal is to translate the data from one domain to other. Generally speaking, the encoder can be applied to extract high-level features from the input data and significantly reduce the data dimension. Then, the decoder is capable of translating those features into other domains according to our needs. We name the encoder-decoder CNN The proposed InversionNet architecture with detail information of each layer is illustrated in Figure 1. All dimensions indicated in Figure 1 are based on the dataset we use to evaluate our model. These dimensions may change when using other datasets, but the same methodology can be applied.

3.1 Encoder

The encoder (the top pipeline) includes a set of convolution blocks denoted by “conv” in Figure 1. Each convolution block consists of a convolution operation, batch normalization(BN) [15] and ReLU [38, 39]. It is formulated as

$$X^{(l+1)} = \text{ReLU}(\text{BN}(\text{Conv}(X^{(l)}))), \quad (9)$$

$$\text{Conv}(X)_{(i,j)} = \sum_m \sum_n \sum_c K_{m,n,c} \cdot X_{(s-1) \times i+m, (s-1) \times j+n, c}, \quad (10)$$

$$\text{ReLU}(x) = \begin{cases} x & \text{if } x \geq 0 \\ \alpha x & \text{if } x < 0, \end{cases} \quad (11)$$

$$\text{BN}_{\gamma, \beta}(X_{i,j,c}) = \gamma \left(\frac{X_{i,j,c} - \mu_B}{\sqrt{\sigma_B^2 + \epsilon}} \right) + \beta. \quad (12)$$

where both the input image X and kernel K are 3D tensors with the first two dimensions indicating the spatial location, s denotes the stride between each sliding location of the kernel, γ and β are two trainable parameters, μ_B and σ_B^2

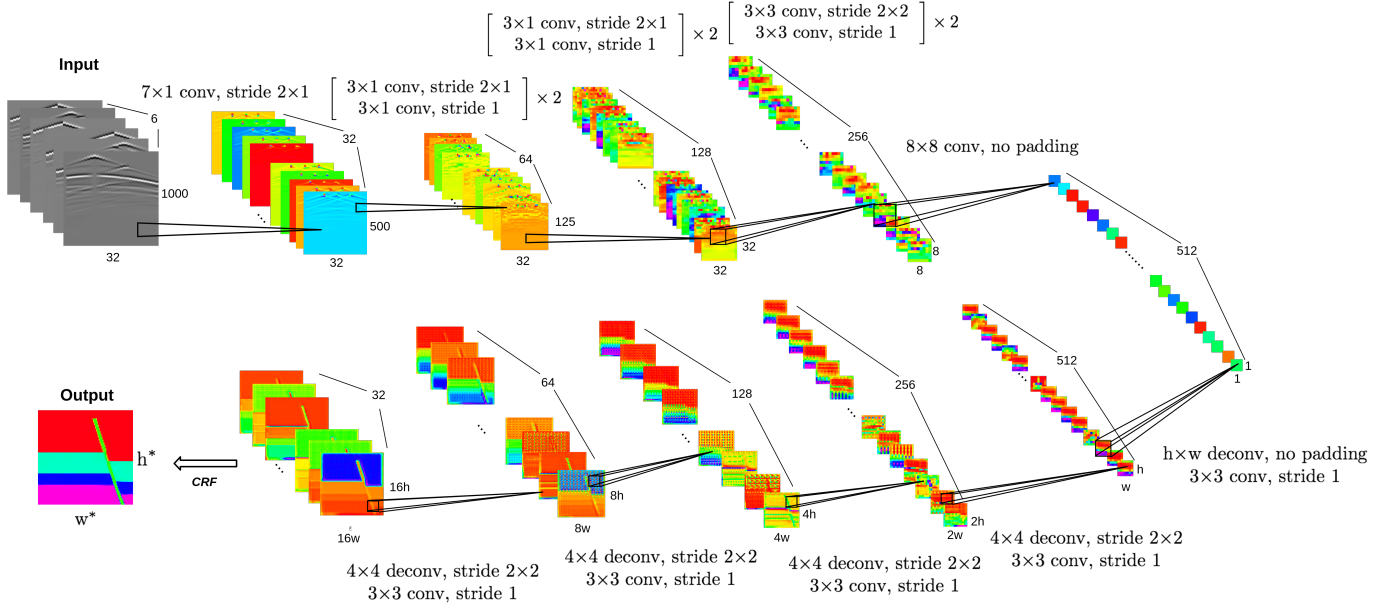


Fig. 1: An illustration of the proposed framework of the data-driven model. The CNN has an encoder-decoder architecture. The encoder (the top pipeline) is primarily built with convolution layers, which extract high-level features from the input seismic data and compress them into a single high-dimensional vector. The decoder (the bottom pipeline) then translates those features into velocity models through a set of deconvolution layers. The specification of each layer is provided in the figure. We build a locally connected CRF on top of the final feature map to generate the final predictions.

are the mean and variance calculated with all values on the same feature map over the mini-batch. ϵ is a small constant added for numerical stability.

The spatial dimensions of the convolution kernels and strides are given in Fig 1. Layers in brackets are repeated twice (weights are not shared). Initial convolutions are 1D, which is because the time dimension is greatly larger so we start with incorporating temporal features of the seismic wave. We do not pad zeros in the last convolution layer so that the feature map can be compressed into a single vector. This is reasonable since it is unnecessary to preserve the temporal and spatial correlations in the seismic data.

3.2 Decoder

The decoder (the bottom pipeline) consists of mixed convolution and deconvolution blocks. Deconvolution (a.k.a. transposed convolution) produces outputs with a larger size than the input, which can be achieved by padding zeros on the input feature map. “deconv” in Figure 1 denotes a deconvolution block that replaces the convolution in Eq. 9 with deconvolution. In each deconvolution block, we apply 4×4 kernels with stride 2 on the input feature map to double the resolution, followed by a regular convolution layer with 3×3 kernels to refine the upsampled feature maps.

3.3 Conditional Random Fields

We build locally connected CRF on the final feature map from the decoder to model the interaction between output values on the velocity model.

A CRF is defined by a Gibbs distribution

$$P(\mathbf{y}|\mathbf{x}) = \frac{1}{Z(\mathbf{x})} \exp(-E(\mathbf{y}|\mathbf{x})), \quad (13)$$

$$E(\mathbf{y}|\mathbf{x}) = \sum_{c \in C(\mathcal{G})} \phi_c(\mathbf{y}_c|\mathbf{x}), \quad (14)$$

$$Z(\mathbf{x}) = \int_{\mathbf{y}} \exp(-E(\mathbf{y}|\mathbf{x})) d\mathbf{y} \quad (15)$$

where $\mathbf{y} = \{y_1, \dots, y_n\}$, $\mathbf{x} = \{\mathbf{x}_1, \dots, \mathbf{x}_n\}$ are two sets of variables, $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ is a graph defined on \mathbf{x} with a set of cliques $C(\mathcal{G})$, each clique c has a potential ϕ_c and $E(\mathbf{y}|\mathbf{x})$ is an energy function summing up all potentials, $Z(x)$ is a normalizing constant. An inference is made by the maximum a posteriori (MAP) $\mathbf{y}^* = \operatorname{argmax}_{\mathbf{y}} P(\mathbf{y}|\mathbf{x})$. The parameters in the CRF can be optimized by maximizing $\log P(\mathbf{y}|\mathbf{x})$.

In our problem, \mathbf{x} ranges over all velocity models of size n and \mathbf{y} ranges over all possible velocity values. The velocity values are implicitly conditioned on each velocity model. The energy function of a fully connect CRF consists of a unary potential ϕ_u and a pairwise potential ϕ_p :

$$E(\mathbf{y}|\mathbf{x}) = \sum_{i \in \mathcal{V}} \phi_u(y_i|\mathbf{x}) + \sum_{i \in \mathcal{V}} \sum_{j \in \mathcal{N}_i} \phi_p(y_i, y_j|\mathbf{x}), \quad (16)$$

where \mathcal{N}_i denotes a set of nodes connected to y_i .

The unary potential models a mapping between the input and each individual output y_i . The pairwise potential models the interaction between outputs y_i and y_j . We define ϕ_u, ϕ_p as

$$\phi_u(y_i|\mathbf{x}) = (y_i - z_i)^2, \quad (17)$$

$$\phi_p(y_i, y_j|\mathbf{x}) = w \cdot k(\mathbf{f}_i, \mathbf{f}_j)(y_i - y_j)^2, \quad (18)$$

where z_i, \dots, z_n are velocity values predicted by the CNN, and w is a weight to be learned. k is similarity function defined as

$$k(\mathbf{f}_i, \mathbf{f}_j) = \exp(-\lambda_1 \|\mathbf{I}_i - \mathbf{I}_j\| - \lambda_2 \|\mathbf{p}_i - \mathbf{p}_j\|), \quad (19)$$

where \mathbf{I} is the feature vector from the final feature map generated by the decoder, \mathbf{p} is the position vector, $\lambda^{(1)}$ and $\lambda^{(2)}$ are hyperparameters.

3.3.1 Approximate Inference

The exact inference on the proposed CRF representation $P(\mathbf{y}|\mathbf{x})$ requires $O(n^3)$ complexity as it needs to compute the inverse of a large matrix [33, 41]. We instead apply mean field theory to compute a distribution $Q(\mathbf{y}|\mathbf{x})$ that can be factorized as $Q(\mathbf{y}|\mathbf{x}) = \prod_i Q_i(y_i|\mathbf{x})$ to approximate $P(\mathbf{y}|\mathbf{x})$ by minimizing Kullback-Leibler (KL) divergence between P and Q [2]. The optimal $Q(\mathbf{y}|\mathbf{x})$ has the form

$$\log Q_i(y_i|\mathbf{x}) = \mathbb{E}_{j \in \mathcal{N}_i} [\log P(\mathbf{y}|\mathbf{x})] + \text{const}, \quad (20)$$

where $\mathbb{E}_{j \in \mathcal{N}_i}$ denotes the expectation of $\log P(\mathbf{y}|\mathbf{x})$ under distributions $Q_j(y_j|\mathbf{x})$ for $j \in \mathcal{N}_i$.

Combine Eq. (13), (16), (17), (18) and (20), we have

$$\begin{aligned} \log Q_i(y_i|\mathbf{x}) &= (y_i - z_i)^2 + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j)(y_i - y_j)^2 \\ &= (1 + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j))y_i^2 \\ &\quad - 2(z_i + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j)\mathbb{E}[y_j])y_i + \text{const}, \end{aligned} \quad (21)$$

Since $Q_i(y_i|\mathbf{x})$ is a quadratic function w.r.t y_j , it can be represented by a Gaussian distribution with

$$\mu_i = \frac{z_i + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j)\mu_j}{1 + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j)}, \quad (22)$$

$$\sigma_i^2 = \frac{1}{2(1 + w \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j))}. \quad (23)$$

We enforce $w \geq 0$ to make each $Q_i(y_i|\mathbf{x})$ a valid distribution, since $k(\mathbf{f}_i, \mathbf{f}_j) > 0$. To obtain the optimal solution for each μ , we iteratively calculate $Q_1(y_1|\mathbf{x}), \dots, Q_n(y_n|\mathbf{x})$ using Eq.(22) and Eq.(23) until the convergence criterion is satisfied. We use the unary prediction z as the initial guess for μ .

In inference phase, we perform MAP on each factorized distributions Q_i to obtain y_i :

$$\begin{aligned} y_i &= \underset{y_i}{\operatorname{argmax}} Q_i(y_i|\mathbf{x}) \\ &= \mu_i. \end{aligned} \quad (24)$$

3.3.2 Learning

We aim to find an optimal parameter w to maximize the log-likelihood $\log P(\mathbf{y}|\mathbf{x})$. By utilizing $Q(\mathbf{y}|\mathbf{x})$, we can instead efficiently optimize the approximate log-likelihood:

$$\mathcal{L}(Q; w) = \sum_{i \in \mathcal{V}} \log Q_i(y_i|\mathbf{x}). \quad (25)$$

The optimal w^* can be learned by the gradient ascent algorithm. Take the derivative w.r.t w in Eq. (25), we have

$$\frac{\partial \mathcal{L}(Q; w)}{\partial w} = \sum_{i \in \mathcal{V}} \left(-\frac{\partial E_i(y_i|x)}{\partial w} - \frac{\partial \log Z_i}{\partial w} \right) \quad (26)$$

The derivative w.r.t $E_i(y_i|x)$ can be calculated from Eq. (16):

$$\frac{\partial E_i(y_i|x)}{\partial w} = \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j)(y_i - y_j)^2. \quad (27)$$

The derivative w.r.t $\log Z_i$ is

$$\begin{aligned} \frac{\partial \log Z_i}{\partial w} &= - \int_{y_i} \frac{1}{Z_i} \exp(-E_i(y_i|x)) \frac{\partial E_i(y_i|x)}{\partial w} dy_i \\ &= - \int_{y_i} Q_i(y_i|\mathbf{x}) \frac{\partial E_i(y_i|x)}{\partial w} dy_i \\ &= - \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j) \mathbb{E}_{y_i \sim Q_i} [(y_i - y_j)^2] \end{aligned} \quad (28)$$

Combine Eq. (27) and (28), we have

$$\begin{aligned} \frac{\partial \mathcal{L}(Q; w)}{\partial w} &= \sum_{i \in \mathcal{V}} \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j) (\mathbb{E}_{y_i \sim Q_i} [(y_i - y_j)^2] - (y_i - y_j)^2) \\ &= \sum_{i \in \mathcal{V}} \sum_{j \in \mathcal{N}_i} k(\mathbf{f}_i, \mathbf{f}_j) (\mu_i^2 + \sigma_i^2 - 2\mu_i y_j - y_i^2 + 2y_i y_j) \end{aligned} \quad (29)$$

By using the projected gradient ascent, we have the following update for w :

$$w^{(k+1)} = \max(0, w^{(k)} + \alpha \frac{\partial \mathcal{L}(Q; w^{(k)})}{\partial w^{(k)}}), \quad (30)$$

where α is the learning rate.

We initialize $w^{(0)}$ to 0, and since we make z as the initial guess for μ , we can directly calculate $w^{(1)}$ with $\mu_i = z_i$ and $\sigma^2 = 0.5$. The values of hyperparameters $\lambda^{(1)}$ and $\lambda^{(2)}$ can be found with the grid search on a validation set.

3.3.3 Computational Cost Analysis

For both inference and learning phases, it requires to iterate over all nodes and their connecting nodes. The complexity is $O(cd^2n)$, where c is the number of mean field iterations, d is the window size of the locally connected CRF, and n is the number of nodes. Since $c \ll n$ and $d^2 \ll n$, the overall complexity of the CRF is $O(n)$.

4 EXPERIMENTAL SETTINGS

4.1 Data

We create two datasets — FlatVel, which is simulated with flat subsurface layers, and CurvedVel, which is simulated with curved subsurface layers. FlatVel contains 60,000 velocity models of 100×100 grid points. The velocity models in FlatVel are different from one another in terms of offset (ranging from 30 grids to 70 grids), tilting angle (ranging from 25° to 165°), layer thickness (ranging from 5 grids to 80 grids), and layer velocity (ranging from 3000 m/s to 5000 m/s). CurvedVel contains 50,000 velocity models of 100×150 grid points. We vary the velocity values in CurvedVel from 1,500 m/s to 3,500 m/s, the fault offset from 30 grids to 70 grids, tilting angle from 25 to 165 degrees, the number of layers from 3 to 5, and the layer thickness from 5 grids to 80 grids. CurvedVel is more challenging to reconstruct than the FlatVel model for two reasons. Firstly, CurvedVel contains much more irregular geological structures which make the inverse of the forward modeling function more difficult to approximate. Secondly,

	mae	rel (10^{-3})	log10 (10^{-3})	acc. (t = 0.001)	acc. (t = 0.002)	acc. (t = 0.005)	acc. (t = 0.01)
AEWI-PRE	68.34	18.38	8.04	8.99%	14.02%	27.50%	44.88%
AEWI-MTV	36.66	9.50	4.17	39.83%	45.28%	55.49%	63.39%
CNN	13.04	3.39	1.47	25.16 %	46.95 %	84.37 %	97.21 %
CNN (residual)	14.05	3.63	1.58	22.52 %	42.98 %	81.07 %	96.80 %
CNN + CRF (d=5)	12.63	3.28	1.42	26.51 %	48.92 %	85.70 %	97.42 %
CNN + CRF (d=20)	11.81	3.06	1.33	28.56 %	51.89 %	88.13 %	98.06 %
CNN + CRF (d=40)	11.82	3.06	1.33	28.74 %	52.04 %	88.12 %	97.97 %

TABLE 1: Quantitative results obtained on FlatVel. We compare the physics-driven models with the proposed data-driven models with different settings. The data-driven models perform significantly better under all metrics. The CRF further boosts the performance by approximately 10%

	mae	rel (10^{-3})	log10 (10^{-3})	acc. (t = 0.01)	acc. (t = 0.02)	acc. (t = 0.05)	acc. (t = 0.1)
AEWI-PRE	172.88	69.71	30.34	22.99 %	35.73 %	58.63 %	76.18 %
AEWI-MTV	145.84	57.77	25.13	40.82 %	51.19 %	65.70 %	79.15 %
CNN	68.70	29.53	12.57	39.74 %	62.79 %	87.45 %	94.98 %
CNN (residual)	73.07	31.51	13.38	36.30 %	60.05 %	86.24 %	94.71 %
CNN-CRF (d=5)	68.29	29.35	12.48	40.82 %	63.76 %	87.61 %	97.87 %
CNN-CRF (d=20)	68.13	29.25	12.45	41.38 %	64.18 %	87.68 %	94.90 %
CNN-CRF (d=40)	68.08	29.23	12.44	41.39 %	64.26 %	87.65 %	94.88 %

TABLE 2: Quantitative results obtained on CurvedVel. The data-driven models outperform the physics-driven counterparts by a large margin and the CNN coupled with the CRF yields the best results.

the curve model is also 1.5 times larger than the FlatVel model, which means much more velocity values need to be correctly estimated by our InversionNet.

The seismic measurements are collections of synthetic seismograms obtained by implementing forward modeling on velocity models. For FlatVel, a total of 3 sources and 32 receivers are evenly distributed along the top boundary of the model. The source interval is 125 m, and the receiver interval is 15 m. We use a Ricker wavelet with a center frequency of 25 Hz as the source time function and a staggered-grid finite-difference scheme with a perfectly matched layered absorbing boundary condition to generate synthetic seismic reflection data. The synthetic trace at each receiver is a collection of time series data of length 1,000. For CurvedVel, there are 3 sources and 150 receivers used in the curve model. Both the sources and receivers are evenly distributed on the top of the model. The source interval is 75 m and the receiver interval is 5 m. Each receiver collects the time series data of length 2,000. We downsample the seismic measurement to 32×1000 to make it consistent with the FlatVel seismic measurements.

4.2 Implementation Details

For FlatVel and CurvedVel, We use 50,000 / 45,000 pairs of seismic measurements and velocity models for training, 10,000 / 5,000 pairs for testing. We adopt the piecewise training strategy to first learn a CNN backbone, then optimize the parameters in the CRF. We apply the Adam optimizer [19] to update the parameters of CNN. The batch size is 50. The initial learning rate is set to 0.0005, we multiply the learning rate by 0.1 after each 15 training epochs. The proposed model has approximately 30M parameters. Our model is implemented on TensorFlow [1] with a single

Nvidia GTX 1080 Ti GPU. The learning methodology of CRF is elaborated in Sec 3.3.2. According to the dimension of velocity models, we make $h = w = 7$ for the first deconvolution layer for FlatVel, and $h = 7, w = 10$ for CurvedVel. We set $\alpha = 0.2$ in Eq. (11) for all ReLU layers. We sample the seismic measurements in CurvedVel to make the dimension 32×1000 . We do not normalize the seismic measurements before feeding into the network, but we standardize the velocity models.

4.3 Evaluation Metrics

Inspired by existing works on FWI and depth estimation [6, 8, 25, 33, 54, 55], we adopt the following metrics in depth estimation: 1) mean absolute error (mae): $\frac{1}{n} \sum_i |d_i - d_i^*|$; 2) mean relative error (rel): $\frac{1}{n} \sum_i \frac{|d_i - d_i^*|}{d_i^*}$; 3) mean log 10 error (log 10): $\frac{1}{n} |\log_{10} d_i - \log_{10} d_i^*|$; 4) The percentage of d_i s.t. $\max(\frac{d_i}{d_i^*}, \frac{d_i^*}{d_i}) < t$.

5 EXPERIMENTAL RESULTS

We compare the proposed methods with two baselines — AEWI-PRE, which is a wave-energy-based precondition method that aims to reduce the artifacts in the gradients caused by the geometrical spreading and defocusing effects, and AEWI-MTV, where the modified total-variation (MTV) regularization is used in AEWI optimization process. MTV is designed to preserve sharp interfaces in piecewise constant structures. In addition to the two baseline models we also test the performance of adding residual blocks [12], a state-of-the-art CNN building block, to the encoder. We build residual blocks as follow:

$$x^{(l+1)} = x^{(l)} + \mathcal{F}'(\mathcal{F}(x^{(l)})), \quad (31)$$

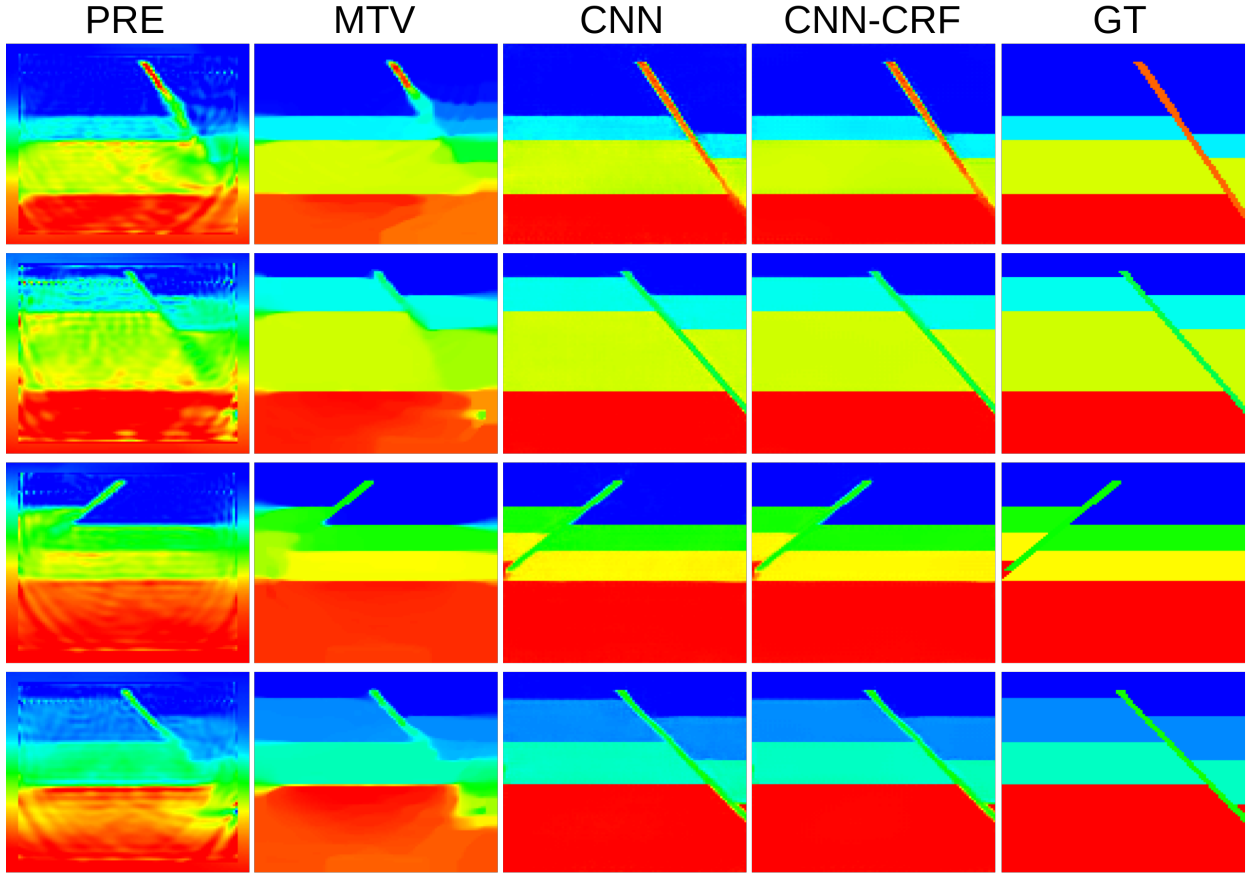


Fig. 2: We juxtapose four predicted velocity models and the ground-truth on FlatVel. The physics-driven models produce significant defects whereas the CNN-CRF model generates accurate velocity estimation and captures the subsurface structure.

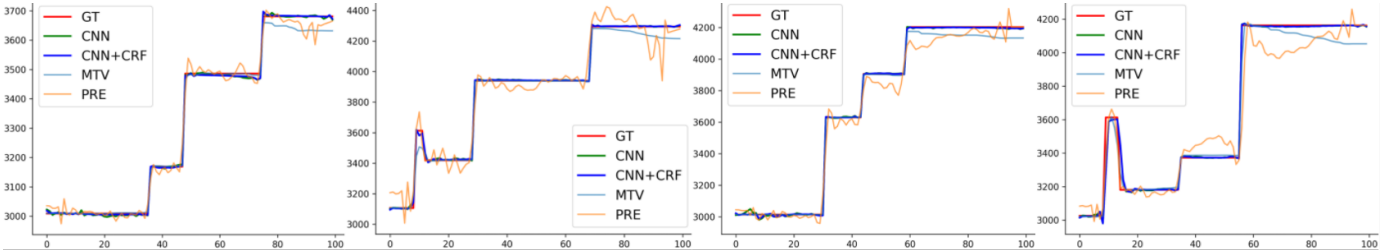


Fig. 3: We plot the profile of the four cases in Figure 2. The physics-driven model produces fluctuating velocity values whereas the velocity models given by the data-driven methods essentially match the ground-truth.

where \mathcal{F}' and \mathcal{F} are two convolution blocks (9).

5.1 Test on FlatVel

We show the quantitative results on FlatVel dataset in Table 1. The two physics-driven models take more time to predict yet still have higher errors comparing with the other data-driven models. Among the data-driven models, we surprisingly find that the plain CNN outperforms its residual counterpart by a margin. For the CRF we test three different values for the window size d . The best performance is achieved when $d = 20$. We plot four velocity models given by each model in Figure 2. The two physics-driven models cannot accurately derive each velocity value and, more

importantly, cannot fully reveal the structural characteristics of the velocity model — the values within each layer are inconsistent. On the other hand, the boundaries and the fault are captured remarkably better using the proposed CNN model. The CRF ($d = 20$ in the plot) further refines the velocity values within each layer by enforcing consistency. We also provide the profile (Figure 3) drew on the horizontal offset 50. The profiles depict how the velocity evolves as the depth increases. We again observe the inaccuracy and inconsistency predictions by physics-driven models. The profile of CNN virtually matches the ground-truth, and the values near boundaries are further improved when coupled with CRF.

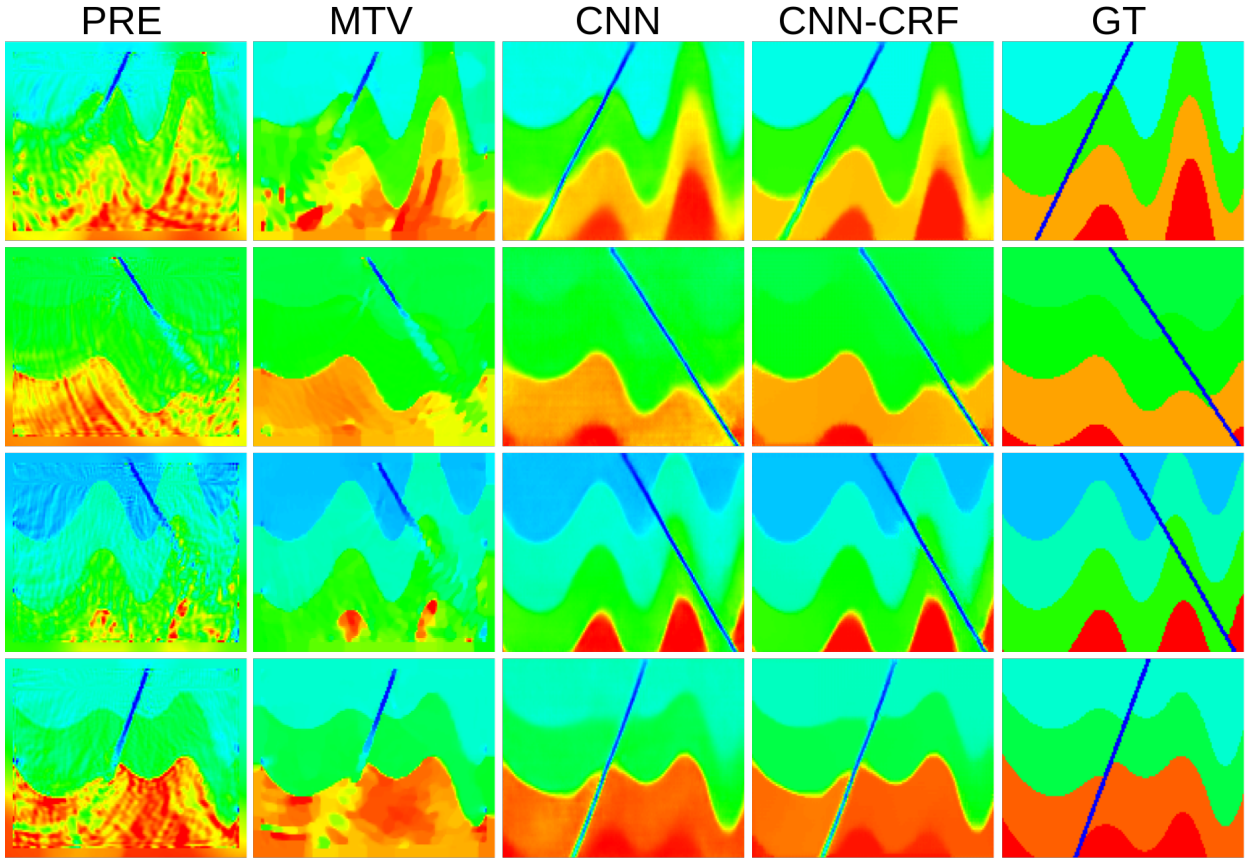


Fig. 4: We juxtapose four predicted velocity models and the ground-truth on CurvedVel. The physics-driven models can hardly derive the complete subsurface structure. The CNN-CRF model only exhibits flaws on boundaries.

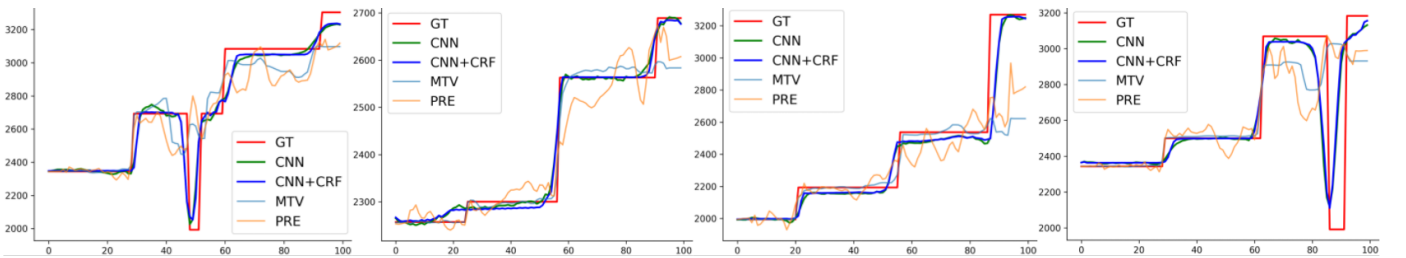


Fig. 5: We plot the profile of the four cases in Figure 4. The proposed methods can predict the velocity values close to the ground-truth while maintaining the subsurface properties.

5.2 Test on CurvedVel

For CurvedVel, we also provide the quantitative results on in Table 2, the visualized velocity models in Figure 4 and the profile drew on the horizontal offset 50 in Figure 5. Since the subsurface structure is more complex it may not be completely reflected in the seismic measurements, which makes the inversion more challenging. From Table 2 we can see that although the accuracy decreases, the data-driven methods still outperform the physics-driven baselines. The comparison between data-driven models agrees with the test on FlatVel that adding residual blocks jeopardizes the performance and the CNN-CRF model yields the best results. Figure 4 shows that physics-driven methods generate fluctuating velocity values and incomplete faults whereas the proposed CNN-CRF model produces more accurate

values within layers and the geological structure is captured significantly better. The profiles reveal that the velocity values within the fault are the most inaccurate (the leftmost and rightmost profiles in Figure 5), this is where our model can be improved.

5.3 Effectiveness of CRF

To better illustrate the effectiveness of the CRF, we use two velocity models from each FlatVel (left) and CurvedVel (right) to plot the difference map between the CNN and GT (top), CNN-CRF and GT (bottom) in Figure 6. The red and blue regions indicate where the mean absolute error is high. It is clear that the CRF smooths out the isolated inaccurate regions, which helps better characterize the subsurface structure.

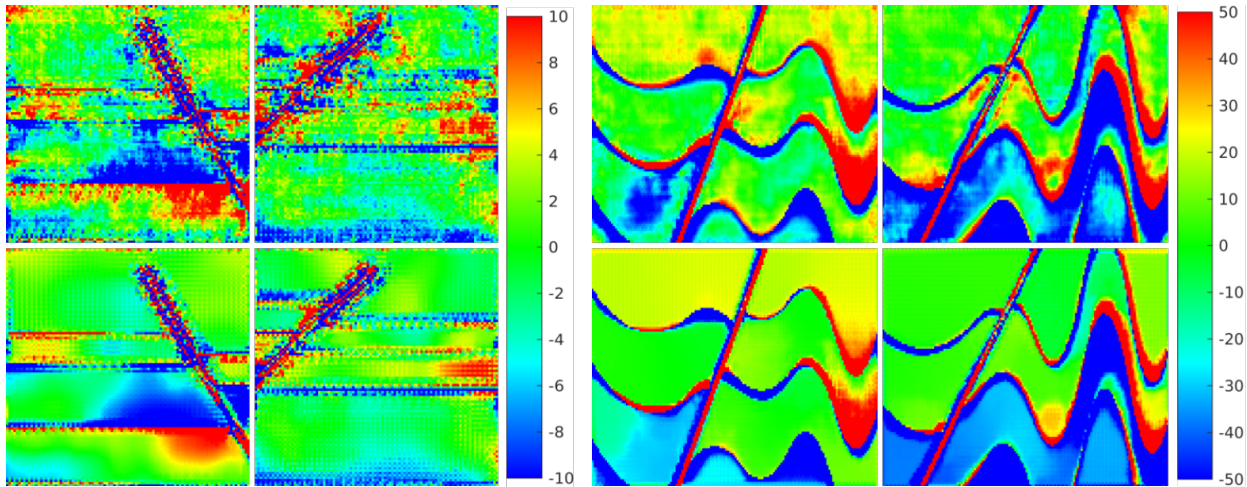


Fig. 6: We show four cases in this figure to demonstrate that inconsistent values are smoothed out (bottom) compared with the predictions given by the CNN (top).

5.4 Robustness Test with Noise

	15 dB	20 dB	25 dB	30 dB	clean
mae	70.30	70.05	69.01	68.49	68.70

TABLE 3: The mean absolute errors under different noise rates. We demonstrate that the performance of our model is not significantly impaired by the noise.

To verify the robustness of our model, we add noise to the seismic measurements in four different levels: 15dB, 20 dB, 25 dB and 30 dB on CurvedVel and compare the mean absolute error of CNN achieved on the testing set. The results in Table 3 indicates that the performance of our data-driven model is not greatly impacted by the noise under certain levels.

6 VISUALIZATION

We display more velocity models generated by the CNN-CRF models in Figure 7 & 8. These results are randomly picked so the effectiveness of our method can be substantiated.

7 CONCLUSIONS

We develop a novel data-driven method that harnesses the power of the CNN and CRF to solve the problem of FWI. The proposed CNN consists of an encoder and a decoder. The encoder utilizes a set of convolution layers to encode seismic waves collected from multiple receivers into a high-dimensional feature vector. The decoder employs a set of deconvolution layers to decode the vector into velocity models. We further build a locally connected CRF to refine the velocity values near boundaries and faults so that the subsurface structure can be better revealed. We demonstrate through our experiments that the proposed CNN-CRF model obtains the best results on the two datasets we make. Through the additional noise test, we demonstrate that our model is robust to noise. Therefore, our CNN-CRF model exhibits great potential for FWI problems.

8 ACKNOWLEDGMENTS

This work was supported by the Center for Space and Earth Science (CSES) at Los Alamos National Laboratory (LANL). The computation was performed using supercomputers of LANL's Institutional Computing Program.

REFERENCES

- [1] Abadi, M., A. Agarwal, P. Barham, E. Brevdo, and Z. Chen, 2016, Tensorflow: Large-scale machine learning on heterogeneous distributed systems: Presented at the arXiv:1603.04467.
- [2] Bishop, C. M., 2006, Pattern recognition and machine learning (information science and statistics): Springer-Verlag.
- [3] Bunks, C., F. Saleck, S. Zaleski, and G. Chavent, 1995, Multiscale seismic waveform inversion: *Geophysics*, **60**, 1457–1473.
- [4] Burstedde, C., and O. Ghattas, 2009, Algorithmic strategies for full waveform inversion: 1D experiments: *Geophysics*, **74**, 37–46.
- [5] Chen, L.-C., G. Papandreou, I. Kokkinos, K. Murphy, and A. L. Yuille, 2016, Deeplab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected crfs: Presented at the arXiv:1606.00915.
- [6] Eigen, D., and R. Fergus, 2014, Predicting depth, surface normals and semantic labels with a common multi-scale convolutional architecture: *CoRR*, **abs/1411.4734**.
- [7] Eigen, D., D. Krishnan, and R. Fergus, 2013, Restoring an image taken through a window covered with dirt or rain: Presented at the IEEE Int. Conf. Computer Vision.
- [8] Eigen, D., C. Puhrsch, and R. Fergus, 2014, Depth map prediction from a single image using a multi-scale deep network: *CoRR*, **abs/1406.2283**.
- [9] Gregor, K., and Y. LeCun, 2010, Learning fast approximations of sparse coding: Presented at the 27th Int. Conf. Machine Learning.

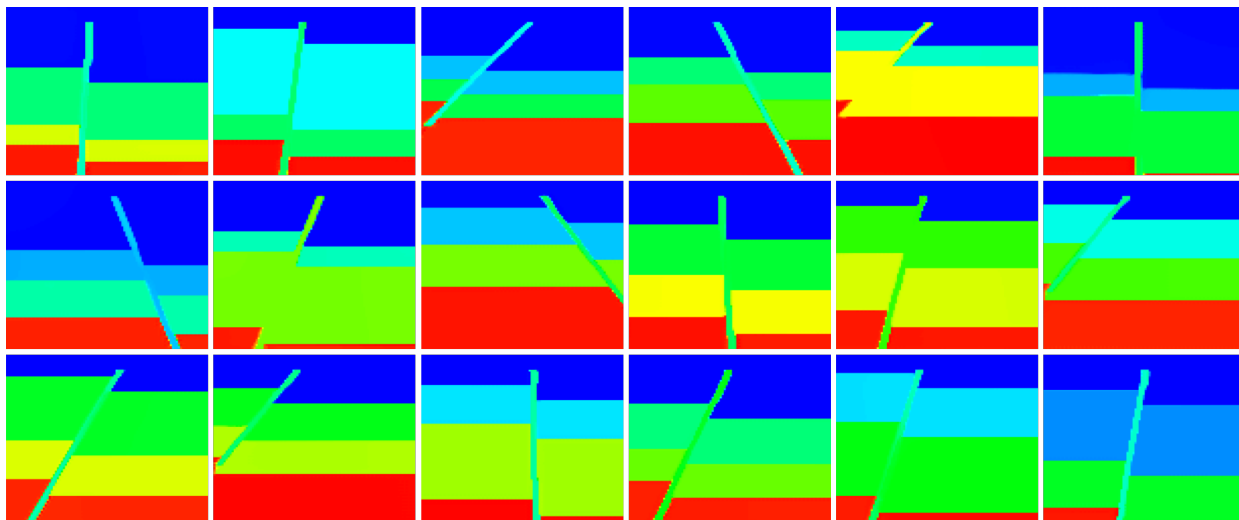


Fig. 7: Randomly picked inversion results obtained with the CNN-CRF model on FlatVel. We think these results can substantiate the effectiveness of our method.

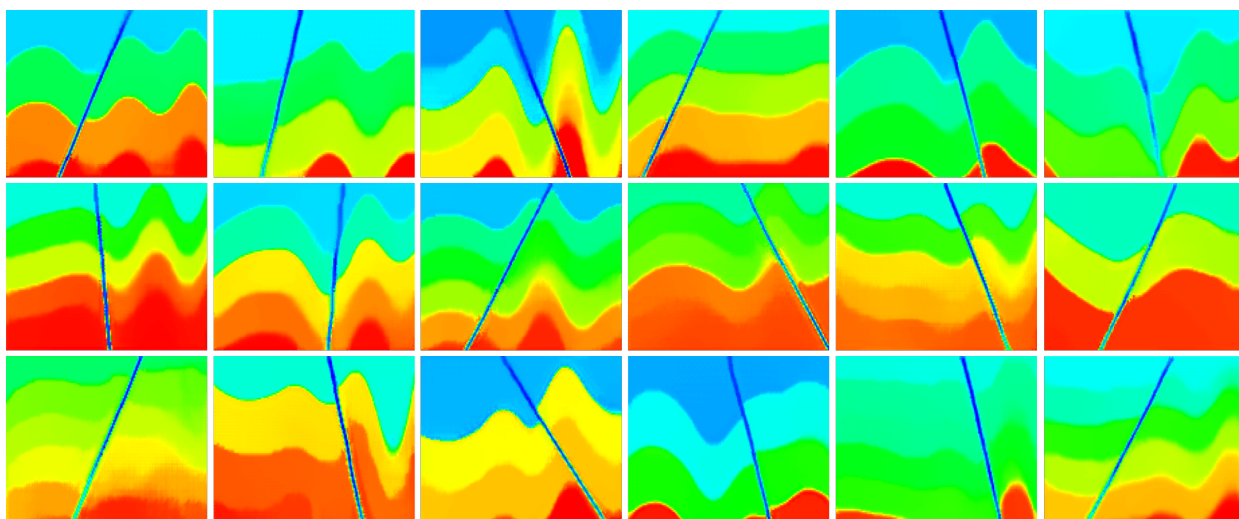


Fig. 8: Randomly picked inversion results obtained with the CNN-CRF model on CurvedVel.

- [10] Guitton, A., 2012, Blocky regularization schemes for full waveform inversion: *Geophysical Prospecting*, **60**, no. 5, 870–884.
- [11] Guitton, A., G. Ayeni, and E. Díaz, 2012, Constrained full-waveform inversion by model reparameterization: *Geophysics*, **77**, R117–R127.
- [12] He, K., X. Zhang, S. Ren, and J. Sun, 2015, Deep residual learning for image recognition: Presented at the CVPR.
- [13] Hornik, K., M. Stinchcombe, and H. White, 1990, Universal approximation of an unknown mapping and its derivatives using multilayer feedforward networks: *Neural Networks*, **3**, 551–560.
- [14] Hu, W., A. Abubakar, and T. Habashy, 2009, Simultaneous multifrequency inversion of full-waveform seismic data: *Geophysics*, **74**, 1–14.
- [15] Ioffe, S., and C. Szegedy, 2015, Batch normalization: Accelerating deep network training by reducing internal covariate shift: Presented at the ICML.
- [16] Jain, V., and H. Seung, 2008, Natural image denoising with convolutional networks: Presented at the Neural Information Processing Systems Conference.
- [17] Jin, K., M. McCann, E. Froustey, and M. Unser, 2017, Deep convolutional neural network for inverse problems in imaging: *IEEE Transactions on Image Processing*, **26**, no. 9, 4509–4522.
- [18] Kim, J., J. K. Lee, and K. M. Lee, 2015, Accurate image super-resolution using very deep convolutional networks: *CoRR*, **abs/1511.04587**.
- [19] Kingma, D. P., , and J. Ba, 2014, Adam: A method for stochastic optimization: Presented at the ICLR.
- [20] Krähenbühl, P., and V. Koltun, 2012, Efficient inference in fully connected crfs with gaussian edge potentials: *CoRR*, **abs/1210.5644**.
- [21] Krizhevsky, A., I. Sutskever, and G. E. Hinton, 2012, Imagenet classification with deep convolutional neural networks: *NIPS*, 1097–1105.
- [22] Lewis, W., and D. Vigh, 2017, Deep learning prior models from seismic images for full-waveform inversion:

- Presented at the SEG Technical Program Expanded Abstracts 2017: pp. 1512-1517.
- [23] Lin, Y., and L. Huang, 2013, Ultrasound waveform tomography with a modified total-variation regularization scheme: Presented at the Proceedings of the SPIE Medical Imaging Conference.
- [24] ———, 2014, Ultrasound waveform tomography with a spatially variant regularization scheme: Presented at the Proceedings of the SPIE Medical Imaging Conference.
- [25] ———, 2015a, Acoustic- and elastic-waveform inversion using a modified total-variation regularization scheme: *Geophysical Journal International*, **200**, 489–502.
- [26] ———, 2015b, Acoustic- and elastic-waveform inversion using a modified total-variation regularization scheme: *Geophysical Journal International*, **200**, no. 1, 489–502.
- [27] ———, 2015c, Quantifying subsurface geophysical properties changes using double-difference seismic-waveform inversion with a modified total-variation regularization scheme: *Geophysical Journal International*, **203**, no. 3, 2125–2149.
- [28] ———, 2016, Ultrasound waveform tomography with the second-order total-generalized-variation regularization: Presented at the Medical Imaging 2016: Physics of Medical Imaging.
- [29] ———, 2017, Building subsurface velocity models with sharp interfaces using interface-guided seismic full-waveform inversion: *Pure and Applied Geophysics*, **174**, 4035–4055.
- [30] Lin, Y., L. Huang, and Z. Zhang, 2012, Ultrasound waveform tomography with the total-variation regularization for detection of small breast tumors: Presented at the Proceedings of the SPIE Medical Imaging Conference.
- [31] Lin, Y., D. O'Malley, V. V. Vesselinov, G. Guthrie, and D. Coblenz, 2018, Randomization in characterizing the subsurface: *SIAM News*, **57**, no. 1.
- [32] Lin, Y., S. Wang, J. Thiagarajan, G. Guthrie, and D. Coblenz, 2017, Towards real-time geologic feature detection from seismic measurements using a randomized machine-learning algorithm: Presented at the Proceeding of Society of Exploration Geophysics.
- [33] Liu, F., C. Shen, and G. Lin, 2015, Deep convolutional neural fields for depth estimation from a single image: Presented at the The IEEE Conference on Computer Vision and Pattern Recognition (CVPR).
- [34] Lucas, A., M. Iliadis, R. Molina, and K. Katsaggelos, 2018, Using deep neural networks for inverse problems in imaging: Beyond analytical methods: *IEEE Signal Processing Magazine*, **35**, no. 1, 20–36.
- [35] Ma, Y., and D. Hale, 2012, Quasi-Newton full-waveform inversion with a projected Hessian matrix: *Geophysics*, **77**, R207–R216.
- [36] ———, 2013, Wave-equation reflection traveltime inversion with dynamic warping and full-waveform inversion: *Geophysics*, **78**, R223–R233.
- [37] Ma, Y., D. Hale, B. Gong, and Z. Meng, 2012, Image-guided sparse-model full waveform inversion: *Geophysics*, **77**, R189–R198.
- [38] Maas, A. L., 2013, Rectifier nonlinearities improve neural network acoustic models: Presented at the Proceedings of the 30th International Conference on Machine Learning.
- [39] Nair, V., and G. E. Hinton, 2010, Rectified linear units improve restricted Boltzmann machines: Presented at the ICML.
- [40] Qin, F., W. Tong, and Y. Luo, 2013, Velocity model building from waveform tomography of band limited reflection seismic data: 83th Annual International Meeting, SEG, Expanded Abstracts, 866–870.
- [41] Radosavljevic, V., S. Vucetic, and Z. Obradovic, 2010, Continuous conditional random fields for regression in remote sensing: Proceedings of the 2010 Conference on ECAI 2010: 19th European Conference on Artificial Intelligence, IOS Press, 809–814.
- [42] Ramirez, A., and W. Lewis, 2010, Regularization and full-waveform inversion: A two-step approach: 80th Annual International Meeting, SEG, Expanded Abstracts, 2773–2778.
- [43] Richardson, A., 2018, Seismic full-waveform inversion using deep learning tools and techniques: Presented at the arXiv:1801.07232.
- [44] Ristovski, K., V. Radosavljevic, S. Vucetic, and Z. Obradovic, 2013, Continuous conditional random fields for efficient regression in large fully connected graphs: Proceedings of the Twenty-Seventh AAAI Conference on Artificial Intelligence, AAAI Press, 840–846.
- [45] Ronneberger, O., P. Fischer, and T. Brox, 2015, U-net: Convolutional networks for biomedical image segmentation: *Medical Image Computing and Computer-Assisted Intervention*, **9351**, 234–241.
- [46] Rudin, L., S. Osher, and E. Fatemi, 1992, Nonlinear total variation based noise removal algorithms: *Physica D.*, **60**, 259–268.
- [47] Schnetzler, E. T., and D. L. Alumbaugh, 2017, The use of predictive analytics for hydrocarbon exploration in the Denver-Julesburg basin: *The Leading Edge*, **36**, no. 3, 227–233.
- [48] Simonyan, K., and A. Zisserman, 2015, Very deep convolutional networks for large-scale image recognition: Presented at the ICLR.
- [49] Tang, Y., and S. Lee, 2010, Preconditioning full waveform inversion with phase-encoded Hessian: 80th Annual International Meeting, SEG, Expanded Abstracts, 1034–1038.
- [50] Tran, K., M. McVay, M. Faraone, and D. Horhota, 2013, Sinkhole detection using 2D full seismic waveform tomography: *Geophysics*, **78**, R175–R183.
- [51] Vigh, D., and E. W. Starr, 2008, Comparisons for waveform inversion, time domain or frequency domain?: 78th Annual International Meeting, SEG, Expanded Abstracts, 1890–1894.
- [52] Virieux, J., A. Asnaashari, R. Brossier, L. Métivier, A. Ribodetti, and W. Zhou, 2014, Chapter 6. an introduction to full waveform inversion: *Society of Exploration Geophysicists*.
- [53] Virieux, J., and S. Operto, 2009, An overview of full-waveform inversion in exploration geophysics: *Geophysics*, **74**, WCC1–WCC26.
- [54] Wang, P., X. Shen, Z. Lin, S. Cohen, B. Price, and A. Yuille, 2015, Towards unified depth and semantic prediction from a single image: 2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR), 2800–2809.

- [55] Xu, D., E. Ricci, W. Ouyang, X. Wang, and N. Sebe, 2017, Multi-scale continuous crfs as sequential deep networks for monocular depth estimation: CoRR, **abs/1704.02157**.
- [56] Yao, H., F. Dai, D. Zhang, Y. Ma, S. Zhang, and Y. Zhang, 2017, Dr²-net: Deep residual reconstruction network for image compressive sensing: CoRR, **abs/1702.05743**.
- [57] Zeng, K., J. Yu, R. Wang, C. Li, and D. Tao, 2017, Coupled deep autoencoder for single image super-resolution: IEEE Transactions on Cybernetics, **47**, 27–37.
- [58] Zhang, Z., and L. Huang, 2013, Double-difference elastic-waveform inversion with prior information for time-lapse monitoring: Geophysics, **78**, R259–R273.
- [59] Zheng, S., S. Jayasumana, B. Romera-Paredes, V. Vineet, Z. Su, D. Du, C. Huang, and P. Torr, 2015, Conditional random fields as recurrent neural networks: Presented at the International Conference on Computer Vision (ICCV).