TopologyGAN: Topology Optimization Using Generative Adversarial Networks Based on Physical Fields Over the Initial Domain

A PREPRINT

Zhenguo Nie

Department of Mechanical Engineering Carnegie Mellon University Pittsburgh, PA 15213 zhenguon@andrew.cmu.edu

Haoliang Jiang

School of Computer Science Georgia Institute of Technology Atlanta, GA 30332 hjiang321@gatech.edu

Tong Lin

Department of Mechanical Engineering Carnegie Mellon University Pittsburgh, PA 15213 tongl1@andrew.cmu.edu

Levent Burak Kara*

Department of Mechanical Engineering Carnegie Mellon University Pittsburgh, PA 15213 lkara@cmu.edu

March 12, 2020

ABSTRACT

In topology optimization using deep learning, load and boundary conditions represented as vectors or sparse matrices often miss the opportunity to encode a rich view of the design problem, leading to less than ideal generalization results. We propose a new data-driven topology optimization model called TopologyGAN that takes advantage of various physical fields computed on the original, unoptimized material domain, as inputs to the generator of a conditional generative adversarial network (cGAN). Compared to a baseline cGAN, TopologyGAN achieves a nearly $3\times$ reduction in the mean squared error and a $2.5\times$ reduction in the mean absolute error on test problems involving previously unseen boundary conditions. Built on several existing network models, we also introduce a hybrid network called U-SE(Squeeze-and-Excitation)-ResNet for the generator that further increases the overall accuracy. We publicly share our full implementation and trained network.

Keywords: TopologyGAN, Deep Learning, Topology Optimization, U-SE-ResNet, Physical Fields

1 Introduction

Topology optimization of solid structures involves generating optimized shapes by minimizing an objective function such as compliance or mass within a material domain, subject to a set of displacement and load boundary conditions (Figure 1). With rapid advances in additive manufacturing and the associated design tools, topology optimization is becoming increasingly more prevalent as it allows optimized structures to be designed automatically. Existing methods include the density based approaches such as the Solid Isotropic Material with Penalization (SIMP) method [1, 2, 3, 4, 5, 6, 7, 8, 9, 10], grid based approaches [11, 12, 13, 14, 15, 16], moving boundary based approaches [17, 18, 19, 20, 21, 22, 23, 24, 25], and load-path based approaches [26, 27, 28]. Although significant efforts have been made to improve solution efficiency [29], topology optimization methods remain to be computationally demanding and are not readily suited to be used inside other design optimization modules such as layout or configuration design tools.

In recent years, new data-driven methods for topology optimization have been proposed to accelerate the process. Deep learning methods have shown promise in efficiently producing near optimal results with respect to shape similarity as

^{*}Address all correspondence to this author.




Figure 1: 2D topology optimization.

well as compliance with negligible run-time cost [30, 31, 32, 33, 34]. Theory-guided machine learning methods use domain-specific theories to establish the mapping between the design variables and the external boundary conditions [35, 36, 37]. However a significant challenge in topology optimization is learning an accurate and generalizable mapping from the boundary conditions to the resulting optimal structure. As such, approaches that involve establishing this map directly often have to severely restrict the displacement and external load configurations, as the results are difficult to generalize to novel boundary conditions.

As one step toward addressing this issue, we propose a new deep learning based generative model called TopologyGAN for topology optimization. TopologyGAN is based on conditional Generative Adversarial Networks (cGAN). The main hypothesis we pursue is that rather than trying to map the boundary conditions to the resulting optimal shapes directly, various physical fields computed on the initial, unoptimized domain subject to the prescribed boundary conditions may hold useful information that allows the network to learn more accurate maps. This approach has been motivated by our observation that in deep learning based approaches, the input displacement and load boundary conditions are often represented as sparse vectors or matrices². This sparsity prevents the network from exploiting useful spatial variations and physical phenomena that occur within the material domain. By contrast, in this work, we propose to take advantage of such variations.

To this end, in TopologyGAN (*i*) the input channels of the generator are related to the physical fields (non-sparse matrices) computed in the initial, unoptimized domain such as the von Mises stress fields, strain energy fields, and displacement fields rather than the original boundary conditions alone, and (*ii*) the condition for the discriminator involve both the physical fields and the initial inputs. We use ground truth data generated by the SIMP method, although our approach is applicable to ground truth data obtained from other topology optimization methods.

Based on this formulation and the model selection studies we conduct, we find that the von Mises stress field and the strain energy density fields are the most useful channels of information to augment with the original displacement and load boundary conditions. Our results show that compared to a baseline cGAN model that does not take advantage of such fields, TopologyGAN achieves lower *test* errors than that of the *training* error of the baseline method on previously unseen boundary conditions. These results are encouraging in that they may prove useful for other researchers who may wish to explore the use of such fields in similar topology optimization scenarios.

We publicly share our full implementation and trained network (https://github.com/zhenguonie/TopologyGAN). The entire data set used in this work is available freely upon request.

Our main contributions are:

²Unless, of course, they are fixed, in which case the network cannot account for variations in these conditions.

- A new method, TopologyGAN, for topology optimization using deep learning models.
- A new design of the input matrices involving the initial physical fields. This input complements the original problem input matrices.
- A hybrid neural network architecture, namely U-SE-ResNet, as the generator for TopologyGAN.

2 Related Work

Our review focuses on studies that highlight topology optimization, deep learning for topology optimization, generative adversarial networks (GAN), and two network architectures closely related to our work.

2.1 Topology Optimization and SIMP

Topology optimization seeks an optimal subset $\Omega_{mat} \subset \Omega$, where Ω is the design domain. To formulate this problem, an objective function f(y) to be minimized is defined as in Eq.(1), in which y denotes the structural design (material distribution)³ and h(y) is a resulting physical outcome such as stress, strain or displacement.

$$f(y) = \begin{cases} \min_{y} & f(y, h(y)) \\ \text{s.t.} & \begin{cases} \text{design constraint on } y \\ \text{state constraint on } h(y) \\ \text{equilibrium constraint} \end{cases}$$
 (1)

In this work, we use the density-based SIMP method ([1, 38]), which is widely implemented in many commercial design software [39, 40]. The SIMP method discretizes the design domain into a grid of finite elements called isotropic solid microstructures. It models the material density y_e to vary between zero (void) and one (full solid). This representation allows the assignment of intermediate densities to the elements. The Young's modulus E_e for each grid element e is given as:

$$E_e(y_e) = E_{min} + y_e^p (E - E_{min}) \tag{2}$$

where E is the material stiffness, E_{min} is an infinitesimal stiffness and p is a penalization factor to favor binary outputs avoiding intermediate densities. The optimization works toward minimizing the compliance C(y) ([41, 42]) as follows:

$$\min_{\mathbf{y}} : C(\mathbf{y}) = \mathbf{U}^{T} \mathbf{K} \mathbf{U} = \sum_{e=1}^{N} (y_{e})^{p} \mathbf{u}_{e}^{T} \mathbf{k}_{e} \mathbf{u}_{e}$$

$$\mathbf{s.t.} : \frac{V(\mathbf{y})}{V_{0}} = \mathbf{V} \mathbf{F}$$

$$: \mathbf{K} \mathbf{U} = \mathbf{F}$$

$$: 0 \le y_{e} \le 1$$
(3)

where y is the density-based structural design tensor, **U** and **F** are the global displacement and force vectors, **K** is the stiffness matrix, \mathbf{u}_e is the elemental displacement vector, \mathbf{k}_e is the elemental stiffness matrix, and N is the number of total elements.

While the above existing methods can provide optimized solutions, our work aims to accelerate the iterative nature of these solvers using a data-driven approach.

2.2 Deep Learning for Topology Optimization

With recent advances in computer hardware, deep neural networks have been widely applied in various fields, including autonomous vehicles, robotics, medical diagnosis, bio-medicine, material design, machine health monitoring, mechanical design, and manufacturing. Deep neural networks have proven to be effective at learning complex mappings between problem input variables and constraints, and target design objectives. Supervised machine learning techniques have proven to be effective for engineering design exploration and optimization, and for mapping out feasible regions of the design space [43]. Guo et al. [30] propose a data-driven design representation where an augmented variational

³We use y for material distribution for consistency with the cGAN output presented in the following sections.

autoencoder is used to encode 2D topologies into a lower-dimensional latent space and to decode samples from this space back into 2D topologies. Oh et al. [44] propose a deep generative adversarial framework capable of generating numerous design alternatives that are both aesthetic and optimized for engineering performance. In 3D topology optimization, Rawat and Shen [32] integrate Wasserstein GAN and a convolutional neural network (CNN) into a coupled model to generate new 3D structures using limited data samples. To speed up convergence in SIMP based topology optimization for thermal conduction, Lin et al. [45] introduce a deep learning approach using U-Nets. Through deep learning, only the early results obtained through SIMP are fed into the network to directly produce the final outputs. Sosnovik and Oseledets [46] use CNNs to accelerate topology optimization from two halfway grayscale images to the final binary image generated through SIMP. However, these networks focus either on latent candidate generation or accelerated optimization and do not establish an end-to-end mapping from the boundary conditions to the optimized topologies.

To realize an end-to-end topology optimization from prescribed boundary conditions, Yu et al. [31] propose a CNN-based encoder-decoder for the generation of low-resolution structures, which are then passed through a super-resolution GAN to generate the final results. Sharpe and Seepersad [33] explore the use of cGANs as a means of generating a compact latent representation of structures resulting from topology optimization. However, only a few boundary conditions and optimization settings are considered. Extending data-driven topology optimization to novel displacement and external load conditions remains a major challenge.

2.3 Generative Adversarial Networks

Generative Adversarial Networks (GAN) [47], is a generative model formulated as a minimax two-player game between two models. It consists of: (1) A generator G whose aim is to learn a generative density function that models the training data and, (2) a discriminator D that aims to discern if an input sample is part of the original training set or a synthetic one generated by G. The structure of GAN is shown in Figure 2. The input to G is random noise G sampled from a distribution G is random noise G sampled from a distribution G is a fake data. A real G is then fed into G to obtain an output G of assigning the correct label to both the real samples G is trained to maximize the probability of assigning the correct label to both the real samples G and G are:

$$\max_{D} \mathcal{L}_{D}^{GAN} = \mathbb{E}_{y_{r} \sim p_{data}(y)}[\log D(y_{r})] + \mathbb{E}_{z \sim p_{z}(z)}[\log(1 - D(G(z)))]$$
(4)

$$\min_{G} \mathcal{L}_{G}^{GAN} = \mathbb{E}_{z \sim p_{z}(z)}[\log(1 - D(G(z)))]$$
(5)

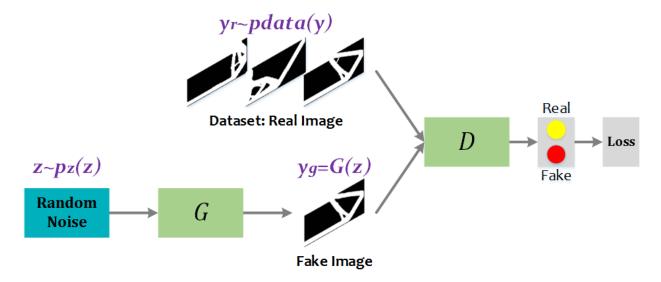


Figure 2: Schematic diagram of GAN.

Conditional GAN Generative adversarial networks can be extended to a conditional model when the generator and the discriminator are conditioned on prescribed information [48]. A conditional GAN (cGAN) learns a mapping from an input x to an output y, as shown in Figure 3. The cGAN loss ([49]) is:

$$\mathcal{L}_{G,D}^{cGAN} = \mathbb{E}_{(x,y) \sim p_{data}(x,y)}[\log D(x,y)] +$$

$$\mathbb{E}_{x \sim p_{data}(x), z \sim p_{z}(z)}[\log(1 - D(x, G(x,z)))]$$
(6)

$$\mathcal{L}_{L1}(G) = \mathbb{E}_{x,y,z}[\|y - G(x,z)\|_{1}]$$
(7)

$$G^* = \arg\min_{G} \max_{D} \mathcal{L}_{G,D}^{cGAN} + \lambda \mathcal{L}_{L1}(G)$$
 (8)

where G^* is the final optimized generative model. In this model, the inputs x are composed of the original (full) domain, the desired volume fraction, the displacement boundary conditions, and the external loads. These are utilized as conditions that the generator has to attune to. The ground truth final optimized structure (real structure) y is computed through the SIMP method and provided as input to the discriminator, alongside x for training.

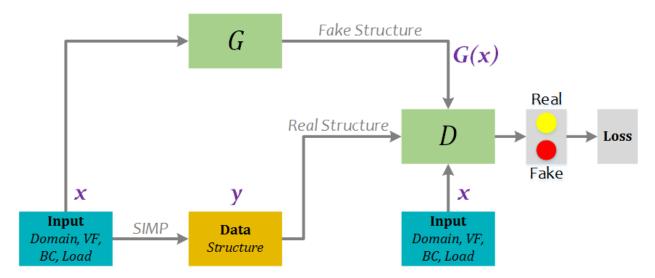


Figure 3: Baseline: cGAN for topology optimization.

2.4 U-Net and SE-ResNet

The U-Net architecture ([50]) shown in Figure 4 allows the network to propagate context information from the downsampling layers to the upsampling layers at various resolutions. To predict the output around the border of the image, the missing context is extrapolated by reflecting the input image. This tiling strategy is important when the network is applied to large images, as otherwise the resolution would be limited by the GPU capacity [51].

SE-ResNet is a CNN-based ResNet [52] enhanced by SE-blocks [53] as shown in Figure 5. Each SE-ResNet module contains two CNN blocks and one SE block [54]. The distinguishing feature of ResNet is the skip connection which simply performs identity mapping added to the output of the stacked layers. As such, ResNet can dynamically select the layer depth for the desired underlying mapping. The final output of the SE-ResNet module is computed by a feedforward neural network with a shortcut connection: w = v + x.

SE block is used in SE-ResNet to improve the representational capacity of the network by enabling it to perform dynamic channel-wise feature recalibration. The input data $u \in R^{H \times W \times C}$ is shrunk to $S(u) \in R^C$ through the global average-pooling layer. Then two fully connected layers are used to downsample and upsample the linear array S(u). A reshape operation produces the excitation output E(u) that has the same dimension as the initial input u. The final output of the SE block is a Hadamard product of E(u) and u through the element-wise matrix multiplication: $v = E(u) \otimes u$.




Figure 4: U-Net

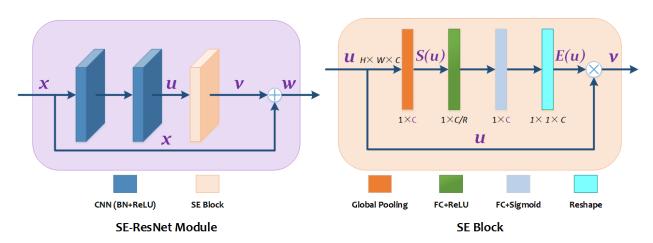


Figure 5: ResNet enhanced by SE block [54]

3 Technical Approach

Topology optimization using deep learning has difficulties in extending to previously unseen boundary conditions because of the high discreteness of the boundary conditions and the sparsity of the input matrices. The high sparsity of the input matrices leads to a high variance of the mapping function.

As one step toward overcoming this challenge, we propose a new model called TopologyGAN. The method is based on the use of various physical fields such as the strain energy field, von Mises stress field, displacement fields, and strain fields computed on the *initial* (unoptimized) design domain as a way to augment the baseline cGAN with this extra information. In this work, we denote these as the *initial fields* f. An illustrative schematic of how TopologyGAN works is shown in Figure 6. The horizontal axis is composed of the problem input matrices encoding the desired VF, displacement BC, and load. The vertical axis is the resulting structure where three structural designs are generated respectively by the SIMP method as the ground truth, by the cGAN as the baseline, and by TopologyGAN as the proposed model. The baseline cGAN directly maps the inputs to the output structure: $x \xrightarrow{cGAN} y$. Our proposed TopologyGAN, on the other hand, builds a mapping from the inputs x to the initial fields f, followed by a mapping from f to the output structure y as follows: $x \xrightarrow{FEM} f \xrightarrow{TopologyGAN} y$. Note that during run time, the initial fields are computed only once.

Our hypothesis in utilizing such initial fields is that they provide useful information regarding the physical state of the original domain under the inputs x that can be further exploited by the network. For instance, as shown in Figure 6,

both the initial strain energy density and the von Mises stress maps produce scalar fields that are richer in information compared to the original problem input matrices x alone. In particular, the initial fields are hypothesized to produce information f (green solid curve) that correlates well with the final structure y (yellow dashed curve), thereby making the network's remaining task less daunting compared to the scenario of mapping x to y directly. As will be shown in Section 5.1, the initial fields indeed help TopologyGAN attain significantly higher training and test accuracies over the baseline cGAN.

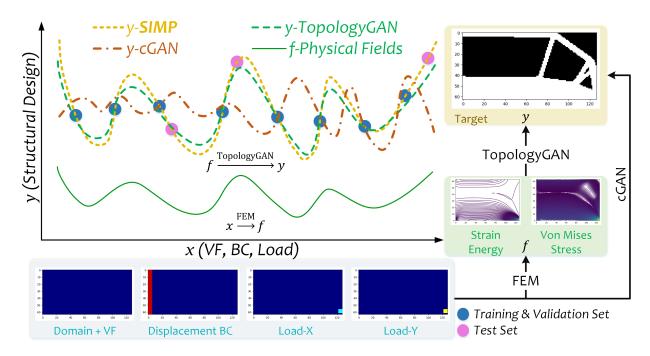


Figure 6: Schematic diagram of TopologyGAN.

3.1 Network Architecture of TopologyGAN

TopologyGAN is based on the conditional Pixel2Pixel GAN architecture [49] and incorporates the FEM and the SIMP solver, as shown in Figure 7. The generator of TopologyGAN establishes a mapping from the initial physical fields f to the estimated optimized topology $\hat{y} = G(f(x), VF)$. The ground truth output y is generated by the SIMP method, as was the case with the baseline cGAN shown in Figure 3. In TopoloyGAN, both the problem inputs x and the initial fields f(x) are used as the condition: r(x) = [x, f(x)].

Both the generator and the discriminator utilize CNN blocks as shown in Figure 8. For the generator, we propose a hybrid architecture called U-SE-ResNet. U-SE-ResNet is a U-Net with the SE-ResNet module in a downsampling-upsampling structure. In the upsampling, transposed convolution layers are used instead of pooling layers. According to [49], PatchGAN discriminator is adopted because the problem of blurry images caused by failures at high-frequency features such as edges and textures can be alleviated by restricting the GAN discriminator to only model high frequencies. The Sigmoid function is used in the generator's last layer for outputting a grayscale structure \hat{y} .

3.2 TopologyGAN Loss Function

As shown in Eq.(9) - Eq.(12), the loss consists of three parts: (1) the loss of TopologyGAN: $\mathcal{L}_{G,D}^{TGAN}$, (2) the L2 loss of the generator: $\mathcal{L}_{L2}(G)$, and (3) the absolute error of the volume fraction of the generator: AE^{VF}.

$$\mathcal{L}_{G,D}^{TGAN} = \mathbb{E}_{(x,y) \sim p_{data}(x,y)}[\log D(r(x), y)] + \\ \mathbb{E}_{x \sim p_{data}(x)}[\log(1 - D(r(x), G(f(x))))]$$

$$(9)$$

$$\mathcal{L}_{G}^{TGAN} = \mathbb{E}_{x \sim p_{data}(x)}[\log(1 - D(r(x), G(f(x))))]$$
(10)

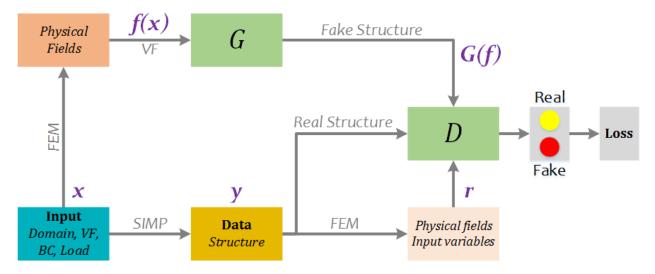


Figure 7: TopologyGAN approach to topology optimization.

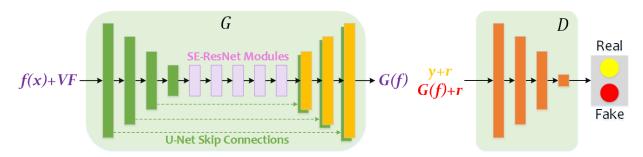


Figure 8: Architectures of the generator G and discriminator D.

$$\mathcal{L}_{L2}(G) = \mathbb{E}_{x,y}[\|y - G(f(x))\|_{2}]$$
(11)

$$AE_G^{VF} = |VF - \widehat{VF}| = \frac{1}{N} |\sum_{e=1}^{N} (y_e - G(f(x))_e)|$$
 (12)

$$G^* = \arg \max_{D} \min_{G} \mathcal{L}_{G,D}^{TGAN} + \lambda_1 \mathcal{L}_{L2}(G) + \lambda_2 A E_G^{VF}$$
(13)

where the generator G tries to minimize the combined loss $\mathcal{L}_G^{TGAN} + \lambda_1 \mathcal{L}_{L2}(G) + \lambda_2 A E_G^{VF}$. At the same time, the adversarial D tries to maximize $\mathcal{L}_{G,D}^{TGAN}$. r(x) is the condition that contains the problem inputs x and the initial physical fields f(x). n is pixel count of the output image. Scalars λ_1 and λ_2 are used to balance the three loss functions. The two scalars are determined empirically using parametric studies. In this paper, $\lambda_1 = 10,000$, $\lambda_2 = 1$.

We select the cGAN as our baseline model. Its structure is shown in Figure 3. Its loss is shown in Eq.(8).

4 Experiments

The proposed TopologyGAN and the baseline cGAN are trained on the same data set that is generated by the SIMP method and then are evaluated and compared on their prediction performance.

4.1 Experiment Design

Our code is written in TensorFlow and trained on a NVIDIA GeForce GTX 2080Ti GPU. Adam [55] is used for optimization, combining the advantages of AdaGrad [56] and RMSProp [57].

In addition to a comparison of TopologyGAN and the baseline cGAN, we also study the impact of different physical fields as inputs. Additionally, we compare different generator structures, namely U-Net, SE-ResNet, and the proposed U-SE-ResNet.

4.2 Data set

A SIMP-based topology optimization framework called ToPy [58] is used to generate the data set. The 2D domain consists of a 64×128 grid structure consisting of square elements. A total of 49,078 optimized structures are generated using ToPy with the randomized conditions as follows:

• volume fraction: [0.3 : 0.02 : 0.5]

• displacement BCs: 42 scenarios

• load position: any point on the boundary of the domain

• load direction: $0: \frac{\pi}{6}: \pi$

• SIMP penalty: 2

• SIMP filter radius: 1.5

The data set is divided into training, validation, and test sets as follows: 4 displacement BCs of the total 42 are randomly selected as the test set. All data samples from the remaining 38 displacement boundary conditions are shuffled and split into training (80%) and validation (20%) sets. Note that the boundary conditions in the test set will not have been seen by the network during training.

Six samples are randomly selected from the entire data set for an illustration of the input and outputs in Figure 9. Images in each row form a sample for TopologyGAN. The first four images in each row are input variables x(VF,BCs) including volume fraction, displacement boundary condition and load boundary conditions along the x-axis and the y-axis. VF is input as a 2D matrix that has the same dimension as the design domain. The value of each element in the matrix is equal to the VF value. Displacement BCs are represented as a 2D matrix by assigning one of the four integers to each element: 0 represents unconstrained, 1 represents $u_x = 0$, 2 represents $u_y = 0$, and 3 represents $u_x = u_y = 0$. Based on the input variables, the initial stress ($\sigma = [\sigma_{11}, \sigma_{22}, \sigma_{12}]$), strain ($\varepsilon = [\varepsilon_{11}, \varepsilon_{22}, \varepsilon_{12}]$), and displacement ($u = [u_x, u_y]$) fields are computed by FEM. Strain energy density and von Mises stress are shown as the example physical fields, which are expressed in Eq(14) and Eq(15). The last image is the output structure y from SIMP.

$$\sigma_{\rm vm} = \sqrt{\sigma_{11}^2 - \sigma_{11}\sigma_{22} + \sigma_{22}^2 + 3\sigma_{12}^2} \tag{14}$$

$$W = \frac{1}{2}(\sigma_{11}\varepsilon_{11} + \sigma_{22}\varepsilon_{22} + 2\sigma_{12}\varepsilon_{12}) \tag{15}$$

4.3 Evaluation Metrics

To assess the performance of TopologyGAN, we use the following four metrics: mean absolute error (MAE), mean squared error (MSE), relative error of volume fraction (AE^{VF}) and its absolute value ($|AE^{VF}|$), relative error of the compliance (RE^{C}) and its absolute value ($|RE^{C}|$). Denote \hat{y} as the prediction from the generator G:

$$\hat{\mathbf{y}} = G(f(x)),\tag{16}$$

and then both the ground truth y and the prediction \hat{y} are reshaped into vectors, with the length of 8,192, from 2D matrices, with the size of 64×128 .

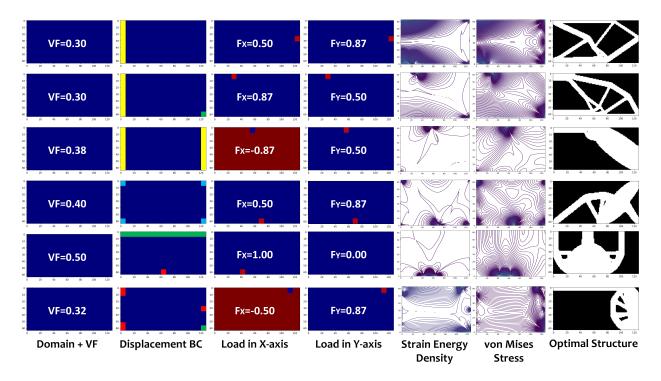


Figure 9: Data samples generated by FEM solver and SIMP solver. Images in each row form one sample. The first four images in each row are input variables *x*(VF,BC,Load), the last image is output *y*. Strain energy density and von Mises stress are shown in level sets with contour lines.

MAE shown in Eq.(17) and MSE shown in Eq.(18) are used to evaluate the model. MAE measures the average magnitude of the absolute differences between the prediction values and the ground truth. MSE measures the average squared difference between the estimated values and the ground truth.

$$MAE = \frac{1}{M} \sum_{i=1}^{M} |y^{(i)} - \hat{y}^{(i)}| = \frac{1}{M} \sum_{i=1}^{M} \frac{1}{N} \sum_{e=1}^{N} |y_e^{(i)} - \hat{y}_e^{(i)}|$$
 (17)

$$MSE = \frac{1}{M} \sum_{i=1}^{M} (y^{(i)} - \hat{y}^{(i)})^2 = \frac{1}{M} \sum_{i=1}^{M} \frac{1}{N} \sum_{e=1}^{N} (y_e^{(i)} - \hat{y}_e^{(i)})^2$$
 (18)

where M is the total number of data samples, and N = 8,192 is the number of grid elements.

In addition to these commonly used metrics, we define two other metrics for evaluation: (1) RE^{VF} is the relative error of the volume fraction between prediction output and ground truth output, and (2) RE^{C} is the ratio between the compliance of the predicted structure and the ground truth structure. These are defined as follows:

$$VF = \frac{1}{N} \sum_{e=1}^{N} y_e$$
 (19)

$$RE^{VF} = \frac{\widehat{VF} - VF}{VF} = \frac{\sum_{e=1}^{N} (\hat{y}_e - y_e)}{\sum_{e=1}^{N} y_e}$$
 (20)

$$C(y) = \mathbf{U}^T \mathbf{K} \mathbf{U} = \sum_{e=1}^{N} (y_e)^p \mathbf{u}_e^T \mathbf{k}_0 \mathbf{u}_e$$
 (21)

$$RE^{C} = \frac{C(\hat{y}) - C(y)}{C(y)}$$
(22)

where C(y) is the compliance of the predicted structure under the given loads.

5 **Results and Discussions**

We find that TopologyGAN outperforms the baseline cGAN in both the training and test. Furthermore, we analyze the physical field selection and the network architecture for the generator. We find that the VF+ $\sigma_{\rm vm}$ +W combination performs significantly better than all other combinations. Moreover, to find the best generator structure, we compare the U-SE-ResNet, U-Net, and SE-ResNet. A comparative experiment is conducted using different generators on the same discriminator and the data set. The results show that the proposed U-SE-ResNet outperforms the other two structures.

5.1 **Model Evaluation**

Our training results of TopologyGAN and the baseline cGAN are summarized in Table 1. It can be seen that TopoloyGAN achieves a 3× lower MSE error and 2.5× lower MAE error than that of the cGAN. More surprisingly, both the MSE and MAE of TopologyGAN on the test set are lower than those of cGAN on the training set.

Loss functions of TopologyGAN are shown in Figure 10, where $\mathcal{L}_{G,D}^{TGAN}$ is the discriminator loss of TopologyGAN, \mathcal{L}_{G}^{TGAN} is the generator loss of TopologyGAN, and G^* is the whole objective of the generator. As the training progresses, it can be seen that \mathcal{L}_{G}^{TGAN} and G^* decrease gradually, and $\mathcal{L}_{G,D}^{TGAN}$ oscillates and tends to balance.

| | | | | 1 0, | | | |
|----|----------|------------|------|----------|------------|------|--|
| el | MAE | | | MSE | | | |
| - | Training | Validation | Test | Training | Validation | Test | |

Mode 0.059943 TopologyGAN 0.001808 0.019133 0.070128 0.001340 0.018022 Baseline: cGAN 0.088257 0.100565 0.181095 0.085916 0.097966 0.175226

Table 1: Comparison of results between TopologyGAN and cGAN.

 10^{3} 10¹ 10^{-1} 10^{-3} 50 100 150 200 250 300

Figure 10: Loss functions of TGAN, Discriminator and Generator in training.

Accuracy and Performance

The accuracy and performance of the trained TopologyGAN are discussed to show the prediction performance. As shown in Figure 12, the generated structures from TopologyGAN become increasingly more defined over the training epochs. Each row denotes a randomly selected sample from the training set. After two-hundred epochs, the predictions become virtually indistinguishable from the ground truth (GT) structures.

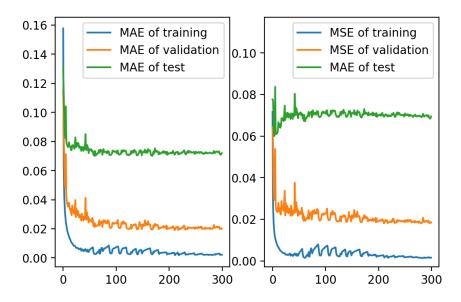


Figure 11: MAE and MSE of TopologyGAN in training.

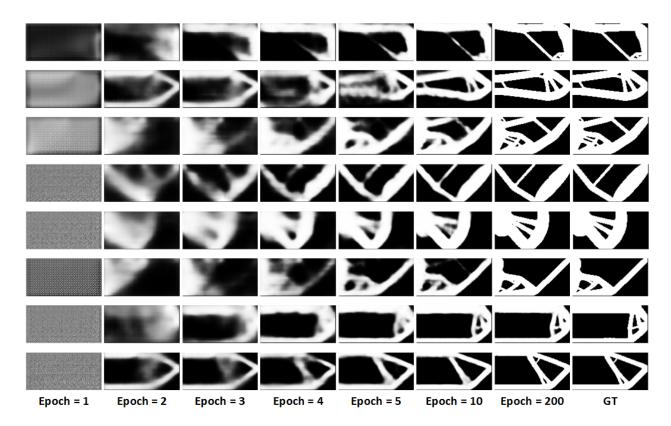


Figure 12: Evolution of TopologyGAN predictions during training.

To visually compare the prediction accuracy of the fully trained TopologyGAN on the training, validation, and test sets, Figure 13 shows the computed results and the corresponding ground truth structures. By comparing each set of images, we find that TopologyGAN performs well on the training and validation sets. The performance of TopologyGAN on the test set is expectedly lower.

To further quantify the performance, we compute the VF and the compliance of the resulting structures and compare them to those of the ground truth structures. Based on the fully trained TopologyGAN, we randomly select 640 samples from each of the training and test sets. For each data sample, this results in two structures: a prediction \hat{y} and a ground truth y. The relative error of the volume fraction RE^{VF} and the relative error of compliance RE^{C} are computed respectively using Eq.(20) and Eq.(22).

The sorted RE^{VF} values for the training and test sets are shown in the first diagram of Figure 14. Histograms of RE^{VF} in the training and the test are also shown in Figure 14. RE^{VF} is close to zero for the majority of the samples. Additionally, the histogram of RE^{VF} on the training set is more concentrated around zero than that on the test set as expected. RE^C shows as similar trend as shown in 15.

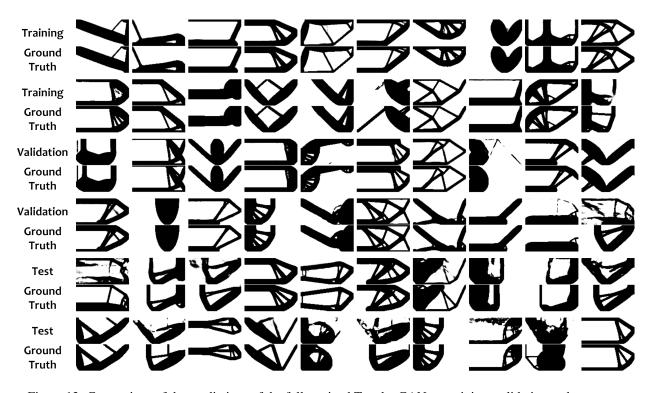


Figure 13: Comparison of the predictions of the fully trained TopoloyGAN on training, validation and test sets.

5.3 Comparison and Selection of Physical Fields

In addition to the combination of von Mises stress $\sigma_{\rm vm}$ and strain energy density W, various physical field combinations are studied as the inputs. The comparison is shown in Table 2. The results indicate that $N \ge 8$ - $[VF + U + \sigma_{\rm vm} + W]$ has the best performance on the training and validation sets, but $N \ge 4$ - $[VF + \sigma_{\rm vm} + W]$ shows a better prediction performance on the test set.

5.4 Generator Architecture

The most important feature of the U-Net is the skip connections between mirrored downsampling and upsampling layers to transfer local information and to merge features at the various resolution levels. The most distinct feature of SE-ResNet is the shortcut connection which performs identity mapping added to the output of the stacked layers to dynamically select the layer depth for the desired underlying mapping. Served as the generator of TopologyGAN, the proposed architecture U-SE-ResNet in this article combines U-Net and SE-ResNet, as shown in Figure 16. We train the TopologyGAN model with different generator architectures, which are U-Net, SE-ResNet, and U-SE-ResNet. The training results are shown in Table 3. U-SE-ResNet has the best performance of the three. This is due to the fact that the U-SE-ResNet combines the advantages of the U-Net and the SE-ResNet, which improves the model flexibility in the local information transfer and the adjustable network depth.

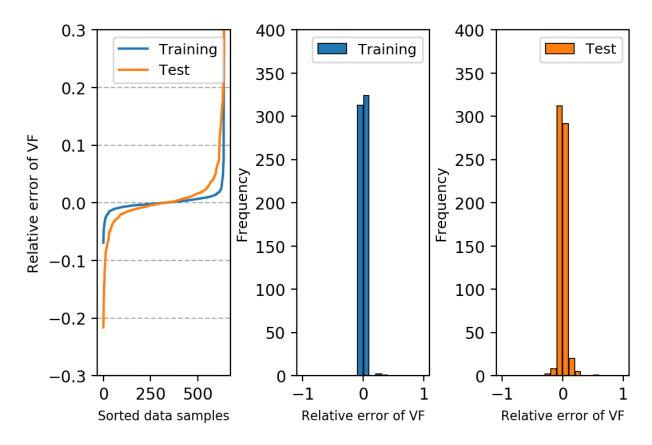


Figure 14: Comparison of volume fraction on training and test sets

Table 2: Comparison and selection of physical fields as GAN inputs.

| Metrics | | MAE | | | MSE | | |
|---------|-------------------------|----------|------------|----------|----------|------------|----------|
| No | Physical Fields | Training | Validation | Test | Training | Validation | Test |
| 0 | Baseline | 0.088257 | 0.100565 | 0.181095 | 0.085916 | 0.097966 | 0.175226 |
| 1 | VF+U | 0.001941 | 0.039551 | 0.105560 | 0.002391 | 0.030464 | 0.099863 |
| 2 | VF+W | 0.001781 | 0.039145 | 0.100626 | 0.002343 | 0.033687 | 0.094903 |
| 3 | VF+ $\sigma_{ m vm}$ | 0.001758 | 0.040411 | 0.098619 | 0.002333 | 0.035467 | 0.081702 |
| 4 | $VF+\sigma_{vm}+W$ | 0.001808 | 0.019133 | 0.070128 | 0.001340 | 0.018022 | 0.059943 |
| 5 | $VF+\sigma$ | 0.002339 | 0.037105 | 0.101626 | 0.002382 | 0.031802 | 0.095526 |
| 6 | $VF+\varepsilon$ | 0.001729 | 0.034620 | 0.093073 | 0.002306 | 0.029235 | 0.087086 |
| 7 | $VF+\sigma+\varepsilon$ | 0.010823 | 0.037518 | 0.122126 | 0.001976 | 0.032496 | 0.092162 |
| 8 | $VF+U+\sigma_{vm}+W$ | 0.000942 | 0.019519 | 0.088748 | 0.001099 | 0.031628 | 0.079184 |
| 9 | VF+LP | 0.001914 | 0.033079 | 0.139781 | 0.00328 | 0.037652 | 0.100326 |

Note: VF is volume fraction, F is external loads, U is displacement field, σ_{vm} is von Mises stress, W is strain energy density, σ is stress field, ε is strain field, and LP is load path vector. Number marked in yellow is the minimum in each column.

5.5 Limitations and Future Work

TopologyGAN exhibits good performance compared to the baseline cGAN and generalizes to previously unseen boundary conditions. However, there are several limitations. First, there is no in-built mechanism that ensures a single connected component (or the avoidance of the checkerboard pattern) outside of the penalization enhanced SIMP-based ground truth training data the network observes. Second, while VF is typically employed as an upper bound for the amount of material that SIMP can utilize, TopologyGAN treats VF as a condition to match as closely as

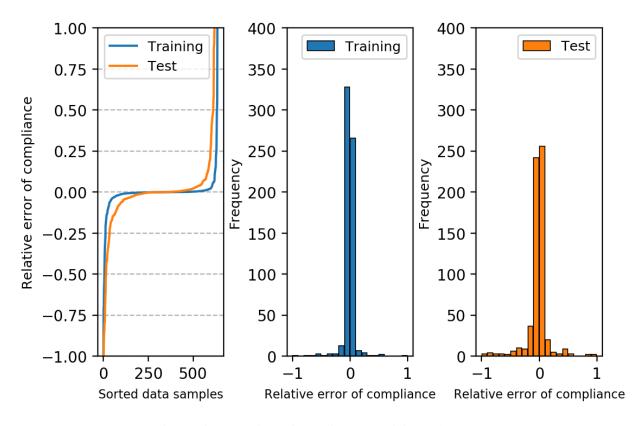


Figure 15: Comparison of compliance on training and test sets.

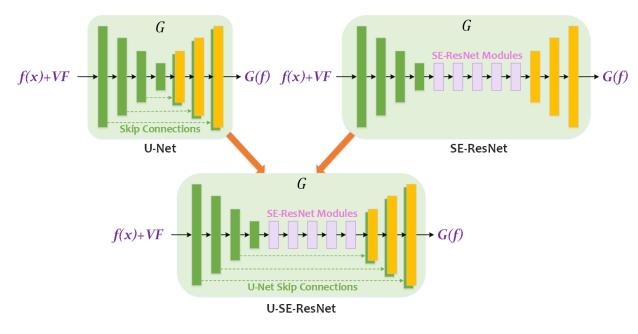


Figure 16: Architectures of U-Net, SE-ResNet, and U-SE-ResNet

possible (minimizing the absolute error of the target and generated VF) rather than a true inequality constraint. Third, TopologyGAN is implemented for 2D topology optimization and, while the approach will be similar in nature, will require modifications to extend to 3D.

Table 3: Training results of the three generator architectures

| Architecture | | MAE | | | MSE | |
|--------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 1 11 011100 00010 | Training | Validation | Test | Training | Validation | Test |
| U-Net SE-ResNet | 0.002908 0.008597 | 0.027434 0.100675 | 0.101455 0.142915 | 0.002471 0.058231 | 0.029133 0.089755 | 0.098439 0.157362 |
| U-SE-ResNet | 0.001808 | 0.019133 | 0.070128 | 0.001340 | 0.018022 | 0.059943 |

TopologyGAN only takes advantage of the fields computed on the original, unoptimized domain. However, theoretically, there is no restriction on which fields can be used to augment the network. In particular, a new network could be devised where the structure generated by TopologyGAN is reassessed to compute the fields of interest and this information can be fed back to the network for improved predictions in several iterative (yet fast) steps. These limitations and observations will be the subject of our future work.

6 Conclusions

We present a new deep learning based generative model called TopologyGAN for topology optimization where the displacement and load boundary conditions, and the target volume fraction are prescribed as inputs. TopologyGAN uses dense initial fields computed over the original, unoptimized domain to augment the conventional inputs. These new fields prove to be helpful for the network to outperform a baseline cGAN in significant ways. In addition, we propose a new hybrid generator architecture called U-SE-ResNet that combines the features of U-Net and SE-ResNet. The use of the initial fields, as well as the U-SE-ResNet model, allows TopologyGAN to significantly reduce the test errors on problems involving previously unseen boundary conditions.

References

- [1] Martin Philip Bendsøe and Noboru Kikuchi. Generating optimal topologies in structural design using a homogenization method. *Computer methods in applied mechanics and engineering*, 71(2):197–224, 1988.
- [2] Katsuyuki Suzuki and Noboru Kikuchi. A homogenization method for shape and topology optimization. *Computer methods in applied mechanics and engineering*, 93(3):291–318, 1991.
- [3] Martin P Bendsøe. Topology optimization. Springer, 2009.
- [4] AR Diaz and MPe Bendsøe. Shape optimization of structures for multiple loading conditions using a homogenization method. *Structural optimization*, 4(1):17–22, 1992.
- [5] Martin P Bendsøe. Optimal shape design as a material distribution problem. *Structural optimization*, 1(4):193–202, 1989.
- [6] Martin P Bendsøe and Ole Sigmund. Material interpolation schemes in topology optimization. *Archive of applied mechanics*, 69(9-10):635–654, 1999.
- [7] Ole Sigmund. Morphology-based black and white filters for topology optimization. *Structural and Multidisci- plinary Optimization*, 33(4-5):401–424, 2007.
- [8] Emre Biyikli and Albert C To. Proportional topology optimization: a new non-sensitivity method for solving stress constrained and minimum compliance problems and its implementation in matlab. *PloS one*, 10(12):e0145041, 2015.
- [9] Zhenguo Nie, Sangjin Jung, Levent Burak Kara, and Kate Whitefoot. Optimization of part consolidation for minimum production costs and time using additive manufacturing. *Journal of Mechanical Design*, pages 1–16, 2019.
- [10] Krishnan Suresh. A 199-line matlab code for pareto-optimal tracing in topology optimization. *Structural and Multidisciplinary Optimization*, 42(5):665–679, 2010.
- [11] Yi M Xie and Grant P Steven. A simple evolutionary procedure for structural optimization. *Computers & structures*, 49(5):885–896, 1993.
- [12] D Nha Chu, YM Xie, A Hira, and GP Steven. On various aspects of evolutionary structural optimization for problems with stiffness constraints. *Finite Elements in Analysis and Design*, 24(4):197–212, 1997.

- [13] OM Querin, GP Steven, and YM Xie. Evolutionary structural optimisation (eso) using a bidirectional algorithm. *Engineering computations*, 15(8):1031–1048, 1998.
- [14] Virginia Young, Osvaldo M Querin, GP Steven, and YM Xie. 3d and multiple load case bi-directional evolutionary structural optimization (beso). *Structural optimization*, 18(2-3):183–192, 1999.
- [15] D Reynolds, J McConnachie, P Bettess, WC Christie, and JW Bull. Reverse adaptivity—a new evolutionary tool for structural optimization. *International journal for numerical methods in engineering*, 45(5):529–552, 1999.
- [16] JS Liu, GT Parks, and PJ Clarkson. Metamorphic development: a new topology optimization method for continuum structures. Structural and Multidisciplinary Optimization, 20(4):288–300, 2000.
- [17] Hans A Eschenauer, Vladimir V Kobelev, and Axel Schumacher. Bubble method for topology and shape optimization of structures. *Structural optimization*, 8(1):42–51, 1994.
- [18] HA Eschenauer and A Schumacher. Topology and shape optimization procedures using hole positioning criteria. In *Topology optimization in structural mechanics*, pages 135–196. Springer, 1997.
- [19] Grégoire Allaire, François Jouve, and Anca-Maria Toader. A level-set method for shape optimization. *Comptes Rendus Mathematique*, 334(12):1125–1130, 2002.
- [20] Grégoire Allaire, François Jouve, and Anca-Maria Toader. Structural optimization using sensitivity analysis and a level-set method. *Journal of computational physics*, 194(1):363–393, 2004.
- [21] Grégoire Allaire, Frédéric De Gournay, François Jouve, and A-M Toader. Structural optimization using topological and shape sensitivity via a level set method. *Control and cybernetics*, 34(1):59, 2005.
- [22] Michael Yu Wang, Xiaoming Wang, and Dongming Guo. A level set method for structural topology optimization. *Computer methods in applied mechanics and engineering*, 192(1-2):227–246, 2003.
- [23] Vivien J Challis and James K Guest. Level set topology optimization of fluids in stokes flow. *International journal for numerical methods in engineering*, 79(10):1284–1308, 2009.
- [24] Krishnan Suresh and Meisam Takalloozadeh. Stress-constrained topology optimization: a topological level-set approach. *Structural and Multidisciplinary Optimization*, 48(2):295–309, 2013.
- [25] Erva Ulu, James Mccann, and Levent Burak Kara. Lightweight structure design under force location uncertainty. *ACM Transactions on Graphics (TOG)*, 36(4):1–13, 2017.
- [26] DW Kelly and M Elsley. A procedure for determining load paths in elastic continua. *Engineering Computations*, 12(5):415–424, 1995.
- [27] DW Kelly, P Hsu, and M Asudullah. Load paths and load flow in finite element analysis. *Engineering Computations*, 18(1/2):304–313, 2001.
- [28] D Kelly, C Reidsema, A Bassandeh, G Pearce, and M Lee. On interpreting load paths and identifying a load bearing topology from finite element analysis. *Finite elements in Analysis and design*, 47(8):867–876, 2011.
- [29] Ole Sigmund and Kurt Maute. Topology optimization approaches. *Structural and Multidisciplinary Optimization*, 48(6):1031–1055, 2013.
- [30] Tinghao Guo, Danny J Lohan, Ruijin Cang, Max Yi Ren, and James T Allison. An indirect design representation for topology optimization using variational autoencoder and style transfer. In 2018 AIAA/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference, page 0804, 2018.
- [31] Yonggyun Yu, Taeil Hur, Jaeho Jung, and In Gwun Jang. Deep learning for determining a near-optimal topological design without any iteration. *Structural and Multidisciplinary Optimization*, 59(3):787–799, 2019.
- [32] Sharad Rawat and MH Herman Shen. Application of adversarial networks for 3d structural topology optimization. Technical report, SAE Technical Paper, 2019.
- [33] Conner Sharpe and Carolyn Conner Seepersad. Topology design with conditional generative adversarial networks. In ASME 2019 International Design Engineering Technical Conferences and Computers and Information in Engineering Conference. American Society of Mechanical Engineers Digital Collection, 2005.
- [34] Erva Ulu, Rusheng Zhang, and Levent Burak Kara. A data-driven investigation and estimation of optimal topologies under variable loading configurations. *Computer Methods in Biomechanics and Biomedical Engineering: Imaging & Visualization*, 4(2):61–72, 2016.
- [35] Ruijin Cang, Hope Yao, and Yi Ren. One-shot generation of near-optimal topology through theory-driven machine learning. *Computer-Aided Design*, 109:12–21, 2019.
- [36] Xin Lei, Chang Liu, Zongliang Du, Weisheng Zhang, and Xu Guo. Machine learning-driven real-time topology optimization under moving morphable component-based framework. *Journal of Applied Mechanics*, 86(1):011004, 2019.

- [37] Tej Kumar and Krishnan Suresh. A density-and-strain-based k-clustering approach to microstructural topology optimization. *Structural and Multidisciplinary Optimization*, pages 1–17, 2019.
- [38] George IN Rozvany, Ming Zhou, and Torben Birker. Generalized shape optimization without homogenization. *Structural optimization*, 4(3-4):250–252, 1992.
- [39] Hans A Eschenauer and Niels Olhoff. Topology optimization of continuum structures: a review. *Applied Mechanics Reviews*, 54(4):331–390, 2001.
- [40] János Plocher and Ajit Panesar. Review on design and structural optimisation in additive manufacturing: Towards next-generation lightweight structures. *Materials & Design*, page 108164, 2019.
- [41] Luigi Ambrosio and Giuseppe Buttazzo. An optimal design problem with perimeter penalization. *Calculus of Variations and Partial Differential Equations*, 1(1):55–69, 1993.
- [42] Joakim Petersson. Some convergence results in perimeter-controlled topology optimization. *Computer Methods in Applied Mechanics and Engineering*, 171(1-2):123–140, 1999.
- [43] Conner Sharpe, Tyler Wiest, Pingfeng Wang, and Carolyn Conner Seepersad. A comparative evaluation of supervised machine learning classification techniques for engineering design applications. *Journal of Mechanical Design*, 141(12), 2019.
- [44] Sangeun Oh, Yongsu Jung, Seongsin Kim, Ikjin Lee, and Namwoo Kang. Deep generative design: Integration of topology optimization and generative models. *Journal of Mechanical Design*, 141(11), 2019.
- [45] Qiyin Lin, Jun Hong, Zheng Liu, Baotong Li, and Jihong Wang. Investigation into the topology optimization for conductive heat transfer based on deep learning approach. *International Communications in Heat and Mass Transfer*, 97:103–109, 2018.
- [46] Ivan Sosnovik and Ivan Oseledets. Neural networks for topology optimization. *Russian Journal of Numerical Analysis and Mathematical Modelling*, 34(4):215–223, 2019.
- [47] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. In *Advances in neural information processing systems*, pages 2672–2680, 2014.
- [48] Mehdi Mirza and Simon Osindero. Conditional generative adversarial nets. arXiv preprint arXiv:1411.1784, 2014.
- [49] Phillip Isola, Jun-Yan Zhu, Tinghui Zhou, and Alexei A Efros. Image-to-image translation with conditional adversarial networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1125–1134, 2017.
- [50] Jonathan Long, Evan Shelhamer, and Trevor Darrell. Fully convolutional networks for semantic segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3431–3440, 2015.
- [51] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *International Conference on Medical image computing and computer-assisted intervention*, pages 234–241. Springer, 2015.
- [52] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [53] Jie Hu, Li Shen, and Gang Sun. Squeeze-and-excitation networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7132–7141, 2018.
- [54] Zhenguo Nie, Haoliang Jiang, and Levent Burak Kara. Stress field prediction in cantilevered structures using convolutional neural networks. *Journal of Computing and Information Science in Engineering*, 20(1), 2020.
- [55] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. arXiv preprint arXiv:1412.6980, 2014.
- [56] John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12(Jul):2121–2159, 2011.
- [57] Geoffrey Hinton, Nitish Srivastava, and Kevin Swersky. Neural networks for machine learning lecture 6a overview of mini-batch gradient descent. *Cited on*, 14:8, 2012.
- [58] William Hunter et al. Topy-topology optimization with python. https://github.com/williamhunter/topy, 2017.