

On Social Interactions of Merging Behaviors at Highway On-Ramps in Congested Traffic

Huanjie Wang, *Student Member, IEEE*, Wenshuo Wang, *Member, IEEE*, Shihua Yuan, Xueyuan Li, and Lijun Sun

Abstract—Merging at highway on-ramps while interacting with other human-driven vehicles is challenging for autonomous vehicles (AVs). An efficient route to this challenge requires exploring and then exploiting knowledge of the interaction process from demonstrations by humans. However, it is unclear what information (or the environment states) is utilized by the human driver to guide their behavior over the whole merging process. This paper provides quantitative analysis and evaluation of the merging behavior at highway on-ramps with congested traffic in a volume of time and space. Two types of social interaction scenarios are considered based on the social preferences of surrounding vehicles: *courteous* and *rude*. The significant levels of environment states for characterizing the interactive merging process are empirically analyzed based on the real-world INTERACTION dataset. Experimental results reveal two fundamental mechanisms in the merging process: 1) Human driver selects different states to make sequential decisions at different moments of task execution and 2) the social preference of surrounding vehicles has an impact on variable selection for making decisions. It implies that for autonomous driving, efficient decision-making design should filter out irrelevant information while considering the social preference of the surrounding vehicles, to reach a comparable human-level performance. These essential findings shed light on developing new decision-making approaches for AVs.

Index Terms—Social interaction, merging behavior, decision making, highway on-ramps.

I. INTRODUCTION

MERGING at highway on-ramps with congested traffic is a daily-routine but challenging task in the real world. Understanding the seemingly mundane merging processes demonstrated daily by human drivers is critical for autonomous vehicles (AVs) that can safely and efficiently interact with humans around them [1]. In the mixture traffic, AVs must effectively respond to the contextual changes. Inefficient collaboration with its surrounding human can cause typical highway traffic issues such as oscillations, congestion, and speed breakdown [2], [3]. According to the recent report of the National Highway Traffic Safety Administration (NHTSA) [4], near 30,000

This work is supported by the National Natural Science Foundation of China (Grant No. U1864210), and the China Scholarship Council (No. 201906030060). (Corresponding Authors: Wenshuo Wang and Shihua Yuan)

H. Wang is with the School of Mechanical Engineering, Beijing Institute of Technology (BIT), Beijing 10081, China, and also with the University of California at Berkeley, Berkeley, CA 94720 USA (e-mail: wanghj_815@163.com).

W. Wang is with the University of California at Berkeley, Berkeley, CA 94720 USA (e-mail: wwsbit@gmail.com).

S. Yuan and X. Li are with the School of Mechanical Engineering, Beijing Institute of Technology (BIT), Beijing 10081, China (e-mail: yuan-shihua@bit.edu.cn).

L. Sun is with the Department of Civil Engineering and Applied Mechanics, McGill University, Montreal, QC H3A 0C3, Canada (e-mail: lijun.sun@mcgill.ca).

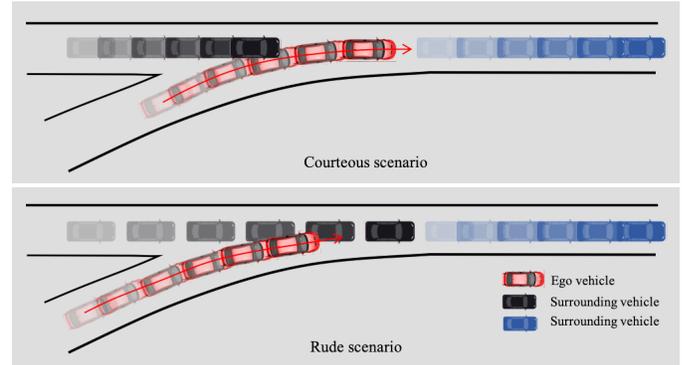


Fig. 1. Illustration of the two typical highway on-ramp merge scenarios with different social preferences of the surrounding vehicles: courteous (top) and rude (bottom). Top: The black vehicle behaves courteously and allows the ego vehicle to cut in ahead. Bottom: The black vehicle behaves rudely and forces the ego vehicle to yield.

highway merging collisions occurred per year in the USA. The desired merging execution should guarantee traffic safety while avoiding congestion. Fig. 1 shows a typical highway on-ramp merge scenario. The merging vehicle (denoted as the ego vehicle) moves on a merge lane is merging into the mainstream traffic flow on the highway, while interacting with its surrounding vehicles. The ego vehicle needs to make a sequential decision according to their *situation-awareness*¹ which essentially is related to the augmented perceptual information of the environment states. The augmented perceptual information consists of direct perceptual information of the environment and indirect inferred causes, both are intrinsically dynamic and stochastic. The typical selected perceptual information for decision-making and task-execution of merging at highway on-ramps includes the state of the ego vehicle and surrounding vehicles and their variants, such as their relative gaps and time-headway. However, the above-selected variables might vary over time and space and get influenced by other human driver's social preferences, for example, competitive and prosocial.

On the one hand, the social preference of the surrounding vehicles might impact the ego vehicle's decision. Considerable efforts of decision-making algorithms have been made to execute the merging task at highway on-ramps. The surrounding human driver makes the merging task more challenging due to the variety of social preferences [6], [7]. For instance, in some scenarios (the top case in Fig. 1), the surrounding

¹The situation-awareness is formally defined as a person's *perception* of the elements of the environment within a volume of time and space, the *comprehension* of their meaning and the *projection* (also known as prediction) of their status in the near future [5]

vehicle behaves courteously by slowing down and leaving an acceptable gap ahead to allow the ego vehicle to cut in. In some other scenarios (the bottom case in Fig. 1), the surrounding vehicle acts rudely by narrowing down their gap ahead, thus forcing the ego vehicle to select the next gap for cutting in. Besides, studies of human social decision making under controllable laboratory settings demonstrate that humans make sequential decisions and execute specific tasks based on different preferences [8]. However, it is unclear whether the mechanisms implicated in simple social decisions in the laboratory are paramount to the decisions in complex driving scenarios, such as merging at highway on-ramps.

On the other hand, the informational needs of human drivers for achieving the task vary over time and space. In real-life situations, generic laboratory evidence reveals that some features of the environment are not readily observed but critical for guiding appropriate behavior [9], while someones are salient but irrelevant for task performance [10]. Human does not utilize all of the sensory information (or the whole states of the environment), instead only a few aspects of them, to make decisions [11]. Take the typical merging behavior, for example, a human driver would use some critical states of the dynamic environment to decide which gap is acceptable, and then dilute the significance of some of them over time and space to execute other subtasks. Therefore, an empirical investigation of the relevance in the merging scenarios at highway on-ramps is much needed.

The above analysis signifies that in a highway merging scenario with congested traffic, the ego vehicle's decision-making has a strong connection to the social preference of the surrounding vehicles. However, there are still unclear mechanisms asked by three fundamental questions:

- What are the relevances (or the states of the environment) to guide human drivers to make a decision?
- How are the relevances (or the states of the environment) changing over time and space?
- How do the social preferences of the surrounding humans make these relevances different?

Based on the above questions, this paper conducts a comprehensive analysis using a real-world dataset. This paper aims to bridge the gap between the merging driver's decision-making and surrounding human driver's social preferences over time and space. To this end, we extract the merging scenarios from the real-world dataset and classify them into two groups according to the surrounding vehicles' social preferences. We then take a quantitative analysis and evaluation of how the ego vehicle utilizes the environment states to make decisions over the merging process. Finally, we provide a comparison to reveal that social preference has an impact on the ego vehicle's decision-making.

The remainder of this paper is organized as follows. Section II reviews related works on merging behaviors, variable selection, and social behavior. Section III defines the merging scenarios. Section IV discusses real-world datasets, data pre-processing, and method. Section V analyzes the experimental results and provides further discussion. Finally, Section VI gives the conclusion.

II. RELATED WORKS

In this section, we first analyze the development of merging behavior and variable selection. Then, we review the related research on social behavior. Finally, we make a summary based on the above two aspects.

A. Merging Behavior & Variable Selection

In general, merging behavior can be distinguished as discretionary (changing the driving condition) and mandatory (reach the target lane/destination). Highway on-ramp merge is a typical mandatory merging task with social interactions. Much research on highway merge has been conducted. At first, the gap acceptance theory is the most typically used one by assuming that the merging vehicle can merge into the target lane if the gap between the assumptive lead and lag vehicles is acceptable [12]–[14]. However, this is often not the case in practice. The vehicle will still initiate merging behavior even if the selected gap is less than the critical value. This situation is particularly common at highway on-ramps in congested traffic because the merging vehicles suppose to merge into the main road as quickly as possible, so its tentative merge intention will still occur even if the selected gap does not meet the distance requirements [15]–[17]. The binary logistic model was then built to describe the probability of merging decisions [18] using the gap, vehicle speed, and remaining distance to the end of the ramp [2], [19]. The probabilistic design of the highway merge was also presented considering time gap, speed, and acceleration [20].

In order to consider the heterogeneity among drivers, Weng, *et al.* [21] developed a mixed probabilistic merging model. In their model, two surrogate safety measures, including the time to collision (TTC) and deceleration rate to avoid the crash (DRAC), were introduced besides the vehicle types, elapsed time, speed, and remaining distance. After that, a finite mixture of the logistic regression model was applied to analyze the heterogeneity for different drivers based on the gap, (relative) speed/distance, distance to the start of the ramp, and whether a lead vehicle exists in the merge lane [22].

Besides, the time-varying effects of different variables are also considered to describe dynamic merging behavior. The lane position information, vehicle parameters, and head motion were selected to infer driver intent [23]. The Cellular Automata models incorporating the dynamic behavior were also developed [24]. From the perspective of safety and collision avoidance, Weng, *et al.* developed a time-varying mixed logit regression model to describe the merging process and then analyzed the time-varying effects of variables on merging behavior, including the vehicle speed, vehicle type, and crash probability and severity [25]. They claimed that the vehicle crash probability and severity were the contributory factors instead of vehicle speeds and gap sizes.

With the fact that the surrounding vehicle also needs to make a response to the merging behavior, researchers in [26] applied the game theory to make the interaction more understandable. In recent years, data-driven methods have drawn more attention. For example, classification and regression trees (CART), Bayesian network (BN), and fuzzy logic models

were used in developing merging decisions based on variables including relative speed, lead/lag gap, and remaining distance [27]–[29].

B. Social Behavior

Humans will consider social interactions rather than their own individual goals when making decisions [8]. It is an essential capability for autonomous vehicles to identify social behavior, and thus make interpretable decisions accurately. Usually, the environment states in the real world are partially observable and dynamic and can be formulated via a time-dependent partially observable Markov decision process (POMDP) to improve the naturalness and social propriety [30]. By leveraging social conventions into the optimization constraints, a path planning and navigation framework was developed [31]. Wei, *et al.* [32] proposed a Bayesian-based social behavior framework to predict other agents' intentions, thus enabling more sociable decisions of the autonomous system. Sun, *et al.* [33] introduced courteous planning to reduce the inconvenience of human drivers and benefit both sides. Based on social gracefulness, Ren, *et al.* [34] proposed a model predictive control method to tackle the two-player game, allowing autonomous vehicles to learn more social behaviors. By considering both rational and irrational social behaviors, Hu, *et al.* [35] presented a prediction framework to estimate continuous trajectories of surrounding vehicles. By defining the optimal control problem and formulating the appropriate algorithm, Speidel, *et al.* [36] proposed a planning framework to avoid too aggressive. Schwarting, *et al.* [6] borrowed the Social Value Orientation (SVO) from the field of social psychology to quantify the degree of selfishness or altruism, which provides the basis for solving dynamic games in a socially acceptable way.

C. Summary

In terms of decision making and variable selection, almost all the existing research on merge behavior only concerns the static analysis, but merely considers the dynamic dominant states of the environment over the merging process. However, it is not clear whether the effects of dominant states may change over time and space, which is also one of the fundamental problems studied in this paper. Research in [25] analyzed the time-varying effects of different variables over the merging behavior; however, their significant analysis was based on the univariate statistical technique, i.e., analyzing a single variable while fixing other variables. This analysis could cause biased conclusions since multiple variables can influence the merge behavior simultaneously in reality. Besides, they neglected the influences of human drivers with various social preferences on the variable selection. More specifically, they did not consider the interactions between the merging vehicle and the *rude* social preference of the surrounding vehicles.

For the social interaction, individual drivers usually have variety in social preferences, reflected by the differences in reactions and motivations. Therefore, at different moments of the merging process, AVs need to be aware of which variables are necessary to make appropriate decisions. Many studies

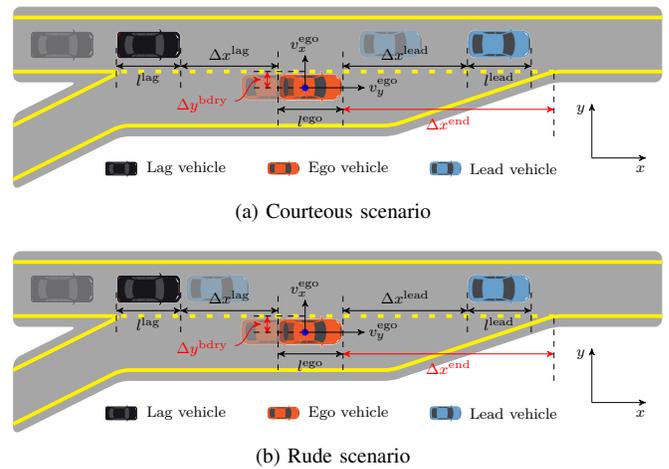


Fig. 2. Illustration of the two typical highway on-ramp merge scenarios wherein two surrounding vehicles (lead vehicle and lag vehicle) are interacting with the ego vehicle. The transparent vehicle represents the initial position of vehicles at the start moment of t_s .

have made efforts to enable AVs more prosocial. However, none of them consider the near-collision or adversarial interaction scenarios in which both human drivers and AVs must be capable of tackling in real traffic.

In summary, the three fundamental questions asked in the Introduction remain open in existing research. Answers to these three questions can improve the AV's decision performance in highway merging scenarios and ensure better social interactions.

III. INTERACTION PROCEDURE OF SOCIAL MERGING BEHAVIOR

In this section, we first specify the two merging scenarios at highway on-ramp (Fig. 2) concerned in this paper. In this scenario, the ego vehicle travels on the merge lane and intends to merge into the highway on which two assumptive surrounding vehicles are moving forward. We then defined three critical moments of the merging process to facilitate analysis and finally discussed variable selection.

A. Definitions of Surrounding Vehicles

We mainly considered two surrounding vehicles that interact closely with the merging vehicle. To make the concerned scenarios clear, we name these two surrounding vehicles based on their final position to the merging vehicle when the merge task is completed.

- *Lead vehicle*: When completing the merge task, the nearest vehicle in front of the merging vehicle is denoted as the lead vehicle. It should be noted that during the merging process, the lead vehicle may be located at the left-behind area of the merging vehicle at the beginning, for example, the blue car in the scenario of Fig. 2(b).
- *Lag vehicle*: When completing the merge task, the nearest vehicle behind the merging vehicle is denoted as the lag vehicle, for example, the black car in the scenario of Fig. 2(a) and (b).

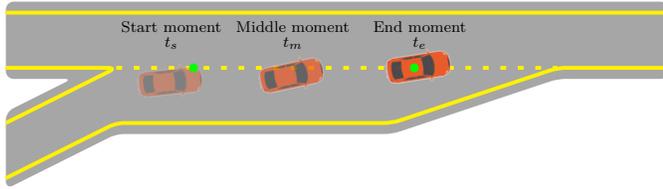


Fig. 3. Illustration of the three critical moments (t_s , t_m , and t_e) of the merging process at highway on-ramps.

B. Critical Moments

Vehicles usually merge into the traffic flow on the highway from on-ramps on the right side because the vehicle speed on the rightmost lane is usually the slowest for countries with right-hand traffic. Hence, this paper mainly focuses on the left merge behavior at highway on-ramp scenarios. In order to study the dynamic changes over the whole merging process, three critical moments (as shown in Fig. 3) are defined:

- *Start moment*: The start moment t_s refers to the moment that the left front tire of the ego vehicle crosses the boundary between the merge lane and the rightmost highway lane.
- *End moment*: The end moment t_e refers to the moment that the centroid of the ego vehicle lies on the boundary between the merge lane and the rightmost highway lane.
- *Middle moment*: The middle moment t_m refers to the middle moment between the start moment (t_s) and the end moment (t_e).

The interactions between the start and end moments defined as above are particularly strong. More concretely, before the start moment, the ego vehicle's intention is usually vague for the lag vehicle on the target lane. Once the ego vehicle reaches the start moment t_s , the target lane's lag vehicle can perceive the ego vehicle's merge intention. For the end moment t_e , it is illegal if the lag vehicle overtakes the ego vehicle from that moment. Therefore, the selected information on vehicle ontology and environmental states at the three critical moments allows us to analyze the dynamic interaction process of highway merge.

C. Social Merging Behavior

In a congested highway on-ramp traffic, the gaps between vehicles are small; therefore, the merging vehicle should actively create a large enough gap by delivering their merge intention to its surrounding vehicles. Although there are many surrounding vehicles in congested traffic, only the lead and lag vehicles on the target lane have a strong interaction with the merging vehicle. In other words, social preferences (e.g., courteous and rude) of the lead and lag vehicles will directly influence the merging vehicle's future decisions. As shown in Fig. 1, we mainly focus on two types of social interactions between the merging and assumptive lead/lag vehicles.

- *Rude*: The surrounding vehicle behaves rudely and competes for the right of way with the merging vehicle since the start moment t_s . Aggressive or near-collision behavior will show in this process because there will be

a phenomenon wherein the merging vehicle traveling at low speed competes with the surrounding vehicle for a while.

- *Courteous*: The surrounding vehicle behaves courteously and gives way to the merging vehicle since the start moment t_s . Aggressive or near-collision behavior will not occur during this process.

D. Variable Selection

Selecting reasonable variables is quite essential for AVs to make decisions with strong interactions because the environmental information is redundant. Only the information directly related to the task is beneficial for AVs to understand the environment and make optimal decisions, while irrelevant information should be removed as noise. For the highway on-ramp merge, the absolute position coordinates of vehicles are unrelated to the task. Instead, the relative distance and relative speed should be adopted to capture the relationships between vehicles better. Unlike the absolute position coordinates, the ego vehicle's absolute speed in longitudinal and lateral direction should also be introduced as references to analyze the influence of different traffic conditions on task.

Based on previous studies, the surrogate safety measure (SSM) between the ego vehicle and the adjacent surrounding vehicles should also be selected to describe the risk level [37]. Otherwise, it will cause improper merge decisions in some critical conditions. For example, when the relative speed between the ego vehicle and the lead vehicle on the target lane is relatively large but the relative distance is small, the collision risk is very high; however, the absence of SSM will make it difficult to perceive this high risk. The standard explanatory variable of SSM includes the deceleration rate [38], the deceleration rate to avoid the crash (DRAC) [39], the time to collision (TTC) [40], and the time headway (THW) [41].

These studies and practices have shown that TTC is more related to the risk levels and can reflect the driver's preferences of risk. Besides, the use of TTC can also improve the prediction accuracy of the modeling for merge decisions [42], [43]. Therefore, we select TTC as the influencing variable in this work. Generally speaking, the calculation of TTC needs to satisfy that the speed of the vehicle behind is higher than that of the vehicle ahead. However, we do not impose such a constraint in this work. In other words, the case that the vehicle behind moves slower than the vehicle ahead results in a negative value of TTC, indicating the relative distance between these two vehicles is gradually increasing. We define the independent variables as listed in Table I. All variables in Table I representing the relative relationship are calculated with respect to the ego vehicle. It should be careful to compute TTC^{lead} in the rude scenario, which is computed by

$$TTC^{\text{lead}} = \begin{cases} \frac{|x^{\text{ego}} - x^{\text{lead}}| - \frac{1}{2}(l^{\text{ego}} + l^{\text{lead}})}{v_x^{\text{lead}} - v_x^{\text{ego}}}, & \text{if Condition1} \\ \frac{|x^{\text{lead}} - x^{\text{ego}}| - \frac{1}{2}(l^{\text{ego}} + l^{\text{lead}})}{v_x^{\text{ego}} - v_x^{\text{lead}}}, & \text{if Condition2} \end{cases} \quad (1)$$

where Condition1 is 'the lead vehicle is in the left- behind area of the ego vehicle' and Condition2 is 'the lead vehicle

TABLE I
DEFINITIONS OF INDEPENDENT VARIABLES

Δx^{lead}	[m]	The longitudinal relative distance of the assumptive lead vehicle and ego vehicle
Δv_x^{lead}	[m/s]	The longitudinal relative speed of the assumptive lead vehicle and ego vehicle
TTC^{lead}	[s]	The time to collision between the assumptive lead vehicle and ego vehicle
v_x^{ego}	[m/s]	The longitudinal speed of the ego vehicle
v_y^{ego}	[m/s]	The lateral speed of the ego vehicle
Δx^{lag}	[m]	The longitudinal relative distance of the assumptive lag vehicle and ego vehicle
Δv_x^{lag}	[m/s]	The longitudinal relative speed of the assumptive lag vehicle and ego vehicle
TTC^{lag}	[s]	The time to collision between the assumptive lag vehicle and ego vehicle

is in the left-ahead area of the ego vehicle', and TTC^{lag} is computed by

$$TTC^{\text{lag}} = \frac{|x^{\text{ego}} - x^{\text{lag}}| - \frac{1}{2}(l^{\text{ego}} + l^{\text{lag}})}{v_x^{\text{lag}} - v_x^{\text{ego}}} \quad (2)$$

In addition to the *independent* variables defined above, we also need to introduce *dependent* variables that can reflect the procedure of the highway on-ramp merge task. This task requires the ego vehicle to merge into the main road as soon as possible while ensuring safety. The longitudinal distance of the ego vehicle to the end of the ramp, Δx^{end} , is used to describe the urgent level, that is, a short distance left increases the urgent level of merge intent. We also define the lateral distance to the lane change boundary line Δy^{bdry} to describe how much of the task has been completed. So these two indicators are selected as the dependent variables.

IV. DATASET AND DATA PROCESSING


A. Real-World Dataset

It is necessary to adopt real-world driving scenarios as a research basis in order to study human-like maneuvers. The accessible realistic driving datasets include the Next Generation Simulation (NGSIM) dataset [44], the highD dataset [45], the Argoverse dataset [46], and the International, Adversarial and Cooperative moTION (INTERACTION) dataset [47]. We utilize the INTERACTION dataset in this paper based on the following reasons:

- It includes diversified interactive driving scenarios, such as intersections, roundabouts, and merging scenarios.
- In addition to regular driving behaviors and safe operations, highly interactive and complex driving behaviors are also densely contained, such as negotiations, adversarial/irrational decisions, and near-collision maneuvers.
- It contains well-defined physical information, such as agents' position and speed in longitudinal and lateral directions, the corresponding timestamp with the resolution of 100 ms, the types of tracked agents (car or truck), yaw angle, and the length and width of vehicles.



(a) Real scene

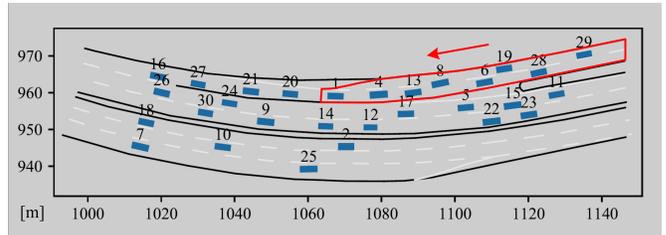

(b) Data visualization

Fig. 4. The highway on-ramp merge scenario in the INTERACTION dataset [47] and the selected local region bounded by the red line.

B. Data Preprocessing

The INTERACTION dataset collected highway merge scenarios in two countries: China and Germany. The video length of the Chinese (German) merge scenario is 94.62 (37.92) minutes, which contains 10359 (574) vehicles. The upper two lanes of the Chinese scenario, as shown in Fig. 4, are specially selected because they cover a longer duration and wider variety in social preferences.

In this work, we consider the merge scenarios that involve three agents, i.e., the ego vehicle, the assumptive lead, and lag vehicles on the target lane. We extracted the complete merge behaviors to ensure that all vehicles included in the behavior have data records between t_s and t_e . Finally, 288 rude and 789 courteous merging events were extracted from the selected local scenarios based on the definition of the merging scenarios with different social preferences (see Section III-B). We should note that the three vehicles' longitudinal positional relationship is unchanged in a courteous scenario. In the rude scenario, however, the longitudinal positional relationship will reverse once: At the start moment t_s , the lead vehicle is upstream of the traffic flow and acts rudely to force the merging vehicle to yield. Considering this, we calculate the TTC between the merging vehicle and the lead vehicle by using the positional relationship in Equations (1) and (2). Based on the selected variables in Section III-C, we calculated the independent variables and dependent variables. We then divided the extracted data into three groups for each scenario according to the three predefined critical moments, to analyze interactions over the whole procedure with different social preferences.

C. Methods

The Analysis of Variance (ANOVA) is a mature method to analyze the significant level of variables through the significance test [48]. It can deal with the mixture analysis in which the independent variable is qualitative, while the dependent variable is quantitative. To meet the requirement of ANOVA,

for both merge scenarios, we divided all the independent variables at different moments into two groups according to their median. In this way, the grouped independent variables and quantitative dependent variables were analyzed by ANOVA (using the SPSS software) to obtain the significance level of independent variables at different times for different merge behaviors.

V. RESULT ANALYSIS AND DISCUSSION

A. Analysis of Independent Variables

Figs. 5 and 6 show the statistical results of the independent variables with rude and courteous social preferences at the start (t_s), middle (t_m), and end (t_e) moments. A comprehensive comparison of these variables reflects the changes in decision making during the merging process. Note that the vehicles on the selected highway and associated ramp move left (see Fig 4 (a)), so the absolute values of the longitudinal coordinate are gradually decreasing (see Fig. 4 (b)), indicating that the speed of all the selected vehicles is negative. In what follows, we will discuss and analyze the dynamic merging process of the ego vehicle when interacting with different social preferences (i.e., rude and courteous) of the surrounding vehicles.

1) *Interactions with rude social preferences:* For the relative position between the ego vehicle and its target vehicles, the grey bars' values in Fig. 5(a) show that the relative distance (Δx^{lead}) changes from positive to negative over the merging process. It indicates that the lead vehicle acts rudely and passes the merging vehicle in the longitudinal direction, as illustrated in Fig. 2(b). This is consistent with the definition of the rude scenario: the human driver in the lead vehicle has a competitive social preference and is more self-centered, and thus does not allow the ego vehicle to merge into the gap ahead of it. The mean value of Δx^{lead} at t_m is approximately equal to zero, which means the lead vehicle almost drives side-by-side with the ego vehicle.

In terms of speed, the gray bars in Fig. 5(c) and (d) show that both v_x^{ego} and v_y^{ego} have identical trends: decreasing first and increasing. At the middle moment, both the longitudinal and lateral speeds of the ego vehicle decrease to the lowest absolute value since the ego vehicle needs to understand the behavior of surrounding vehicles and avoids collisions. Moreover, Δv_x^{lead} in Fig. 5(b) changes significantly from t_s to t_m because the ego vehicle changes its longitudinal speed a lot while the lead vehicle adjusts its speed slightly. Also, at the middle moment t_m , Δv_x^{lead} is generally less than zero, which indicates that the lead vehicle is moving faster than the ego vehicle. After t_m , both the ego and lead vehicles will gradually increase their speed by about 60% to be consistent with the traffic flow. However, the average value of Δv_x^{lag} (the gray bars in Fig. 5(f)) keeps decreasing slightly from t_s to t_e . The above analysis indicates that the lead vehicle behaves rudely and will give a high priority to keep moving forward with a near-constant speed in the merging process. The lag vehicle keeps decelerating throughout the process to leave enough gap for the merging vehicle to cut in.

2) *Interactions with courteous social preferences:* Regarding the position of the involved vehicles, the red bars in Fig.

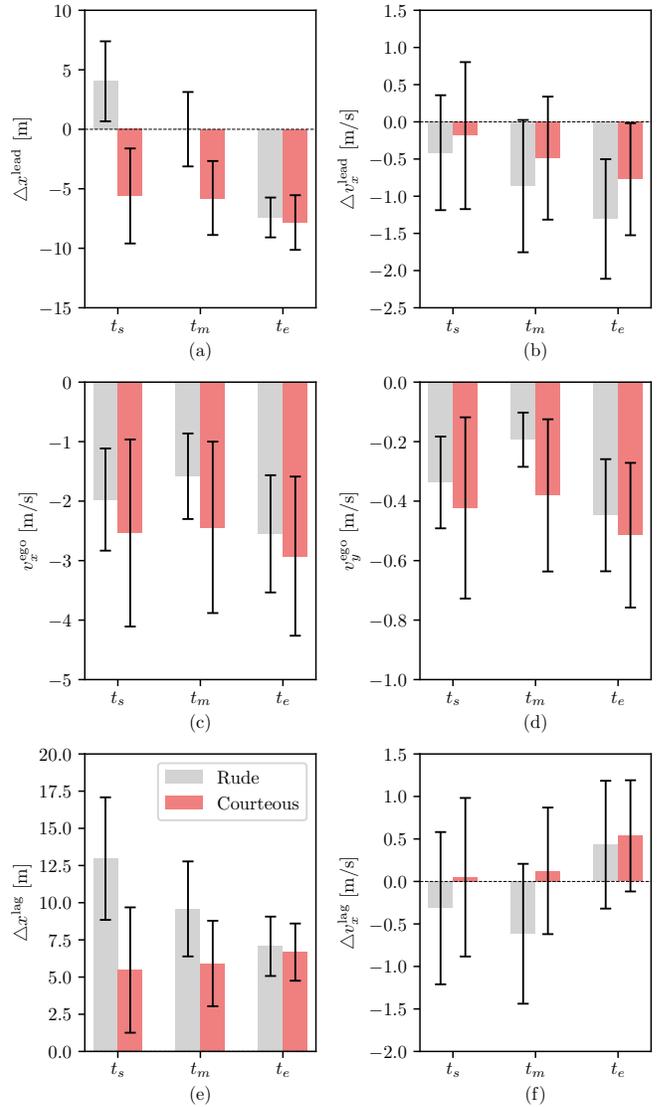


Fig. 5. Statistical results of independent variables at the three critical moments (t_s , t_m , and t_e) in the rude and courteous scenarios.

5(a) and (e) show that the values of Δx^{lead} and Δx^{lag} are negative and positive for all three moments. It indicates that the ego vehicle always stays the middle between the assumptive lead and lag vehicles during the merging process, as shown in Fig. 2(a). However, the averages of Δx^{lead} and Δx^{lag} increase along with the merging process. It reveals that the lag vehicle acts courteously by actively adjusting their speed to ensure an adequate safety gap ahead, thus allowing the ego vehicle to cut in.

In terms of speed, both v_x^{ego} and v_y^{ego} decrease first and increase then, which has the same interactions in a rude scenario. However, due to the courteous yield behavior of the lag vehicle, the duration of deceleration caused by the merge duration is shorter than that in the rude scenario, causing smaller speed changes from t_s to t_e . At the end moment t_e , all the averages of Δv_x^{lead} are negative, while almost all the averages of Δv_x^{lag} are positive, which tells that the ego vehicle will actively decelerate to keep a safe distance ahead;

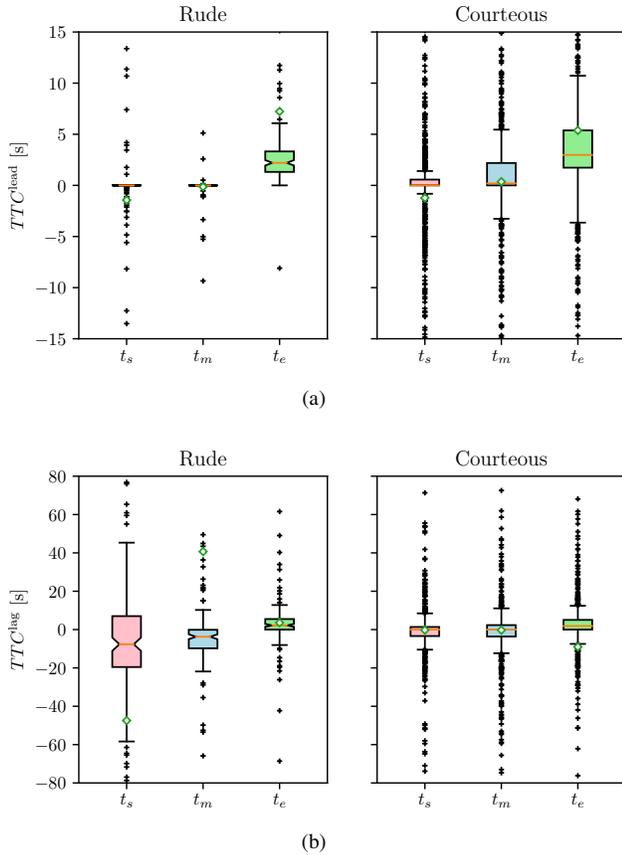


Fig. 6. Statistical results of (a) TTC^{lead} and (b) TTC^{lag} at the three critical moments (t_s , t_m , and t_e) in rude and courteous scenarios.

meanwhile, the courteous human driver of the lag vehicle will also slow down after detecting the merging intention and then yield. The ego vehicle can interactively respond to the courteous behavior of the lag vehicle. Hence, although both the ego and lag vehicles suffer a speed loss, the speed changes over the three critical moments are small because the game period is shorter than in a rude scenario.

3) *Comparisons*: Comparisons in Fig. 5(a) and (e) reveal that although the merging processes interacting with the rude and courteous social preferences are quite different, their absolute mean value and variance of Δx^{lead} for t_e are almost consistent. The same conclusion can be obtained for Δx^{lag} . Besides, the mean values of Δx^{lead} and Δx^{lag} in the courteous scenario are almost equal to those in the rude scenario at t_e . Moreover, both Δx^{lead} and Δx^{lag} obtain the lowest value at t_e , which indicates that the human drivers will adjust their relative position and speed to achieve the merging task by finally keeping a relatively safe gap (about $5 \sim 7$ m). Note that the changes in Δx^{lead} and Δx^{lag} after t_e are the opposite: Δv_x^{lead} at the end moment t_e is negative, while most of the Δv_x^{lag} is positive, indicating that the gaps (i.e., $|\Delta x^{\text{lead}}|$ and $|\Delta x^{\text{lag}}|$) will continue to increase after merging. In addition, when interacting with a rude surrounding driver, Δv_x^{lead} obtains the highest average value, indicating that the surrounding driver with a rude preference tends to accelerate after passing over the ego vehicle.

By comparing v_x^{ego} with v_y^{ego} in Fig. 5(c) and (d), we

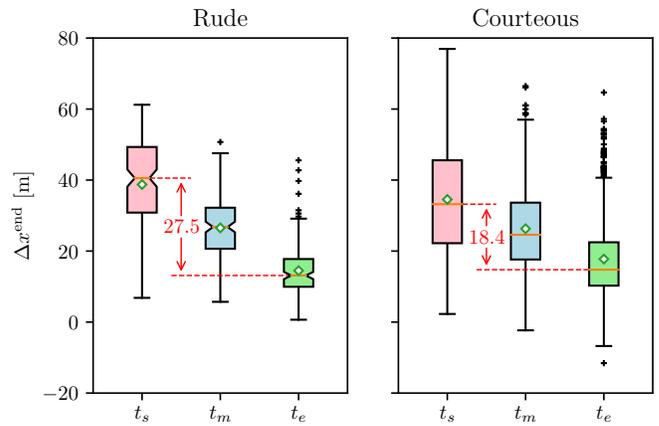


Fig. 7. Statistical results of Δx^{end} , the remaining longitudinal distance to the end of merge lane at the three critical moments (t_s , t_m , and t_e) in rude and courteous scenarios.

can see that the ego vehicle will actively slow down in both longitudinal and lateral direction to ensure a safe merge, while the speed change of v_y^{ego} is particularly apparent, especially when interacting with a rude surrounding driver. Besides, Fig. 5(b) and (f) reveals that the changes of Δv_x^{lead} and Δv_x^{lag} from t_s to t_e in the courteous scenario are more stable compared with that in the rude scenario.

Fig. 6 displays the statistical results of TTC^{lead} and TTC^{lag} , and their changes are consistent with those indicated by position and speed. One interesting finding is that TTC^{lag} changes more slightly than TTC^{lead} , while either variable in the courteous scenario changes more steadily than that in the rude scenario.

B. Analysis of Dependent Variables

The above analysis is only based on the independent variables. Here, we will analyze the dependent variables Δx^{end} and Δy^{bdry} . The definitions of the three critical moments (in Section III-A) make the distribution of Δy^{bdry} the same with each other at each moments. Therefore, we will mainly show and discuss Δx^{end} (Fig. 7), instead Δy^{bdry} here.

Fig. 7 reveals that the ego vehicle would start a merge behavior earlier when interacting with a rude surrounding driver than with a courteous driver because the averaged Δx^{end} at t_s in the rude scenario is higher than that in the courteous scenario. However, the median and mean values of Δx^{end} at the other two moments in the two social scenarios are not significantly different. Besides, the longitudinal driving distance of the ego vehicle throughout the merging process when interacting with a rude surrounding driver (27.5 m) is higher than with a courteous surrounding driver (18.4 m). It underlies that courteous social interaction may improve traffic efficiency. Moreover, the position data in the rude scenario are densely located near the end of the ramp because the merge intention becomes more intense as the ego vehicle is approaching the end of the ramp. This increasing merge intent will make the rude surrounding vehicle more egoistic and competitive.

TABLE II
THE RESULTS OF SIGNIFICANCE ANALYSIS (p -VALUE) ON THE SELECTED VARIABLES AT THE THREE CRITICAL MOMENTS (t_s , t_m , AND t_e) IN RUDE AND COURTEOUS SCENARIOS (WITH $*p < 0.05$; $**p < 0.01$; $***p < 0.001$)

			Δx^{lead}	Δv_x^{lead}	TTC^{lead}	v_x^{ego}	v_y^{ego}	Δx^{lag}	Δv_x^{lag}	TTC^{lag}
Δx^{end}	Rude	t_s	–	–	–	0.003**	< 0.001***	–	–	–
		t_m	–	< 0.001***	0.042*	0.001**	< 0.001***	–	0.032*	0.024*
		t_e	–	–	0.028*	–	–	–	0.008**	–
	Courteous	t_s	0.003**	< 0.001***	–	< 0.001***	< 0.001***	–	–	0.001**
		t_m	0.001**	< 0.001***	0.005**	< 0.001***	< 0.001***	< 0.001***	–	–
		t_e	–	< 0.001***	–	< 0.001***	< 0.001***	–	0.012*	0.014*
Δy^{bdry}	Rude	t_s	–	–	–	–	–	–	–	–
		t_m	–	–	0.001**	0.002**	< 0.001***	–	–	–
		t_e	–	–	–	–	–	–	–	–
	Courteous	t_s	–	–	–	< 0.001***	0.001**	–	–	–
		t_m	–	–	0.019*	< 0.001***	< 0.001***	–	< 0.001***	–
		t_e	–	–	–	–	–	0.038*	–	–

On the other hand, in the rude scenario, all the merging behaviors of the ego vehicle are completed before the ramp is separated by the white diversion line, as shown in Fig. 4(a). However, in the courteous scenario, some merging behaviors can occur after the ramp's end by violating the traffic rules and driving on the forbidden region marked by the diversion line. There are two main reasons for this phenomenon: 1) The surrounding traffic conditions on the target lane do not meet the merging conditions, and 2) The ahead gap is large enough for merging. Besides, the higher the ego vehicle's speed is, the more likely this phenomenon will occur. The ego vehicle courteously merges into the target lane at the cost of violating traffic rules, and thus, it gains a shorter merging time and has a low impact on the subsequent ramp traffic flow.

C. Significance Analysis of Variables

Until this section, the merging process with congested traffic is analyzed based on independent and dependent variables. In this section, we focus on the significance analysis of variables over time and space and their difference under different social interaction scenarios, which is corresponding to the proposed three questions in Section I. The p -value is a random variable derived from the distribution of the test statistic used to analyze a data set. In this work, the significance level was set to 0.05, for which a p -value less than is considered statistically significant: the smaller the p -value, the more significant the variable. The results of significance analysis on the selected variables are listed in Table II. The significance analysis of Δy^{bdry} is consistent with that of Δx^{end} although with small differences. Analyzing the results for the two dependent variables comprehensively, we can get three key conclusions as follows.

1) Social preferences of the surrounding vehicles impact the variable selection of the ego vehicle to make a decision. When interacting with a rude surrounding driver, the ego driver would mainly rely on the relative velocity (highlighted as orange), rather than the relative distance at

any moment (highlighted as gray). In other words, the ego vehicle will not use the full states of the environment to make decisions when interacting with a rude surrounding driver in merge scenarios. Conversely, when interacting with a courteous surrounding driver, the ego vehicle would select *all* the selected independent variables to make decisions during the whole merge process. Specifically, the relative distance and relative speed are most significant (highlighted as red) for the ego vehicle, but with different significance levels over the three critical moments. In other words, the ego vehicle will use more environment states to make decisions in a courteous scenario than in a rude scenario. However, the v_x^{ego} and v_y^{ego} are significant for the ego vehicle over the merging procedure, except for at t_e in the rude scenario, in both courteous and rude scenarios.

2) Variable saliency varies over the merging process.

The changes in variable saliency in the merging process in different scenarios are different. In what follows, we discuss each scenario as follows.

In the rude scenario, at the moment

- t_s : v_x^{ego} ($p = 0.003$) and v_y^{ego} ($p < 0.001$) are the only significant variables. It means that at the initial stage of merging, the ego vehicle attempts to merge through triggering an interaction with its surrounding vehicles by only evaluating their longitudinal and lateral speed.
- t_m : Except for v_x^{ego} and v_y^{ego} (both with $p < 0.001$), the Δv_x^{lead} is also the most significant variable (with $p < 0.001$). Moreover, the merging decision of the ego vehicle also slightly depends on TTC^{lead} ($p = 0.042$), Δv_x^{lag} ($p = 0.032$) and TTC^{lag} ($p = 0.024$). The slight dependence on Δv_x^{lag} and TTC^{lag} indicates that the ego vehicle needs to take care of the intention of the lag vehicle while interacting with the lead vehicle to judge the social preference of the lag vehicle.
- t_e : The ego vehicle makes decisions by mainly relying on Δv_x^{lag} ($p = 0.008$) and slightly relying on TTC^{lead} ($p = 0.028$). The intuitive explanation of this is that the

TABLE III

THE STATISTICS OF SIGNIFICANT VARIABLES AT DIFFERENT MOMENTS FOR THE RUDE AND COURTEOUS SCENARIO (DARK BACKGROUND COLOR REPRESENTS A HIGH SIGNIFICANCE LEVEL OF VARIABLES)

Rude			Courteous		
t_s	t_m	t_e	t_s	t_m	t_e
v_y^{ego}	v_y^{ego}	Δv_x^{lag}	v_y^{ego}	v_y^{ego}	v_y^{ego}
v_x^{ego}	Δv_x^{lead}	TTC^{lead}	v_x^{ego}	v_x^{ego}	v_x^{ego}
	v_x^{ego}		Δv_x^{lead}	Δv_x^{lead}	Δv_x^{lead}
	TTC^{lead}		Δx^{lead}	Δx^{lag}	Δx^{lag}
	Δv_x^{lag}		TTC^{lag}	Δv_x^{lag}	Δv_x^{lag}
	TTC^{lag}			Δx^{lead}	TTC^{lag}
				TTC^{lead}	

ego vehicle still needs to pay more attention to the lag vehicle's behavior to ensure safety while following with the lead vehicle because the ego vehicle almost completes the merging task at this moment.

In the courteous scenario, at the moment

- t_s : The ego vehicle makes decisions mainly depending on the relative speed to the lead vehicle, with Δv_x^{lead} ($p < 0.001$), while slightly depending on the distance to the lead vehicle Δx^{lead} ($p = 0.003$) and the risk level with the lag vehicle TTC^{lag} ($p = 0.001$).
- t_m : The ego vehicle takes actions depending mainly on Δx^{lag} ($p < 0.001$) and Δv_x^{lag} ($p < 0.001$), while slightly on Δx^{lead} ($p = 0.001$) and TTC^{lead} ($p = 0.005$).
- t_e : The ego vehicle will make decisions by using, but not significantly, Δx^{lag} ($p = 0.038$), Δv_x^{lag} ($p = 0.012$) and TTC^{lag} ($p = 0.014$). One more interesting finding is that the ego vehicle would put his/her secondary-attention from the lead vehicle to the lag vehicle.

3) Drivers always rely on certain basis variables during the whole merging procedure. For example, when interacting with a courteous driver, Δv_x^{lead} ($p < 0.001$), v_x^{ego} ($p < 0.001$) and v_y^{ego} ($p < 0.001$) are always the most significant variables. The dominant Δv_x^{lead} indicates that the ego vehicle will keep paying attention to the relative speed to the lead vehicle, to make a timely response to contextual changes.

Based on the above analysis, we summarize the significant levels of each independent variable over the whole merging process while interacting with the rude and courteous surrounding vehicles in Table III. Three significant levels are marked with dark gray ($p < 0.001$), gray ($p < 0.01$), and light gray ($p < 0.05$).

D. Further Discussions

1) *Potential Applications*: The multi-dimensional states of the complex environment can overwhelm human insights and analysis. Even in a simple real-world autonomous task, the sensory devices receive a large amount of information, but most of which is useless for the task execution [9]. Hence, it is crucial to know what information guides humans to make decisions when interacting in a multivariate environment. Moreover, identifying the task-related variables and their

significance over time can help advance learning technologies, such as reinforcement learning [49], [50]. However, existing research on learning algorithms for the highway on-ramp merge neglects the differences in each variable's contribution to the task execution over space and time [51], [52]. Therefore, the obtained conclusions in this paper can benefit weighted variable selection based on their significance, to improve the learning performance.

2) *Influences of Traffic Conditions*: This paper mainly focuses on a congested traffic condition. For the free-flow traffic condition, the vehicle speed is high, and the gaps between vehicles are large. The conclusions obtained in this paper might not be suitable for the merge task in a free-flow traffic condition due to the differences in merge location and space/time gap [41]. Therefore, further investigation under different traffic flow conditions is needed in future work.

3) *Types of Vehicles*: This paper mainly focused on the interactions of cars, without considering other vehicles such as trucks. However, the type of vehicles could influence the lane-change decision of humans [53], and their preferences in rude and courteous. For example, the driver in a passenger car usually leaves an ample space ahead when interacting with a fully-loaded truck. Therefore, the influences of the type of vehicles on variable selection and social interactions would be considered in future work.

VI. CONCLUSION

This paper provided insights into the influence of the social preferences of surrounding vehicles on merging vehicles' decisions over time and space. We defined three critical moments of highway on-ramp merge to describe the dynamic merging process. Then, we specified two typical interaction scenarios (i.e., rude and courteous) based on the social preferences of the surrounding vehicles. Further, the selected independent and dependent variables were analyzed based on the INTER-ACTION dataset with the ANOVA approaches. Finally, two fundamental mechanisms in merge task at highway on-ramps with congested traffic are obtained:

- The social preferences of the surrounding vehicles impact the variable selection of the ego vehicle when making decisions.
- The variable saliency is not constant; that is, it varies over the merging process with different social preferences in rude and courteous.

The above two critical conclusions are expected to benefit for decision-making algorithm design of autonomous vehicles when interacting with human-driven vehicles.

REFERENCES

- [1] A. Zgonnikov, D. Abbink, and G. Markkula, "Should I stay or should I go? Evidence accumulation drives decision making in human drivers," 2020.
- [2] F. Marczak, W. Daamen, and C. Buisson, "Merging behaviour: Empirical comparison between two sites and new theory development," *Transportation Research Part C: Emerging Technologies*, vol. 36, pp. 530–546, 2013.
- [3] J. Sun, J. Ouyang, and J. Yang, "Modeling and analysis of merging behavior at expressway on-ramp bottlenecks," *Transportation Research Record*, vol. 2421, no. 1, pp. 74–81, 2014.

- [4] N. H. T. S. Administration, "Summary of motor vehicle crashes: 2016 data," United States. National Highway Traffic Safety Administration, Tech. Rep., 2018.
- [5] M. R. Endsley, "Measurement of situation awareness in dynamic systems," *Human factors*, vol. 37, no. 1, pp. 65–84, 1995.
- [6] W. Schwarting, A. Pierson, J. Alonso-Mora, S. Karaman, and D. Rus, "Social behavior for autonomous vehicles," *Proceedings of the National Academy of Sciences*, vol. 116, no. 50, pp. 24972–24978, 2019.
- [7] E. Koechlin, "Human decision-making beyond the rational decision theory," *Trends in Cognitive Sciences*, vol. 24, no. 1, pp. 4–6, 2020.
- [8] H. Seo and D. Lee, "Neural basis of learning and preference during social decision-making," *Current opinion in neurobiology*, vol. 22, no. 6, pp. 990–995, 2012.
- [9] A. J. Langdon, M. Song, and Y. Niv, "Uncovering the state: Tracing the hidden state representations that structure learning and decision-making," *Behavioural processes*, vol. 167, p. 103891, 2019.
- [10] S. Yang, W. Wang, C. Liu, and W. Deng, "Scene understanding in deep learning-based end-to-end controllers for autonomous vehicles," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 49, no. 1, pp. 53–63, 2018.
- [11] R. C. Wilson and Y. Niv, "Inferring relevance in a changing world," *Frontiers in human neuroscience*, vol. 5, p. 189, 2012.
- [12] K. Ahmed, M. Ben-Akiva, H. Koutsopoulos, and R. Mishalani, "Models of freeway lane changing and gap acceptance behavior," *Transportation and traffic theory*, vol. 13, pp. 501–515, 1996.
- [13] G. Lee, "Modeling gap acceptance at freeway merges," Ph.D. dissertation, Massachusetts Institute of Technology, 2006.
- [14] T. Toledo, H. N. Koutsopoulos, and M. Ben-Akiva, "Estimation of an integrated driving behavior model," *Transportation Research Part C: Emerging Technologies*, vol. 17, no. 4, pp. 365–380, 2009.
- [15] D. Sun and L. Elefteriadou, "A driver behavior-based lane-changing model for urban arterial streets," *Transportation science*, vol. 48, no. 2, pp. 184–205, 2014.
- [16] Z. Zheng, "Recent developments and research needs in modeling lane changing," *Transportation research part B: methodological*, vol. 60, pp. 16–32, 2014.
- [17] W. Tang and D. M. Levinson, "Deviation between actual and shortest travel time paths for commuters," *Journal of Transportation Engineering, Part A: Systems*, vol. 144, no. 8, p. 04018042, 2018.
- [18] H. Kita, "Effects of merging lane length on the merging behavior at expressway on-ramps," *Transportation and Traffic Theory*, pp. 37–51, 1993.
- [19] J. Weng and Q. Meng, "Modeling speed-flow relationship and merging behavior in work zone merging areas," *Transportation research part C: emerging technologies*, vol. 19, no. 6, pp. 985–996, 2011.
- [20] T. Fatema and Y. Hassan, "Probabilistic design of freeway entrance speed-change lanes considering acceleration and gap acceptance behavior," *Transportation research record*, vol. 2348, no. 1, pp. 30–37, 2013.
- [21] J. Weng, S. Xue, Y. Yang, X. Yan, and X. Qu, "In-depth analysis of drivers merging behavior and rear-end crash risks in work zone merging areas," *Accident Analysis & Prevention*, vol. 77, pp. 51–61, 2015.
- [22] G. Li, "Application of finite mixture of logistic regression for heterogeneous merging behavior analysis," *Journal of Advanced Transportation*, vol. 2018, 2018.
- [23] J. C. McCall, D. P. Wipf, M. M. Trivedi, and B. D. Rao, "Lane change intent analysis using robust operators and sparse bayesian learning," *IEEE Transactions on Intelligent Transportation Systems*, vol. 8, no. 3, pp. 431–440, 2007.
- [24] Q. Meng and J. Weng, "An improved cellular automata model for heterogeneous work zone traffic," *Transportation research part C: emerging technologies*, vol. 19, no. 6, pp. 1263–1275, 2011.
- [25] J. Weng, G. Du, D. Li, and Y. Yu, "Time-varying mixed logit model for vehicle merging behavior in work zone merging areas," *Accident Analysis & Prevention*, vol. 117, pp. 328–339, 2018.
- [26] D. Arbis and V. V. Dixit, "Game theoretic model for lane changing: Incorporating conflict risks," *Accident Analysis & Prevention*, vol. 125, pp. 158–164, 2019.
- [27] Q. Meng and J. Weng, "Classification and regression tree approach for predicting drivers merging behavior in short-term work zone merging areas," *Journal of Transportation Engineering*, vol. 138, no. 8, pp. 1062–1070, 2012.
- [28] Y. Hou, P. Edara, and C. Sun, "Modeling mandatory lane changing using bayes classifier and decision trees," *IEEE Transactions on Intelligent Transportation Systems*, vol. 15, no. 2, pp. 647–655, 2013.
- [29] J. Tang, F. Liu, W. Zhang, R. Ke, and Y. Zou, "Lane-changes prediction based on adaptive fuzzy neural network," *Expert Systems with Applications*, vol. 91, pp. 452–463, 2018.
- [30] F. Broz *et al.*, "Planning for human-robot interaction: representing time and human intention," Ph.D. dissertation, Carnegie Mellon University, The Robotics Institute, 2008.
- [31] R. Kirby, "Social robot navigation," 2010.
- [32] J. Wei, J. M. Dolan, and B. Litkouhi, "Autonomous vehicle social behavior for highway entrance ramp management," in *2013 IEEE Intelligent Vehicles Symposium (IV)*. IEEE, 2013, pp. 201–207.
- [33] L. Sun, W. Zhan, M. Tomizuka, and A. D. Dragan, "Courteous autonomous cars," in *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2018, pp. 663–670.
- [34] Y. Ren, S. Elliott, Y. Wang, Y. Yang, and W. Zhang, "How shall i drive? interaction modeling and motion planning towards empathetic and socially-graceful driving," in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, 2019, pp. 4325–4331.
- [35] Y. Hu, L. Sun, and M. Tomizuka, "Generic prediction architecture considering both rational and irrational driving behaviors," in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2019, pp. 3539–3546.
- [36] O. Speidel, M. Graf, T. Phan-Huu, and K. Dietmayer, "Towards courteous behavior and trajectory planning for automated driving," in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2019, pp. 3142–3148.
- [37] C. Oh and T. Kim, "Estimation of rear-end crash potential using vehicle trajectory data," *Accident Analysis & Prevention*, vol. 42, no. 6, pp. 1888–1893, 2010.
- [38] D. Gettman and L. Head, "Surrogate safety measures from traffic simulation models," *Transportation Research Record*, vol. 1840, no. 1, pp. 104–115, 2003.
- [39] F. Cunto and F. F. Saccomanno, "Calibration and validation of simulated vehicle safety performance at signalized intersections," *Accident analysis & prevention*, vol. 40, no. 3, pp. 1171–1179, 2008.
- [40] J. Weng and Q. Meng, "Rear-end crash potential estimation in the work zone merging areas," *Journal of Advanced Transportation*, vol. 48, no. 3, pp. 238–249, 2014.
- [41] W. Daamen, M. Loot, and S. P. Hoogendoorn, "Empirical analysis of merging behavior at freeway on-ramp," *Transportation Research Record*, vol. 2188, no. 1, pp. 108–118, 2010.
- [42] J.-q. Wang, R.-j. Chi, L. Zhang, K.-q. Li, and T. Yu, "Study on forward collision warning-avoidance algorithm based on driver characteristics adaptation," *Journal of Highway and Transportation Research and Development*, vol. 26, no. supplement 1, 2009.
- [43] J. Weng, S. Xue, and X. Yan, "Modeling vehicle merging behavior in work zone merging areas during the merging implementation period," *IEEE Transactions on Intelligent Transportation Systems*, vol. 17, no. 4, pp. 917–925, 2015.
- [44] V. Alexiadis, J. Colyar, J. Halkias, R. Hranac, and G. McHale, "The next generation simulation program," *Institute of Transportation Engineers. ITE Journal*, vol. 74, no. 8, p. 22, 2004.
- [45] R. Krajewski, J. Bock, L. Kloeker, and L. Eckstein, "The hight dataset: A drone dataset of naturalistic vehicle trajectories on german highways for validation of highly automated driving systems," in *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*. IEEE, 2018, pp. 2118–2125.
- [46] M.-F. Chang, J. Lambert, P. Sangkloy, J. Singh, S. Bak, A. Hartnett, D. Wang, P. Carr, S. Lucey, D. Ramanan *et al.*, "Argoverse: 3d tracking and forecasting with rich maps," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019, pp. 8748–8757.
- [47] W. Zhan, L. Sun, D. Wang, H. Shi, A. Clausse, M. Naumann, J. Kummerle, H. Konigshof, C. Stiller, A. de La Fortelle *et al.*, "Interaction dataset: An international, adversarial and cooperative motion dataset in interactive driving scenarios with semantic maps," *arXiv preprint arXiv:1910.03088*, 2019.
- [48] K. P. Weinfurt, "Multivariate analysis of variance." 1995.
- [49] M. Song, Y. Niv, and M. B. Cai, "Learning what is relevant for rewards via value-based serial hypothesis testing."
- [50] Y. Niv, "Learning task-state representations," *Nature neuroscience*, vol. 22, no. 10, pp. 1544–1553, 2019.
- [51] T. Nishi, P. Doshi, and D. Prokhorov, "Merging in congested freeway traffic using multipolicy decision making and passive actor-critic learning," *IEEE Transactions on Intelligent Vehicles*, vol. 4, no. 2, pp. 287–297, 2019.
- [52] M. Bouton, A. Nakhaei, K. Fujimura, and M. J. Kochenderfer, "Cooperation-aware reinforcement learning for merging in dense traffic," in *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*. IEEE, 2019, pp. 3441–3447.

- [53] S. Moridpour, M. Sarvi, and G. Rose, "Modeling the lane-changing execution of multiclass vehicles under heavy traffic conditions," *Transportation research record*, vol. 2161, no. 1, pp. 11–19, 2010.



Huanjie Wang received the M.A. degree from the School of Mechanical Engineering, Beijing Institute of Technology (BIT), China, in 2016, where he is currently pursuing the Ph.D. degree in mechanical engineering. He has also been a Research Scholar with the University of California at Berkeley (UCB) since 2018. His research interests include automated vehicle, situational awareness, decision-making, and machine learning.



Lijun Sun received the B.S. degree in Civil Engineering from Tsinghua University, Beijing, China, in 2011, and Ph.D. degree in Civil Engineering (Transportation) from National University of Singapore in 2015. He is currently an Assistant Professor with the Department of Civil Engineering at McGill University, Montreal, QC, Canada. His research centers on intelligent transportation systems, machine learning, spatiotemporal modeling, travel behavior, and agent-based simulation.



Wenshuo Wang (SM'15-M'18) received the Ph.D. degree in mechanical engineering from the Beijing Institute of Technology, Beijing, China, in 2018. He is currently working as a Postdoctoral Researcher with California Partners for Advanced Transportation Technology (California PATH), UC Berkeley. He was a Postdoctoral Research Associate with the Carnegie Mellon University, Pittsburgh, PA, USA, from 2018 to 2019. He was also a Research Scholar with the University of California at Berkeley from 2015 to 2017 and with the University of Michigan,

Ann Arbor, from 2017 to 2018. His research interests include Bayesian non-parametric learning, human driver model, humanvehicle interaction, ADAS, and autonomous vehicles.



Shihua Yuan received the B.S., M.S., and Ph.D. degrees in vehicle engineering from the Beijing Institute of Technology, Beijing, China, in 1982, 1985, and 2000, respectively. From 1992 to 1997, he was an Associate Professor with the Beijing Institute of Technology, where he has been a Professor with the School of Mechanical Engineering, since 1997. He is the author of more than 100 research articles. His research interests include vehicle dynamics, vehicle braking energy recovery, vehicle continuous transmission and its control technology, and unmanned

ground vehicle.



Xueyuan Li received the B.S., M.S., and Ph.D. degrees in vehicle engineering from the Beijing Institute of Technology, Beijing, China, in 1999, 2002, and 2010, respectively. He was the Director of the National Key Laboratory of Vehicular Transmission, from 2008 to 2014. He is currently the Vice Director of the Department of Vehicle Engineering, Beijing Institute of Technology. Since 2002, he has been an Associate Professor with the School of Mechanical Engineering, Beijing Institute of Technology. His research interests include vehicle transmission theory and technology, unmanned vehicle theory and technology, and machine learning.

and technology, unmanned vehicle theory and technology, and machine learning.