

Regret-optimal control in dynamic environments

Gautam Goel

California Insititute of Technology

GGOEL@CALTECH.EDU

Babak Hassibi

California Insititute of Technology

HASSIBI@CALTECH.EDU

Abstract

We consider control in linear time-varying dynamical systems from the perspective of regret minimization. Unlike most prior work in this area, we focus on the problem of designing an online controller which minimizes regret against the best dynamic sequence of control actions selected in hindsight (dynamic regret), instead of the best fixed controller in some specific class of controllers (policy regret). This formulation is attractive when the environment changes over time and no single controller achieves good performance over the entire time horizon. We derive the state-space structure of the regret-optimal controller via a novel reduction to H_∞ control and present a tight data-dependent bound on its regret in terms of the energy of the disturbance. Our results easily extend to the model-predictive setting where the controller can anticipate future disturbances and to settings where the controller only affects the system dynamics after a fixed delay. We present numerical experiments which show that our regret-optimal controller interpolates between the performance of the H_2 -optimal and H_∞ -optimal controllers across stochastic and adversarial environments.

Keywords: dynamic regret, robust control

1. Introduction

The central question in control theory is how to regulate the behavior of an evolving system with state x that is perturbed by a disturbance w by dynamically adjusting a control action u . Traditionally, this question has been studied in two distinct settings: in the H_2 setting, we assume that the disturbance w is generated by a stochastic process and seek to select the control u so as to minimize the *expected* control cost, whereas in the H_∞ setting we assume the noise is selected adversarially and instead seek to minimize the *worst-case* control cost.

Both H_2 and H_∞ controllers suffer from an obvious drawback: they are designed with respect to a specific class of disturbances, and if the true disturbances fall outside of this class, the performance of the controller may be poor. Indeed, the loss in performance can be arbitrarily large if the disturbances are carefully chosen [Doyle \(1978\)](#).

This observation naturally motivates the design of *adaptive* controllers, which dynamically adjust their control strategy as they sequentially observe the disturbances instead of blindly following a prescribed strategy. This problem has attracted much recent attention in the online learning community (e.g. [Agarwal et al. \(2019\)](#); [Hazan et al. \(2020\)](#); [Foster and Simchowitz \(2020\)](#)), mostly from the perspective of regret minimization. In this framework, the online control policy π is chosen so as to minimize *policy regret*:

$$\sup_w \left[\text{cost}(w, \pi(w)) - \inf_{\pi^* \in \Pi} \text{cost}(w, \pi^*(w)) \right],$$

where Π is some class of policies and $\text{cost}(w, u)$ is the control cost incurred by selecting the control action u in response to the disturbance w . The comparator class Π is often taken to be the class of state-feedback policies or the class of disturbance-action policies introduced in Agarwal et al. (2019). The resulting controllers are adaptive in the sense that they seek to minimize cost irrespective of how the disturbances are generated.

In this paper, we take a somewhat different approach to the design of adaptive controllers. Instead of designing an online policy to minimize regret against the best policy selected in hindsight from some specific class, we instead focus on designing a policy which minimizes *dynamic regret*. In other words, we focus on designing online controllers which compete against the optimal dynamic sequence of control actions selected in hindsight

$$u^* = \underset{u}{\operatorname{argmin}} \text{cost}(w, u).$$

We emphasize the key distinction between policy regret and dynamic regret: in policy regret, we compare the performance of the online policy to the single best fixed policy from a class of policies Π , whereas in dynamic regret we compare to a time-varying sequence of control actions, without reference to any specific class.

We believe that this dynamic regret formulation of online control is more attractive than the standard policy regret formulation for two fundamental reasons. Firstly, it is more general: instead of imposing *a priori* some parametric structure on the controller we learn (e.g. state feedback policies, disturbance action policies, etc), which may or may not be appropriate for the given control task, we compete with the globally optimal dynamic sequence of control actions, with no artificial constraints. Secondly, and perhaps more importantly, the controllers we obtain are more robust to changes in the environment. Consider, for example, a scenario in which an online controller is trying to compete with the best state feedback controller selected in hindsight, and suppose the disturbances alternate between being generated by a stochastic process and being generated adversarially. When the disturbances are stochastic, an optimistic controller (such as the H_2 controller) will perform well; conversely, when the disturbances are adversarial, a more conservative, pessimistic controller (such as an H_∞ controller) will perform well. No single state-feedback controller will perform well over the entire time horizon, and hence any online algorithm which tries to learn the best fixed controller will incur high cumulative cost. A controller which minimizes regret against the optimal dynamic sequence of control actions, however, is not constrained to converge to any fixed controller, and hence can potentially outperform standard regret-minimizing control algorithms when the environment is dynamic.

Our approach to regret minimization in control is similar in outlook to a series of works in online learning (e.g. Herbster and Warmuth (1998); Hazan and Seshadhri (2009); Jadbabaie et al. (2015); Goel et al. (2019)), which seek to design online learning algorithms which compete with a dynamic sequence of actions instead of the best fixed action selected in hindsight; this formulation is natural when the reward-generating process encountered by the online algorithm varies over time. Unlike these prior works, we consider online learning in settings with *dynamics*. This setting is considerably more challenging to analyze through the lens of regret, because the dynamics serve to couple costs across rounds; the actions selected by a learning algorithm in each round affect the costs incurred in all subsequent rounds, making counterfactual analysis difficult.

It is well-known that dynamic regret can scale linearly in the number of rounds in the worst case (Jadbabaie et al. (2015)). For this reason, dynamic regret bounds are usually stated in a “data-dependent” manner, where the regret is bounded in terms of the variation or energy of the input sequence. For example, Besbes et al. (2015); Wei and Luo (2018) and Bubeck et al. (2019) give dynamic regret bounds for bandit optimization in terms of the pathlength $\sum_{t=1}^T \|\ell_t - \ell_{t-1}\|$, which measures the variation in the sequence of losses ℓ_1, \dots, ℓ_T ; Goel and Wierman (2019) also give a dynamic regret bound in terms of pathlength in the context of online convex optimization with switching costs. In recent work, Baby and Wang (2019) and Raj et al. (2020) give dynamic regret bounds for online regression in terms of the total variation of the underlying sequence being estimated. In this paper, we derive the online control policy whose dynamic regret has optimal dependence on the energy of the disturbance w , namely $\sum_{t=0}^{T-1} \|w_t\|_2^2$. We call the resulting controller the “regret-optimal” controller.

1.1. Contributions of this paper

Our main result is a derivation of the regret-optimal controller in state-space form using a novel reduction to H_∞ control (Theorem 6). Given an n -dimensional linear control system and a corresponding LQR cost functional, we show how to construct a $2n$ -dimensional linear system and a new cost functional such that the H_∞ -optimal controller in the new system minimizes dynamic regret in the original system. We show that the regret-optimal controller has a surprising symmetry relative to the offline optimal controller: the regret-optimal control in every round is the sum of the H_2 -optimal action in the new system and a linear combination of past disturbances, whereas the offline optimal control in every round is the sum of the H_2 -optimal action in the original system and a linear combination of *future* disturbances.

We emphasize several distinctions between our results and prior work on regret minimization in online control. First, the control policy we derive is the first which is optimal as measured by dynamic regret. In other words, we focus on obtaining an online control policy which competes against the optimal noncausal policy *in the infinite-dimensional set of all possible policies, including time-varying, nonlinear and discontinuous policies*. This stands in stark contrast to all prior work that we are aware of, which focuses on minimizing regret against the optimal fixed policy in some finite-dimensional, parametric class of policies such as state-feedback or disturbance-action policies. Our results also hold in more general settings than is usually considered in prior work; for example, we allow both the control costs and the dynamics to vary arbitrarily over time. Lastly, the data-dependent regret bound we obtain has a tight dependence on the energy of the disturbance, all the way up to leading constants; while most prior work focuses on finding algorithms with “order-optimal” regret bounds, we obtain the controller which *exactly* minimizes dynamic regret. The optimality of our controller follows from our reduction to H_∞ control; since the variational problem of obtaining a controller with optimal H_∞ gain can be solved exactly, the controller we obtain also achieves the exact optimal regret. We also present numerical experiments which show that our regret-optimal controller interpolates between the performance of the H_2 -optimal and H_∞ -optimal controllers across stochastic and adversarial environments (Section D).

We extend our analysis to settings where the controller has access to predictions of future disturbances (model-predictive control) and to settings where the controller only affects the system dynamics after a fixed delay. We completely characterize the regret-optimal model predictive controller (Theorem 9); our approach is to show that the problem of deriving the regret-optimal controller with predictions can be reduced to the standard regret-optimal control problem without predictions. We show an analogous reduction for control systems with delay and derive the corresponding regret-optimal policy (Theorem 10). To the best of our knowledge, these policies are the first with optimal dynamic regret in either setting.

1.2. Related work

This paper sits at the intersection of two large bodies of work in online learning, the first concerning regret minimization in the control, and the second concerning online learning with dynamic comparators. We briefly summarize some connections to our results.

Regret minimization in control. Regret minimization in control has attracted much recent attention across several distinct settings. A series of papers (e.g. Abbasi-Yadkori and Szepesvari (2011); Dean et al. (2018); Cohen et al. (2019)) consider a model where a fully observed linear system with unknown dynamics (but known costs) is perturbed by stochastic disturbances; the learner picks control actions with the goal of minimizing regret against the class of state-feedback policies. We note that Lale et al. (2020) considered a similar setting, but with only partial observability. In the “Non-stochastic control” setting proposed in Agarwal et al. (2019), the learner knows the dynamics, but the disturbance may be generated adversarially; the controller seeks to minimize regret against the class of disturbance-action policies. An $O(\sqrt{T})$ regret bound was given in Agarwal et al. (2019); this was recently improved to $O(\log T)$ in Foster and Simchowitz (2020). We emphasize that all of these works focus on minimizing regret against a fixed controller from some parametric class of control policies (policy regret), while we focus on minimizing regret against the optimal dynamic sequence of control actions (dynamic regret).

Online learning against dynamic comparators. Several papers consider the problem of designing online learning algorithms which compete against dynamic comparators, e.g. Herbster and Warmuth (1998); Bousquet and Warmuth (2002); Jadbabaie et al. (2015); Goel et al. (2019). The notion of dynamic regret was introduced in Zinkevich (2003); adaptive regret was introduced in Hazan and Seshadhri (2009). A series of papers Besbes et al. (2015); Wei and Luo (2018) and Bubeck et al. (2019) give dynamic regret bounds for bandit optimization in terms of the pathlength $\sum_{t=1}^T \|\ell_t - \ell_{t-1}\|$, which measures the variation in the sequence of losses ℓ_1, \dots, ℓ_T ; Goel and Wierman (2019) also give a dynamic regret bound in terms of pathlength in the context of online convex optimization with switching costs. In recent work, Baby and Wang (2019) and Raj et al. (2020) give dynamic regret bounds for online regression in terms of the total variation of the underlying sequence being estimated.

Control in changing environments. A key distinction between this paper and most previous work on regret minimization in online control is that we focus on designing an

online controller which competes against the optimal dynamic sequence of control actions, instead of the best fixed policy. This problem was first studied in [Goel et al. \(2017\)](#) in the context of timescale separation in control (albeit through the lens of competitive ratio rather than regret). In [Goel and Wierman \(2019\)](#) it was shown that the Online Balanced Descent algorithm introduced in [Chen et al. \(2018\)](#) could be used to give some competitive ratio guarantees in the LQR setting; this result was extended in a series of recent papers, e.g. [Goel et al. \(2019\)](#); [Lin et al. \(2020\)](#); [Shi et al. \(2020\)](#). A separate line of papers prove dynamic regret bounds for model-predictive control algorithms in settings without dynamics, e.g. [Chen et al. \(2016\)](#); [Li et al. \(2018\)](#); [Li and Li \(2020\)](#). We note that [Gradu et al. \(2020\)](#) give a control algorithm with low adaptive regret against the class of disturbance-action policies.

2. Preliminaries

We consider a linear dynamical system governed by the following evolution equation:

$$x_{t+1} = A_t x_t + B_{u,t} u_t + B_{w,t} w_t. \quad (1)$$

Here $x_t \in \mathbb{R}^n$ is a state variable we seek to regulate, $u_t \in \mathbb{R}^m$ is a control variable which we can dynamically adjust to influence the evolution of the system, and $w_t \in \mathbb{R}^p$ is an external disturbance. We assume for simplicity that the initial state is $x_0 = 0$. We consider the evolution of this system over a finite time horizon $t = 0, \dots, T-1$ and often use the notation $u = (u_0, \dots, u_{T-1})$, $x = (x_0, \dots, x_{T-1})$, $w = (w_0, \dots, w_{T-1})$. We formulate the problem of controlling the system as an optimization problem, where the goal is to select the control actions so as to minimize the LQR cost

$$\text{cost}(w, u) = \sum_{t=0}^{T-1} \left(x_t^\top Q_t x_t + u_t^\top R_t u_t \right), \quad (2)$$

where $Q_t \succeq 0, R_t \succ 0$ for $t = 0, \dots, T-1$ represent state and control costs, respectively, and $Q_T \succeq 0$ is a terminal state cost. We assume that the dynamics $\{A_t, B_{u,t}, B_{w,t}\}$ and costs $\{Q_t, R_t\}_{t=0}^{T-1}$ are known, so the only uncertainty in the evolution of the system comes from the disturbance w . We define the *energy* in a signal $w = (w_0, \dots, w_{T-1})$ to be $\|w\|_2^2 = \sum_{t=0}^{T-1} \|w_t\|^2$.

We say that a control policy is *causal* if the control action it selects at time t depends only on disturbances w_0, w_1, \dots, w_t ; otherwise we say the controller is *noncausal*. We often think of controllers as *linear operators* mapping disturbances w to control actions u ; in this framework, a causal controller is precisely one whose associated operator is causal, i.e. lower-triangular.

For notational convenience, we assume that $R_t = I$ for $t = 0, \dots, T-1$; we emphasize that this imposes no real restriction, since for all $R_t \succ 0$ we can always rescale u_t so that $R_t = I$. More precisely, we can define $B'_{u,t} = B_{u,t} R_t^{-1/2}$ and $u'_t = R_t^{1/2} u_t$; with this reparameterization, the evolution equation (1) becomes

$$x_{t+1} = A_t x_t + B'_{u,t} u'_t + B_{w,t} w_t,$$

while the state costs $\{Q_t\}_{t=0}^{T-1}$ appearing in (2) remain unchanged and the control costs are all equal to the identity. We define $s_t = Q_t^{1/2} x_t$ and let $s = (s_0, \dots, s_{T-1})$. Notice that with

this notation, the LQR cost (2) takes a very simple form:

$$\text{cost}(w, u) = \|s\|_2^2 + \|u\|_2^2. \quad (3)$$

It is easy to see s can be expressed as a linear combination of w and u , i.e. $s = Fu + Gw$, where F and G are strictly causal operators capturing the linear dynamics (1).

2.1. State-space models vs input-output models

A key idea that underpins the results of this paper is that there are two different approaches to describing control policies. The first, and perhaps better-known, approach is to use *state-space models*. In this formulation, we describe a control policy explicitly in terms of the quantities appearing in the dynamics (1), such as the state x_t , the disturbances w_0, \dots, w_t and the matrices $\{A_t, B_{u,t}, B_{w,t}, Q_t, R_t\}_{t=0}^{T-1}$. For example, here is a state-space description of the H_2 -optimal controller obtained by Kalman in his seminal paper [Kalman et al. \(1960\)](#):

Theorem 1 (Kalman, 1960) *The H_2 -optimal controller has the state-space form*

$$u_t = -H_t^{-1} B_{u,t}^\top P_{t+1} (A_t x_t + B_{w,t} w_t),$$

where $H_t = (R_t + B_{u,t}^\top P_{t+1} B_{u,t})$ and P_t is the solution of the backwards Riccati recursion

$$P_t = Q_t + A_t^\top P_{t+1} A - A_t^\top P_{t+1} B_t H_t^{-1} P_{t+1} A_t \quad (4)$$

where we initialize $P_T = 0$.

We emphasize that state-space models give a *local* description of the controller; they describe how to compute each control action u_t individually.

The second approach to describe a control policy is to use *input-output models*. In this formulation, we think of a controller \mathcal{K} as an operator mapping a disturbance $w = (w_0, \dots, w_{T-1})$ to a sequence of control actions $u = (u_0, \dots, u_{T-1})$, defined in terms of the dynamics encoded by F and G . For example, the H_2 -optimal controller described in Theorem 1 has an equivalent input-output description:

Theorem 2 (Theorem 11.2.2 in Hassibi et al. (1999)) *The H_2 -optimal controller \mathcal{K} is given in input-output form as*

$$\mathcal{K} = -(I + F^\top F)^{-1} \{\Delta^{-1} F^\top G\}_+,$$

where $\{\mathcal{A}\}_+$ denotes the causal part of an operator \mathcal{A} and Δ is a causal and invertible operator such that $\Delta^\top \Delta = I + F^\top F$.

Input-output models, in contrast to state-space models, give a *global* description of a controller: they describe how to compute the full sequence $u = (u_0, \dots, u_{T-1})$ all at once, without focusing on any particular timestep. We emphasize that input-output models generally do not give a computationally efficient description of a controller. One could, in principle, obtain the H_2 -optimal controller using the formula in Theorem 2, but notice that this would take $O(T^3)$ time, since it involves matrix multiplications of $T \times T$ block matrices. By contrast, the state-space controller in Theorem 1 can be implemented to run in $O(T)$ time. The main advantage of input-output models is that they are very amenable to algebraic manipulation; in this paper, we first obtain the regret-optimal controller in input-output form and then give more an explicit and computationally efficient description in state-space form.

2.2. Robust control

Our result rely heavily on techniques from robust control; in particular, we show that the problem of finding the regret-optimal controller can be encoded as an H_∞ control problem:

Problem 1 (H_∞ -optimal control problem) *Find a causal control policy that minimizes*

$$\sup_w \frac{\text{cost}(w, u)}{\|w\|_2^2}.$$

This problem has the natural interpretation of minimizing the worst-case gain from the energy in the disturbance w to the cost incurred by the controller. In general, it is not known how to derive a closed-form for this H_∞ gain or the optimal H_∞ controller, so instead is it common to consider a relaxation:

Problem 2 (Suboptimal H_∞ control problem) *Given a performance level $\gamma > 0$, find a causal control policy such that*

$$\sup_w \frac{\text{cost}(w, u)}{\|w\|_2^2} < \gamma^2,$$

or determine whether no such policy exists.

This problem has a well-known state-space solution:

Theorem 3 (Theorem 9.5.1 in Hassibi et al. (1999)) *A suboptimal H_∞ controller exists at performance level γ if and only if*

$$-\gamma^2 I + B_{w,t}^\top P_{t+1} B_{w,t} - B_{w,t}^\top P_{t+1} B_{u,t} H_t^{-1} B_{u,t}^\top P_{t+1} B_{w,t} \prec 0$$

for all $t = 0, \dots, T-1$, where we define

$$H_t = R_t + B_{u,t}^\top P_{t+1} B_{u,t},$$

P_t is the solution of the backwards-time Riccati equation

$$P_t = Q_t + A_t^\top P_{t+1} A_t - A_t^\top P_{t+1} \hat{B}_t \hat{H}_t^{-1} \hat{B}_t^\top P_{t+1} A_t$$

with initialization $P_T = Q_T$, and we define

$$\hat{B}_t = \begin{bmatrix} B_{u,t} & B_{w,t} \end{bmatrix},$$

$$\hat{H}_t = \begin{bmatrix} R_t & 0 \\ 0 & -\gamma^2 I \end{bmatrix} + \hat{B}_t^\top P_{t+1} \hat{B}_t.$$

In this case, the suboptimal H_∞ controller has the form

$$u_t = -H_t^{-1} B_{u,t}^\top P_{t+1} (A_t x_t + B_{w,t} w_t).$$

Note that the H_∞ -optimal controller described in Problem (1) is easily obtained from the solution of the suboptimal H_∞ problem by bisection on γ . We iteratively reduce the value of γ until we find the smallest value of γ such that the constraints described in Theorem 3 are satisfied; the corresponding controller is the optimal H_∞ controller (we refer the reader to Doyle et al. (1988); Uchida and Fujita (1990); Nagpal and Khargonekar (1991); Limebeer et al. (1989) for details).

2.3. Regret-optimal control

In this paper, instead of minimizing the worst-case *cost* as in H_∞ control, our goal is to minimize the worst-case *regret*. This problem has a natural analog of the H_∞ problem:

Problem 3 (Regret-optimal control problem) *Find a causal control policy that minimizes*

$$\sup_w \frac{\text{cost}(w, u) - \min_u \text{cost}(w, u)}{\|w\|_2^2}.$$

This problem has the natural interpretation of minimizing the worst-case gain from the energy in the disturbance w to the regret incurred by the controller against the optimal dynamic sequence of control actions. As in the H_∞ setting, we consider the relaxation:

Problem 4 (Regret-suboptimal control problem) *Given a performance level $\gamma > 0$, find a causal control policy such that*

$$\frac{\text{cost}(w, u) - \min_u \text{cost}(w, u)}{\|w\|_2^2} < \gamma^2$$

for all disturbances w , or determine whether no such policy exists.

Note that if we can find a regret-suboptimal controller at some performance level γ , we immediately obtain a data-dependent bound on its dynamic regret:

$$\text{cost}(w, u) - \min_u \text{cost}(w, u) < \gamma \|w\|_2^2.$$

We emphasize that, as in the H_∞ setting, if we can solve the regret-suboptimal problem, we can easily recover the solution to the regret-optimal problem by bisection on γ .

2.4. The optimal noncausal controller

We briefly state a few facts about the optimal noncausal controller (sometimes called the offline optimal controller), i.e. the controller which selects the optimal dynamic sequence of control actions given full knowledge of the disturbance w :

$$u^* = \operatorname{argmin} \text{cost}(w, u).$$

Recall from equation (3) that

$$\text{cost}(w, u) = \|Fu + Gw\|_2^2 + \|w\|_2^2.$$

Solving for the cost-minimizing u via completion-of-squares, we see that

$$u^* = -(I + F^\top F)^{-1} F^\top Gw. \tag{5}$$

and

$$\text{cost}(w; u^*) = w^\top G^\top (I + FF^\top)^{-1} Gw. \tag{6}$$

While equation (6) shows that the optimal noncausal control action is a linear function of the disturbance w , we emphasize that we did not impose any structure on the optimal

noncausal controller; u^* is the optimal choice out of all possible functions of w , including nonlinear and even discontinuous functions of w . Equation (5) gives the optimal noncausal controller in input-output form; recently [Goel and Hassibi \(2020\)](#) and [Foster and Simchowicz \(2020\)](#) obtained a state-space description using dynamic programming:

Theorem 4 ([Goel and Hassibi \(2020\)](#)) *The optimal noncausal controller has the form*

$$u_t^* = -H_t^{-1} B_{u,t}^\top \left(P_{t+1} A_t x_t + P_{t+1} B_{w,t} w_t + \frac{1}{2} v_{t+1} \right),$$

where we define

$$H_t = R_t + B_{u,t}^\top P_{t+1} B_{u,t},$$

P_t is the solution of the Riccati recurrence (4), and v_t satisfies the recurrence

$$v_t = 2A_t^\top S_t B_{w,t} w_t + A_t^\top S_t P_{t+1}^{-1} v_{t+1},$$

and we define

$$S_t = P_{t+1} - P_{t+1} B_{u,t} H_t^{-1} B_{u,t}^\top P_{t+1}.$$

In light of Theorem 1, this shows that *the regret-optimal control action at time t is the sum of the H_2 -optimal control action and a linear combination of the future disturbances w_{t+1}, \dots, w_{T-1} .*

3. The regret-optimal controller

We now turn to the problem of deriving the regret-optimal controller. Our approach is to reduce the regret-suboptimal control problem (Problem 4) to the suboptimal H_∞ problem (Problem 2). As in the H_∞ setting, once the regret-suboptimal controller is found, the regret-optimal controller is easily obtained by bisection.

Recall that the regret-suboptimal problem (Problem 4) with performance level γ is to find, if possible, a causal control policy such that for all disturbances w ,

$$\text{cost}(w, u) - \min_u \text{cost}(w, u) < \gamma^2 \|w\|_2^2.$$

In light of equations (3) and (6), this condition can be rewritten as

$$\|u\|_2^2 + \|s\|_2^2 < w^\top (\gamma^2 I + G^\top (I + FF^\top)^{-1} G) w, \quad (7)$$

where $s = Fu + Gw$. Our approach shall be to find a change of variables such that this problem takes the form of the suboptimal H_∞ control problem (Problem 2). Since $\gamma^2 I + G^\top (I + FF^\top)^{-1} G$ is strictly positive definite, there exists a unique causal, invertible matrix Δ such that

$$\gamma^2 I + G^\top (I + FF^\top)^{-1} G = \Delta^\top \Delta.$$

Notice that

$$w^\top (\gamma^2 I + G^\top (I + FF^\top)^{-1} G) w = \|\Delta w\|_2^2.$$

Letting $z = \Delta w$ and $G' = G\Delta^{-1}$, we have $s = Fu + G'z$. With this change of variables, the regret-suboptimal problem (7) takes the form of finding, if possible, a causal control policy such that for all w ,

$$\|u\|_2^2 + \|s\|_2^2 < \|z\|_2^2.$$

Notice that this is a suboptimal H_∞ problem. We have shown:

Theorem 5 *Consider a linear dynamical system with dynamics given by F and G . A causal controller \mathcal{K} is a solution to the regret-suboptimal problem (Problem 4) in this system at performance level γ if and only if \mathcal{K} is a solution to the suboptimal H_∞ problem (Problem 2) with performance level 1 in a linear dynamical system with dynamics given by F and G' , where $G' = G\Delta^{-1}$ and Δ is the unique causal operator such that*

$$\gamma^2 I + G^\top (I + FF^\top)^{-1} G = \Delta^\top \Delta.$$

Using Theorem 5, we can easily obtain the regret-optimal controller in input-output form; we refer the reader to Section A for details and concentrate on obtaining the regret-optimal controller in state-space form.

The main technical challenge is to obtain an explicit factorization of $\gamma^2 I + G^\top (I + FF^\top)^{-1} G$ as $\Delta^\top \Delta$; once we have obtained Δ it is straightforward to recover a state-space description of the regret-optimal controller using the state-space description of the H_∞ -optimal controller (Theorem 3). We briefly give a high-level overview of our proof technique. Our approach is centered around repeated use of the celebrated Kalman filter, which, given a state-space model for a random variable whose covariance is a positive-definite operator Σ , produces a causal state-space model for an operator M such that $\Sigma = M^\top M$. Alternatively, we can use the backwards Kalman filter (i.e. the standard Kalman filter given observations in reverse order) to obtain a factorization MM^\top , where M is causal. We first construct a state-space model representing a random variable with covariance $I + FF^\top$; we then use the Kalman filter to factor this operator as LL^\top where L is causal. Using the state-space model for L , we construct a new random variable with covariance $\gamma^2 I + G^\top (I + FF^\top)^{-1} G$ and use the backwards Kalman filter to factor this operator as $\Delta^\top \Delta$ where Δ is causal.

We state our main result, and defer the technical details to Section B.

Theorem 6 *The regret-suboptimal controller at performance level γ has the form*

$$u_t = -\hat{H}_t^{-1} \hat{B}_{u,t}^\top \hat{P}_{t+1} \left(\hat{A}_t \begin{bmatrix} \zeta_t \\ \hat{\nu}_t \end{bmatrix} + \hat{B}_{w,t} z_t \right),$$

where we define

$$\begin{aligned} \hat{A}_t &= \begin{bmatrix} A_t & -B_{w,t}(K_{l,t}^b)^\top \\ 0 & \tilde{A}_t - B_{w,t}(K_{l,t}^b)^\top \end{bmatrix}, & \hat{B}_{u,t} &= \begin{bmatrix} B_{u,t} \\ 0 \end{bmatrix}, & \hat{B}_{w,t} &= \begin{bmatrix} B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \\ B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \end{bmatrix}, \\ \hat{Q}_t &= \begin{bmatrix} Q_t & 0 \\ 0 & 0 \end{bmatrix}, & \hat{H}_t &= I + \hat{B}_{u,t}^\top \hat{P}_{t+1} \hat{B}_{u,t}, & \tilde{A}_t &= A_t - K_{p,t} Q_t^{\frac{1}{2}}, \\ K_{p,t} &= A_t P_t Q_t^{\frac{1}{2}} R_{e,t}^{-1}, & R_{e,t} &= I + Q_t^{\frac{1}{2}} P_t Q_t^{\frac{1}{2}}, & K_{l,t}^b &= \tilde{A}_t^\top P_t^b B_{w,t} (R_{e,t}^b)^{-1}, \end{aligned}$$

$R_{e,t}^b = \gamma^2 I + B_{w,t}^\top P_t^b B_{w,t}$, $\delta_{t+1} = \tilde{A}_t \delta_t + B_{w,t} w_t$, $z_t = (R_{e,t}^b)^{\frac{1}{2}} (K_{l,t}^b)^\top \delta_t + (R_{e,t}^b)^{\frac{1}{2}} w_t$,
 and we initialize $\delta_0 = 0$. The state variables ζ_t and \hat{v}_t evolve according to the dynamics

$$\begin{bmatrix} \zeta_{t+1} \\ \hat{v}_{t+1} \end{bmatrix} = \hat{A}_t \begin{bmatrix} \zeta_t \\ \hat{v}_t \end{bmatrix} + \hat{B}_{u,t} u_t + \hat{B}_{w,t} z_t,$$

where we initialize $\zeta_0, \hat{v}_0 = 0$. We define P_t to be the solution of the forwards Riccati recursion

$$P_{t+1} = A_t P_t A_t^\top + B_{u,t} B_{u,t}^\top - K_{p,t} R_{e,t} K_{p,t}^\top,$$

where we initialize $P_0 = 0$, and \hat{P}_t, P_t^b to be the solutions of the backwards Riccati recursions

$$\begin{aligned} P_{t-1}^b &= \tilde{A}_t^\top P_t^b \tilde{A}_t + Q_t^{\frac{1}{2}} (R_{e,t})^{-1} Q_t^{\frac{1}{2}} - K_{l,t}^b R_{e,t}^b (K_{l,t}^b)^\top, \\ \hat{P}_t &= \hat{Q}_t + \hat{A}_t^\top \hat{P}_{t+1} \hat{A}_t - \hat{A}_t^\top \hat{P}_{t+1} \hat{B}_{u,t} \hat{H}_t^{-1} \hat{B}_{u,t}^\top \hat{P}_{t+1} \hat{A}_t, \end{aligned}$$

where we initialize $P_T^b = 0, \hat{P}_T = 0$. The regret-optimal controller is the regret-suboptimal controller at performance level γ_{opt} , where γ_{opt} is the smallest value of γ such that

$$-\gamma^2 I + \hat{B}_{w,t}^\top \hat{P}_{t+1} \hat{B}_{w,t} - \hat{B}_{w,t}^\top \hat{P}_{t+1} \hat{B}_{u,t} \hat{H}_t^{-1} \hat{B}_{u,t}^\top \hat{P}_{t+1} \hat{B}_{w,t} \prec 0$$

for all $t = 0, \dots, T-1$. Furthermore, the regret incurred by the regret-optimal controller on any specific disturbance $w = (w_0, \dots, w_{T-1})$ is at most $\gamma_{opt}^2 \|w\|_2^2$.

The regret-optimal controller described in Theorem 6 may appear mysterious, so we take a brief detour to better understand its structure. We introduce the block decomposition

$$\hat{P}_t = \begin{bmatrix} P_{11,t} & P_{12,t} \\ P_{21,t} & P_{22,t} \end{bmatrix},$$

where each of the submatrices has size $n \times n$. With this notation, we see that

$$\hat{H}_t = I + B_{u,t}^\top P_{11,t} B_{u,t}$$

and

$$\begin{aligned} u_t &= -\hat{H}_t^{-1} B_{u,t}^\top [P_{11,t} \quad P_{12,t}] \left(\hat{A}_t \begin{bmatrix} \zeta_t \\ \hat{v}_t \end{bmatrix} + \hat{B}_{w,t} z_t \right) \\ &= -\hat{H}_t^{-1} B_{u,t}^\top P_{11,t} (A_t \zeta_t + B_{w,t} (R_{l,t}^b)^{-\frac{1}{2}} z_t) + \hat{H}_t^{-1} B_{u,t}^\top P_{11,t} B_{w,t} (K_{l,t}^b)^\top \hat{v}_t \\ &\quad - \hat{H}_t^{-1} B_{u,t}^\top P_{12,t} (\tilde{A}_t - B_{w,t} (K_{l,t}^b)^\top) \hat{v}_t, \end{aligned}$$

where we repeatedly used the fact that the $(2, 1)$ block submatrix of $\hat{B}_{u,t}$ is zero. After simplifying the backwards Riccati recursion for \hat{P}_t , we see that $P_{11,t}$ satisfies the recursion

$$P_{11,t} = Q_t + A_t^\top P_{11,t+1} A - A^\top P_{11,t+1} B_t \hat{H}_t^{-1} P_{11,t+1} A_t,$$

where $P_{11,T} = 0$. Notice that this is precisely the recursion (4) that appears in the H_2 -optimal controller. We can hence recognize the term $-\hat{H}_t^{-1} B_{u,t}^\top P_{11,t} A_t \zeta_t$ as the optimal H_2 control action described in Theorem 1. It is worth emphasizing this result:

The regret-optimal control action at time t is the sum of the H_2 -optimal control action and a linear combination of past disturbances w_0, \dots, w_t .

This result is especially interesting in light of Theorem 4, which shows that the optimal noncausal control action is the sum of H_2 -optimal control action and a linear combination of *future* disturbances.

3.1. Regret-optimal control with predictions and delay

Our techniques easily extend to settings where the controller can predict the next h disturbances (model-predictive control) and to settings where the controller is only able to affect the system dynamics after a delay of d timesteps; we refer the reader to Section C for details.

4. Numerical experiments

We benchmark the H_2 -optimal, H_∞ -optimal, optimal noncausal, and regret-optimal controllers in the context of the inverted pendulum, a classic control system which has been widely studied in works at the intersection of machine learning and control. Our experiments show that our regret-optimal controller interpolates between the performance of the H_2 -optimal and H_∞ -optimal controllers across stochastic and adversarial environments; we refer the reader to Section D for details and plots.

5. Conclusion

In this paper, we consider regret minimization in online control through the lens of dynamic regret, a more challenging benchmark than policy regret which is studied in much prior work. We obtain a computationally efficient state-space description of the regret-optimal controller via a novel reduction to H_∞ control, and present a simple bound on its dynamic regret in terms of the energy of the disturbance. We show that our regret-optimal controller has a surprising symmetry relative to the offline optimal controller: the regret-optimal control action in each round is the sum of the action selected by an H_2 -optimal controller and a linear combination of past disturbances, whereas the offline optimal control in each round is the sum of the action selected by an H_2 -optimal controller and a linear combination of *future* disturbances.

We hope that this work will help bring operator-theoretic tools from robust control and signal processing into the machine learning community. In future work, we plan to extend the results of this paper to the more challenging *partial observability* setting, where the online policy only has access to noisy linear estimates of the state. It would also be interesting to consider systems with nonlinear dynamics and measure the performance of a receding-horizon control policy which iteratively linearizes the system dynamics and selects the corresponding regret-optimal controller.

References

- Yasin Abbasi-Yadkori and Csaba Szepesvari. Regret bounds for the adaptive control of linear quadratic systems. In *Proceedings of the 24th Annual Conference on Learning Theory*, pages 1–26, 2011.
- Naman Agarwal, Brian Bullins, Elad Hazan, Sham M Kakade, and Karan Singh. Online control with adversarial disturbances. *arXiv preprint arXiv:1902.08721*, 2019.
- Karl Johan Åström and Richard M Murray. *Feedback systems: an introduction for scientists and engineers*. Princeton university press, 2021.
- Dheeraj Baby and Yu-Xiang Wang. Online forecasting of total-variation-bounded sequences. *arXiv preprint arXiv:1906.03364*, 2019.
- Omar Besbes, Yonatan Gur, and Assaf Zeevi. Non-stationary stochastic optimization. *Operations research*, 63(5):1227–1244, 2015.
- Olivier Bousquet and Manfred K Warmuth. Tracking a small set of experts by mixing past posteriors. *Journal of Machine Learning Research*, 3(Nov):363–396, 2002.
- Sébastien Bubeck, Yuanzhi Li, Haipeng Luo, and Chen-Yu Wei. Improved path-length regret bounds for bandits. In *Conference On Learning Theory*, pages 508–528. PMLR, 2019.
- Niangjun Chen, Joshua Comden, Zhenhua Liu, Anshul Gandhi, and Adam Wierman. Using predictions in online optimization: Looking forward with an eye on the past. *ACM SIGMETRICS Performance Evaluation Review*, 44(1):193–206, 2016.
- Niangjun Chen, Gautam Goel, and Adam Wierman. Smoothed online convex optimization in high dimensions via online balanced descent. *arXiv preprint arXiv:1803.10366*, 2018.
- Alon Cohen, Tomer Koren, and Yishay Mansour. Learning linear-quadratic regulators efficiently with only \sqrt{T} regret. *arXiv preprint arXiv:1902.06223*, 2019.
- Sarah Dean, Horia Mania, Nikolai Matni, Benjamin Recht, and Stephen Tu. Regret bounds for robust adaptive control of the linear quadratic regulator. In *Advances in Neural Information Processing Systems*, pages 4188–4197, 2018.
- John Doyle, Keith Glover, Pramod Khargonekar, and Bruce Francis. State-space solutions to standard h_2 and h_∞ control problems. In *1988 American Control Conference*, pages 1691–1696. IEEE, 1988.
- John C Doyle. Guaranteed margins for lqg regulators. *IEEE Transactions on automatic Control*, 23(4):756–757, 1978.
- Dylan J Foster and Max Simchowitz. Logarithmic regret for adversarial online control. *arXiv preprint arXiv:2003.00189*, 2020.
- Gautam Goel and Babak Hassibi. The power of linear controllers in lqr control. *arXiv preprint arXiv:2002.02574*, 2020.

- Gautam Goel and Adam Wierman. An online algorithm for smoothed regression and lqr control. *Proceedings of Machine Learning Research*, 89:2504–2513, 2019.
- Gautam Goel, Niangjun Chen, and Adam Wierman. Thinking fast and slow: Optimization decomposition across timescales. In *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*, pages 1291–1298. IEEE, 2017.
- Gautam Goel, Yiheng Lin, Haoyuan Sun, and Adam Wierman. Beyond online balanced descent: An optimal algorithm for smoothed online optimization. In *Advances in Neural Information Processing Systems*, pages 1875–1885, 2019.
- Paula Gradu, Elad Hazan, and Edgar Minasyan. Adaptive regret for control of time-varying dynamics. *arXiv preprint arXiv:2007.04393*, 2020.
- Babak Hassibi, Ali H Sayed, and Thomas Kailath. *Indefinite-quadratic estimation and control: a unified approach to H_2 and H_∞ theories*. SIAM, 1999.
- Elad Hazan and Comandur Seshadhri. Efficient learning algorithms for changing environments. In *Proceedings of the 26th annual international conference on machine learning*, pages 393–400, 2009.
- Elad Hazan, Sham Kakade, and Karan Singh. The nonstochastic control problem. In *Algorithmic Learning Theory*, pages 408–421. PMLR, 2020.
- Mark Herbster and Manfred K Warmuth. Tracking the best expert. *Machine learning*, 32(2):151–178, 1998.
- Ali Jadbabaie, Alexander Rakhlin, Shahin Shahrampour, and Karthik Sridharan. Online optimization: Competing with dynamic comparators. In *Artificial Intelligence and Statistics*, pages 398–406. PMLR, 2015.
- Thomas Kailath, Ali H Sayed, and Babak Hassibi. *Linear estimation*. Prentice Hall, 2000.
- Rudolf Emil Kalman et al. Contributions to the theory of optimal control. *Bol. soc. mat. mexicana*, 5(2):102–119, 1960.
- Sahin Lale, Kamyar Azizzadenesheli, Babak Hassibi, and Anima Anandkumar. Regret bound of adaptive control in linear quadratic gaussian (lqg) systems. *arXiv preprint arXiv:2003.05999*, 2020.
- Yingying Li and Na Li. Leveraging predictions in smoothed online convex optimization via gradient-based algorithms. *arXiv preprint arXiv:2011.12539*, 2020.
- Yingying Li, Guannan Qu, and Na Li. Using predictions in online optimization with switching costs: A fast algorithm and a fundamental limit. In *2018 Annual American Control Conference (ACC)*, pages 3008–3013. IEEE, 2018.
- DJN Limebeer, Michael Green, and D Walker. Discrete-time h/\sup infinity/control. In *Proceedings of the 28th IEEE Conference on Decision and Control*,, pages 392–396. IEEE, 1989.

- Yiheng Lin, Gautam Goel, and Adam Wierman. Online optimization with predictions and non-convex losses. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 4(1):1–32, 2020.
- Krishan M Nagpal and Pramod P Khargonekar. Filtering and smoothing in an h/sup infinity/setting. *IEEE Transactions on Automatic Control*, 36(2):152–166, 1991.
- Anant Raj, Pierre Gaillard, and Christophe Saad. Non-stationary online regression. *arXiv preprint arXiv:2011.06957*, 2020.
- Guanya Shi, Yiheng Lin, Soon-Jo Chung, Yisong Yue, and Adam Wierman. Online optimization with memory and competitive control. *arXiv e-prints*, pages arXiv–2002, 2020.
- Kenko Uchida and Mayasuki Fujita. Finite horizon h/sup infinity/control problems with terminal penalties. In *29th IEEE Conference on Decision and Control*, pages 1808–1813. IEEE, 1990.
- Chen-Yu Wei and Haipeng Luo. More adaptive algorithms for adversarial bandits. In *Conference On Learning Theory*, pages 1263–1291. PMLR, 2018.
- Martin Zinkevich. Online convex programming and generalized infinitesimal gradient ascent. In *Proceedings of the 20th international conference on machine learning (icml-03)*, pages 928–936, 2003.

Appendix A. The regret-optimal controller in input-output form

We first describe the suboptimal H_∞ controller in input-output form:

Theorem 7 (Theorem 11.3.3 in Hassibi et al. (1999)) *A suboptimal H_∞ controller \mathcal{K} at performance level γ exists if and only if the operator*

$$\begin{bmatrix} I + F^\top F & F^\top G \\ G^\top F & -\gamma^2 I + G^\top G \end{bmatrix}$$

can be factored as

$$\begin{bmatrix} L_{11}^\top & L_{21}^\top \\ L_{12}^\top & L_{22}^\top \end{bmatrix} \begin{bmatrix} I & 0 \\ 0 & -I \end{bmatrix} \begin{bmatrix} L_{11} & L_{12} \\ L_{21} & L_{22} \end{bmatrix},$$

where $\begin{bmatrix} L_{11} & L_{12} \\ L_{21} & L_{22} \end{bmatrix}$ is causal and invertible, L_{11} is causal and invertible, and L_{22} is strictly causal. In this case, the suboptimal H_∞ controller at performance level γ is given by $\mathcal{K} = -L_{11}^{-1}L_{12}$.

In light of Theorem 5, we immediately obtain an input-output description of the regret-suboptimal controller.

Theorem 8 *A regret-suboptimal controller \mathcal{K} at performance level γ exists if and only if the operator*

$$\begin{bmatrix} I + F^\top F & F^\top G \Delta^{-1} \\ \Delta^{-\top} G^\top F & -I + \Delta^{-\top} G^\top G \Delta^{-1} \end{bmatrix}$$

can be factored as

$$\begin{bmatrix} L_{11}^\top & L_{21}^\top \\ L_{12}^\top & L_{22}^\top \end{bmatrix} \begin{bmatrix} I & 0 \\ 0 & -I \end{bmatrix} \begin{bmatrix} L_{11} & L_{12} \\ L_{21} & L_{22} \end{bmatrix},$$

where $\begin{bmatrix} L_{11} & L_{12} \\ L_{21} & L_{22} \end{bmatrix}$ is causal and invertible, L_{11} is causal and invertible, L_{22} is strictly causal, and we define Δ to be the unique causal operator such that

$$\gamma^2 I + G^\top (I + F F^\top)^{-1} G = \Delta^\top \Delta.$$

In this case, the regret-suboptimal controller at performance level γ is given by $\mathcal{K} = -L_{11}^{-1}L_{12}$.

The regret-optimal controller is the regret-suboptimal controller at performance level γ_{opt} ; where γ_{opt} is the smallest value of γ such that the factorization described in Theorem 8 exists; an equivalent description of the regret-optimal controller and γ_{opt} is described in Theorem 6.

Appendix B. Proof of Theorem 6

Proof Consider the state-space model

$$\xi_{t+1} = A_t \xi_t + B_{u,t} u_t, \quad y_t = Q_t^{\frac{1}{2}} \xi_t + v_t,$$

where u_t, v_t are zero mean noise variables such that $\mathbb{E}[u_t u_t^\top] = \mathbb{E}[v_t v_t^\top] = I$ and $\mathbb{E}[u_t v_t^\top] = 0$. Let $y = (y_0, \dots, y_{T-1})$, $u = (u_0, \dots, u_{T-1})$, and $v = (v_0, \dots, v_{T-1})$. Notice that $y = Fu + v$ and $\mathbb{E}[yy^\top] = I + FF^\top$. Suppose we can find a causal matrix L such that $y = Le$ where e is a zero-mean random variable such that $\mathbb{E}[ee^\top] = I$. Then $\mathbb{E}[yy^\top] = LL^\top$, so $I + FF^\top = LL^\top$.

Using the Kalman filter (as described in Theorem 9.2.1 in [Kailath et al. \(2000\)](#)), we obtain a state-space model for L given by

$$\hat{\xi}_{t+1} = A_t \hat{\xi}_t + K_{p,t} R_{e,t}^{\frac{1}{2}} e_t, \quad y_t = Q_t^{\frac{1}{2}} \hat{\xi}_t + R_{e,t}^{\frac{1}{2}} e_t, \quad (8)$$

where we define $K_{p,t} = A_t P_t Q_t^{\frac{1}{2}} R_{e,t}^{-1}$ and $R_{e,t} = I + Q_t^{\frac{1}{2}} P_t Q_t^{\frac{1}{2}}$ and P_t is defined recursively as

$$P_{t+1} = A_t P_t A_t^\top + B_{u,t} B_{u,t}^\top - K_{p,t} R_{e,t} K_{p,t}^\top$$

and $P_0 = 0$. Exchanging inputs and outputs, we see that a state-space model for L^{-1} is

$$\hat{\xi}_{t+1} = A_t \hat{\xi}_t + K_{p,t} (y_t - Q_t^{\frac{1}{2}} \hat{\xi}_t), \quad e_t = R_{e,t}^{-\frac{1}{2}} (y_t - Q_t^{\frac{1}{2}} \hat{\xi}_t).$$

We have factored $I + FF^\top$ as LL^\top , so $\gamma^2 I + G^\top (I + FF^\top)^{-1} G = \gamma^2 I + (L^{-1} G)^\top (L^{-1} G)$. Notice that $L^{-1} G$ is strictly causal, since L^{-1} is causal and G is strictly causal. A state-space model for G is

$$\eta_{t+1} = A_t \eta_t + B_{w,t} w_t, \quad s_t = Q_t^{\frac{1}{2}} \eta_t.$$

Equating s and y , we see that a state-space model for $L^{-1} G$ is

$$\begin{bmatrix} \hat{\xi}_{t+1} \\ \eta_{t+1} \end{bmatrix} = \begin{bmatrix} \tilde{A}_t & K_{p,t} Q_t^{\frac{1}{2}} \\ 0 & A_t \end{bmatrix} \begin{bmatrix} \hat{\xi}_t \\ \eta_t \end{bmatrix} + \begin{bmatrix} 0 \\ B_{w,t} \end{bmatrix} w_t,$$

$$e_t = R_{e,t}^{-\frac{1}{2}} Q_t^{\frac{1}{2}} (\eta_t - \hat{\xi}_t),$$

where we defined $\tilde{A}_t = A_t - K_{p,t} Q_t^{\frac{1}{2}}$. Setting $\nu_t = \eta_t - \hat{\xi}_t$ and simplifying, we see that a minimal representation for a state-space model for $L^{-1} G$ is

$$\nu_{t+1} = \tilde{A}_t \nu_t + B_{w,t} w_t, \quad e_t = R_{e,t}^{-\frac{1}{2}} Q_t^{\frac{1}{2}} \nu_t, \quad (9)$$

It follows that a state-space model for $(L^{-1} G)^\top$ is

$$\nu_{t-1} = \tilde{A}_t^\top \nu_t + Q_t^{\frac{1}{2}} R_{e,t}^{-\frac{1}{2}} w_t, \quad e_t = B_{w,t}^\top \nu_t.$$

Recall that our original goal was to obtain a factorization $\gamma^2 I + G^\top (I + FF^\top)^{-1} G = \Delta^\top \Delta$, where Δ is causal. Let $z = (L^{-1} G)^\top a + b$, where a and b are zero-mean random variables such that $\mathbb{E}[aa^\top] = I$, $\mathbb{E}[ab^\top] = 0$, and $\mathbb{E}[bb^\top] = \gamma^2 I$. Suppose that we can find

an causal matrix Δ such that $z = \Delta^\top f$, where f is a zero-mean random variable such that $\mathbb{E}[ff^\top] = I$. Notice that $\mathbb{E}[zz^\top] = \gamma^2 I + (L^{-1}G)^\top(L^{-1}G) = \gamma^2 I + G^\top(I + FF^\top)^{-1}G$; on the other hand $\mathbb{E}[zz^\top] = \Delta^\top \Delta$ as desired.

A backwards-time state-space model for z is given by

$$\begin{aligned}\nu_{t-1} &= \tilde{A}_t^\top \nu_t - Q_t^{\frac{1}{2}} R_{e,t}^{-\frac{1}{2}} a_t, \\ z_t &= B_{w,t}^\top \nu_t + b_t.\end{aligned}$$

Using the (backwards time) Kalman filter, we see that a state-space model for L^\top is given by

$$\begin{aligned}\hat{\nu}_{t-1} &= \tilde{A}_t^\top \hat{\nu}_t + K_{l,t}^b (R_{e,t}^b)^{\frac{1}{2}} f_t, \\ z_t &= B_{w,t}^\top \hat{\nu}_t + (R_{e,t}^b)^{\frac{1}{2}} f_t,\end{aligned}$$

where we define $K_{l,t}^b = (A_t - K_{p,t} Q_t^{\frac{1}{2}})^\top P_t^b B_{w,t} (R_{e,t}^b)^{-1}$ and $R_{e,t}^b = \gamma^2 I + B_{w,t}^\top P_t^b B_{w,t}$, and P_t^b is the solution to the backwards Riccati recursion

$$P_{t-1}^b = \tilde{A}_t^\top P_t^b \tilde{A}_t + Q_t^{\frac{1}{2}} (R_{e,t}^b)^{-1} Q_t^{\frac{1}{2}} - K_{l,t}^b R_{e,t}^b (K_{l,t}^b)^\top,$$

and $P_T^b = 0$. It follows that a state-space model for Δ is given by

$$\begin{aligned}\hat{\nu}_{t+1} &= \tilde{A}_t \hat{\nu}_t + B_{w,t} f_t, \\ z_t &= (R_{e,t}^b)^{\frac{1}{2}} (K_{l,t}^b)^\top \hat{\nu}_t + (R_{e,t}^b)^{\frac{1}{2}} f_t.\end{aligned}$$

Therefore a state-space model for Δ^{-1} is

$$\begin{aligned}\hat{\nu}_{t+1} &= (\tilde{A}_t - B_{w,t} (K_{l,t}^b)^\top) \hat{\nu}_t + B_{w,t} (R_{e,t}^b)^{-\frac{1}{2}} z_t, \\ f_t &= -(K_{l,t}^b)^\top \hat{\nu}_t + (R_{e,t}^b)^{-\frac{1}{2}} z_t.\end{aligned}$$

Recall that a state-space model for G is given by

$$\eta_{t+1} = A_t \eta_t + B_{w,t} w_t, \quad s_t = Q_t^{\frac{1}{2}} \eta_t.$$

Equating f_t and w_t , we see that a state-space model for $G\Delta^{-1}$ is

$$\begin{aligned}\hat{\nu}_{t+1} &= (\tilde{A}_t - B_{w,t} (K_{l,t}^b)^\top) \hat{\nu}_t + B_{w,t} (R_{e,t}^b)^{-\frac{1}{2}} z_t, \\ \eta_{t+1} &= A_t \eta_t - B_{w,t} (K_{l,t}^b)^\top \hat{\nu}_t + B_{w,t} (R_{e,t}^b)^{-\frac{1}{2}} z_t, \\ s_t &= Q_t^{\frac{1}{2}} \eta_t.\end{aligned}$$

A state-space model for F is given by

$$\psi_{t+1} = A_t \psi_t + B_{u,t} u_t, \quad s_t = Q_t^{\frac{1}{2}} \psi_t.$$

Letting $\zeta_t = \eta_t + \psi_t$, we see that a state-space model for the overall system is given by

$$\begin{aligned} \begin{bmatrix} \zeta_{t+1} \\ \hat{\nu}_{t+1} \end{bmatrix} &= \begin{bmatrix} A_t & -B_{w,t}(K_{l,t}^b)^\top \\ 0 & \tilde{A}_t - B_{w,t}(K_{l,t}^b)^\top \end{bmatrix} \begin{bmatrix} \zeta_t \\ \hat{\nu}_t \end{bmatrix} + \begin{bmatrix} B_{u,t} \\ 0 \end{bmatrix} u_t + \begin{bmatrix} B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \\ B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \end{bmatrix} z_t, \\ s_t &= \begin{bmatrix} Q_t^{\frac{1}{2}} & 0 \end{bmatrix} \begin{bmatrix} \zeta_t \\ \hat{\nu}_t \end{bmatrix}. \end{aligned}$$

To derive the regret-optimal controller, we can plug this state-space model into the formula for the optimal H_∞ controller given in Theorem 3. We see that the regret-optimal controller is given by

$$u_t = -\hat{H}_t^{-1} \hat{B}_{u,t}^\top \hat{P}_{t+1} \left(\hat{A}_t \begin{bmatrix} \zeta_t \\ \hat{\nu}_t \end{bmatrix} + \hat{B}_{w,t} z_t \right),$$

where we define

$$\begin{aligned} \hat{A}_t &= \begin{bmatrix} A_t & -B_{w,t}(K_{l,t}^b)^\top \\ 0 & \tilde{A}_t - B_{w,t}(K_{l,t}^b)^\top \end{bmatrix}, \\ \hat{B}_{u,t} &= \begin{bmatrix} B_{u,t} \\ 0 \end{bmatrix}, \\ \hat{B}_{w,t} &= \begin{bmatrix} B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \\ B_{w,t}(R_{e,t}^b)^{-\frac{1}{2}} \end{bmatrix}, \\ \hat{Q}_t &= \begin{bmatrix} Q_t & 0 \\ 0 & 0 \end{bmatrix}, \\ \hat{H}_t &= I + \hat{B}_{u,t}^\top \hat{P}_{t+1} \hat{B}_{u,t}, \end{aligned}$$

and \hat{P}_t is the solution of the backwards Riccati recursion

$$\hat{P}_t = \hat{Q}_t + \hat{A}_t^\top \hat{P}_{t+1} \hat{A}_t - \hat{A}_t^\top \hat{P}_{t+1} \hat{B}_{u,t} \hat{H}_t^{-1} \hat{B}_{u,t}^\top \hat{P}_{t+1} \hat{A}_t$$

and we initialize $\hat{P}_T = 0$. We emphasize that the driving disturbance in this system is not w , but rather $z = \Delta w$. We already found a state-space model for Δ , so it is easy to see that a state-space model for z is given by

$$\begin{aligned} \delta_{t+1} &= \tilde{A}_t \delta_t + B_{w,t} w_t, \\ z_t &= (R_{e,t}^b)^{\frac{1}{2}} (K_{l,t}^b)^\top \delta_t + (R_{e,t}^b)^{\frac{1}{2}} w_t, \end{aligned}$$

where we initialize $\delta_0 = 0$. The regret bound stated in Theorem 6 is immediate: by definition the regret-suboptimal controller at performance level γ has dynamic regret at most $\gamma^2 \|w\|_2^2$. To find the regret-optimal controller, we minimize γ subject to the constraints described in Theorem 3. \blacksquare

Appendix C. Integrating predictions and delay

In this section, we extend the results of Sections 3 to settings with predictions and delay by using reductions to Theorem 6. While we consider control with predictions and control with delay separately, we emphasize that it is easy to extend our results to settings with both predictions and delay by performing one reduction and then the other.

C.1. Regret-optimal model-predictive control

Consider a system with dynamics given by the linear evolution equation (1). In model-predictive control we assume that the controller can predict future disturbances over a horizon of length h ; in other words, we assume that at time t the controller knows the disturbances w_t, \dots, w_{t+h-1} . Define the augmented state

$$\xi_t = \begin{bmatrix} x_t \\ w_t \\ w_{t+1} \\ \vdots \\ w_{t+h-2} \\ w_{t+h-1} \end{bmatrix}.$$

We can think of ξ_t as representing the state x_t along with a transcript of the next h predicted disturbances w_t, \dots, w_{t+h-1} . Notice that ξ has dynamics given by the linear evolution equation

$$\xi_{t+1} = \hat{A}_t \xi_t + \hat{B}_{u,t} u_t + \hat{B}_{w,t} w'_t, \quad (10)$$

where we define $w'_t = w_{t+h}$ and

$$\hat{A}_t = \begin{bmatrix} A_t & B_{w,t} & 0 & \dots & 0 & 0 \\ 0 & 0 & I & \dots & 0 & 0 \\ 0 & 0 & & & & 0 \\ \vdots & \vdots & & \ddots & \ddots & \\ \vdots & \vdots & & & & I \\ 0 & 0 & 0 & \dots & 0 & 0 \end{bmatrix}, \quad \hat{B}_{u,t} = \begin{bmatrix} B_{u,t} \\ 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix} u_t, \quad \hat{B}_{w,t} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ \vdots \\ 0 \\ I \end{bmatrix}.$$

We can rewrite the LQR cost in the original system (1) in terms of ξ :

$$x_T^\top Q_T x_T + \sum_{t=0}^{T-1} (x_t^\top Q_t x_t + u_t^\top R_t u_t) = \xi_T^\top \hat{Q}_T \xi_T + \sum_{t=0}^{T-1} (\xi_t^\top \hat{Q}_t \xi_t + u_t^\top R_t u_t), \quad (11)$$

where we define the block-diagonal matrix

$$\hat{Q}_t = \begin{bmatrix} Q & 0 & \dots \\ 0 & 0 & \\ \vdots & & \ddots \end{bmatrix}.$$

In light of (11), we see that any sequence of control actions $u = (u_0, \dots, u_{T-1})$ generates an identical cost in the original system (12) and in the new system (13). Notice that a causal control policy in the new system (i.e. one whose control actions at time t depend only on w'_0, \dots, w'_t) is a policy with a lookahead of length h in the original system. We have proven:

Theorem 9 *The regret-optimal model-predictive controller with lookahead of length h in the dynamical system (1) is the regret-optimal controller described in Theorem 6 applied to the system (10).*

C.2. Regret-optimal control with delay

Consider the linear evolution equation

$$x_{t+1} = A_t x_t + B_{u,t-d} u_{t-d} + B_{w,t} w_t. \quad (12)$$

In this system, control actions affect the state only after a delay of length d ; in other words, at time t , the state x_t is a function of w_0, w_1, \dots, w_{t-1} and $u_0, u_1, \dots, u_{t-d-1}$. For $t = 0, \dots, T-1$, we define the augmented state

$$\xi_t = \begin{bmatrix} x_t \\ u_{t-1} \\ u_{t-2} \\ \vdots \\ u_{t-d+1} \\ u_{t-d} \end{bmatrix}.$$

We can think of each ξ_t as representing the actual state x_t along with a transcript of the previous d control actions. Notice that ξ has dynamics given by the linear evolution equation

$$\xi_{t+1} = \hat{A}_t \xi_t + \hat{B}_{u,t} u_t + \hat{B}_{w,t} w_t, \quad (13)$$

where we define

$$\hat{A}_t = \begin{bmatrix} A_t & 0 & 0 & \dots & 0 & B_{u,t-d} \\ 0 & 0 & 0 & \dots & 0 & 0 \\ 0 & I & 0 & \dots & 0 & 0 \\ \vdots & & \ddots & & & \vdots \\ 0 & & & \ddots & & \vdots \\ 0 & 0 & 0 & \dots & I & 0 \end{bmatrix}, \quad \hat{B}_{u,t} = \begin{bmatrix} 0 \\ I \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix}, \quad \hat{B}_{w,t} = \begin{bmatrix} B_{w,t} \\ 0 \\ 0 \\ \vdots \\ 0 \\ 0 \end{bmatrix}.$$

We can rewrite the LQR cost in the original system (12) in terms of ξ :

$$\sum_{t=0}^{T-1} \left(x_t^\top Q_t x_t + u_t^\top R_t u_t \right) = \xi_T^\top \hat{Q}_T \xi_T + \sum_{t=0}^{T-1} \left(\xi_t^\top \hat{Q}_t \xi_t + u_t^\top R_t u_t \right), \quad (14)$$

where we define the block-diagonal matrix

$$\hat{Q}_t = \begin{bmatrix} Q & 0 & \dots \\ 0 & 0 & \\ \vdots & & \ddots \end{bmatrix}.$$

In light of (14), we see that any sequence of control actions $u = (u_0, \dots, u_{T-1})$ generates an identical cost in the original system (12) and in the new system (13). Also notice that the new system is of the form (1), i.e. it has no delay. A causal controller in the new system is a causal controller in the original system. We have proven:

Theorem 10 *The regret-optimal controller in the dynamical system with delay (12) is the regret-optimal controller described in Theorem 6 applied to the system (13).*

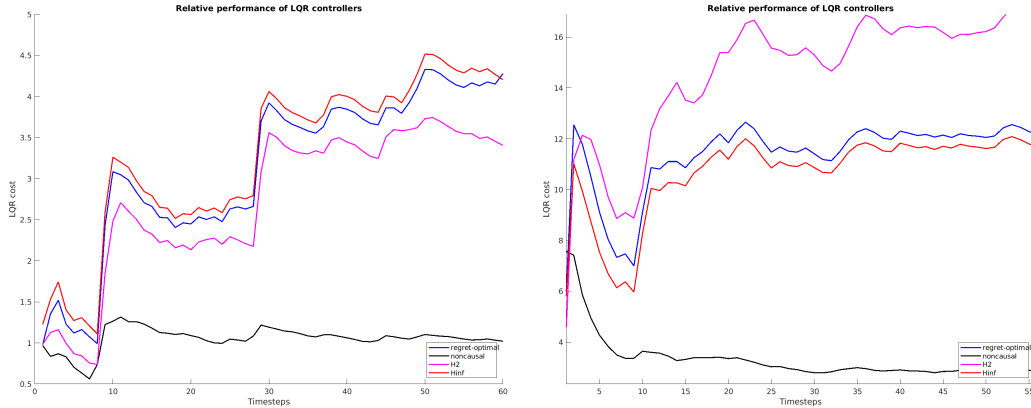


Figure 1: We plot the time-averaged costs of the LQR controllers with noisy inverted pendulum dynamics. The first plot shows that when each component of the noise is drawn independently from $\mathcal{N}(0, 1)$ the regret-optimal controller’s performance lies between that of the H_2 -optimal controller and the H_∞ -optimal controller. In the second plot, the noise components alternate between being drawn from $\mathcal{N}(1, 1)$ and $\mathcal{N}(-1, 1)$ every 15 timesteps. We see that the regret-optimal controller significantly outperforms the H_2 -optimal controller and closely tracks the performance of the H_∞ -optimal controller.

Appendix D. Numerical experiments

We refer the reader to Examples 2.2 and 4.4 in [Åström and Murray \(2021\)](#) for background on the physics of the inverted pendulum; for our purposes it suffices to know that the continuous-time closed-loop dynamics of the inverted pendulum is given by the nonlinear differential equation

$$\frac{dx}{dt} = \begin{bmatrix} x_2 \\ \sin x_1 - cx_2 + u \cos x_1 \end{bmatrix},$$

where $x = (x_1, x_2)$ is the state, u is a scalar control input, and c is a physical parameter of the system. Using the linearizations $\sin x \approx x$, $\cos x \approx 1$ for small x , and $x_{t+\Delta} \approx x_t + \frac{dx}{dt} \Delta$ for small Δ and adding a disturbance term, we can capture these dynamics by the state-space model

$$x_{t+1} = \begin{bmatrix} 1 & 1 \\ 1 & 1-c \end{bmatrix} x_t + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u_t + w_t.$$

In our experiments we set $c = 0.1$, $Q = I$, $R = 1$ and initialize $x_0 = 0$. Note that $w_t \in \mathbb{R}^2$; in our experiments we set each of the two components individually. In our first experiment, we consider a stationary stochastic environment and draw each component independently from $\mathcal{N}(0, 1)$ in each timestep. In our second experiment, we consider a more adversarial setting and alternate between drawing from $\mathcal{N}(1, 1)$ and $\mathcal{N}(-1, 1)$ every 15 timesteps. Figure 1 shows that the regret-optimal controller interpolates between the performance of the H_2 -optimal and H_∞ -optimal controllers.