

Learning When to Switch: Composing Controllers to Traverse a Sequence of Terrain Artifacts

Brendan Tidd¹, Nicolas Hudson², Akansel Cosgun³ and Jürgen Leitner^{1,4}

Abstract—Legged robots often use separate control policies that are highly engineered for traversing difficult terrain such as stairs, gaps, and steps, where switching between policies is only possible when the robot is in a region that is common to adjacent controllers. Deep Reinforcement Learning (DRL) is a promising alternative to hand-crafted control design, though typically requires the full set of test conditions to be known before training. DRL policies can result in complex (often unrealistic) behaviours that have few or no overlapping regions between adjacent policies, making it difficult to switch behaviours. In this work we develop multiple DRL policies with Curriculum Learning (CL), each that can traverse a single respective terrain condition, while ensuring an overlap between policies. We then train a network for each destination policy that estimates the likelihood of successfully switching from any other policy. We evaluate our switching method on a previously unseen combination of terrain artifacts and show that it performs better than heuristic methods. While our method is trained on individual terrain types, it performs comparably to a Deep Q Network trained on the full set of terrain conditions. This approach allows the development of separate policies in constrained conditions with embedded prior knowledge about each behaviour, that is scalable to any number of behaviours, and prepares DRL methods for applications in the real world.

I. INTRODUCTION

Legged robots are useful for traversing various terrain conditions where wheeled platforms fail to operate. Terrains that are easily negotiated by humans, however, can present a difficult control problem in robotics [1]. Consider a delivery driver who jumps down from the delivery vehicle, takes a large step over a break in the sidewalk and walks up the stairs to reach the receiver’s front door. For a last mile delivery robot, it is difficult to design a single locomotion controller that can handle a set of similar tasks. Humanoid robots often use separate control policies that have been meticulously tuned for a specific condition in a constrained setting.

For highly dynamic robots such as bipeds, transitioning from one policy to the next may only be possible through a very narrow set of states. Activating a policy when the robot is in an unsuitable configuration for the target policy can result in the robot falling over. We refer to the set of all states from which using a policy will result in a desirable stable behaviour as the Region of Attraction (RoA) of the policy [2]. A state that is in the RoA for more than one policy presents an opportunity where these policies can be switched

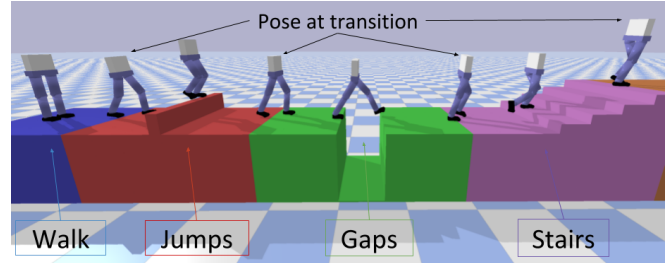


Fig. 1: We design policies for each complex terrain type separately, ensuring common regions of the state between policies. Switching in these common regions results in desirable behaviour from the switched policy. To successfully switch between policies we train a switch estimator for each policy that learns when best to switch. Our method involves training on each artifact type separately, where training on multiple artifact types at once may be unavailable or dangerous.

such that the agent will eventuate in a stable configuration. A robust policy switching method would reduce robot falls, which is a real problem with humanoid robots [1], [3].

Deep Reinforcement Learning (DRL) has been shown to be an effective method for developing walking policies [4], [5], [6], and eliminates some of the hand engineering that is required by classical controllers. Deep neural networks, however do not provide insight as to where the policies will be stable. Generally, DRL policies train on the domain they are required to operate, either with a single end-to-end policy [5], or by learning when to switch by interacting with the target environment [7]. Developing policies on a real system that requires exposure to a large set of terrain types during training may be difficult. Instead, it is more practical to design separate policies and then determine when to switch. This approach also allows us to embed prior knowledge into controller design (such as a rudimentary walking policy), to improve the learning outcomes of each individual policy [8].

In this work, we first train individual DRL policies, each capable of traversing a single respective terrain artifact. The RoA of each controller is expanded using curriculum learning, while ensuring there exists a set of states common between policies (RoA overlap). We then train a neural network that estimates the probability of successful switching, given the robot state and target policy. We evaluate our approach on a random sequence of terrain types (an example shown in Fig 1). We show that learning to switch is more stable than heuristic methods. We also compare our method to learning approaches trained on the test domain (sequence of terrain artifacts rather than individual artifacts), and show that we have comparable results despite interacting with only one terrain condition at a time.

The contributions of this work are two-fold:

¹Queensland University of Technology (QUT), Australia.
Email: brendan.tidd@hdr.qut.edu.au

²Data61 at Commonwealth Scientific and Industrial Research Organisation (CSIRO), Australia

³Monash University, Australia

⁴LYRO Robotics Pty Ltd, Australia

- We train DRL policies for each terrain type while expanding the RoA of each policy, and ensuring an overlap between them via Curriculum Learning
- We design a policy switching network that estimates when the robot is in the RoA for the next policy by predicting the probability of success switching in the current state

The organization of this paper is as follows. After reviewing the relevant literature in Sec II, we describe our method in Sec III. We define the problem of interest in Sec III-A, present how we train DRL policies for individual terrain types with curriculum learning in Sec III-B and describe our switch estimator in Sec III-C. We present our results in IV, before concluding with a brief discussion in Sec V.

II. RELATED WORK

Controllers developed with bipedal robots with classical methods can perform complex behaviours such as ascending and descending stairs [9], balancing on a Segway [10], and executing a jump [11]. Humanoid robots often employ a set of control primitives, each individually developed and tuned, such as Dynamic Movement Primitives which uses discrete and rhythmic controllers that allow a humanoid robot to play the drums and swing a tennis racket [12]. Hauser et al. [13] uses primitives to place and remove a foot from contact, enabling a robot to walk on uneven terrain, up a step, and climb a ladder. Motion capture primitives can be stitched together with Hidden Markov Models to create sequences of motions [14]. Controllers developed with classical methods usually require extensive human engineering.

Linking a sequence of controllers together by understanding where each works has been demonstrated on a juggling robot, the stable switching of behaviours is known as sequential composition [2]. A key component is determining the region of attraction (RoA) for each policy, which is defined as the set of states that whether engaging a given policy will converge to a target set of states defined for that policy. Estimating the RoA overlap between controllers can be difficult for robots with high state spaces, however it can be simplified by defining a set of pre and post conditions for each controller [15], or by providing a rule-based bound on parameters like heading angle and switching frequency [16]. These methods result in combinations of complex primitives, though they require a mathematically defined RoA, or a hand designed switching criteria for each primitive. RoA expansion can also be considered to provide a greater overlap between controllers [17]. Borno et al. [17] estimates the RoA for a simulated humanoid using multiple forward dynamics model simulations, a similar approach to ours.

DRL offers an alternative to classical control methods, policies learn how to act by interacting with the environment. DRL methods have demonstrated bipedal walking over complex terrain [4], [5], [6], and performing complex maneuvers replicating motion capture [18]. Usually DRL methods are limited to solving a single task end-to-end, characterised by a scalar reward function. End-to-end methods require retraining if new terrains are introduced, and in a real setting

it may be intractable to train on the complete set of expected conditions.

Designing a single policy that can display multiple behaviours is challenging, and often results in the degraded performance of individual behaviours [19]. Combining DRL primitives usually involves training a deep Q network (or a similar discrete switching network) that selects which primitive to use [20], [7], [19], or learning a complex combination of primitives [21]. Other hierarchical approaches learn the primitives and selection network together [22], or with several task-dependent selection networks [23]. Training in each of these examples needs access to all expected environment conditions during training, and adding new primitives requires retraining of the selection policy.

While estimating the complete RoA of a policy is possible for systems with a relatively small state space, such as the single [24], [25], or double inverted pendulum [26], for more complex systems the RoA is difficult to determine. Where it is possible to differentiate between unmodeled regions of the state from those that are well behaved, DRL can guide the agent back to where a classical controller can take over [25], [26]. Other work with DRL has shown that expanding the RoA of each primitive with transition policies improves switching [27]. Designing policies with DRL for complex walking robots and combining these behaviours with RoA estimation is a promising approach to scale the capabilities of legged robots, and is an area of research that requires more investigation.

In our work, we pre-train a set of policies with DRL to traverse complex terrain artifacts. We not only ensure there is a RoA overlap between policies, but also estimate when the overlap occurs such that policies can be switched safely, without the need to train on the complete set of terrain combinations.

III. METHOD

A summary of our method is outlined in Fig. 2. For each terrain type i , where $i \in \{\text{walk, jump, gaps, stairs}\}$, we train a neural network policy and a switch estimator. We assume access to an oracle terrain detector to determine the upcoming terrain type, and therefore what the next policy will be. The switch estimator \mathcal{E}_j for the next policy π_j is activated once the next terrain type is detected, with output $e_j \in [0, 1]$ indicating the confidence level that the robot is in the RoA of the next policy.

A. Problem definition

The problem we consider is a biped in a 3D environment, with 12 torque controlled actuators using the Pybullet simulator [28]. The task of the biped is to navigate obstacles typically navigated by a human delivery driver, as such the robot must traverse stairs, gaps, and a large step. We consider the state $s_t = [rs_t, I_t]$ to be the robot state rs_t and heightmap image I_t at time t .

Robot state: $rs_t = [J_t, Jv_t, c_t, c_{t-1}, v_{CoM,t}, \omega_{CoM,t}, \theta_{CoM,t}, \phi_{CoM,t}, h_{CoM,t}]$, where J_t are the joint positions in radians, Jv_t are the joint velocities in rad/s, c_t and c_{t-1} are the current and previous contact information of each foot,

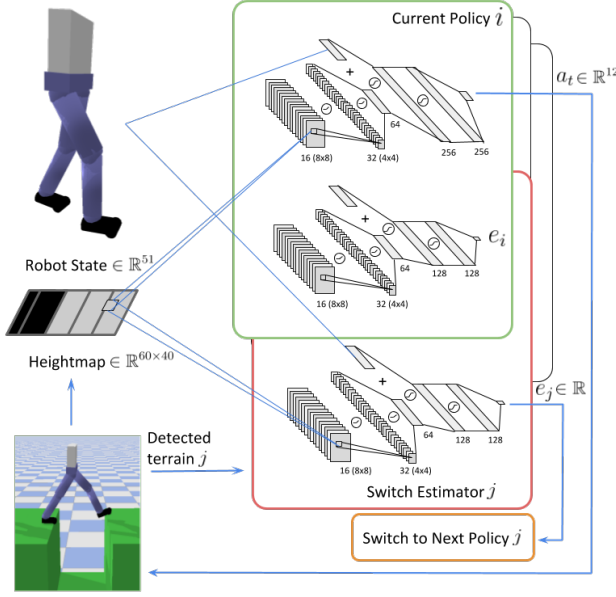


Fig. 2: We pre-train a suite of deep reinforcement learning (DRL) policies for a set of terrain conditions, and for each policy we train a switch estimator. Using the current policy π_i , and detecting upcoming terrain type j , we use the switch estimator output e_j to determine when the robot is in a suitable configuration to safely switch to the next policy π_j . Each policy π_i (where $i \in \{\text{walk, jump, gaps, stairs}\}$) is a neural network with inputs $s_t = \{\text{robot state, heightmap}\}$ and outputs a_t that are the torques applied to each joint. Each switch estimator \mathcal{E} is a neural network with inputs $s_t = \{\text{robot state, heightmap}\}$ and outputs e_j , where $e_j \in [0, 1]$ indicates that the current state is in the region of attraction (RoA) for π_j : $s_t \in R(\pi_j)$. Switching to π_j is safest when e_j is high.

respectively (four Boolean contact points per foot, plus one variable for no points in contact), $v_{CoM,t}$ and $\omega_{CoM,t}$ are the linear and angular velocities of the body Centre of Mass (CoM), $\theta_{CoM,t}$ and $\phi_{CoM,t}$ are the pitch and roll angles of the CoM, and $h_{CoM,t}$ is the height of the CoM above the terrain. All angles except joint angles are represented in the world coordinate frame. In total there are 51 elements to the robot state, which is normalised by subtracting the mean and dividing by the standard deviation for each variable (statistics are collected as an aggregate during training).

Heightmap: Perception is provided in the form of a heightmap that moves with the x,y,z and yaw positions of the robot body. A heightmap is a common perception method used in robotics, usually extracted from range measuring sensors such as depth cameras, laser scanners or stereo cameras [29]. Other work in DRL for walking uses perception from state information [27], RGB cameras [7], or a heightmap [6]. In early experiments, we found that using a heightmap improved policy performance compared to providing the ground truth terrain pose. The height map is scaled from 0 (the CoM of the robot) to 1 (2m below the CoM), and has a resolution of $[60, 40]$, with a grid size of 0.025m. The robot itself does not appear in the heightmap, and is centred with a larger view in front. The effective field of view is 0.9m in front, 0.6m behind, and 0.5m to each side. A depiction of the heightmap is shown in Fig. 2.

B. Training Policies for Individual Terrain Types

Our switching method requires policies to have a RoA overlap, and provided this condition is met we can employ

policies derived from any method. We choose DRL as our method to populate our set of policies. In this section we first introduce the reinforcement learning problem and the algorithm of choice. We then introduce our reward function, and finally our curriculum learning approach that ensures policies have a RoA overlap.

Deep Reinforcement Learning: We consider our task to be a Markov Decision Process (MDP) defined by tuple $\{\mathcal{S}, \mathcal{A}, R, \mathcal{P}, \gamma\}$ where $s_t \in \mathcal{S}$, $a_t \in \mathcal{A}$, $r_t \in R$ are state, action and reward observed at time t , \mathcal{P} is an unknown transition probability from s_t to s_{t+1} taking a_t , and γ is a discount factor. The reinforcement learning goal is to maximise the sum of future rewards $R = \sum_{t=0}^T \gamma^t r_t$, where r_t is provided by the environment at time t . For continuous control, actions are sampled from a deep neural network policy $a_t \sim \pi_\theta(s_t)$, where a_t is a torque applied to each joint. We update the weights θ of the policy using Proximal Policy Optimisation (PPO) [4].

Guided Curriculum Learning: Curriculum learning is a systematic way of increasing the difficulty of a task [30], and results in learning attractive walking gaits quickly [31]. In our work, **Guided Curriculum Learning** [8], we apply curriculum learning to a sequence of tasks, where each stage is completed before the commencement of the next stage. The difficulty of each curriculum is increased as milestones are reached with average episode reward used as the milestone for all stages: as the robot consistently achieves a threshold reward, the difficulty of the current stage is increased. We employ three stages: increasing terrain difficulty while guided by expert forces, reducing the expert forces, and increasing perturbations.

The first stage is increasing the terrain difficulty with external guidance from a rudimentary target walking policy. It is in this stage we enforce that all policies start from the same set of initial conditions, thus there exists a set of states that are common between policies (RoA overlap). We apply external forces to stabilise the CoM (similar to [31]), and to each joint. Forces applied to each joint are determined from a PD controller tracking the rudimentary target walking policy. Once the respective terrain is at its most difficult setting (maximum stair height, step height, and gap length), all external forces are annealed to zero. The third stage increases the magnitude of perturbations. We found adding strong perturbations early hindered training, while increasing gradually in the last curriculum stage allowed for greater final disturbances and more robust policies. By increasing the perturbations we also increase the RoA of the respective policy, i.e. the set of states the policy can safely operate within is now larger. The full details on our curriculum learning approach, including the reward used for training each policy, can be found in our previous work [8].

C. Learning When to Switch

Switching from one policy to another by estimating when a state is in the RoA for the next policy is an idea that stems from the sequential composition framework [2]. Each policy π_i has a goal set $\mathcal{G}(\pi_i) = \{s_i^*\}$ where $s = [r, s, I]$,

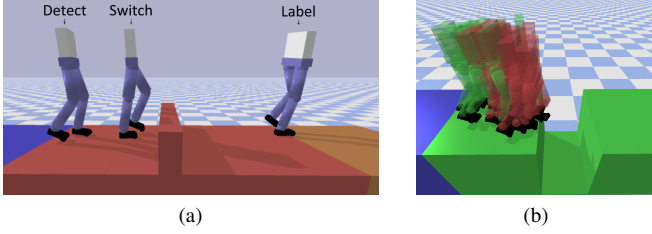


Fig. 3: a) A switch estimator is trained for each policy, with data collected from each terrain type separately. Data points are collected around the switch point and given a label of 1 if the robot reaches the goal state, 0 otherwise. b) Early switching results in successful transitions for some policies (green), whereas switching late is more likely to fail (red).

and a Region of Attraction (RoA) $\mathcal{R}(\pi_i) = \{s_0 \in \mathcal{S} : \lim_{t \rightarrow \infty} s(t, s_0) = \mathcal{G}(\pi_i)\}$. $\mathcal{G}(\pi_i)$ is the set of states policy π_i was designed to operate within (Goal Set or Invariant Set), and $\mathcal{R}(\pi_i)$ is the set of states that will converge to a state in $\mathcal{G}(\pi_i)$.

The complete set of states of the RoA for a complex biped is difficult to determine. Instead, we estimate when the robot is in the RoA of a given policy by training a neural network switch estimator. We train a switch estimator for each policy. In other words, each policy has its own switch estimator that is activated once its respective target terrain type is detected. If we switch policies when the switch estimator for the upcoming policy predicts a high value, then the likelihood of the robot safely traversing the target terrain is increased.

The data collection procedure for switching is as follows. A sample is collected by running π_j on terrain condition i and switching to π_i a random distance from the terrain artifact (where $j \neq i$). As shown in Fig. 3a), there are three steps to data collection that occur for each sample: detection, switching, and labelling. Detection occurs when the terrain artifact appears 0.9m from the robot body. We switch to the target policy at a distance $\sim \mathcal{U}(0, 0.9)$ m from the artifact. A total of 5 data points (robot state + heightmap) are collected for each sample, including the data point when switching occurred at timestep t and the surrounding data points: $[t-2, t-1, t, t+1, t+2]$. The sample (all 5 data points) is labelled as successful (1) if the robot is able to traverse the terrain artifact and not fall for two complete steps. Otherwise, all data points in the sample are labelled as failed (0).

Each switch estimator \mathcal{E}_i is trained to minimise the loss $L(\phi) = (\mathcal{E}_i(s_t) - y_t)^2$, where ϕ is the neural network weights, s_t is the state and y_t is the corresponding label for data point t . The final layer of the network is a single output with a sigmoid activation. Data is split into 90% training and 10% validation, with a 50/50 split of positive and negative labels forced during training and validation. We collected a total of 100000 data points for each terrain type, and trained each switch estimator for 1500 epochs.

IV. EXPERIMENTS

In this section, we present the results of our simulation experiments. First, in Sec IV-A we analyze the performance of each policy on the single artifact type they are trained on. Second, in Sec IV-B we present results on terrains that have a sequence of randomly ordered multiple artifact types. In Sec IV-C we discuss how our approach compares with learn-

Policy	% Total Dist.	% Success
Walk	97.6	99.2
Jumps	93.9	91.2
Gaps	78.7	60.4
Stairs	67.3	34.4

TABLE I: Results of each individual policy on its corresponding terrain type (i.e. Walking policy on flat terrain). % of total track distance covered and % success is shown.

ing methods that are trained directly on the multi-terrains. For performance evaluation, we measure two metrics:

- **% Total Distance:** How far the robot has travelled as a percentage of the total terrain length.
- **% Success:** The percentage of cases where the robot was able to get to the end of the terrain without falling.

Each terrain artifact is made up of horizontally stacked boxes, with each trial composed of 7 artifacts. In the single-terrain case all artifacts are of the same type, whereas in the multi-terrain case they are randomly selected among all terrain types. Terrain artifacts consist of Stairs (up and down) with a rise of 0.17m, Gaps that are 0.7m in length, and Steps 0.3m high and 0.16m in length. The terrain width is sampled uniformly from $\mathcal{U}(1.1, 1.7)$ m and fixed for each trial, flat segments (including the run of stairs) have a length sampled uniformly from $\mathcal{U}(0.36, 0.44)$ m.

A. Single Artifact Type Terrains

Table I shows the percentage of total track distance covered and the success rate for each terrain type. Each policy is evaluated for 500 trials with 7 artifacts per trial. In these results no switching occurs. The Walk policy had the highest success rate with 99.2%, which was expected because the robot was on flat surface. Jumps policy on step artifacts performed second best, with 91.2% success rate. The Gaps and Stairs policies were the least successful, reaching to the final zone only 60.4% and 34.4% of the time. Percentage of the total distance metric was consistent with the success rates.

B. Multiple Artifact Type Terrains

Our switching method is compared with several other methods, with results displayed in Table II. All tests are performed with 2500 trials of a test world consisting of 7 terrain artifacts randomly selected from gaps, jumps and stairs. Each trial begins with a flat segment and the walk policy. Artifacts are restricted so there may not be two sequential artifacts of the same type. For the combination test worlds, only widths are fixed for an episode, each box length is randomly chosen. The number of boxes in each artifact varies from 4 to 9, while ensuring at least 0.9m of flat surface before each artifact to be consistent with how our switch estimator data is collected.

We compare our policy switching method with several heuristic methods, with the only difference between the methods being the timing of the switching.

- **Random:** Switching occurs a random distance after the artifact is detected.
- **On detection:** Switching occurs as soon as a next artifact is detected.

Switch Method	% Total Dist.	% Success	% Gap Fail	% Jump Fail	% Stair Fail
Random	42.7	10.1	70.6	11.6	7.6
On detection	75.6	60.1	21.4	3.3	15.2
Lookup table	76.3	59.0	21.2	4.7	14.9
CoM over feet	79.1	66.8	17.6	2.7	12.9
Ours	82.4	71.4	16.7	2.4	9.4
*DQN	83.2	72.4	15.1	3.7	8.8
*End-to-end	92.7	90.2	4.2	1.8	3.7

TABLE II: Results of each switching method on multi-terrain test worlds (500 trials). The % of the total distance covered, and the success rate for the robot reaching the end of the trial is shown. The final three columns show the % of failures for each artifact type.

*Trained on the test domain (combinations of terrain types).

- **Lookup table:** We evaluate the optimal distance to switch for all switch combinations. On each artifact separately, we record the success rate of switching from any other policy to the target policy from 0 to 0.9m from the artifact (0.01m resolution). Therefore, each switchable combination (e.g. π_j to π_i) has a table of size 90. We then take the $\arg \max$ of each permutation to determine the optimal switch distance for each artifact given the current policy and the target policy.
- **Centre of mass over feet:** Having the CoM over the support polygon created by the grounded foot is a well known criteria for the stability of legged robots [15]. We switch when the following two conditions are true: 1) CoM is over the support polygon and 2) Both feet are within a tolerance distance to each other.
- **Our switch estimator:** We predict the probability of success for switching in the current state with our switch estimators. We threshold our predictions at 0.85 which empirically gave the best overall success for transitions. If terrain condition i is detected and $\mathcal{E}_i(s_t) \geq 0.85$ we switch to π_i .

For **CoM over feet** and our **Switch Estimator** methods, if there is no state where the condition to switch is met, then we force-switch to next policy when the robot is within 1cm of the corresponding artifact.

Table II shows the results for multi-terrain test worlds. For less dynamic platforms it may be possible to switch controllers at any time after obstacle detection, however that was not the case for our scenarios: random switching performed the worst as expected with only 10.1% success rate. Switching as soon as an artifact is detected does better than randomly switching with 60.1% success, we suggest this is because switching early might give the policies enough time to align to an artifact. Fig. 3.b) shows it is preferential to switch early for some policies. **Lookup table** method performed similarly to the **On Detection** method. **CoM over feet** method performed relatively well with 66.8% success. An advantage of this method is that it does not require further data collection once individual policies are trained, providing insight into where RoA overlap occurs for most policies. Our switching method was the most robust, whilst following our condition that we only have access to each individual terrain artifact at training time, traversing 82.4% of the terrain and reaching the final zone in 71.4% of trials.

Fig. 4 shows a single trial of the test world using our

method. We can see the switch estimator predictions for each policy in the top figure, and the times our predictions prevented early switching (vertical green lines show detection, vertical red lines show when switching occurs). We can also see in the bottom plot the times that the CoM is over the feet, and instances our estimator switched outside of these regions (timestep ≈ 875).

The final three columns of Table II shows the failure distribution of each switch method. We record where the robot was when failure occurs, given as a percentage of all trials. For each method, the most failures happened after switching to the Gaps policy. For instance, it contributed to 16.7% of a total (28.6%) failures for our switching method. For all terrain types, these results show less failures than the single terrain experiments reported in Table I. This suggests we are improving the robustness of each policy using our switch estimator.

C. Comparison with training on multiple artifact terrains

For completeness, we also look at other methods that involve training on a full combination of terrain artifacts, including training a Deep Q Network (DQN) using our pre-trained policies, and a single end-to-end policy. Results are displayed in the last two rows of Table II. The DQN was provided with the artifact detection in the form of a one hot encoding appended to the robot state, and received the same reward as each policy, with an additional reward provided by our oracle terrain detector. We note that without the additional reward provided by the oracle the DQN failed to learn. For the end-to-end learning method, we applied the same reward and curriculum learning approach (from [8]) as our policies. Robot state + heightmap is provided as input, and torques are generated at the output. We note that without the curriculum the end-to-end method failed to learn.

Our estimator performs similarly to the DQN despite not seeing more than one terrain artifact type during training (71.4% success compared to 72.4%). While learning was substantially longer for the end-to-end policy (approx. 3 times longer than an individual policy), it performed the best with 90.2% success rate. While these methods trained on the test domain perform well, it may not be possible to train on all expected terrain conditions on a real platform, where training policies separately allows us to refine each policy in a constrained setting.

V. CONCLUSION

We introduce a novel method for estimating when to switch between a set of pre-trained policies. We show that our method improves the stability of switching compared to heuristic methods, where policies and switch estimators only have access to a single terrain during training. Our method also performs comparable to a DQN trained on test conditions (all terrain types), which may not be possible for real systems. By designing policies separately we are able to refine controllers in a constrained setting, and embed prior knowledge about the required behaviour. Similar to the human delivery driver, our bipedal agent can traverse several difficult terrain types, and by understanding when to switch

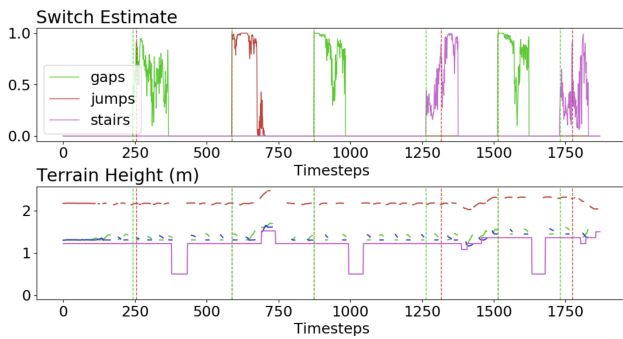


Fig. 4: Our method on a single trial in the test world. The top figure shows the switch estimate from the time the next artifact is detected until the robot has past the artifact. The bottom figure shows the terrain (pink) with foot (blue and green) and CoM height (red) when the CoM is over the stance foot. Green vertical lines indicate when the terrain was detected, red vertical lines show when switching occurred.

between behaviours our method can scale to any number of terrain conditions.

We design our policies with an overlapping Region of Attraction (RoA). However, this may not always be the possible, particularly for specialist policies where the RoA represents a very narrow set of states that do not overlap with a simple walking policy. Future work will look at evoking a setup policy that expands the RoA of a given policy to ensure this overlap exists. A limitation of our method is the assumption that we have a terrain oracle, learning to identify the upcoming terrain type is left for future work. We believe that harnessing the capabilities of DRL and combining controllers in a modular way will allow us to expand the locomotion capabilities of legged robots.

REFERENCES

- [1] C. G. Atkeson, B. Babu, N. Banerjee, D. Berenson, C. Bove, X. Cui, M. DeDonato, R. Du, S. Feng, P. Franklin *et al.*, “What happened at the darpa robotics challenge, and why,” *submitted to the DRC Finals Special Issue of the Journal of Field Robotics*, vol. 1, 2016.
- [2] R. R. Burridge, A. A. Rizzi, and D. E. Koditschek, “Sequential Composition of Dynamically Dexterous Robot Behaviors,” *The International Journal of Robotics Research*, vol. 18, no. 6, pp. 534–555, Jun. 1999.
- [3] S. Kalyan Krishnan and A. Goswami, “Learning to predict humanoid fall,” *International Journal of Humanoid Robotics*, vol. 8, no. 02, pp. 245–273, 2011.
- [4] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, “Proximal Policy Optimization Algorithms,” *arXiv:1707.06347 [cs]*, Aug. 2017.
- [5] N. Heess, D. TB, S. Sriram, J. Lemmon, J. Merel, G. Wayne, Y. Tassa, T. Erez, Z. Wang, S. M. A. Eslami, M. Riedmiller, and D. Silver, “Emergence of Locomotion Behaviours in Rich Environments,” *arXiv:1707.02286 [cs]*, Jul. 2017.
- [6] X. B. Peng, G. Berseth, K. Yin, and M. Van De Panne, “DeepLoco: dynamic locomotion skills using hierarchical deep reinforcement learning,” *ACM Transactions on Graphics*, vol. 36, no. 4, pp. 1–13, Jul. 2017.
- [7] J. Merel, A. Ahuja, V. Pham, S. Tunyasuvunakool, S. Liu, D. Tirumala, N. Heess, and G. Wayne, “Hierarchical visuomotor control of humanoids,” in *International Conference on Learning Representations*, Jan. 2019.
- [8] B. Tidd, N. Hudson, and A. Cosgun, “Guided Curriculum Learning for Walking Over Complex Terrain,” *arXiv:2010.03848 [cs]*, Oct. 2020.
- [9] C.-L. Shih, “Ascending and descending stairs for a biped robot,” *IEEE Transactions on Systems, Man, and Cybernetics - Part A: Systems and Humans*, vol. 29, no. 3, pp. 255–268, May 1999.
- [10] Y. Gong, R. Hartley, X. Da, A. Hereid, O. Harib, J.-K. Huang, and J. Grizzle, “Feedback Control of a Cassie Bipedal Robot: Walking, Standing, and Riding a Segway,” in *American Control Conference (ACC)*, 2019.
- [11] X. Xiong and A. Ames, “Bipedal Hopping: Reduced-order Model Embedding via Optimization-based Control,” in *2018 IEEE International Conference on Intelligent Robots and Systems (IROS)*, Aug. 2018.
- [12] S. Schaal, “Dynamic movement primitives—a framework for motor control in humans and humanoid robotics,” in *Adaptive motion of animals and machines*. Springer, 2006, pp. 261–280.
- [13] K. Hauser, T. Bretl, K. Harada, and J.-C. Latombe, “Using Motion Primitives in Probabilistic Sample-Based Planning for Humanoid Robots,” in *Algorithmic Foundation of Robotics VII*, B. Siciliano, Ed. Springer, 2008, vol. 47, pp. 507–522.
- [14] D. Kulić, C. Ott, D. Lee, J. Ishikawa, and Y. Nakamura, “Incremental learning of full body motion primitives and their sequencing through human motion observation,” *The International Journal of Robotics Research*, vol. 31, no. 3, pp. 330–345, Mar. 2012.
- [15] P. Faloutsos, M. van de Panne, and D. Terzopoulos, “Composable controllers for physics-based character animation,” in *Proceedings of the 28th annual conference on Computer graphics and interactive techniques - SIGGRAPH '01*, 2001, pp. 251–260.
- [16] R. D. Gregg, A. K. Tilton, S. Candido, T. Bretl, and M. W. Spong, “Control and Planning of 3-D Dynamic Walking With Asymptotically Stable Gait Primitives,” *IEEE Transactions on Robotics*, vol. 28, no. 6, pp. 1415–1423, Dec. 2012.
- [17] M. A. Borno, M. V. D. Panne, and E. Fiume, “Domain of Attraction Expansion for Physics-Based Character Control,” *ACM Transactions on Graphics*, vol. 36, no. 2, pp. 17:1–17:11, Mar. 2017.
- [18] X. B. Peng, P. Abbeel, S. Levine, and M. van de Panne, “DeepMimic: example-guided deep reinforcement learning of physics-based character skills,” *ACM Transactions on Graphics*, vol. 37, no. 4, pp. 1–14, Jul. 2018.
- [19] J. Lee, J. Hwangbo, and M. Hutter, “Robust Recovery Controller for a Quadrupedal Robot using Deep Reinforcement Learning,” *arXiv:1901.07517 [cs]*, Jan. 2019.
- [20] L. Liu and J. Hodgins, “Learning to Schedule Control Fragments for Physics-Based Characters Using Deep Q-Learning,” *ACM Transactions on Graphics*, vol. 36, no. 3, pp. 1–14, Jul. 2017.
- [21] X. B. Peng, M. Chang, G. Zhang, P. Abbeel, and S. Levine, “MCP: Learning Composable Hierarchical Control with Multiplicative Compositional Policies,” in *Neural Information Processing Systems (NeurIPS)*, 2019.
- [22] P.-L. Bacon, J. Harb, and D. Precup, “The Option-Critic Architecture,” in *International Conference on Learning Representations*, 2018.
- [23] K. Frans, J. Ho, X. Chen, P. Abbeel, and J. Schulman, “Meta Learning Shared Hierarchies,” *arXiv:1710.09767 [cs]*, Oct. 2017.
- [24] F. Berkenkamp, M. Turchetta, A. P. Schoellig, and A. Krause, “Safe Model-based Reinforcement Learning with Stability Guarantees,” in *Proc. of Neural Information Processing Systems (NIPS)*, 2017, 2017.
- [25] E. Najafi, R. Babuška, and G. A. D. Lopes, “Learning Sequential Composition Control,” *IEEE Transactions on Cybernetics*, vol. 46, no. 11, pp. 2559–2569, Nov. 2016.
- [26] J. Randlev, A. G. Barto, and M. T. Rosenstein, “Combining Reinforcement Learning with a Local Control Algorithm,” in *Proceedings of the Seventeenth International Conference on Machine Learning*, 2000, pp. 775–782.
- [27] Y. Lee, S.-H. Sun, S. Somasundaram, E. S. Hu, and J. J. Lim, “Composing Complex Skills by Learning Transition Policies,” in *International Conference on Learning Representations*, 2019, p. 19.
- [28] E. Coumans and Y. Bai, *PyBullet, a Python module for physics simulation for games, robotics and machine learning*, 2020, <http://pybullet.org>.
- [29] P. Fankhauser and M. Hutter, “A Universal Grid Map Library: Implementation and Use Case for Rough Terrain Navigation,” in *Robot Operating System (ROS)*. Springer International Publishing, 2016, vol. 625, pp. 99–120.
- [30] Y. Bengio, J. Louradour, R. Collobert, and J. Weston, “Curriculum learning,” in *International Conference on Machine Learning*, 2009.
- [31] W. Yu, G. Turk, and C. K. Liu, “Learning Symmetric and Low-energy Locomotion,” *ACM Transactions on Graphics*, vol. 37, 2018.