

CSCF: A Chaotic sine cosine firefly Algorithm for practical application problems

Bryar A. Hassan¹²

¹Kurdistan Institution for Strategic Studies and Scientific Research, Sulaimani, Iraq.

²Department of Computer Networks, Technical College of Informatics,
Sulaimani Polytechnic University, Sulaimani, Iraq.

Email: bryar.hassan@kissr.edu.krd

Abstract

Recently, numerous meta-heuristic based approaches are deliberated to reduce the computational complexities of several existing approaches that include tricky derivations, very large memory space requirement, initial value sensitivity etc. However, several optimization algorithms namely firefly algorithm, sine cosine algorithm, particle swarm optimization algorithm have few drawbacks such as computational complexity, convergence speed etc. So to overcome such shortcomings, this paper aims in developing a novel Chaotic Sine Cosine Firefly (CSCF) algorithm with numerous variants to solve optimization problems. Here, the chaotic form of two algorithms namely the sine cosine algorithm (SCA) and the Firefly (FF) algorithms are integrated to improve the convergence speed and efficiency thus minimizing several complexity issues. Moreover, the proposed CSCF approach is operated under various chaotic phases and the optimal chaotic variants containing the best chaotic mapping is selected. Then numerous chaotic benchmark functions are utilized to examine the system performance of the CSCF algorithm. Finally, the simulation results for the problems based on engineering design are demonstrated to prove the efficiency, robustness and effectiveness of the proposed algorithm.

Keywords: CSCF; engineering design problems; variants; chaotic maps; optimization function

1. Introduction

In recent decades, numerous algorithms have proposed to overcome various optimization problems in the field of engineering [1]. These optimization problems determine the value of a few parameters under specific circumstances for optimizing the objective function. In general, the objective function is a specific characteristic that provides a minimal or maximal

solution based on the problem. Therefore, to attain best optimistic solutions, the optimizations are broadly utilized in various applications such as industrial design, manufacture design, design analysis and engineering design etc. [2]. There occur several optimization problems while obtaining optimal solution and these optimization problems are categorized into several types namely dynamic or static, continuous or discrete, single-objective or multi-objective as well as constrained or unconstrained. Hence, to enhance the accuracy and the efficiency of such optimization problems, several research scholars depend upon meta-heuristic algorithms for easy implementation, gradient information and to avoid or bypass local optimization problem [3].

At the same time, the meta-heuristic algorithm plays a significant role in engineering field due to its wide range of challenges. But the nature-inspired meta-heuristic algorithms are relatively straight forward and are inspired mostly by unsophisticated ideas. Normally, the meta-heuristic algorithms are divided into four main categories namely swarm-based algorithm, evolutionary-based algorithm; human behaviour based algorithm as well as physic-based algorithm [4]. Optimization algorithms such as Differential Evolution (DE) algorithm [5], Evolution Strategy (ES) algorithm [6], backtracking search optimization Algorithm (BSA) [44][45], Genetic Algorithm (GA) [7] etc. are categorized under evolutionary-based technique [36] [38] [39]. Few algorithms namely FireFly (FF) algorithm [8] [34] [35], Particle Swarm Optimization (PSO) algorithm [9] [37], Artificial Bee Colony (ABC) algorithm [10] are categorized under swarm intelligence approach; Gravitational Search (GS) algorithm [11], Black Hole (BH) algorithm [12] are few algorithms that are characterized under physic-based techniques. The human-based behaviour comprises of Mine Blast (MB) algorithm [13], League Championship (LC) algorithm [14] etc. The evolutionary algorithm imitates the behaviour of evolutionary processes thereby producing a global optimal offspring value. Then the candidate solutions are enhanced and the iterative processes are continued until it satisfies the terminating criteria [15] [30].

In the present study, a novel Chaotic Sine Cosine Firefly (CSCF) algorithm is developed with numerous variants to solve optimization problems. Then, the chaotic form of two algorithms namely the sine cosine algorithm (SCA) and the Firefly (FF) algorithms are integrated to improve the convergence speed and efficiency thereby minimizing several complexity issues. In addition to this, the proposed CSCF approach is operated under various chaotic phases and the optimal chaotic variants containing the best chaotic mapping is selected to determine the efficiency of the system.

This research study fulfils four main objectives

- Demonstrating a novel Chaotic Sine Cosine Firefly (CSCF) algorithm to improve the convergence speed and efficiency thereby minimizing several complexity issues
- Developing numerous variants such as Variant- I, Variant- II, Variant- III, Variant- IV and Variant- V of the novel CSCF algorithm for chaotic tuning of numerous parameters.
- Utilizing numerous chaotic benchmark functions to examine the system performance of the CSCF algorithm.
- Demonstrating engineering design problems to prove the efficiency, robustness and effectiveness of the CSCF algorithm.

The rest of the paper is structured as follows. Section 2 provides the basics of two different types of algorithms namely firefly (FF) algorithm and Sine cosine algorithm (SCA). Section 3 describes the proposed CSCF algorithm by forming diverse variants to tune the parameters. Then section 4 demonstrates the chaotic and benchmark functions to determine the efficiency of the system; the comparative analysis of various approaches with the proposed CSCF algorithm and finally the engineering design problems are solved. Section 5 concludes the article.

2. Related Literal Works

2.1 Improved Firefly (IFF) Algorithm

➤ Standard Firefly Algorithm

The Firefly algorithm was first developed by Xin-She at the University of Cambridge. The firefly algorithm imitates the characteristics of the firefly as well as its locomotion activities [16]. This firefly algorithm is considered to be a more efficient approach in finding solutions for various crucial engineering related issues because of very high exploration capability, its brightness and flashlight capability. Also, the firefly algorithm works under the principle of bionics [40]. The most effective firefly algorithm is selected to obtain the best optimal value despite the complex and non-linear design. In general, each individual firefly has the capability to flash its light to attract the adjacent firefly thereby providing arbitrary solutions.

A. Purpose for flashing light

- Attracting the partner for mating since every firefly is unisexual in nature

- The attracting capability is proportional to the brightness. The firefly also utilizes its flashing light capability to attract the prey for survival.
- Moreover, the firefly uses its flashing light to protect themselves from other enemies [17].

B. Light Intensity variation and Attraction Capability

The light intensity variation and the attraction capability play a significant role in the firefly algorithm. The fitness value is determined by the light intensity. It also has the capability to deal with several multi optimization problems and are highly non-linear [41]. Here, the firefly with high or low intensity gets attracted with the neighbouring firefly having high or low intensity [18]. Let us consider, D_{XY} be the distance among two fireflies namely X and Y . Furthermore, the intensity of the light diminishes concerning the distance from the source; also the media absorbs the light. Then as per the law of square inverse, the expression for the intensity of the light is represented in equation (1).

$$I(D) = \frac{I_s}{D_{XY}^2} \quad (1)$$

From equation (1), the source intensity is represented as I_s . Then the expression for the intensity of the light I_L that varies concerning the distance D_{XY} is mentioned in equation (2). Therefore,

$$I_L = I_0 e^{-\beta D_{XY}} \quad (2)$$

From the above equation, β is the absorption coefficient of the fixed light. The initial intensity of the light is denoted as I_0 .

Each firefly contains a very strong attractive capability. This implies the strong attracting behaviour of a firefly over neighbouring firefly groups. Based on the distance between the two fireflies namely X and Y , the attractive capability is varied. We know that the attractive capability of the firefly is directly proportional to the intensity of the light of the neighbouring fireflies. Therefore, the expression based on the attractive function is delineated in the following equation.

$$\alpha = \alpha_0 e^{-\beta D_{XY}^2} \quad (3)$$

From equation (3), the attractive capability at distance $D_{XY} = 0$ is denoted as α_0 . For a fixed, characteristic length becomes

$$\Psi = \beta - 1/M \rightarrow 1, M \rightarrow \infty \quad (4)$$

The Cartesian distances among two different fireflies X and Y are denoted as P_X and P_Y correspondingly. Therefore, the Cartesian distance formula for two fireflies is expressed in the following expression.

$$D_{X,Y} = \|P_X - P_Y\| = \sqrt{\sum_{R=1}^{\alpha} (P_X^R - P_Y^R)^2} \quad (5)$$

Then the movement of attraction from one fly to another fly i.e. X and Y is characterised in equation (6). The determination of firefly movement with respect to the attracting capability is defined as,

$$P_X^{R+1} = P_X^R + \alpha_0 e^{-\beta D_{XY}^2} (P_Y - P_X) + J\eta \quad (6)$$

From equation (6), $\alpha_0 e^{-\beta D_{XY}^2} (P_Y - P_X)$ be the attractive term and $J\eta$ be the term containing random variable ranges from [0, 1].

➤ Improved FireFly Algorithm

In the firefly algorithm, the best optimal value provides the firefly with very high brightness. The model of other classical approaches suffers from the trapping of local minima due to the non-linear design strategy. Therefore Improved Firefly algorithm was developed to improve the trapping of local minimum value. Here, an additional term is added to the standard firefly algorithm to achieve better randomness and efficiency of the firefly. Then the difference among the arbitrary firefly and the X th position of the firefly is obtained thereby achieving the effective randomness of the firefly [19].

The brightest firefly found among the firefly group is said to be known as Best firefly B_F . The random number is denoted as R_4 and the value ranges from [0, 1]. Even though the computational complexity is high in case of improved firefly optimization, the local trapping quality is good for tuning the J and K parameter value. Therefore, the modified firefly algorithm is referred to as improved firefly algorithm. Then the updated expression is determined in the following section.

$$P_X^{R+1} = P_X^R + \alpha_0 e^{-\beta D_{XY}^2} (P_Y - P_X) + J\eta + K(P_A - P_X) \quad (7)$$

Where, $A \neq X$ and Y . $K(P_A - P_X)$ be the term containing random variable ranges from $[0, 1]$. The pseudo-code for improved firefly algorithm is delineated as follows.

Pseudo-code 1: Improved Firefly Algorithm

Input: Size of the population

Output: Best optimal solution

- 1: Parameter setting of firefly algorithm;
- 2: Generation of initial population;
- 3: Determination of light intensity;
- 4: **while** ($T \leq \text{Max Iteration}$)
- 5: Define absorption coefficient β ;
- 6: **for** $X = 1:n$ (n fireflies)
- 7: **for** $Y = 1:n$ (n fireflies)
- 8: **if** $I_Y > I_X$
- 9: move firefly towards Y ;
- 10: **end if**
- 11: Vary attractiveness with distance D_{XY} via $e^{-\beta D_{XY}^2}$;
- 12: Evaluation of new solutions and updating of light intensity;
- 13: **end for**
- 14: **end for**
- 15: Firefly ranking and determination of best solution;
- 16: $T = T + 1$
- 17: **end while**

➤ *Chaotic Firefly algorithm*

The fireflies are also referred to as lighting bugs that are found during the night time particularly in the summer season [31]. In chaotic optimization approaches, the chaotic firefly variables replace the random variables [32]. The chaotic firefly algorithm selects the initial population of the search algorithm. The absorption coefficient β found in the solution space and the firefly positions is updated by employing the chaotic sequence demonstrated by the chaotic maps that are represented in Table 1. From equation (6), the step size J affects the random vector η and the chaotic time series replaces the third term and the mathematical expression is obtained as follows.

$$\eta_x = CHAOS_X^K \quad (8)$$

From equation (8), the chaotic maps are represented by $CHAOS_X^K$; where the superscript K represents the type of chaotic map to be determined. In a similar way, the attractive term α_0 from equation (6) is substituted by the chaotic term that is represented in the following equation.

$$\alpha_0 = \alpha_0 CHAOS_X^K \quad (9)$$

The random motion of the firefly plays a significant role in determining the candidate [where α_0 (attractive term) relies on β (light absorption coefficient)] from the population. In addition to these two limiting cases ($\beta \rightarrow 0$; $\alpha \rightarrow \alpha_0$) are formulated while determining β . Therefore, the entire fireflies can spot one another and they start moving randomly when β becomes ∞ .

$$P_X^{R+1}(T+1) = P_X^R(T) - \alpha_0 e^{-\beta D_{xy}^2} P_X(T) \quad (10)$$

The light absorption coefficient then employs in characterizing the dissimilarities in the attractiveness as well as the values are vitally imperative to determine the convergence capability and the speed of the firefly algorithm.

Pseudo-code 2: Sine Cosine Algorithm
Input: Population size
Output: Best solution
1: Initializing the set of solution or search agents; 2: do 3: Evaluation of search agents or solution by employing the fitness function; 4: Updation of so far obtained best solution; 5: Updation of R_1, R_2, R_3 and R_4 ; 6: Position updation using equation (13); 7: while ($T \leq Max \text{ Iteration}$) do 8: Return

2.2 Sine Cosine (SC) Algorithm

In general, the optimization approach based on population initiates its optimization method containing a random solution. The Sine-Cosine algorithm was first developed by Mirjalili in the year of 2016 for solving several optimization issues [20]. The SC algorithm utilizes sine and cosine functions to determine the best optimal solution. In SCA, the distance and the movement among each feature solution and the best member are affected. Therefore, the SCA employs a balance equation utilizing two phases namely the exploration phase and the exploitation phase. The solutions are changed randomly in the exploration case whereas, in the exploitation phase, the random variables are less.

The updating equation for both the exploitation and the exploration phase is expressed in the following equation.

$$P_X^{T+1} = P_X^T + R_1 \sin(R_2) |R_3 Z_X^T - P_X^T| \quad (11)$$

$$P_X^{T+1} = P_X^T + R_1 \cos(R_2) |R_3 Z_X^T - P_X^T| \quad (12)$$

From equation (11) and (12), P_X^T signifies the position of the current solution; where X represents the dimension and T represents the iteration. The random numbers are represented as R_1, R_2 and R_3 . The position of the destination point in X th dimension is represented as Z_X ; $| \cdot |$ represents the absolute value.

Then the combined equation based on sine cosine algorithm is represented as follows. Therefore,

$$P_X^{T+1} = \begin{cases} P_X^T + R_1 \sin(R_2) |R_3 Z_X^T - P_X^T|; R_4 < 0.5 \\ P_X^T + R_1 \cos(R_2) |R_3 Z_X^T - P_X^T|; R_4 \geq 0.5 \end{cases} \quad (13)$$

From equation (13), the random number is denoted by R_4 and the random values may range from [0, 1]. From equation (11)-(13), the region of next position that present in between the destination and the solution is denoted by R_1 ; The movement outwards the destination is represented by R_2 . The random weight is represented utilizing two different constraints determined in the following equation.

$$\begin{cases} \text{if } R_3 > 1; & \text{stochastically emphasized} \\ \text{if } R_3 < 1; & \text{stochastically deemphasized} \end{cases} \quad (14)$$

Moreover, the exploration and the exploitation phase of the algorithm is to be balanced for finding the search space region. Therefore, equation (11) to (12) is modified for balancing both the phases that are determined in the following equation. Therefore,

$$R_1 = A - T \frac{A}{t} \quad (15)$$

From equation (15), the maximum iteration number and the current iterations are represented by t and T respectively and the constant term is denoted as A .

The general procedure of the sine cosine algorithm is represented in the following section.

➤ *Chaotic Sine Cosine Algorithm*

In this section, the parameters R_1 , R_2 and R_3 of equation (13) are modulated using chaotic maps during iterations that are described in section 3 [equations (18 to 20)]. The meta-heuristic algorithms use a conventional method to find the best optimal solutions that are based on iteration; also it relies on random solutions to replicate the naturally occurring phenomenon [42]. More clear that, there occurs a major shortcoming based on the solution outcome and the convergence speed since these solutions rely upon random parameters. Consequently, the random parameters are replaced with the chaotic parameters also; numerous chaotic mapping functions are employed to enhance the overall performances of the optimization approach [21]. In addition to this, new parameters are introduced to replace the random numbers and functions with various deterministic numbers [22]. Also, the standard distributive functions namely Gaussian distribution [33] and uniform distributions are replaced with the non-standard distributive functions namely chaotic based optimization algorithms. Moreover, the chaotic forms of the sine cosine algorithms are employed in boosting the performances of the sine cosine algorithm [43].

3. Proposed CSCF Algorithm

Numerous meta-heuristic based approaches are deliberated to eliminate the computational complexities of several existing approaches namely complex and tricky derivations, the requirement of very large memory space, initial value sensitivity etc. In general, the meta-heuristic based approaches are deliberated to reduce the computational complexities of several existing approaches that contain complex and tricky derivations, the requirement of very large memory space, initial value sensitivity etc. However, several optimization

algorithms such as firefly algorithm, sine cosine algorithm, particle swarm optimization algorithm have few drawbacks such as computational complexity, convergence speed etc. So to overcome such shortcomings, this paper aims in developing a novel Chaotic Sine Cosine Firefly (CSCF) algorithm with numerous variants to solve optimization problems.

In this paper, the improved firefly algorithm and the sine cosine optimization algorithms are integrated to form a Sine Cosine Firefly approach. Then the integrated algorithm aims in hybridizing the chaotic algorithm [i.e. Chaotic Sine Cosine Firefly (CSCF) approach] containing various chaotic mapping functions. The proposed CSCF approach is operated under various chaotic phases and the optimal chaotic variants containing the best chaotic mapping is selected. The general architecture of the proposed CSCF algorithm is represented in fig.1. The initial step involves in parameter initialization followed by the random initialization of the function. Then the fitness function is evaluated and if the trial is less than the limit the chaotically tuned J th and K th of the firefly algorithm is formulated to obtain the best optimal solution; else the chaotically tuned R_1 , R_2 and R_3 of the sine cosine algorithm is formulated to obtain the best optimal solution. The boxes that are highlighted characterize the new variants of the original algorithm. The diverse variants of CSCF approaches are delineated in the following section.

3.1 Variants of CSCF approach

The following subsections describe numerous variants of the CSCF (sine cosine algorithm and firefly algorithm) approach in accordance with the tuned parameters.

➤ Variant- I

The parameter J of equation (7) is modified by chaotic maps (CM). Therefore, the new version of equation (7) is determined in the following equation.

$$P_X^{R+1} = P_X^R + \alpha_0 e^{-\beta D^2} (P_Y - P_X) + J^{CHAOS(\cdot)}(\eta) + K(P_A - P_X) \quad (16)$$

From equation (16), the chaotic random movement of the firefly is denoted as $J^{CHAOS(\cdot)}$ and are determined by $J^{CHAOS(\cdot)} = J.CM_I$. Here, J is a fixed value in standard firefly, while in variant-I, it evolves chaotically.

➤ Variant- II

In this version, the parameter K of equation (7) is modified such that it is changed chaotically using the chaotic maps (CM). Therefore,

$$P_X^{R+1} = P_X^R + \alpha_0 e^{-\beta D^2} (P_Y - P_X) + J(\eta) + K^{CHAOS(\cdot)} (P_A - P_X) \quad (17)$$

From the above equation, $K^{CHAOS(\cdot)}$ represents the chaotic fractional difference between the arbitrary fireflies. The standard firefly optimization algorithm generates the random position; whereas the chaotic firefly generates according to the chaotic maps.

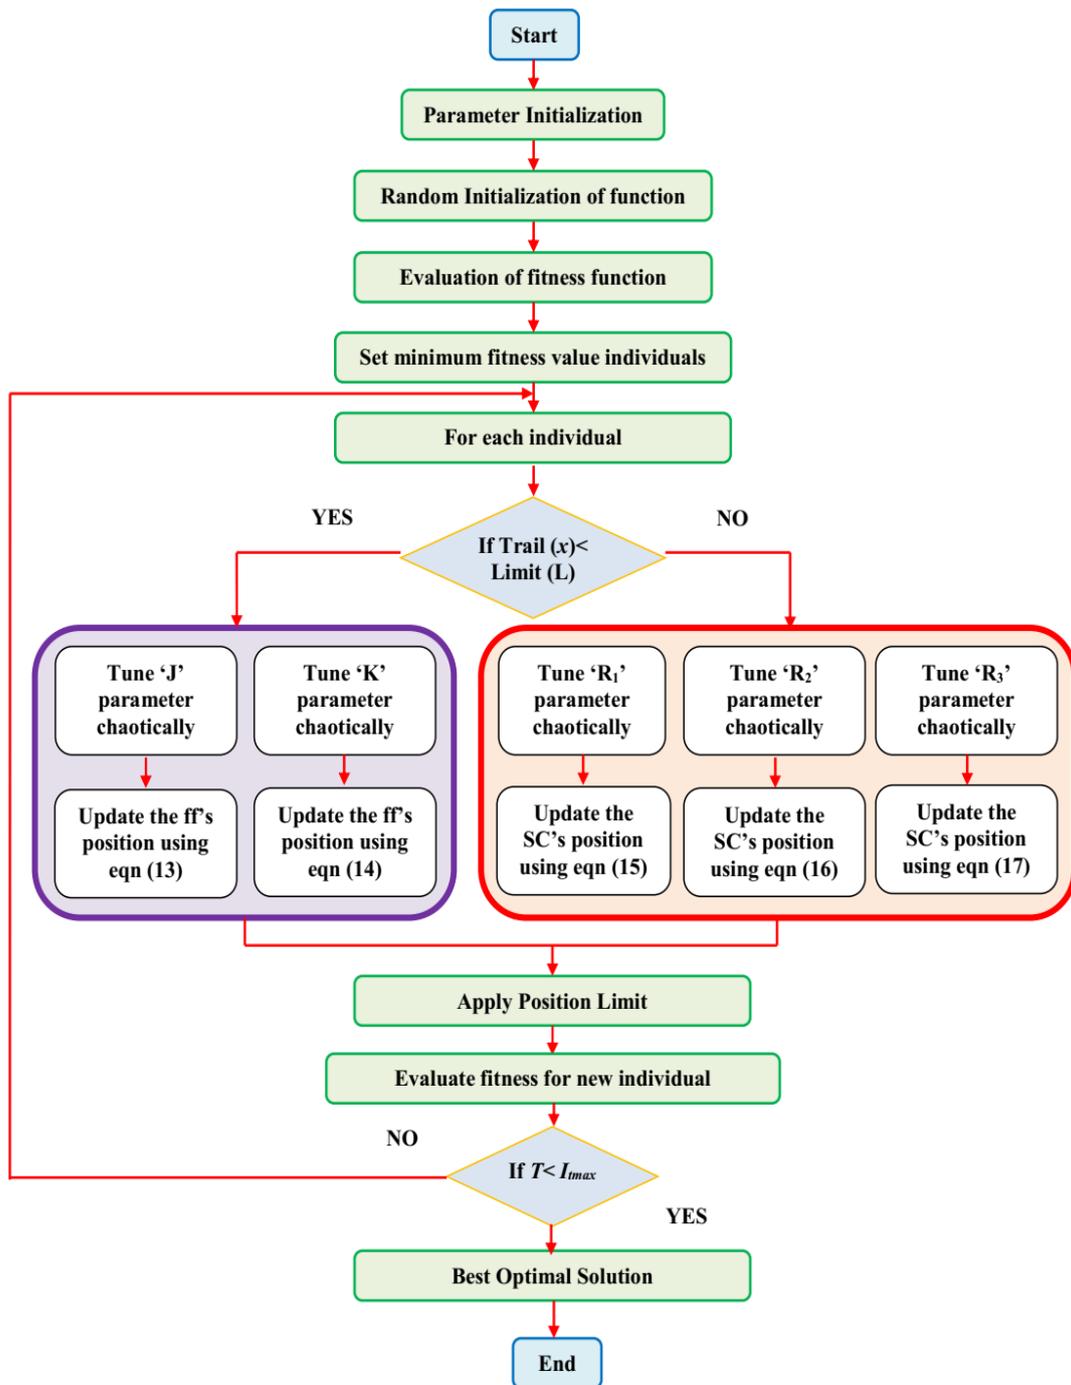


Fig.1. Flow chart representation of a CSCF algorithm

➤ *Variant- III*

The parameter R_1 of equation (13) is modulated using chaotic maps during iterations. Thus equation (13) is changed to,

$$P_X^{T+1} = \begin{cases} P_X^T + R_1^{CHAOS(\cdot)} \sin(R_2) |R_3 Z_X^T - P_X^T|; R_4 < 0.5 \\ P_X^T + R_1^{CHAOS(\cdot)} \cos(R_2) |R_3 Z_X^T - P_X^T|; R_4 \geq 0.5 \end{cases} \quad (18)$$

From equation (18), in standard sine cosine algorithm, R_1 is created randomly between 0 and 1; while in variant III, it is a chaotic number between 0 and 1.

➤ *Variant- IV*

In this version, R_2 the parameter is modified such that it is chaotically altered using CM. Then,

$$P_X^{T+1} = \begin{cases} P_X^T + R_1 \sin(R_2^{CHAOS(\cdot)}) |R_3 Z_X^T - P_X^T|; R_4 < 0.5 \\ P_X^T + R_1 \cos(R_2^{CHAOS(\cdot)}) |R_3 Z_X^T - P_X^T|; R_4 \geq 0.5 \end{cases} \quad (19)$$

Where, in the standard SC algorithm, the random number varies from 0 to 1. While in variant IV, it is a chaotic number between 0 and 1.

➤ *Variant- V*

The parameter R_3 of equation (13) is modulated using chaotic maps during iterations. Thus equation (13) becomes,

$$P_X^{T+1} = \begin{cases} P_X^T + R_1 \sin(R_2) |R_3^{CHAOS(\cdot)} Z_X^T - P_X^T|; R_4 < 0.5 \\ P_X^T + R_1 \cos(R_2) |R_3^{CHAOS(\cdot)} Z_X^T - P_X^T|; R_4 \geq 0.5 \end{cases} \quad (20)$$

From the above equation, $R_3^{CHAOS(\cdot)}$ is the chaotic random value that ranges from 0 to 1.

4. Result and Discussions

In this section, various experiments are conducted to evaluate the efficiency and the performances of the Chaotic Sine Cosine Firefly (CSCF) algorithm. Owing to its hypothetical nature, various chaotic functions and benchmark functions are discussed to obtain better optimal results. In addition to this, the proposed CSCF algorithms are compared with several

other optimization algorithms such as FireFly (FF) algorithm [19], Sine Cosine Algorithm (SCA) [20], Particle Swarm Optimization (PSO) approach [23], Artificial Bee Colony (ABC) optimization algorithms [24] to evaluate the effectiveness of the CSCF algorithm. Furthermore, followed by the comparison of optimization algorithms, a detailed description of the real-time engineering applications are delineated in the following section. The experimental analysis is carried out under the platform of MATLAB R2016a by using the operating system as Windows 10. The simulations are done on a central processing unit containing Intel Core (TM) i7-6700HQ CPU @ 2.60 GHz with 8G of memory. Then the chaotic benchmark functions and the test functions are explained as follows.

Table 1. Chaotic Mapping (CM) description and its functions

No	Name of the Maps	Mapping Functions
Chaotic Map 1	Logistic	$Z_{J+1} = AZ_J(1 - Z_J)$
Chaotic Map 2	Tent	$Z_{J+1} = \begin{cases} \beta - Z_J; & Z_J < 0.5 \\ \beta(1 - Z_J); & 0.5 \leq Z_J \end{cases}$
Chaotic Map 3	Sinusoidal	$Z_{J+1} = AZ_J^2 \sin(\pi Z_J)$
Chaotic Map 4	Gauss	$Z_{J+1} = \begin{cases} 0; & Z_J = 0 \\ \frac{1}{Z_J} \text{Mod}(1); & Z_J \in [0,1] \end{cases}$ Where, $\frac{1}{Z_J} \text{Mod}(1) = \frac{1}{Z_J} - \left[\frac{1}{Z_J} \right]$
Chaotic Map 5	Circle	$Z_{J+1} = Z_J + B - \left(\frac{A}{2\pi} \right) \sin(2\pi Z_J) \text{mod}(1);$ where $A = 0.5$ and $B = 0.2$
Chaotic Map 6	Sinus	$Z_{J+1} = 2.3(Z_J)^2 \sin(\pi Z_J)$
Chaotic Map 7	Iterative	$Z_{J+1} = \sin\left(\frac{A\pi}{Z_J}\right); \quad A \in [0,1]$
Chaotic Map 8	Chebyshev	$Z_{J+1} = 2.3(Z_J)^2 \sin(\pi Z_J)$
Chaotic Map 9	Henon	$Z_{J+1} = 1 - P(Z_J)^2 + QZ_J - 1$
Chaotic Map 10	Intermittency	$Z_{J+1} = \begin{cases} \delta + Z_J + BZ_J^N; & 0 < Z_J \leq P \\ \frac{Z_J - P}{1 - P}; & P < Z_J \leq 1 \end{cases}$
Chaotic Map 11	Singer	$Z_{J+1} = \alpha(7.8 Z_J - 23.3 Z_J^2 + 28.7 Z_J^3 - 13.3 Z_J^4)$
Chaotic Map 12	Sine	$Z_{J+1} = \frac{A}{4} \sin(\pi Z_J); \quad 0 < A \leq 4$

Table 2. Benchmark functions

Fn	Mathematical Equations	DM	Ranges	Fov
----	------------------------	----	--------	-----

Fn ¹	$\text{Fn}^1 = -20 \text{Exp}(-0.2 \sqrt{\frac{1}{J} \sum_{K=1}^J P_K^2}) - \text{Exp}(\frac{1}{J} \sum_{K=1}^J \text{COS}(2\pi P_K)) + 20 + E$	20	[-30,30]	0
Fn ²	$\text{Fn}^2 = \frac{1}{4000} \sum_{K=1}^J P_K^2 - \prod_{K=1}^J \cos(\frac{P_1}{\sqrt{K}}) + 1$	20	[-600,600]	0
Fn ³	$\text{Fn}^3 = 30 + \sum_{K=1}^J \lfloor P_K \rfloor$	20	[-5.12,5.12]	-6J+30
Fn ⁴	$\text{Fn}^4 = \sum_{K=1}^J \sin(10 \text{Log}(P_K))$	20	[0.25,10]	-J
Fn ⁵	$\text{Fn}^5 = \sum_{K=1}^J P_K^5 - 3P_K^4 + 4P_K^3 + 2P_K^2 - 10P_K - 4 $	20	[-10,10]	0
Fn ⁶	$\text{Fn}^6 = P_K^2$	20	[-100,100]	0
Fn ⁷	$\text{Fn}^7 = \sum_{K=1}^J \left(\sum_{K=1}^K P_K \right)^2$	20	[-100,100]	0
Fn ⁸	$\text{Fn}^8 = \sum_{K=1}^J (P_K + 0.5)^2$	20	[-10,10]	-3.214
Fn ⁹	$\text{Fn}^9 = \sum_{K=1}^J -P_K \sin(\sqrt{ P_K })$	20	[-5.12, 5.12]	0
Fn ¹⁰	$\text{Fn}^{10} = \sum_{K=1}^J [(P_K^2 - 10 \cos(2\pi P_K)) + 10]$	20	[-200,200]	0
Fn ¹¹	$\text{Fn}^{11} = 4P_1^2 - 2.1P_1^4 + \frac{1}{3}P_1^6 + P_1 P_2 - 4P_2^2 - 4P_2^4$	20	[-5,5]	-1.6428
Fn ¹²	$\text{Fn}^{12} = [1 + (P_1 + P_2 + 1)^2 (19 - 14P_1 + 3P_1^2 - 14P_2 + 6P_1P_2 + 3P_2^2)] * [30 + (2P_1 - 3P_2)^2 (18 - 32P_1 + 12P_1^2 + 48P_2 - 36P_1P_2 + 27P_2^2)]$	20	[-3,3]	3
Fn ¹³	$\text{Fn}^{13} = -\sum_{K=1}^{10} [(P - Y_l)(P - Z_K)^T + Z_K]^{-1}$	20	[0,20]	-10.4673
Fn ¹⁴	$\text{Fn}^{14} = \sum_{K=1}^J KP_K^4 + \text{Random}[0,1]$	20	[-1.28,1.28]	0
Fn ¹⁵	$\text{Fn}^{15} = \sum_{K=1}^J -P_l \sin(\sqrt{P_K})$	20	[-500,500]	0
Fn ¹⁶	$\text{Fn}^{16} = \text{Max} \{P_K 1 \leq K \leq J\}$	20	[-600,600]	1
Fn ¹⁷	$\text{Fn}^{17} = \sum_{K=1}^{J-1} [100(P_{K-1} - P_K^2)^2 + (P_K - 1)^2]$	20	[-65, 65]	-209
Fn ¹⁸	$\text{Fn}^{18} = \frac{1}{25} \sum_{K=1}^6 P_K^2 - \prod_{K=1}^6 \cos(\frac{P_1}{\sqrt{K}}) + 1$	20	[0,1]	-3.33

F_n^{19}	$F_n^{19} = \frac{\pi}{J} \left\{ 10 \sin(\pi P_1) + \sum_{l=1}^N (P_K - 1)^2 [1 + 10 \sin^2(\pi P_{K-1})] + \sum_{K=1}^N U(P_K, 10, 100, 4) \right\}$	20	[-50,50]	0
F_n^{20}	$F_n^{20} = 0.1 \left\{ \begin{aligned} &\sin^2(3\pi P_1) + \sum_{K=1}^J (P_l - 1)^2 [1 + \\ &\sin^2(3\pi P_1 + 1) \\ &+ (P_j - 1)^2 [1 + \sin^2(2\pi P_j)] + \\ &\sum_{K=1}^J U(P_K, 5, 100, 4) \end{aligned} \right\}$	20	[-50,50]	0

Table 3. Comparative analysis of CSCF with SCF algorithm

Test fn.	CSCF				SCF			
	μ	σ	B	W	μ	σ	B	W
F_n^1	1.23E+02	3.27E+03	5.27 E+03	6.37 E+02	7.37 E+02	2.17 E+05	6.38 E+02	9.52E+02
F_n^2	2.46 E+03	2.49E+04	2.38 E+05	3.49 E+02	5.27 E+01	3.49 E+06	5.30 E+02	7.39 E+05
F_n^3	2.62 E+03	6.38E+05	1.56 E+06	4.58 E+03	4.32 E+03	1.23 E+06	2.47 E+02	2.37 E+06
F_n^4	1.47 E+04	4.50E+03	2.59 E+07	1.38 E+04	2.48 E+04	2.48 E+06	2.58 E+03	5.33 E+02
F_n^5	3.65 E+02	3.59E+03	1.27 E+06	2.50 E+04	4.48 E+03	3.47 E+07	4.58 E+04	2.45 E+03
F_n^6	2.47 E+02	1.49 E+04	2.50 E+04	5.37 E+05	6.58 E+05	4.45 E+08	5.68 E+05	4.57 E+04
F_n^7	1.69 E+02	5.49 E+03	3.67 E+03	4.39 E+06	8.37 E+04	2.24 E+03	2.49 E+06	3.27 E+06
F_n^8	1.50 E+02	1.37 E+03	4.28 E+03	2.54 E+07	3.28 E+04	1.34 E+02	7.48 E+04	1.36 E+07
F_n^9	2.47 E+02	2.59 E+02	7.38 E+07	2.11 E+08	2.49 E+05	3.46 E+03	5.39 E+04	4.56 E+08
F_n^{10}	3.46 E+02	5.28 E+02	3.31 E+02	4.87 E+02	1.25 E+02	4.61 E+02	3.18 E+02	6.27 E+02
F_n^{11}	1.56 E+02	4.68 E+02	6.38 E+08	5.82 E+08	1.39 E+06	2.48 E+02	2.12 E+04	7.38 E+07
F_n^{12}	2.15 E+04	7.47 E+06	2.46 E+09	7.95 E+23	2.68 E+07	4.57 E+03	3.34 E+07	3.27 E+06
F_n^{13}	1.48 E+03	3.48 E+05	1.46 E+09	2.59 E+02	1.38 E+07	6.46 E+02	5.23 E+05	6.38 E+07
F_n^{14}	2.48 E+05	1.37 E+07	2.27 E+07	1.22 E+11	2.59 E+07	4.68 E+02	2.37 E+07	3.27 E+09
F_n^{15}	1.59 E+06	4.56 E+08	1.49 E+05	3.54 E+10	3.78 E+05	6.39 E+03	1.36 E+06	2.49 E+08
F_n^{16}	1.67 E+05	3.28 E+07	3.48 E+05	4.28 E+08	2.40 E+05	7.35 E+05	1.48 E+04	1.27 E+05
F_n^{17}	2.59 E+05	2.47 E+10	2.83 E+04	2.19 E+07	4.39 E+03	2.13 E+05	1.25 E+02	3.29 E+04
F_n^{18}	3.86 E+07	1.39 E+09	2.49 E+07	1.37 E+04	2.59 E+03	1.46 E+03	2.49 E+02	2.19 E+03
F_n^{19}	2.69 E+05	5.39 E+02	1.48 E+06	2.28 E+03	3.50 E+02	1.58 E+02	3.59 E+05	2.40 E+07
F_n^{20}	1.78 E+05	3.28 E+03	5.30 E+05	1.38 E+02	2.28 E+06	1.30 E+02	4.37 E+07	1.38 E+05

Table 4. Comparative analysis of CSCF with SCF for various dimensions

Test fn.	D=20		D=50		D=100	
	CSCF	SCF	CSCF	SCF	CSCF	SCF
F_n^1	7.48 E+04	2.59 E+05	2.47 E+10	2.46 E+09	3.49 E+06	5.30 E+02
F_n^2	5.27 E+03	2.74 E+02	5.82 E+08	1.39 E+06	2.48 E+02	2.58 E+03
F_n^3	4.58 E+04	1.22 E+11	3.48 E+04	3.34 E+07	7.47 E+06	2.46 E+09
F_n^4	4.57 E+03	3.54 E+02	2.59 E+07	5.39 E+04	3.48 E+05	1.46 E+09
F_n^5	5.23 E+05	3.48 E+05	1.48 E+04	1.38 E+02	1.37 E+07	2.27 E+07
F_n^6	7.38 E+07	1.37 E+02	1.25 E+02	6.38E+05	1.56 E+06	4.58 E+03
F_n^7	4.67E+03	2.47 E+10	2.83 E+04	2.19 E+07	5.39 E+04	4.56 E+08
F_n^8	3.48 E+05	6.46 E+02	5.39 E+04	6.38 E+07	7.47 E+06	2.46 E+09
F_n^9	2.54E+03	4.68 E+02	2.12 E+04	3.27 E+09	3.48 E+05	1.46 E+09
F_n^{10}	5.28 E+02	5.82 E+08	4.48 E+03	3.47 E+07	4.58 E+04	2.49 E+02
F_n^{11}	2.49 E+03	1.37 E+04	2.59 E+03	2.49 E+08	1.37 E+07	2.27 E+07
F_n^{12}	1.59 E+03	4.56 E+02	1.46 E+04	5.39 E+02	7.38 E+05	2.59 E+05
F_n^{13}	1.67 E+05	3.28 E+07	2.27 E+07	2.46 E+07	7.95 E+23	2.49 E+08
F_n^{14}	2.62 E+03	6.38E+02	4.28 E+04	2.40 E+05	7.35 E+05	1.48 E+04
F_n^{15}	8.37 E+03	2.24 E+03	2.83 E+04	7.37 E+02	2.49 E+02	7.35 E+05
F_n^{16}	3.28 E+03	1.34 E+02	7.39 E+05	5.27 E+01	3.59 E+05	2.13 E+05
F_n^{17}	4.28 E+08	2.47 E+02	2.37 E+06	4.32 E+03	2.13 E+05	1.25 E+02
F_n^{18}	2.19 E+03	2.58 E+03	5.33 E+04	6.38 E+07	1.46 E+03	2.49 E+02
F_n^{19}	3.86 E+03	1.39 E+02	2.49 E+04	3.27 E+09	1.58 E+05	3.59 E+05
F_n^{20}	7.95 E+03	5.49 E+03	3.67 E+04	4.39 E+06	7.38 E+07	2.11 E+08
Total	12	10	11	5	9	3

4.1 Chaotic Mapping (CM) and Benchmark functions

In this section, numerous chaotic benchmark functions are utilized to improve the system performance of the CSCF algorithm [25]. The complex operations, its nature and several other possessions of these chaotic functions are obtained easily from the definitions. Then the chaotic benchmark functions for CSCF algorithm is obtained in Table 1. Table 2 represents the benchmark functions with three different models namely uni-modal test function, multi-modal test function and three fixed dimensions multi-modal test function. Here 20 benchmark functions are employed to investigate the system performances. In Table 2, F_n represents the test functions, D_M and F_{OV} signify the dimensional value and the optimal value respectively.

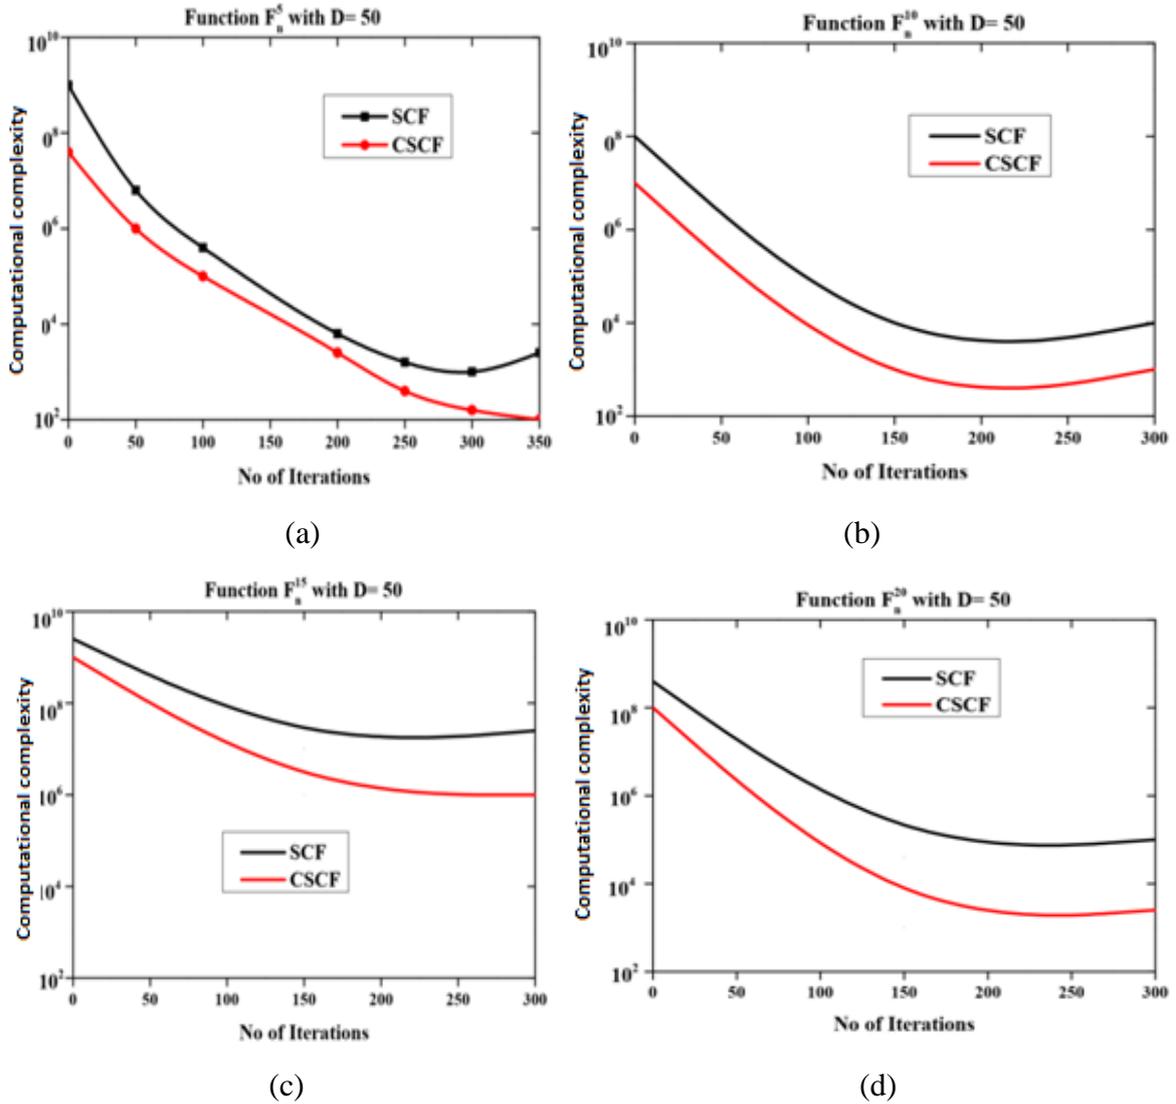


Fig.2. Graphical analysis of functions a) F_n^5 , b) F_n^{10} , c) F_n^{15} and d) F_n^{20} with $D=50$

4.2 Comparison of CSCF with Sine Cosine Firefly algorithm

In this section, the chaotic sine cosine firefly is compared with sine cosine and firefly algorithms by using four different parameters namely mean (μ) standard deviation (σ), best (B) and worst (W) values. For each functions, the size of the population is predetermined as 20 and the subsequent dimensional values may range from 20, 50 and 100 respectively. In addition to this, the maximum iteration value is set as 500. The comparative analyses of CSCF and sine cosine firefly algorithms are mentioned in Table 3. From the Table, the comparative analysis reveals that the proposed CSCF algorithm provides better performances when compared with SCF approach. Then Table 4 provides the comparative analysis of CSCF with SCF for different dimensions namely $D=20$, $D=50$, $D=100$. Then the convergence curve is compared for the proposed CSCF and SCF algorithms for various

dimensions and the graphical analysis for four functions namely F_n^5 , F_n^{10} , F_n^{15} and F_n^{20} for $D=50$ are mentioned in fig.2.

Table 5. Comparative analysis of various optimization algorithms with respect to mean (μ) standard deviation (σ)

Test functions		FF	SCA	PSO	ABC	CSCF
F_n^1	μ	5.82 E+08	5.68 E+05	7.21 E+02	2.57 E+02	1.56 E+02
	σ	2.40 E+07	7.11E+02	4.32 E+03	1.23 E+06	1.78 E+05
F_n^2	μ	1.38 E+05	4.56 E+08	7.22 E+02	5.33 E+02	3.59E+03
	σ	4.21 E+04	6.27 E+02	4.45 E+08	2.45 E+03	5.49 E+03
F_n^3	μ	2.24 E+03	7.46 E+02	7.31 E+02	6.38 E+02	3.65 E+04
	σ	3.56E+04	5.30 E+02	2.38 E+05	3.49 E+02	3.28 E+07
F_n^4	μ	8.37 E+04	2.47 E+02	2.14 E+04	3.34 E+07	3.46 E+02
	σ	1.06 E+06	1.56 E+06	4.58 E+03	7.21 E+02	3.65 E+02
F_n^5	μ	1.45 E+06	3.20E+07	7.06 E+02	5.27 E+03	3.86 E+07
	σ	3.04E+07	1.38 E+04	6.58 E+05	4.64 E+02	6.38E+05
F_n^6	μ	4.28 E+03	2.54 E+07	3.91E+07	3.59 E+05	4.50E+03
	σ	3.71 E+01	7.45 E+02	3.28 E+04	4.37 E+07	3.28 E+03
F_n^7	μ	1.37 E+04	7.38 E+07	1.49 E+05	3.54 E+10	7.47 E+06
	σ	6.39 E+03	3.71 E+07	2.83 E+04	2.19 E+07	1.49 E+04
F_n^8	μ	1.34 E+02	2.13 E+05	1.48 E+04	3.41 E+07	2.49E+04
	σ	4.57 E+04	2.72E+02	3.51 E+07	7.35 E+05	2.46 E+03
F_n^9	μ	3.27 E+06	6.46 E+02	6.72 E+07	4.24 E+02	2.62 E+03
	σ	3.67 E+03	4.39 E+06	1.27 E+06	7.48 E+04	3.25 E+03
F_n^{10}	μ	2.17 E+05	2.42 E+02	2.50 E+04	2.48 E+02	2.69 E+05
	σ	4.57 E+03	4.04 E+02	2.37 E+07	4.76 E+02	2.59 E+05
F_n^{11}	μ	9.52E+02	5.37 E+05	4.01 E+02	1.27 E+05	1.69 E+02
	σ	7.39 E+05	3.27 E+06	3.47 E+07	1.25 E+03	1.50 E+02
F_n^{12}	μ	2.59 E+03	2.40 E+05	5.30 E+05	1.38 E+02	2.47 E+02
	σ	1.36 E+07	4.29 E+02	4.39 E+03	2.47 E+02	2.59 E+02
F_n^{13}	μ	2.49 E+06	2.49 E+02	2.19 E+03	3.33E+07	3.48 E+05
	σ	3.50 E+02	2.28 E+03	5.27 E+01	3.49 E+06	1.39 E+09
F_n^{14}	μ	2.28 E+06	4.48 E+03	1.59 E+06	3.27 E+09	1.67 E+05
	σ	2.46 E+09	7.95 E+23	3.29 E+04	5.39 E+04	5.28 E+02
F_n^{15}	μ	1.39 E+06	3.31 E+02	4.87 E+02	2.49 E+08	4.68 E+02
	σ	1.47 E+04	6.38 E+08	5.82 E+08	2.48 E+06	2.47 E+10
F_n^{16}	μ	4.61 E+02	4.33 E+02	6.37 E+02	7.37 E+02	2.15 E+04
	σ	2.37 E+06	4.54 E+02	1.23E+02	2.49 E+07	1.48 E+03
F_n^{17}	μ	4.21 E+02	3.48 E+05	2.49 E+05	1.48 E+06	3.27E+03
	σ	4.28 E+08	2.50 E+04	1.23E+02	1.25 E+02	4.56 E+08
F_n^{18}	μ	5.23 E+05	3.18 E+02	1.25 E+02	1.58 E+02	5.39 E+02
	σ	2.68 E+07	2.59 E+07	1.38 E+04	2.48 E+04	1.37 E+03
F_n^{19}	μ	1.38 E+07	3.46 E+03	2.12 E+04	7.38 E+07	1.69 E+02
	σ	2.59 E+07	1.46 E+09	2.59 E+02	2.58 E+03	1.50 E+02
F_n^{20}	μ	6.38 E+07	2.27 E+07	1.22 E+11	4.58 E+04	1.37 E+07
	σ	4.68 E+02	1.46 E+03	3.78 E+05	1.30 E+02	2.48 E+05

Table 6. Comparative analysis of various optimization algorithms with respect to Best value (*B*) and worst value (*W*)

Test functions		FF	SCA	PSO	ABC	CSCF
Fn ¹	<i>B</i>	6.12E+05	2.09 E+08	5.64 E+08	4.51 E+08	1.38 E+04
	<i>W</i>	4.10 E+08	2.48 E+02	4.13 E+08	3.33 E+02	7.38 E+07
Fn ²	<i>B</i>	1.32E+02	1.11E+05	2.59 E+04	7.12E+05	1.27 E+06
	<i>W</i>	1.59 E+06	3.27E+03	6.77E+05	3.34E+05	6.37 E+02
Fn ³	<i>B</i>	7.37 E+02	2.17 E+05	3.34 E+07	1.78 E+02	2.83 E+04
	<i>W</i>	2.32 E+08	2.22 E+07	2.49 E+05	6.07E+05	1.48 E+06
Fn ⁴	<i>B</i>	2.48 E+04	2.48 E+06	2.89 E+08	6.46 E+02	2.38 E+05
	<i>W</i>	7.13E+04	3.78 E+05	6.39 E+03	2.47 E+02	5.37 E+05
Fn ⁵	<i>B</i>	5.49 E+03	1.37 E+03	4.13 E+08	2.19 E+03	1.37 E+04
	<i>W</i>	2.49 E+06	1.38 E+05	2.49E+04	7.47 E+06	1.27 E+06
Fn ⁶	<i>B</i>	7.58 E+04	1.48 E+04	1.27 E+05	3.48 E+05	1.49 E+05
	<i>W</i>	1.37 E+07	1.25 E+02	3.29 E+04	7.11 E+04	3.48 E+05
Fn ⁷	<i>B</i>	5.27 E+01	3.49 E+06	6.23E+05	4.45 E+08	2.59 E+07
	<i>W</i>	1.32 E+05	1.46 E+03	4.61 E+02	2.24 E+03	7.88 E+04
Fn ⁸	<i>B</i>	7.38 E+07	2.69 E+05	6.58 E+05	5.68 E+05	2.46 E+09
	<i>W</i>	3.27 E+06	1.78 E+05	8.37 E+04	6.27 E+02	2.19 E+07
Fn ⁹	<i>B</i>	1.23E+05	6.38 E+07	4.32 E+08	7.48 E+04	2.49 E+07
	<i>W</i>	1.34 E+02	2.51E+04	4.57 E+03	4.18 E+08	4.28 E+03
Fn ¹⁰	<i>B</i>	4.20 E+08	2.08 E+02	1.51E+05	2.68 E+07	4.58 E+03
	<i>W</i>	1.58 E+02	1.22 E+11	2.08 E+07	1.38 E+07	2.27 E+07
Fn ¹¹	<i>B</i>	7.52 E+04	6.18E+05	5.30 E+02	2.59 E+07	2.59 E+02
	<i>W</i>	3.46 E+02	2.58 E+03	4.48 E+03	7.12 E+04	4.87 E+02
Fn ¹²	<i>B</i>	3.59E+03	5.28 E+02	3.47 E+07	5.39 E+02	1.22 E+11
	<i>W</i>	1.56 E+02	1.67 E+05	2.12 E+04	3.28 E+03	6.38 E+08
Fn ¹³	<i>B</i>	1.48 E+03	2.59 E+05	6.38 E+02	9.52E+02	1.56 E+06
	<i>W</i>	2.48 E+05	1.69 E+02	4.32 E+03	3.46 E+03	1.46 E+09
Fn ¹⁴	<i>B</i>	1.50 E+02	2.02 E+08	4.57 E+04	1.55 E+05	2.50 E+04
	<i>W</i>	1.39 E+06	4.68 E+02	3.27 E+06	2.59 E+03	3.67 E+03
Fn ¹⁵	<i>B</i>	2.28 E+06	1.30 E+02	1.23E+02	3.50 E+02	7.95 E+23
	<i>W</i>	5.39 E+04	3.28 E+04	2.46 E+03	2.99 E+08	4.28 E+08
Fn ¹⁶	<i>B</i>	6.33E+05	2.11 E+08	2.15 E+04	1.49 E+04	2.50 E+04
	<i>W</i>	4.58 E+04	2.45 E+03	1.01 E+05	6.20E+05	3.49 E+02
Fn ¹⁷	<i>B</i>	1.36 E+07	1.38 E+02	1.23 E+06	2.47 E+02	3.31 E+02
	<i>W</i>	4.56 E+08	4.39 E+03	2.62 E+03	1.20 E+05	4.39 E+06
Fn ¹⁸	<i>B</i>	1.36 E+06	2.49 E+08	3.18 E+02	2.37 E+06	3.54 E+10
	<i>W</i>	2.47 E+02	2.59 E+02	6.38E+05	5.33 E+02	2.28 E+03
Fn ¹⁹	<i>B</i>	4.56 E+08	4.37 E+07	4.50E+03	2.49 E+02	2.54 E+07
	<i>W</i>	7.39 E+05	3.28 E+07	4.68 E+02	2.13 E+05	2.11 E+08
Fn ²⁰	<i>B</i>	5.23 E+05	2.47 E+10	3.86 E+07	1.39 E+09	5.30 E+05
	<i>W</i>	1.47 E+04	2.40 E+05	2.37 E+07	3.27 E+09	5.27 E+03

4.3 Comparison of CSCF with various optimization algorithms

This section demonstrates the comparative analysis of the proposed CSCF algorithm with various other optimization algorithms such as FireFly (FF) algorithm [19], Sine Cosine Algorithm (SCA) [20], Particle Swarm Optimization (PSO) approach [23], Artificial Bee Colony (ABC) optimization algorithms [24] to evaluate the effectiveness of the CSCF algorithm. Here, the dimension value range is assumed to be $D=100$; where each algorithm is implemented by using 20 benchmark functions. Moreover, the size of the initial population is set as 20. Therefore, the comparative analysis of various optimization approaches with respect to mean (μ) standard deviation (σ) is explained in Table 5. Also, the comparative analysis for various optimization approaches with respect to Best value (B) and worst value (W) is explained in Table 6. The experimental analysis based on average rank testing of the CSCF approach is compared with FF, SCA, PSO and ABC in Table 7. Therefore, the experimental results for two different types of tests namely Wilcoxon's rank-sum (R-S) test and Wilcoxon's multiple problem (M-P) tests for the proposed CSCF algorithm based on twenty benchmark functions are described in Table 7. In addition to this, the value of $P < (\epsilon = 0.1 \text{ and } 0.05)$ and r^+ and r^- values are greater for all respective cases. Thus the analysis reveals that the proposed CSCF algorithm provides better performances when compared to all other approaches [26].

Table 7. Analysis of Wilcoxon's (R-S) test and Wilcoxon's (M-P) tests of CSCF algorithm

Approaches	Best Value (B)	Worst value (W)	r^+	r^-	P	$\epsilon=0.1$	$\epsilon=0.05$
CSCF v_s FF	16	4	201	41	2.46E-02	YES	YES
CSCF v_s SCA	12	8	104	24	5.23E-03	YES	YES
CSCF v_s PSO	19	1	211	7	7.75E-02	YES	YES
CSCF v_s ABC	11	9	223	83	3.61E-01	YES	YES

4.4 Real-time engineering design problem for CSCF

In this section, the efficiency and the performances of the proposed CSCF algorithm is solved by evaluating three different types of engineering design problems namely Welded Beam Design (WB_D), Pressure Vessel Design (PV_D) and Tension-Compression Spring Design ($T-CS_D$). These engineering design problems are described briefly in the following section. Here, the initial size of the population is set as 20 and the maximum size of the population is set as 100.

A. Illustration 1: Problem based on Welded Beam Design (WB_D)

This section illustrates problem based on the design of a welding beam (WB_D) [27]; where the minimum cost function is subjected to several constraints namely the beam's end deflection (BE_D), beam's bending stress (BB_S), Shear stress (S_S) and buckling load of the bar (BB_L). Moreover, the (WB_D) comprises of four different types of variables namely $H(Z_1)$, $L(Z_2)$, $T(Z_3)$ and $B(Z_1)$ respectively. The structural model for the problem based on a welding beam (WB_D) is represented in fig.3.

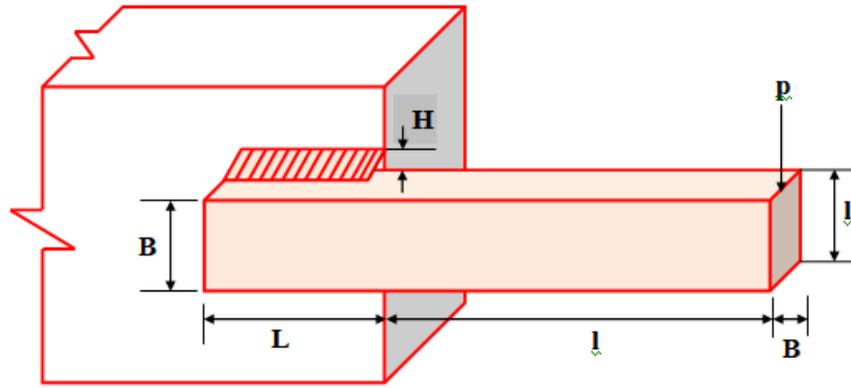


Fig.3 Design for the welding beam (WB_D) problem

The mathematical expression based on the design for the problem based on a welding beam (WB_D) is formulated in the following section.

$$\text{Minimize : } F(Z) = 1.1047LZ_1^2Z_2 + 0.04811Z_3Z_4(14.0 + Z_2) \quad (21)$$

Subject to :

$$G_1(Z) = S_s(Z) - S_s^{MAX} \leq 0 \quad (22)$$

$$G_2(Z) = BB_s(Z) - BB_s^{MAX} \leq 0 \quad (23)$$

$$G_3(Z) = Z - 1 - Z_4 \leq 0 \quad (24)$$

$$G_4(Z) = 1.1047LZ_1^2 + 0.04811Z_3Z_4(14.0 + Z_2) - 5.0 \leq 0 \quad (25)$$

$$G_5(Z) = 0.125 - Z_1 \leq 0 \quad (26)$$

$$G_6(Z) = BE_D(Z) - BE_D^{MAX} \leq 0 \quad (27)$$

$$G_7(Z) = p - BB_L(Z) \leq 0 \quad (28)$$

Therefore, the expression for several constraints and variables based on the problem based on the design of a welding beam (WB_D) are delineated in the following section.

$$S_s(Z) = \sqrt{(S'_s)^2 + 2S'_s S''_s \frac{Z_2}{2r} + (S''_s)^2} \quad (29)$$

From the above equation,

$$S'_s = \frac{p}{\sqrt{2} Z_1 Z_2}; \quad S''_s = \frac{Jr}{M}; \quad J = P \left(l + \frac{Z_2}{2} \right); \quad BB_s(Z) = \frac{6pl}{Z_4 Z_3^2}$$

$$BE_D(Z) = \frac{4pl^3}{eZ_4 Z_3^3}; \quad M = 2\sqrt{2} Z_1 Z_2 \left[\frac{Z_2^2}{12} + \left(\frac{Z_1 + Z_3}{2} \right)^2 \right]$$

$$r = \sqrt{\frac{Z_2^2}{4} + \left(\frac{Z_1 + Z_2}{2} \right)^2}; \quad BB_L(Z) = \frac{4.013e \sqrt{\frac{Z_3^2 Z_4^6}{36}}}{l^2} \left(1 - \frac{Z_3}{2l} \sqrt{\frac{e}{4F}} \right)$$

$$p = 6000LB; \quad l = 14in; \quad e = 30 \times 10^6 \text{ psi}; \quad F = 12 \times 10^6 \text{ psi}$$

$$S_s^{MAX} = 1360 \text{ psi} \quad BB_s^{MAX} = 3000 \text{ psi} \quad BE_D^{MAX} = 0.25 \text{ psi}$$

Table 8 provides the best solutions for various approaches such as FF, SCA, PSO, ABC and proposed CSCF approaches. Table 9 provides the statistical analysis for the mean (μ) standard deviation (σ), Best value (B) and worst value (W).

Table 8. Best solutions for various approaches based on WB_D

Variables	CSCF	FF	SCA	PSO	ABC
F(Z)	1.704	2.236	1.725	1.942	2.358
Z ₁ (H)	0.197	1.237	1.478	2.365	0.937
Z ₂ (L)	8.035	7.238	5.323	8.368	7.234
Z ₃ (T)	3.209	4.235	3.736	3.897	5.237
Z ₄ (B)	2.210	4.358	2.789	3.247	4.374
G ₁ (Z)	-4.288	-5.235	-5.565	-7.327	-5.856
G ₂ (Z)	-4.789	-5.385	-6.462	NA	-7.357
G ₃ (Z)	-0.499	-1.375	-1.458	NA	-2.345
G ₄ (Z)	-0.067	-0.475	-0.637	NA	-0.927
G ₅ (Z)	-3.274	-3.985	-4.214	NA	-4.274
G ₆ (Z)	-3.173	-4.763	-5.247	NA	-6.436
G ₇ (Z)	-2.438	-3.475	-2.462	-4.287	-3.345

Table 9. Statistical analysis of various approaches for WB_D

Approaches	μ	σ	B	W
CSCF	1.7043	1.7042	1.7048	1.7044
FF	NA	NA	2.236432	NA
SCA	1.7256	1.72564	1.7258	1.7252
PSO	NA	NA	1.942762	NA
ABC	2.3585	2.3583	2.3584	1.7487

B. Illustration 2: Problem based on Pressure Vessel Design (PV_D)

The problem based on Pressure Vessel Design (PV_D) aims in minimizing the manufacturing cost function [28]. The structural design of the pressure vessel is represented in fig. 4 that contains the working pressure and the volume of about 3000 psi and 750 ft³. In addition to this, the Pressure Vessel Design (PV_D) comprises of four different variables namely the shell thickness S_T as Z_1 , Head thickness H_T as Z_2 , Inner radius I_R as Z_3 , the cylindrical section having the length l as Z_4 . Here, the continuous variables are denoted as Z_3 and Z_4 where the integral multiples are denoted as Z_1 and Z_2 respectively. Then the mathematical expression based on the design for the problem based on Pressure Vessel Design (PV_D) is formulated in the following section.

$$\text{Minimize : } F(Z) = 0.6224Z_1Z_3Z_4 + 1.7781Z_2Z_3^2 + 3.1611Z_1^2Z_4 + 19.84Z_1^2Z_3 \quad (30)$$

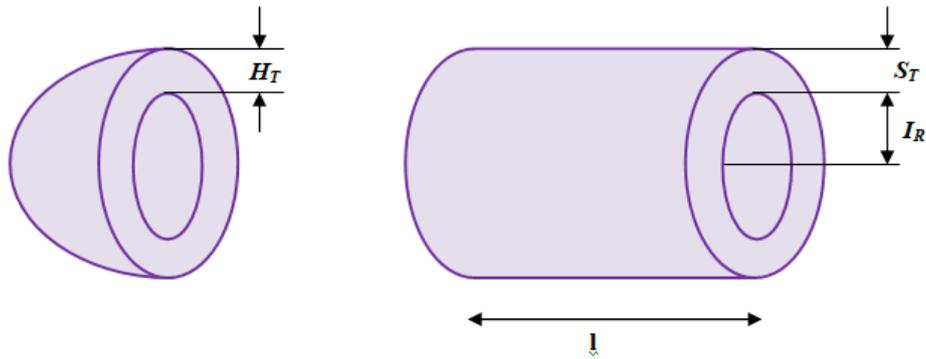


Fig.4 Design for Pressure Vessel Design (PV_D) problem

Subject to :

$$G_1(Z_1, Z_3) = -Z_1 + 0.0193Z_3 \leq 0 \quad (31)$$

$$G_2(Z_2, Z_3) = -Z_2 + 0.0095Z_3 \leq 0 \quad (32)$$

$$G_3(Z_3, Z_4) = -\pi Z_3^2 Z_4 - \frac{4}{3} \pi Z_3^2 + 1296000 \leq 0 \quad (33)$$

$$G_4(Z_4) = Z_4 + 240 \leq 0 \quad (34)$$

Table 10 provides the best solutions for various approaches such as FF, SCA, PSO, ABC and proposed CSCF approaches. Table 11 provides the statistical analysis for the mean (μ) standard deviation (σ), Best value (B) and worst value (W).

Table 10. Best solutions for various approaches based on PV_D

Variables	CSCF	FF	SCA	PSO	ABC
F(Z)	6123.489	6356.956	647.025	6485.382	6627.827
$Z_1(S_T)$	0.726329	0.729647	0.74583	0.75938	0.763045
$Z_2(H_T)$	0.527452	0.537219	0.53947	0.54728	0.54682
$Z_3(I_R)$	41.66390	41.86719	42.4893	43.4710	44.3729
$Z_4(l)$	163.4489	163.5762	164.294	165.328	166.320
$G_1(Z)$	-0.000147	-0.000163	0.000245	NA	0.00038
$G_2(Z)$	-0.043820	-0.044625	0.043894	NA	0.04429
$G_3(Z)$	-112.4896	-112.5782	113.4340	NA	114.927
$G_4(Z)$	-60.47343	-60.62632	-61.3829	NA	-62.3840

Table 11. Statistical analysis of various approaches for PV_D

Approaches	μ	σ	B	W
CSCF	6123.489	2.427594	6123.532	6123.563
FF	6034.87	83.26723	635.809	6234.87
SCA	NA	NA	622.479	NA
PSO	NA	NA	632.479	NA
ABC	6142.763	12.3769	6782.498	6232.457

C. Illustration 3: Problem based on Tension-Compression Spring Design ($T - CS_D$)

Fig.5 describes the structural model for the problem based on Tension-Compression Spring Design ($T - CS_D$). Here, the ($T - CS_D$) is considered as one of the continuous constrained problem developed by Belegundu [29]. Moreover, the Tension-Compression Spring Design ($T - CS_D$) comprises of four different parameters namely diameter of the coil (D_C), active

coil number (N_c) with the diameter (D). Then the mathematical expression based on the design for the problem based on Tension-Compression Spring Design ($T - CS_D$) is formulated in the following section.

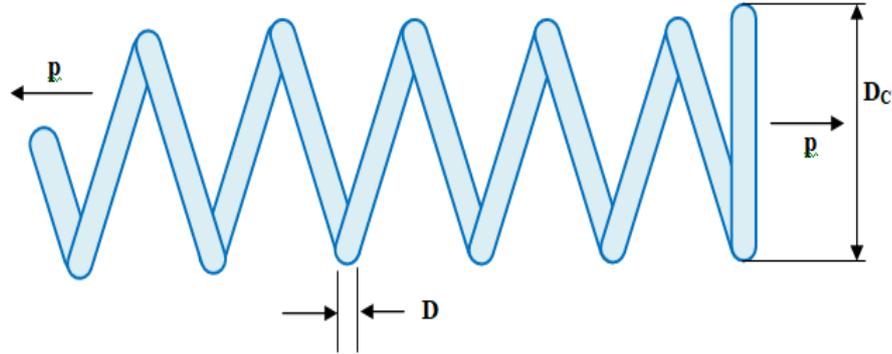


Fig.5 Design for Tension-Compression Spring Design ($T - CS_D$) problem

$$\text{Let us assume, } Z = [Z_1, Z_2, Z_3] = D_c, N_c, D \quad (35)$$

$$\text{Minimize : } F(Z) = [N_c + 2]D_c D^2 \quad (36)$$

Subject to :

$$G_1(Z) = 1 - \frac{D_c^3 N_c}{71785D} \leq 0 \quad (37)$$

$$G_2(Z) = \frac{4D_c^2 - DD_c}{12566(D_c D^2 - D^4)} + \frac{1}{5108D^2} - 1 \leq 0 \quad (38)$$

$$G_3(Z) = 1 - \frac{140.45D}{N_c D^2} \leq 0 \quad (39)$$

$$G_4(Z) = \frac{D + D_c}{1.5} - 1 \leq 0 \quad (40)$$

Then the design variables for the problem based on Tension-Compression Spring Design ($T - CS_D$) are delineated in the following section. $0.05 \leq D \leq 2$; $0.25 \leq D_c \leq 1.3$ as well as $2 \leq D_c \leq 15$. Table 12 provides the best solutions for various approaches such as FF, SCA, PSO, ABC and proposed CSCF approaches. Table 13 provides the statistical analysis for the mean (μ) standard deviation (σ), Best value (B) and worst value (W).

Table 12`. Best solutions for various approaches based on $T - CS_D$

Variables	CSCF	FF	SCA	PSO	ABC
F(Z)	0.020342	0.028833	0.022856	0.0265978	0.027573
$Z_1(D_c)$	0.374584	0.374637	0.383674	0.3936732	0.426537
$Z_2(N_c)$	0.503762	0.527482	0.53842	0.543785	0.568239
$Z_3(D)$	10.83740	10.8643	11.0352	11.36789	11.48793
$Z_4(B)$	-5.37998	-5.43789	-5.38265	-5.401632	-5.41789
$G_1(Z)$	-3.89787	-4.67882	-4.7298	NA	-4.28701
$G_2(Z)$	-0.26379	-0.27245	-0.28753	NA	-0.29363
$G_3(Z)$	-4.67903	-4.83567	-4.69365	NA	-4.72734
$G_4(Z)$	-0.76727	-0.77346	-0.78437	NA	-0.72763

Table 13. Statistical analysis of various approaches for $T - CS_D$


Approaches	μ	σ	B	W
CSCF	0.021356	3.67811	0.021356	0.021356
FF	0.021356	4.3689	0.021356	0.021356
SCA	NA	NA	0.021356	NA
PSO	NA	NA	0.021356	NA
ABC	0.021356	4.58678	0.021356	0.021356

Then, various chaotic variants namely


Variant- I, Variant- II, Variant- III, Variant- IV, and Variant- V of the novel CSCF algorithm is employed in solving the above mentioned three engineering problems namely P_1, P_2, P_3 that are represented in Table 14. Fig.6 explains the ranking system of five different variants of the CSCSF algorithm. From the graphical analysis, it is noted that the fourth variant of the circle mapping provides minimum Mean Absolute Error (MAE) when compared with all other variants. The term MAE is defined as the average value obtained by the absolute difference among the actual value and the predicted value. Finally, fig.7 describes the convergence time with respect to all the five variants. The graphical analysis reveals that the variant-II comprises of less convergence time during the running process when compared with all other variants.

Table 14. CM optimization for six variants of CSCF algorithm


Problems	CM	Variant I	Variant II	Variant III	Variant IV	Variant V
P_1	Logistic	0.23024	0.23453	0.25687	0.22475	0.22946
	Tent	0.26437	0.26892	0.27356	0.23728	0.26409
	Sinusoidal	0.29037	0.29784	0.29487	0.25782	0.27365
	Gauss	0.24893	0.24632	0.24387	0.24023	0.24973
	Circle	0.22731	0.22472	0.22636	0.22022	0.22537
	Sinus	0.24577	0.24376	0.24937	0.24065	0.24637
	Iterative	0.23263	0.23436	0.24854	0.23036	0.24872
	Chebyshev	0.26972	0.26253	0.27463	0.26165	0.27261
	Henon	0.23365	0.23343	0.24876	0.23347	0.23226
	Intermittency	0.25376	0.25434	0.26362	0.25336	0.26328
	Singer	0.26287	0.25421	0.27887	0.26114	0.27115
	Sine	0.24763	0.24376	0.24874	0.24462	0.24736
P_2	Logistic	0.33536	0.33543	0.33472	0.33398	0.33253
	Tent	0.33374	0.33346	0.33464	0.33487	0.33376
	Sinusoidal	0.34476	0.34236	0.34345	0.34212	0.34864
	Gauss	0.33536	0.33453	0.33463	0.33534	0.33562
	Circle	0.33342	0.33367	0.33376	0.33333	0.33364
	Sinus	0.34764	0.34463	0.34475	0.34874	0.34497
	Iterative	0.34373	0.34473	0.34472	0.34364	0.34398
	Chebyshev	0.33236	0.33372	0.33447	0.33243	0.33348
	Henon	0.34747	0.34248	0.34834	0.34172	0.34152
	Intermittency	0.34362	0.34235	0.34236	0.34234	0.34086
	Singer	0.33283	0.33263	0.33476	0.33107	0.33127
	Sine	0.34873	0.34473	0.34331	0.34163	0.34836
P_3	Logistic	0.52243	0.52454	0.52345	0.52032	0.52257
	Tent	0.53476	0.53365	0.53673	0.53163	0.53256
	Sinusoidal	0.52677	0.52256	0.52488	0.52112	0.52157
	Gauss	0.52143	0.52657	0.52225	0.52376	0.52478
	Circle	0.52589	0.52144	0.52586	0.52002	0.52164
	Sinus	0.54254	0.54685	0.54148	0.54265	0.54574
	Iterative	0.53547	0.53148	0.53658	0.53356	0.53467
	Chebyshev	0.53679	0.53251	0.53135	0.53673	0.53682
	Henon	0.52146	0.52367	0.52785	0.52576	0.52147
	Intermittency	0.54457	0.54237	0.54652	0.54134	0.54658
	Singer	0.52254	0.52475	0.52111	0.52457	0.52537
	Sine	0.53789	0.53645	0.53467	0.53362	0.53364

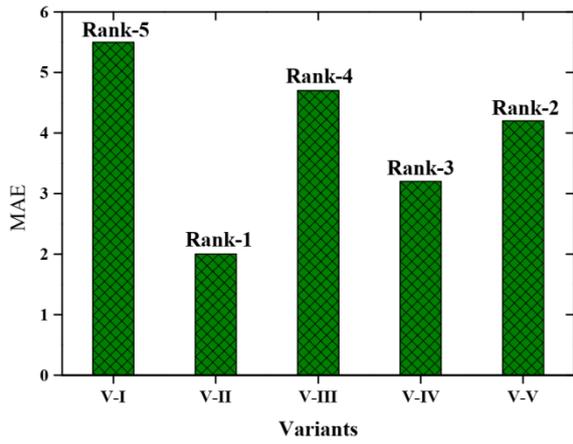

(a)

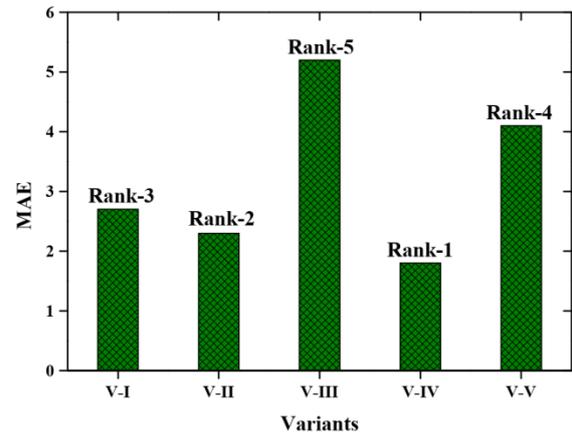

(b)

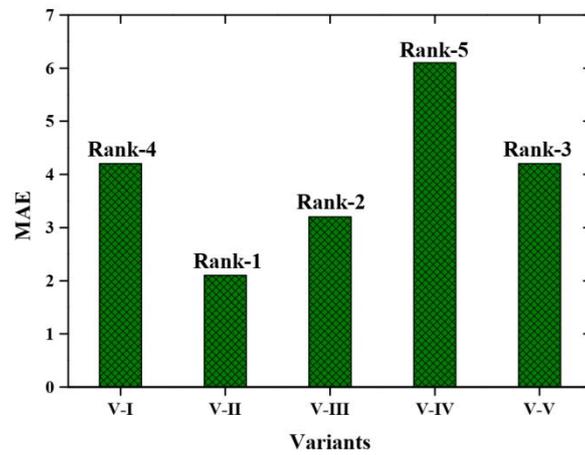

(c)

Fig.6 MAE versus Variants for a) P₁ b) P₂ c) P₃

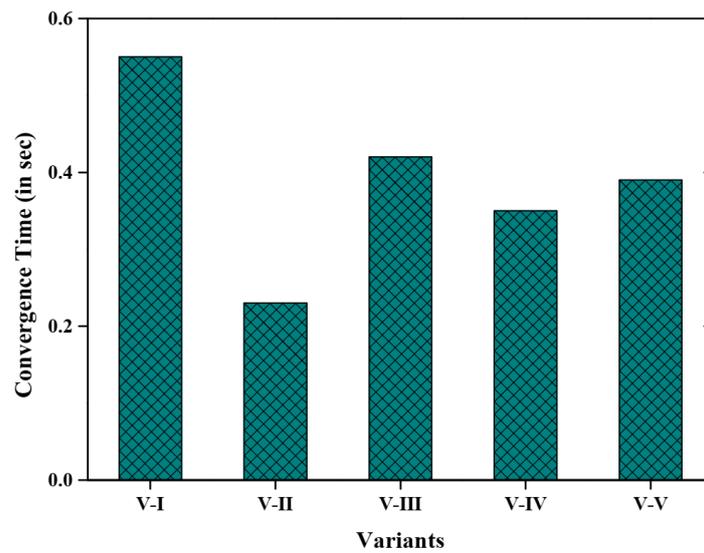


Fig.7. Convergence time versus variants

5. Conclusion

This paper proposed a novel Chaotic Sine Cosine Firefly (CSCF) algorithm with numerous variants to solve optimization problems such as computational complexity, memory space, tricky derivations, efficiency, convergence speed etc. The chaotic form of two algorithms namely the sine cosine algorithm (SCA) and the Firefly (FF) algorithms are integrated to improve the convergence speed and efficiency to minimize the complexity issues. Moreover, the proposed CSCF approach is operated under various chaotic phases and the optimal chaotic variants containing the best chaotic mapping is selected. Then various experiments are conducted to evaluate the efficiency and the performances of the Chaotic Sine Cosine Firefly (CSCF) algorithm. Owing to its hypothetical nature, various chaotic functions and benchmark functions are discussed to obtain better optimal results. Furthermore, the proposed CSCF algorithms are compared with several other optimization algorithms such as FireFly (FF) algorithm, Particle Swarm Optimization (PSO) approach, Artificial Bee Colony (ABC) optimization algorithms to evaluate the effectiveness of the CSCF algorithm. Finally, the efficiency and the performances of the proposed CSCF algorithm is solved by evaluating three different types of engineering design problems to prove the efficiency, robustness and effectiveness of the system.

Compliance with ethical standards

Conflict of interest

The authors declare that they have no conflict of interest.

References

1. Dhiman, Gaurav, and Vijay Kumar. Emperor penguin optimizer: A bio-inspired algorithm for engineering problems. *Knowledge-Based Systems* 159 (2018): 20-50.
2. Jiang, Jianhua, Meirong Xu, Xianqiu Meng, and Keqin Li. STSA: A sine Tree-Seed Algorithm for complex continuous optimization problems. *Physica A: Statistical Mechanics and its Applications* 537 (2020): 122802.
3. Sundararaj, V., Anoop, V., Dixit, P., Arjaria, A., Chourasia, U., Bhambri, P., Rejeesh, M.R. and Sundararaj, R., 2020. CCGPA-MPPT: Cauchy preferential crossover-based global pollination algorithm for MPPT in photovoltaic system. *Progress in Photovoltaics: Research and Applications*.

4. Mirjalili S, Lewis A. The whale optimization algorithm. *Adv. Eng. Softw.* 95, (2016): 51–67.
5. Wang Y, Li H, Huang T, Li L, Differential evolution based on covariance matrix learning and bimodal distribution parameter setting, *Appl. Soft Comput.* 18 (2014) 232–247
6. Deb K, An efficient constraint handling method for genetic algorithms, *Comput. Methods Appl. Mech. Engrg.* 186 (2) (2000) 311–338
7. Moradi M, Parsa S, An evolutionary method for community detection using a novel local search strategy, *Physica A*, 523 (2019) 457–475
8. Yang X, Firefly algorithm, stochastic test functions and design optimisation, *Int. J. Bio-inspir. Comput.* 2 (2) (2010) 78–84
9. Marouani H, Fouad Y, Particle swarm optimization performance for fitting of levy noise data, *Physica A*, 514 (2019) 708–714
10. Jiang, Feng Y, Zhao J, Li K, Data ABC: a fast ABC based energy-efficient live VM consolidation policy with data-intensive energy evaluation model, *Future Gener. Comput. Syst.* 74 (2017) 132–141,
11. Rashedi E, Nezamabadipour H, Saryazdi S, GSA: a gravitational search algorithm, *Inform. Sci.* 179 (13) (2009) 2232–2248
12. Hatamlou A, Black hole: a new heuristic optimization approach for data clustering, *Inform. Sci.* 222 (2013) 175–184,
13. Sadollah A, Bahreininejad A, Eskandar H, Hamdi M, Mine blast algorithm: a new population based algorithm for solving constrained engineering optimization problems, *Inform. Sci.* 13 (2013) 2592–2612
14. Kashan AH, League Championship Algorithm (LCA): an algorithm for global optimization inspired by sport championships, *Appl. Soft Comput.* 16 (2014) 171–200
15. Sulaiman, Mohd Herwan, Zuriani Mustaffa, Mohd Mawardi Saari, and Hamdan Daniyal. Barnacles Mating Optimizer: A new bio-inspired algorithm for solving engineering optimization problems. *Engineering Applications of Artificial Intelligence* 87 (2020): 103330.
16. Yang XS, *Nature-Inspired Metaheuristic Algorithms*, (Chapter 8), Luniver Press, Cambridge, 2008.

17. Yang XS, Firefly algorithms for multimodal optimization, Stochastic algorithms: foundations and applications, SAGA Lecture Notes in Comp. Science 5792 (2009) 169–178.
18. Agarwal S, Singh AP, & Anand N. Evaluation performance study of Firefly algorithm, particle swarm optimization and artificial bee colony algorithm for non-linear mathematical optimization functions. In 2013 Fourth International Conference on Computing, Communications and Networking Technologies (ICCCNT) (pp. 1-8). IEEE, 2013.
19. Dash, Judhisthir, Bivas Dam, and Rajkishore Swain. Improved firefly algorithm based optimal design of special signal blocking IIR filters. *Measurement* 149 (2020): 106986.
20. Mirjalili SA, SCA: A Sine Cosine Algorithm for Solving Optimization Problems, *Knowl-Based Syst.* 96 (2016) 120-133.
21. Hui Lu , Xiaoteng Wang, Zongming Fei, and Meikang Qiu, The Effects of Using Chaotic Map on Improving the Performance of Multi-objective Evolutionary Algorithms, *Mathematical Problems in Engineering* 2014 (2014) 1-16.
22. Trelea IC, The particle swarm optimization algorithm: convergence analysis and parameter selection, *Information Processing Letters* 85 (2003) 317–325.
23. Tsai C, Huang K, Yang C, Chiang M, A fast particle swarm optimization for clustering, *Soft Comput.* 19 (2) (2015) 321–338.
24. Karaboga D, Ozturk C, A novel clustering approach: artificial bee colony (ABC) algorithm, *Appl. Soft Comput.* 11 (1) (2011) 652–657
25. Rizk-Allah, Rizk M., Aboul Ella Hassanien, and Siddhartha Bhattacharyya. Chaotic crow search algorithm for fractional optimization problems. *Applied Soft Computing* 71 (2018): 1161-1175.
26. Jiang, Jianhua, Xi Yang, Xianqiu Meng, and Keqin Li. Enhance chaotic gravitational search algorithm (CGSA) by balance adjustment mechanism and sine randomness function for continuous optimization problems. *Physica A: Statistical Mechanics and its Applications* 537 (2020): 122621.
27. Coello CA. Use of a self-adaptive penalty approach for engineering optimization problems. *Computers in Industry*, 41 (2000) 113–127.
28. Onwubolu GC and Babu BV. *New Optimization Techniques in Engineering*. Springer-Verlag Berlin Heidelberg, (2004).

29. Belegundu AD. A study of mathematical programming methods for structural optimization. *International Journal for Numerical Methods in Engineering*, 21 (1985): 1601–1623.
30. Chegini SN, Bagheri A. and Najafi F. PSOSCALF: A new hybrid PSO based on Sine Cosine Algorithm and Levy flight for solving optimization problems. *Applied Soft Computing*, 73 (2018) 697-726.
31. Dash, Sujata, Ajith Abraham, Ashish Kr Luhach, Jolanta Mizera-Pietraszko, and Joel JPC Rodrigues. Hybrid chaotic firefly decision making model for Parkinson's disease diagnosis. *International Journal of Distributed Sensor Networks* 16(1) (2020): 1550147719895210.
32. Gandomi, Amir Hossein, Yang XS, Talatahari S, and Amir Hossein Alavi. Firefly algorithm with chaos. *Communications in Nonlinear Science and Numerical Simulation* 18(1) (2013): 89-98.
33. Fu, Wenlong, Kai Wang, Chaoshun Li, Xiong Li, Yuehua Li, and Hao Zhong. Vibration trend measurement for a hydropower generator based on optimal variational mode decomposition and an LSSVM improved with chaotic sine cosine algorithm optimization. *Measurement Science and Technology* 30(1) (2018): 015012.
34. Vinu Sundararaj, Muthukumar, S., Kumar, R.S.: An optimal cluster formation based energy efficient dynamic scheduling hybrid MAC protocol for heavy traffic load in wireless sensor networks. *Comput. Secur.* 77, 277–288 (2018)
35. Sundararaj, V: An efficient threshold prediction scheme for wavelet based ECG signal noise reduction using variable step size firefly algorithm. *Int. J. Intell. Eng. Syst.* 9(3), 117–126 (2016)
36. Vinu S, Optimal task assignment in mobile cloud computing by queue based ant-bee algorithm. *Wireless. Pers. Commun.* 104(1), 173–197 (2019)
37. Sundararaj, V.: Optimised denoising scheme via opposition-based self-adaptive learning PSO algorithm for wavelet-based ECG signal noise reduction. *Int. J. Biomed. Eng. Technol.* 31(4), 325 (2019)
38. Rejeesh, M.R., 2019. Interest point based face recognition using adaptive neuro fuzzy inference system. *Multimedia Tools and Applications*, 78(16), pp.22691-22710.
39. Dunia S., Ramzy Ali, Chaotic Sine-Cosine Optimization Algorithms, *International Journal of Soft Computing* 13(3):108-122, August 2018.
40. Guo, Meng-Wei, Jie-Sheng Wang, and Xue Yang. "An Chaotic Firefly Algorithm to Solve Quadratic Assignment Problem." *Engineering Letters* 28, no. 2 (2020).

41. Jagatheesan, K., B. Anand, Soumadip Sen, and Sourav Samanta. "Application of chaos-based firefly algorithm optimized controller for automatic generation control of two area interconnected power system with energy storage unit and UPFC." In *Applications of Firefly Algorithm and its Variants*, pp. 173-191. Springer, Singapore, 2020.
42. Guesmi, Tawfik, Anouar Farah, Ismail Marouani, Badr Alshammari, and Hsan Hadj Abdallah. "A new chaotic sine cosine algorithm for chance-constrained economic emission dispatch problem including wind energy." *IET Renewable Power Generation* (2020).
43. Liang, Xi, Zhennao Cai, Mingjing Wang, Xuehua Zhao, Huiling Chen, and Chengye Li. "Chaotic oppositional sine–cosine method for solving global optimization problems." *Engineering with Computers* (2020): 1-17.
44. Hassan BA, Rashid TA (2019) Operational framework for recent advances in backtracking search optimisation algorithm: A systematic review and performance evaluation. *Appl Math Comput* 124919
45. Hassan BA, Rashid TA (2020) Datasets on statistical analysis and performance evaluation of backtracking search optimisation algorithm compared with its counterpart algorithms. *Data Br* 28:105046