

On the Complexity of a Family of Decoupled Multi-Robot Motion Planning Problems*

Tzvika Geft¹ and Dan Halperin¹

Abstract—In multi-robot motion planning (MRMP) the aim is to plan the motion of several robots operating in a common workspace, while avoiding collisions with obstacles or with fellow robots. The main contribution of this paper is a simple construction that serves as a lower bound for the computational cost of a variety of prevalent MRMP problems. In particular we show that optimal decoupling of multi-robot motion—decoupling being a standard approach to practically addressing MRMP—is NP-hard. The basic problem for which we present our construction is *monotone* MRMP, a restricted and natural MRMP variant, where robots move one by one to their targets with no intermediate stops. Observing the hardness of these restricted versions of MRMP is significant as it guides the search for efficient solutions towards techniques that can cope with intractable problems. Furthermore, our construction highlights structural properties of difficult instances, such as the need of robots to pass through many start and target positions of other robots. These insights can lead to useful problem relaxations resulting in efficient solutions and to suitable engineering of workspaces.

I. INTRODUCTION

Multi-robot systems play an increasing role in manufacturing, logistics automation, monitoring of natural resources, large structure inspection, and they are anticipated to expand to many more domains. A key ingredient necessary for the autonomy of multi-robot systems, is the ability to plan collision-free motions. In multi-robot motion planning (MRMP) the aim is to plan the motion of several robots operating in a common workspace, while avoiding collisions with obstacles or with each other. We consider the *labeled* case, where each robot moves from its start to its *own* target position without incurring collisions.

MRMP in two-dimensional continuous domains has been shown to be hard in various settings [1], [2], [3], [4]. Recently, the problem was shown to be PSPACE-hard even for unit square robots amidst polygonal obstacles [5]. Nevertheless, finding the border between tractability and intractability is still a major open challenge in MRMP [6]. For example, it has been shown that a slight relaxation of the problem, requiring a modest amount of spacing among robots in their initial and final placements, can lend itself to efficient polynomial-time solutions [7], [8], [9]. Therefore, an increasing interest remains in the computational complexity of narrowed-down MRMP settings, such as grid-like domains, which are often used to model warehouses. Both positive

and negative results for such questions can have significant implications for algorithm design and the advancement of the state-of-the-art.

In all the MRMP hardness results we are aware of the robots are allowed to make multiple moves. For example, one robot A performs a single *move* consisting of starting and then stopping along A 's path, then another robot moves, and then robot A resumes its motion. Moreover, the number of moves made by robots in some hardness constructions is exponential in the number of robots [3], [5] (somewhat expectedly, given that they emulate computation of problems in PSPACE). In real scenarios it is highly unlikely that plans with an exponential length would be considered. We are therefore motivated to consider MRMP variants where the motion plans are restricted to be simpler.

We study *monotone* MRMP, where we restrict robots to move only once, i.e., robots must move one by one to their targets with no intermediate stops, and when one robot moves the others stay put. Our main result is that monotone MRMP is NP-complete. This hardness result carries further significance due to its applicability to other prevalent MRMP problems, which we now present.

Optimal decoupling into sequential plans. A prevalent approach in MRMP is *decoupled* planning, where paths are initially computed for robots independently and later deconflicted. Decoupled planners need to consider fewer degrees of freedom simultaneously and are therefore generally faster, though this may come at the expense of completeness [10]. van den Berg et al. [10] propose a decoupling method that divides robots into groups with minimum degree of coupled control while maintaining completeness. Informally, robots are added to the same group only if they must move together to reach their goals. This method allows solving large MRMP instances faster by minimizing the number of degrees of freedom that need to be handled simultaneously.

To the best of our knowledge, the computational complexity of optimal decoupling has not been formally determined. Our hardness result applies to the optimal decoupling problem in [10] and therefore settles its computational complexity.

Reconfiguration. A problem highly related to MRMP is *reconfiguration*. In this problem we are given a set of objects along with a start configuration S and a target configuration T for these objects in a workspace. The goal is to efficiently move the objects from S to T , subject to constraints on the allowable motions, which are typically simple, such as translations along a single line segment [11]. Such problems arise in robotics, e.g., when a robot needs to arrange products

*Work on this paper by T. Geft and D. Halperin has been supported in part by the Israel Science Foundation (grant no. 1736/19), by the US National Science Foundation/US-Israel Binational Science Foundation (grant no. 2019754, Agarwal-Halperin), by the Blavatnik Computer Science Research Fund, and by a grant from Yandex.

¹Blavatnik School of Computer Science, Tel-Aviv University, Israel

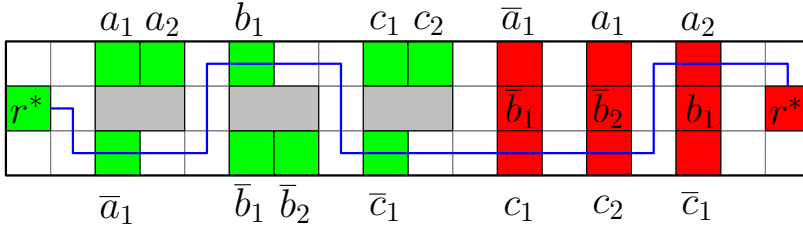


Fig. 1: The monotone MRMP instance for the formula $(\bar{a} \vee \bar{b} \vee c) \wedge (a \vee \bar{b} \vee c) \wedge (a \vee b \vee \bar{c})$. The start and target positions are colored in green and red, respectively, and are labeled with their respective literals. Literal labels have unique indices in order to distinguish between appearances of the same literal. The path P (blue) is shown for the assignment $a = T, b = F, c = T$, for which the corresponding motion plan has robots moving in the following order: $\bar{c}_1, b_1, \bar{a}_1, r^*, a_2, a_1, \bar{b}_2, c_2, \bar{b}_1, c_1$.

on a shelf.

Dumitrescu and Jiang [12] consider a problem called L-SLIDE-RP of minimizing the number of moves in the reconfiguration of unit discs in the plane. L-SLIDE-RP and a discrete version of this problem on the grid [13] were shown to be NP-hard. Our hardness construction constitutes an alternative hardness proof for these problems. Our proof is more compact in the sense that we use a linear number of unit discs (in the size of the instance of the reduction base problem) to show hardness, whereas a quadratic number of unit discs is used in [12].

Contribution. We show that monotone MRMP, a natural restriction of MRMP, is still hard, namely NP-complete. We present a simple hardness construction that uses rectangular workspace with unit-square robots and obstacles. Our construction applies to both continuous and discrete domains, such as robots operating on a grid with holes. The applicability of the hardness result to discrete domains stands in contrast to unrestricted (non-monotone) graph-based MRMP, for which feasibility is decidable in polynomial time [14], [15], [16].

The remainder of the paper is organized as follows. In Section II we present the hardness proof for monotone MRMP. In sections III and IV we show its applicability to optimal decoupling and reconfiguration, respectively. Finally, in Section V we discuss the insights gained from the hardness results and raise questions for further study.

II. HARDNESS OF MONOTONE MRMP

We begin by defining an instance of monotone MRMP. We are given a set R of n unit square robots in a planar workspace, where each robot $r \in R$ has a start and target position, denoted by s_r and t_r , respectively. The goal is to decide whether there is a *monotone motion plan*, i.e., a sequence of moves in which each robot $r \in R$ moves once from s_r to t_r without inducing collisions while other robots are stationary. If such a motion plan exists we say that the given instance is *feasible*. We show that the following problem is NP-complete:

Problem: Let I be an instance of monotone MRMP. Is I feasible?

To prove hardness we use a reduction from 3SAT, the problem of deciding satisfiability of a formula in conjunctive

normal form with 3 literals in each clause. Given a 3SAT formula ϕ , we construct a corresponding monotone MRMP instance I that is feasible if and only if ϕ has a satisfying assignment. The workspace in which the robots can move is a three-row high rectangular portion of the unit grid in which some of the cells are immovable obstacles; see Figure 1. All the start and target positions are cells on the grid. There is one robot for each literal in ϕ , which together are called *literal robots*, and one *assignment verifier* robot r^* . The literal robots' start positions are located in *assignment gadgets*. Each assignment gadget initially contains robots representing literals of a single variable of ϕ . The top and bottom rows of the gadget contain robots representing only positive and negative literals, respectively, while the middle row is composed of obstacle cells. The literal robots' target positions are located in *clause gadgets*, each of which is a column of three cells, one for each literal in the clause. All the assignment gadgets are located to the left of the clause gadgets (the order of gadgets of the same type is arbitrary). To the left of every gadget is a vertical column of empty cells to allow robots to enter the gadget at any of the three rows. After all the gadgets are placed, for each assignment gadget we determine the order of the sources within each of its two non-obstacle rows. In each such row, the left to right order of the sources is set so that it matches the left to right order of the corresponding targets, which we refer to as the *intra-literal order property*. Finally, r^* has to move across the workspace, from the leftmost to the rightmost column.

Theorem 1. *The monotone MRMP instance I is feasible if and only if ϕ has a satisfying assignment.*

Proof. Assume that ϕ has a satisfying assignment \mathcal{A} . Let R^+ (resp. R^-) be the set of robots corresponding to literals that evaluate to true (resp. false) according to \mathcal{A} . That is, for each assignment gadget, R^+ contains robots that are all initially either in the top or the bottom row of the gadget, according to \mathcal{A} . We show that the robots can move in the rough order R^-, r^*, R^+ , which is made more precise below. Let P be a weakly x -monotone path from s_{r^*} to t_{r^*} that passes through the sources of R^- and targets of R^+ (without passing through obstacles or other sources or targets); see Figure 1. P exists because each clause gadget must contain a target of some robot in R^+ , or else \mathcal{A} does not satisfy

ϕ . In the motion plan, each $r \in R^-$ follows the subpath of P from s_r (through which P passes) up to the empty column before the gadget containing t_r , from which r easily reaches the target t_r . The order in which the robots in R^- move is the right to left order of their sources, which guarantees no collisions with another robot located at its source. Since the robots in R^- move before R^+ , the targets through which P passes are unoccupied when the robots in R^- move, guaranteeing no collisions in the clause gadgets. Next, r^* moves using P , which consists of empty cells at this point. Finally, each $r \in R^+$ connects to P at the nearest empty column to its right, from which point it continues similarly to R^- . The order of motion of the robots in R^+ is the right to left order of their targets, which guarantees no collisions in the clause gadgets. Note that due to the intra-literal order property we also have no collisions among R^+ within assignment gadgets. We have shown that I is feasible.

For the other direction, we assume that there is a monotone motion plan for I and show that ϕ has a satisfying assignment. Let R^+ denote the robots that move after r^* . For any variable $x \in \phi$, R^+ cannot contain robots corresponding to both literals x and \bar{x} , since otherwise r^* would not have a valid path to t_{r^*} during its turn. Therefore, we can define an assignment \mathcal{A} in which the literals corresponding to R^+ evaluate to true. Let C be a clause of ϕ and let t be a target in C 's clause gadget that is unoccupied during r^* 's motion. Such a t must exist in order for r^* to have a valid path to t_{r^*} during its turn. Since the literal robot whose target is t must be in R^+ , it evaluates to true by the assignment \mathcal{A} , which means that C is satisfied and we are done. \square

Monotone MRMP is clearly in NP, therefore we obtain the following:

Corollary 1. *Monotone MRMP is NP-complete.*

III. CONNECTION TO OPTIMAL DECOUPLING INTO SEQUENTIAL PLANS

Algorithms for MRMP are often classified as being either *coupled* or *decoupled*. Coupled approaches (see, e.g., [17], [18]) compute paths for robots in their joint configuration space, which essentially treats all robots as a single entity. In contrast to that, decoupled planning (see, e.g., [19], [20]) computes a path for each robot independently and handles conflicts as they arise. Naturally, coupled approaches tend to be *complete*, i.e. guaranteeing to return a solution if one exists or reporting that none exists otherwise, while decoupled are usually not. However, since the size of the joint configuration space of all robots grows exponentially with the number of robots, coupled methods are usually effective only when this number is small. It is therefore desirable to limit the search within the joint configuration space, ideally without compromising completeness. To this end, van den Berg et al. [10] propose a method that decouples a given MRMP instance by producing smaller sub-instances that can be executed independently of each other in a sequential manner. Their algorithm finds an optimal decoupling, where

the dimension of the largest configuration space needed to solve the original MRMP instance is minimized.

We present the formal problem statement for optimal decoupling, based on the definitions in [10]. We are given an MRMP instance I for a set R of robots. A *decoupled execution sequence* is an ordered partition $S = (R_1, \dots, R_k)$ of R , i.e., $R_i \cap R_j = \emptyset$ for $i \neq j$ and $\bigcup_i R_i = R$. Such a sequence is a *solution sequence* for I if there is a motion plan that can be divided into k time intervals τ_1, \dots, τ_k where at each interval τ_i only the robots in R_i move. Equivalently, S is a solution sequence if for each $1 \leq i \leq k$, the set of robots $R_i \in S$ can move from their start to target positions while the robots of R_1, \dots, R_{i-1} are placed as obstacles at their *target* positions and the robots of R_{i+1}, \dots, R_k are placed as obstacles at their *start* positions. The dimension of a solution sequence S , $\dim(S)$, is the size of the largest group of robots in S , i.e., $\dim(S) = \max_{R_i \in S} |R_i|$. A solution sequence S is *optimal* if it has the smallest dimension over all possible solution sequences for I .¹ The problem of optimal decoupling is to find an optimal solution sequence.

We relate our hardness result to the decision problem version of optimal decoupling, which is defined as follows:

Problem: Let I be an instance of MRMP and ℓ be an integer. Does I have a solution sequence S with a dimension of at most ℓ ?

In monotone MRMP we consider the feasibility of the best possible sequential decoupling, since each robot must be decoupled from all the others in a feasible instance. Therefore, the connection to optimal decoupling is quite apparent: A monotone MRMP instance I is feasible if and only if the corresponding optimal decoupling instance has a solution sequence S with a dimension of at most 1. Therefore, we obtain the following:

Theorem 2. *Optimal decoupling into sequential plans is NP-hard.*

IV. CONNECTION TO RECONFIGURATION

In reconfiguration, we are given a set of objects in the plane or in three-dimensional space and two configurations of these objects, a start configuration S and a target configuration T , where in each configuration the objects are pairwise interior disjoint. The goal of the problem is to efficiently move the objects from S to T , subject to constraints on the allowable motions, the most notable of which is that all the moves be collision free [11].

Dumitrescu and Jiang [12] consider a problem called L-SLIDE-RP of minimizing the number of moves in the reconfiguration of unit discs. Each move consists of sliding a disc along a continuous curve in the plane without inducing collisions. We state the problem formally:

¹In general, one can define minimality in terms of the sum of the degrees of freedom of the robots in R_i instead of $|R_i|$. When all the robots are identical the measures are equivalent.

Problem: Let I be a reconfiguration instance of unit discs in the plane and ℓ be an integer. Can I be solved using at most ℓ moves?

Dumitrescu and Jiang [12] show that L-SLIDE-RP is NP-complete using a reduction from the Rectilinear Steiner Tree problem, which is known to be strongly NP-complete. Their proof is an adaptation of an earlier reduction from [13] for the NP-hardness of a discrete version of the problem with chips on an infinite grid. Our construction can be modified to show hardness for both problems. We only discuss L-SLIDE-RP for brevity.

Let ϕ be a 3SAT formula and let I be the corresponding monotone MRMP instance having n robots as defined in Section II. We convert I to an instance I' of L-SLIDE-RP. First, we replace each unit square robot by a unit disc. Then, we replace each obstacle cell, including the grid cells that surround the workspace, by a unit disc whose source and target are the same (such “obstacles” are also used in [12]). It is easily seen that I is feasible if and only if I' has a motion plan with at most n moves.

Our construction is more compact in the sense that it uses less unit discs. More precisely, for a 3SAT instance of size (i.e., number of literals) m , our corresponding L-SLIDE-RP instance I' has $O(m)$ unit discs. The proof in [12] constructs an L-SLIDE-RP instance with $O(m^2)$ unit discs for a Rectilinear Steiner Tree instance of size m .

We remark that Abellanas et al. [21] consider a disc reconfiguration problem that is analogous to monotone MRMP. However, they have a further restriction requiring each disc to make a single translation (as opposed to taking an arbitrary path) to its target. The single-translation restriction gives rise to a fairly straightforward polynomial-time algorithm based on a precedence graph. For additional reconfiguration problems where the motions are single translations see [11].

V. CONCLUSION AND FUTURE WORK

We have presented a simple construction showing that various variants of the multi-robot motion-planning problem are provably computationally hard. Our results suggest design guidelines for multi-robot workspaces as well as raise a number of questions for further investigation as we outline next.

An apparent source of hardness in our construction is the need for robots to pass through a large number of start and target positions of other robots. From a practical standpoint, additional space for robots to bypass other start and target positions would help in finding solutions. However, increasing the workspace’s size to add such spacing has its own cost and therefore it would be interesting to find the optimal balance between additional space and solvability. A natural question that arises is the following: Does monotone MRMP remain hard when each robot only needs to pass through a constant number of start and target positions of other robots?

A different future direction is to reconsider the problem formulation. While the motivation behind monotone MRMP is to consider simple motion plans, the constrained nature

of the problem appears to introduce some hardness. A robot cannot move once it reaches its target, which might result in a robot being stuck in a position that will later block other robots. When faced with the decision of which robot should move to its target next, it might be hard for an algorithm to find a robot that will not block other robots in the future. Therefore, a possible relaxation is to allow robots to make more moves, though allowing too much freedom could contribute to the intractability of the problem. An interesting question is whether one can “strike the balance” between the restrictive motion plans allowed by monotone MRMP and more complex motion plans in a way that gives rise to efficient algorithms.

A possible relaxed formulation of monotone MRMP is to allow robots to have a small number of intermediate stops. van den Berg et al. [10] observed that insisting to compute full paths between start and target positions has the drawback of introducing unnecessary coupling between robots in some cases. They then suggested to introduce intermediate stops along the paths as a way to further reduce the degree of coupling. Since our hardness construction prohibits such intermediate stops, the question that arises is whether a limited number intermediate stops can indeed aid tractability. Therefore the selection and placement of intermediate stops appears to be a fruitful topic for further investigation.

REFERENCES

- [1] J. E. Hopcroft, J. T. Schwartz, and M. Sharir, “On the complexity of motion planning for multiple independent objects; PSPACE-hardness of the “warehouseman’s problem”,” *The International Journal of Robotics Research*, vol. 3, no. 4, pp. 76–88, 1984.
- [2] P. G. Spirakis and C. Yap, “Strong NP-hardness of moving many discs,” *Inf. Process. Lett.*, vol. 19, no. 1, pp. 55–59, 1984.
- [3] R. A. Hearn and E. D. Demaine, “PSPACE-completeness of sliding-block puzzles and other problems through the nondeterministic constraint logic model of computation,” *Theor. Comput. Sci.*, vol. 343, no. 1–2, pp. 72–96, 2005.
- [4] T. Brocken, G. W. van der Heijden, I. Kostitsyna, L. E. Lo-Wong, and R. J. A. Surtel, “Multi-robot motion planning of k-colored discs is PSPACE-hard,” in *FUN*, ser. LIPIcs, vol. 157. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2021, pp. 15:1–15:16.
- [5] K. Solovey and D. Halperin, “On the hardness of unlabeled multi-robot motion planning,” *Int. J. Robotics Res.*, vol. 35, no. 14, pp. 1750–1759, 2016.
- [6] O. Salzman and R. Stern, “Research challenges and opportunities in multi-agent path finding and multi-agent pickup and delivery problems,” in *AAMAS*. International Foundation for Autonomous Agents and Multiagent Systems, 2020, pp. 1711–1715.
- [7] A. Adler, M. de Berg, D. Halperin, and K. Solovey, “Efficient multi-robot motion planning for unlabeled discs in simple polygons,” *IEEE Trans Autom. Sci. Eng.*, vol. 12, no. 4, pp. 1309–1317, 2015.
- [8] I. Solomon and D. Halperin, “Motion planning for multiple unit-ball robots in \mathbb{R}^d ,” in *Workshop on the Algorithmic Foundations of Robotics, WAFR*, 2018, pp. 799–816.
- [9] K. Solovey, J. Yu, O. Zamir, and D. Halperin, “Motion planning for unlabeled discs with optimality guarantees,” in *Robotics: Science and Systems*, 2015.
- [10] J. van den Berg, J. Snoeyink, M. C. Lin, and D. Manocha, “Centralized path planning for multiple robots: Optimal decoupling into sequential plans,” in *Robotics: Science and Systems*. The MIT Press, 2009.
- [11] D. Halperin, M. J. van Kreveld, G. Miglioli-Levy, and M. Sharir, “Space-aware reconfiguration,” *CoRR*, vol. abs/2006.04402, 2020.
- [12] A. Dumitrescu and M. Jiang, “On reconfiguration of disks in the plane and related problems,” *Comput. Geom.*, vol. 46, no. 3, pp. 191–202, 2013.
- [13] G. Călinescu, A. Dumitrescu, and J. Pach, “Reconfigurations in graphs and grids,” *SIAM J. Discret. Math.*, vol. 22, no. 1, pp. 124–138, 2008.

- [14] D. Kornhauser, G. L. Miller, and P. G. Spirakis, "Coordinating pebble motion on graphs, the diameter of permutation groups, and applications," in *FOCS*. IEEE Computer Society, 1984, pp. 241–250.
- [15] J. Yu and D. Rus, "Pebble motion on graphs with rotations: Efficient feasibility tests and planning algorithms," in *Workshop on the Algorithmic Foundations of Robotics, WAFR*, 2014, pp. 729–746.
- [16] J. Yu, "A linear time algorithm for the feasibility of pebble motion on graphs," *CoRR*, vol. abs/1301.2342, 2013.
- [17] K. Solovey, O. Salzman, and D. Halperin, "Finding a needle in an exponential haystack: Discrete RRT for exploration of implicit roadmaps in multi-robot motion planning," *Int. J. Robotics Res.*, vol. 35, no. 5, pp. 501–513, 2016.
- [18] O. Salzman, M. Hemmer, and D. Halperin, "On the power of manifold samples in exploring configuration spaces and the dimensionality of narrow passages," *IEEE Trans Autom. Sci. Eng.*, vol. 12, no. 2, pp. 529–538, 2015.
- [19] J. P. van den Berg and M. H. Overmars, "Prioritized motion planning for multiple robots," in *ROS*. IEEE, 2005, pp. 430–435.
- [20] D. Silver, "Cooperative pathfinding," in *AIIDE*. AAAI Press, 2005, pp. 117–122.
- [21] M. Abellanas, S. Bereg, F. Hurtado, A. G. Olaverri, D. Rappaport, and J. Tejel, "Moving coins," *Comput. Geom.*, vol. 34, no. 1, pp. 35–48, 2006.