

Neural Network Compression of ACAS Xu Early Prototype is Unsafe: Closed-Loop Verification through Quantized State Backreachability

Stanley Bak¹ and Hoang-Dung Tran²

¹ Stony Brook University, Stony Brook, NY, USA
stanley.bak@stonybrook.edu

² University of Nebraska-Lincoln, Lincoln, NE, USA
dtran30@unl.edu

Abstract. ACAS Xu is an air-to-air collision avoidance system designed for unmanned aircraft that issues horizontal turn advisories to avoid an intruder aircraft. Due to the use of a large lookup table in the design, a neural network compression of the policy was proposed. Analysis of this system has spurred a significant body of research in the formal methods community on neural network verification. While many powerful methods have been developed, most work focuses on open-loop properties of the networks, rather than the main point of the system—collision avoidance—which requires closed-loop analysis.

In this work, we develop a technique to verify a closed-loop approximation of the system using *state quantization* and *backreachability*. We use favorable assumptions for the analysis—perfect sensor information, instant following of advisories, ideal aircraft maneuvers and an intruder that only flies straight. When the method fails to prove the system is safe, we refine the quantization parameters until generating counterexamples where the original (non-quantized) system also has collisions.

Keywords: Neural Network Verification · ACAS Xu · Reachability

1 Introduction

The Airborne Collision Avoidance System X (ACAS X) is a mid-air collision avoidance system under development [26], with the ACAS Xu variant focused on collision avoidance for unmanned aircraft [20]. Originally designed offline using dynamic programming and Markov decision processes (MDPs) [21], the large rule table was compressed by a factor of 1000 using a set of neural networks [19]. The proposed system is an example of a neural network control system (NNCS), where the system’s execution alternates between the aircraft dynamics and a neural network controller. As collision avoidance is safety-critical, analysis of the neural networks has spurred a significant body of research on neural network verification. Most existing work, however, focuses on *open-loop* verification, such as property ϕ_3 from the original work [20], which states, “if the intruder is

directly ahead and is moving towards the ownship, [a turn will be commanded].” Open-loop properties can be expressed in terms of constraints over the inputs and outputs of a single execution of the neural network. However, satisfying open-loop properties does not prove the system is safe, as this requires reasoning with the physical system dynamics—how the aircraft responds to turn commands. Also, the system is running continuously and may change advisories at a future time, complicating safety analysis. Verification of closed-loop safety of provided collision avoidance system under all designed operating conditions is thus a sort of grand challenge.

While verification of neural networks is continuously improving, an intriguing alternate approach has recently been proposed based on input quantization [15]. Rather than verifying the neural network directly, which requires reasoning about the semantics at each layer, the system’s execution semantics are changed to round the inputs to a discrete set of possible values before running the network. To be clear, this type of quantization is a preprocessing layer before the network runs; it does not change the representation of the floating-point values inside the network itself. Through input quantization, proving open-loop properties of a neural network is reduced to the problem of *network execution* for each of a finite set of possible inputs. Due to the possibility of combinatorial explosion, this strategy can only work if the number of inputs is small, which is often the case for neural networks used in control systems. When the strategy is applicable, however, it enjoys several advantages: (i) batch execution of neural networks is often used in training and so optimized hardware like GPUs can be leveraged to enumerate the possible inputs for verification, (ii) the performance of the final quantized system approximates the performance of the original neural network and the approximation can be tuned through the quantization parameters, and (iii) the verification method only requires execution, and works regardless of the network size, the network architecture, or the layer types, unlike most neural network verification methods. In the context of verification, however, quantization has only been considered for open-loop properties.

In this work, we propose an approach to formally verify quantized closed-loop NNCS. Although the technique is general, we focus primarily on proving safety for quantized version of the well-studied aircraft collision avoidance neural network benchmark. Two key ideas are needed to make this work: (1) we perform *state quantization* rather than input quantization and (2) we use *back-reachability* from the unsafe states to reduce the number of partitions. We prove the approach is sound and complete, in the sense that by continuing to refine quantization parameters, either the quantized system will eventually be proven safe or an unsafe counterexample will be found in the original system. When the method fails to prove safety of quantized closed-loop system, we refine the quantization values until discovering cases where the original (unquantized) version of the system fails. We also show that with stricter assumptions on the ownship aircraft’s velocity, the quantized system can guarantee safety.

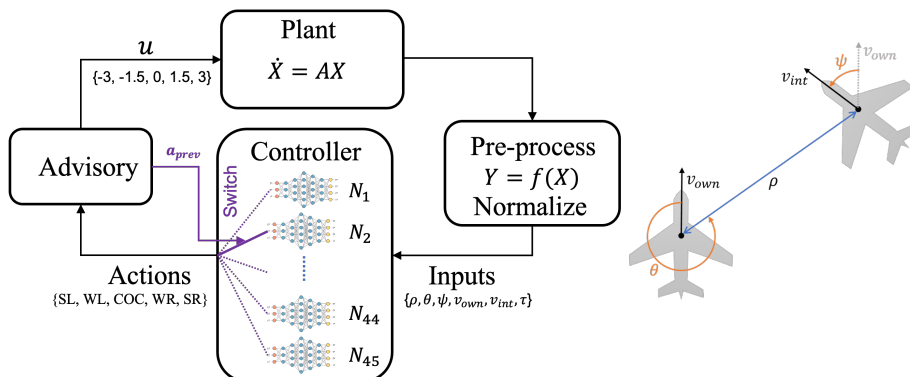


Fig. 1: The closed-loop air-to-air collision avoidance system design.

2 Background and Problem Formulation

We next review key aspects of the system design, proof assumptions, and provide background on \mathcal{AH} -Polytopes before formulating the safety verification problem.

2.1 Collision Avoidance System Design

We are interested in safety verification and falsification of the *closed-loop* air-to-air collision avoidance system [21,20] depicted in Figure 1. The system computes advisory commands to control an ownship aircraft with physical dynamics described by a set of ordinary differential equations (ODEs), trying to avoid collisions with a nearby intruder.

A detailed description of the inputs and actions in the system is shown in Table 1. The system receives 7 inputs about the state of an ownship and a nearby intruder aircraft, $\mathcal{I} = \{\rho, \theta, \psi, v_{own}, v_{int}, \tau, a_{prev}\}$, and produces one of five possible advisories for the ownship, $\mathcal{A} = \{\text{COC}, \text{WL}, \text{WR}, \text{SL}, \text{SR}\}$.

The turn advisories in the system are generated by 45 deep ReLU neural networks with 6 layers and 50 neurons per layer for each network. Control switches between different neural networks $N_{a_{prev}, \tau}$ based on the previous advisory a_{prev} (total of 5 choices) and the time until loss of vertical separation $\tau = \{0, 1, 5, 10, 20, 50, 60, 80, 100\}$ (total of 9 choices). For example, the network $N_{5,3}$ will be invoked if the previous advisory is $a_{prev} = \text{SR}$ and $\tau = 5$. If the ownship and the intruder are at the same altitude, then $\tau = 0$ and only five neural network controllers need to be used, $N_{1,1}, N_{2,1}, N_{3,1}, N_{4,1}$, and $N_{5,1}$.

2.2 Assumptions and Plant Model

Before we describe the plant model used in analysis, we first state our system assumptions: (i) the intruder flies in straight-line trajectories with constant speed,

(ii) the ownship flies with constant speed and its heading is adjusted every second (the NNCS control period), (iii) the actions correspond to heading changes in the intruder of 1.5 deg/sec for weak turn commands, 3.0 deg/sec for strong turns and 0.0 deg/sec for clear-of-conflict commands [19], (iv) there is no sensor noise and (v) advisories are followed exactly and immediately. Many of these are fairly strong and the real system would need to be robust to maneuvering intruders, pilot delay and sensor noise. From a safety proof perspective, however, we would want the system to *at least* be safe under these ideal assumptions.

To model the state of the system with these assumptions, we use Cartesian coordinates. The values $x_{own}, y_{own}, x_{int}, y_{int}$ refer to the x and y positions of the ownship and the intruder; $v_{own} = \sqrt{(v_{own}^x)^2 + (v_{own}^y)^2}$ and $v_{int} = \sqrt{(v_{int}^x)^2 + (v_{int}^y)^2}$ are the speed of the ownship and the intruder; θ_{own} and θ_{int} are the heading of the ownship and the intruder w.r.t the x axis. The system performs idealized turn maneuvers modeled with Dubins aircraft dynamics:

$$\begin{aligned} \dot{x}_{own} &= v_{own}^x = v_{own} \cos(\theta_{own}) \\ \dot{y}_{own} &= v_{own}^y = v_{own} \sin(\theta_{own}) \\ \dot{x}_{int} &= v_{int}^x = v_{int} \cos(\theta_{int}) \\ \dot{y}_{int} &= v_{int}^y = v_{int} \sin(\theta_{int}) \end{aligned} \quad (1)$$

Equation 1 does not show clearly how the aircraft can be controlled by changing their heading. Taking derivatives of the Equation 1 one more time and noticing that $\dot{\theta}_{own}$ is a constant between advisories, $\dot{\theta}_{own} = (\pi/180)u = c(rad/s)$, and then taking $\dot{\theta}_{int} = 0$, we obtain the following 8-d linear system dynamics:

$$\begin{bmatrix} \dot{x}_{own} \\ \dot{y}_{own} \\ \dot{v}_{own}^x \\ \dot{v}_{own}^y \\ \dot{x}_{int} \\ \dot{y}_{int} \\ \dot{v}_{int}^x \\ \dot{v}_{int}^y \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -c & 0 & 0 & 0 & 0 \\ 0 & 0 & c & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} x_{own} \\ y_{own} \\ v_{own}^x \\ v_{own}^y \\ x_{int} \\ y_{int} \\ v_{int}^x \\ v_{int}^y \end{bmatrix} \quad (2)$$

The linear model described in Equation 2 is valid for only one control step, with a fixed control signal u , which may be either $-3, -1.5, 0, 1.5$ or 3 deg/s

Input	Units	Description	Action	Description
ρ	ft	distance between ownship and intruder	SL	strong left turn at 3.0 deg/s
θ	rad	angle to intruder w.r.t ownship heading	WL	weak left at turn 1.5 deg/s
ψ	rad	heading of intruder w.r.t ownship	COC	clear of conflict (do nothing)
v_{own}	ft/s	velocity of ownship	WR	weak right turn at 1.5 deg/s
v_{int}	ft/s	velocity of intruder	SR	strong right turn at 3.0 deg/s
τ	s	time until loss of vertical separation		
a_{prev}		previous advisory		

Table 1: Input variables used to produce a turn advisory.

depending on the specific command. Therefore, this model can be considered as a piece-wise linear model of the system. From the plant state variables, we can obtain the inputs for the neural network controller which are expected to in radial coordinates as follows.

$$\begin{aligned}\theta_{own} &= \arctan\left(\frac{v_{own}^y}{v_{own}^x}\right), & \theta_{int} &= \arctan\left(\frac{v_{int}^y}{v_{int}^x}\right), \\ \rho &= \sqrt{(x_{int} - x_{own})^2 + (y_{int} - y_{own})^2}, \\ \theta &= \arctan\left(\frac{y_{int} - y_{own}}{x_{int} - x_{own}}\right) - \theta_{own}, & \psi &= \theta_{int} - \theta_{own}.\end{aligned}\tag{3}$$

2.3 Reachability with \mathcal{AH} -Polytopes

An \mathcal{AH} -polytope is a set representation that informally is an affine transformation of a half-space polytope, where the affine transformation and polytope terms are explicitly kept separate. Although the name is fairly recent [27], this set representation has often been used in reachability analysis for linear systems [5,2] and neural networks [30,4], where it is also called a linear star set [8], constrained zonotope [28], affine form [12], or symbolic orthogonal projection [11].

Importantly for this work, discrete-time reachability of systems with linear dynamics, $\dot{x} = Ax$, can be expressed exactly using this set representation, as it amounts to a linear transformation of the entire set by the matrix exponential e^{At} , where t is the time step. Further, operations like intersections can be performed exactly on \mathcal{AH} -polytopes, as well as linear optimization over the sets.

Definition 1 (\mathcal{AH} -Polytope). *An \mathcal{AH} -Polytope is a tuple $\Theta = \langle V, c, C, d \rangle$ that represents a set of states as follows:*

$$\llbracket \Theta \rrbracket = \{x \in \mathbb{R}^n \mid \exists \alpha \in \mathbb{R}^m, x = V\alpha + c \wedge C\alpha \leq d\}.$$

Proposition 1 (Affine Mapping). *An affine mapping of an \mathcal{AH} -Polytope $\Theta = \langle V, c, C, d \rangle$ with a mapping matrix W and an offset vector b is a new \mathcal{AH} -Polytope $\Theta' = \langle V', c', C', d' \rangle$ in which $V' = WV$, $c' = Wc + b$, $C' = C$, $d' = d$.*

Proposition 2 (Linear Transformation). *A linear transformation of an \mathcal{AH} -Polytope with a matrix W is an affine mapping using mapping matrix W and an offset vector of $b = 0$.*

Proposition 3 (Intersection). *The intersection of $\Theta = \langle V, c, C, d \rangle$ and a half-space $\mathcal{H} = \{x \mid Gx \leq g\}$ is a new \mathcal{AH} -Polytope $\Theta' = \langle V', c', C', d' \rangle$ with $c' = c$, $V' = V$, $C' = [C; GV]$, $d' = [d; g - Gc]$.*

Proposition 4 (Linear Optimization). *Linear optimization in given a direction $w \in \mathbb{R}^n$ over a star set $\Theta = \langle V, c, C, d \rangle$ can be solved with linear programming as follows: $\min(w^T x)$, s.t. $x \in \Theta = w^T c + \min(w^T V\alpha)$, s.t. $C\alpha \leq d$.*

2.4 Safety Problem Formulation

Verifying the safety of the closed-loop system means proving the absence of *unsafe paths* under all operating conditions. For simplified presentation, we consider a discrete-time version of the problem, where we only check for collisions once a second when the system is activated. Our analysis could be extended to continuous time through *conservative time-discretization* approaches from hybrid systems reachability analysis [10], which essentially bloat the initial set and then perform discrete-time analysis.

Definition 2 (Path). *A path is written as $s_1 \xrightarrow{\alpha_1} s_2 \xrightarrow{\alpha_2} \dots \xrightarrow{\alpha_{n-1}} s_n$, where successive values of s_i and s_{i+1} correspond to the state of the system one second apart according to the plant dynamics in Equation 2. The command α_i is the system output from state s_i using $\alpha_{prev} = \alpha_{i-1}$, with s_1 using the COC network. Paths can either be in-plane, where $\dot{\tau} = 0$ and $\tau = 0$ in all states and so the $N_{1,*}$ networks get used to generate all commands, or out-of-plane, where $\dot{\tau} = -1$. In the out-of-plane case, each state in the path should decrease τ by one second.*

An unsafe path has s_1 as an initial state and s_n as an unsafe state.

Definition 3 (Initial State). *An initial state of the state of the system is one where the aircraft are outside of the system’s operating range ($\rho > 60760$ ft).*

Definition 4 (Unsafe State). *Unsafe states are defined to be any states in the near mid-air collision (NMAC) cylinder [25], where the horizontal separation ρ is less than 500 ft and the time to loss of vertical separation τ is zero seconds.*

The operating conditions where the system should ensure safety are extracted based on the training ranges used for the original neural networks [21,20]. The system should be active when the distance between aircraft $\rho \in [0, 60760]$ ft, otherwise clear-of-conflict is commanded. The valid values for the ownship velocity are $v_{own} \in [100, 1200]$ ft/sec, valid values for intruder velocity are $v_{int} \in [0, 1200]$ ft/sec, and the angular inputs θ and ψ are both between $-\pi$ and π .

3 Quantized State Backreachability

Our verification strategy is to compute the backwards reachable set of states from all possible unsafe states, trying to find a path that begins with an initial state. We first partition the unsafe states along state quantization boundaries.

3.1 Partitioning the Unsafe States

Since the system advisories are only based on relative positions and headings, we eliminate symmetry by assuming that at the time of the collision the intruder is flying due east and at the origin. We then consider all possible positions of the ownship to account for all possible unsafe states. Three quantization parameters are used in the analysis: q_{pos} to quantize positions, q_{vel} to quantize velocities,

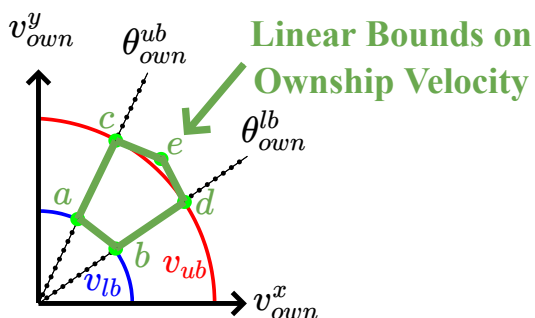


Fig. 2: The ownship velocity range and heading angle range are used to create linear bounds on v_{own}^x and v_{own}^y by connecting the points a, b, c, d and e .

and q_θ to quantize the heading angle. Based on these parameters, we partition the unsafe states into 8-d \mathcal{AH} -polytopes covering the entire set of possible unsafe states. The eight dimensions correspond to the system states in the linear dynamics in Equation 2, including positions x, y , and velocities v^x, v^y for both the ownship and intruder. Associated with each partition, we also enumerate the five possible previous commands α_{prev} and two possibilities for whether there is a relative vertical velocity—whether the time to loss of vertical separation is fixed at 0 or decreasing, $\dot{\tau} \in \{0, -1\}$.

To create partitions, the x_{own} and y_{own} values are divided into a grid based on q_{pos} . The intruder position (x_{int}, y_{int}) is set to $(0, 0)$. The intruder and ownship velocities are partitioned based on q_{vel} , which gets reflected in the x and y velocity state variables for the two aircraft. The intruder is moving due east, so $v_{int}^y = 0$ and v_{int}^x is set to the range of intruder velocities corresponding to the current partition. The heading of the angle of the ownship is partitioned based on q_θ , where each partition has a lower and upper bound on the heading $[\theta_{own}^{lb}, \theta_{own}^{ub}]$. From the current range of values for the ownship heading and the range of values for the ownship velocity, we can construct linear bounds on v_{own}^x and v_{own}^y . This is done by connecting five points, a, b, c, d and e , where a and b are the points at two extreme angles and minimum velocity, c and d are the two extreme angles and max velocity, and e is the point at the intersection of the tangent lines of the maximum velocity circle at c and d . A visualization is shown in Figure 2. We generally use $q_\theta = 1.5$ deg (as it makes for a cleaner backreachability step), which guarantee all possible v_{own}^x, v_{own}^y values are covered.

3.2 Backreachability from Each Partition

Once a covering of the entire set of unsafe states is performed, for each partition we compute the *exact* set of predecessor states that can lead to the states in the partition at a previous step. This process is repeated until either no predecessors

```

Function: check_state, Recursively checks safety of predecessors
Input   : State set:  $\mathcal{S}$ , Prev cmd:  $\alpha_{\text{prev}}$ , Time to loss of vertical separation:  $\tau$ 
Output  : Verification Result (safe or unsafe)
1  $\mathcal{P} = \text{backreach\_step}(\mathcal{S}, \alpha_{\text{prev}})$  // state set of one-step predecessors
2  $\tau_{\text{prev}} = \tau - \dot{\tau}$  //  $\dot{\tau}$  is fixed at either 0 or -1
3 for  $\alpha_{\text{prevprev}}$  in [COC, WL, WR, SL, SR] do
4   predecessor_quanta  $\leftarrow$  List()
5   all_correct  $\leftarrow$  TRUE
6   for  $q$  in possible_quantized_states( $\mathcal{P}$ ) do
7     if run_network( $\alpha_{\text{prevprev}}, \tau_{\text{prev}}, q$ ) =  $\alpha_{\text{prev}}$  then
8       predecessor_quanta.append( $q$ )
9       if  $\rho_{\text{min}}(q) > 60760$  then
10        | return unsafe // predecessor is valid initial state
11      else
12        | all_correct  $\leftarrow$  FALSE
13      end
14    if all_correct then
15      // recursive case without splitting
16      if check_state( $\mathcal{P}, \alpha_{\text{prevprev}}, \tau_{\text{prev}}$ ) = unsafe then
17        | return unsafe
18      end
19    else
20      // recursive case with splitting along quantum boundaries
21      for  $q$  in predecessor_quanta do
22         $\mathcal{T} \leftarrow$  quantized_to_state_set( $q$ )
23         $\mathcal{Q} \leftarrow \mathcal{T} \cap \mathcal{P}$ 
24        if check_state( $\mathcal{Q}, \alpha_{\text{prevprev}}, \tau_{\text{prev}}$ ) = unsafe then
25          | return unsafe
26        end
27      end
28 end
29 return safe

```

Algorithm 1: High-level algorithm for single partition backreachability.

exist or an initial state predecessor is found³, as described in Definition 3. In the latter case, a path exists from an initial state to a partition of the unsafe states in the quantized closed-loop system. Otherwise, if no partitions contain unsafe paths, then the quantized closed-loop system is safe.

The `check_state` function in Algorithm 1 recursively computes and checks predecessors. The input is a state set \mathcal{S} , which is initially an 8-d partition of the unsafe states represented as an \mathcal{AH} -Polytope, as well as the associated value of α_{prev} and the time to loss of vertical separation, $\tau = 0$ in all unsafe states.

In line 1, `backreach_step` is called, which returns the predecessor set of states as an \mathcal{AH} -polytope \mathcal{P} . This is done by taking the linear derivative matrix A_c

³ Degenerate paths could theoretically exist of infinite length that never include a valid initial state, but we did not observe this occurring in practice.

from Equation 2 with the value of c corresponding to α_{prev} , and then computing the matrix exponential $W = e^{-Ac}$. The resulting matrix is the solution matrix for the system one second prior. A linear transformation of the \mathcal{AH} -polytope S is then performed by W in order to obtain \mathcal{P} . In line 2, the value of the time to loss of vertical separation at the previous step τ_{prev} is computed. This either always equals 0 if $\dot{\tau} = 0$ for the current partition corresponding to in-plane flight, or increases by 1 at each call to `check_state` if $\dot{\tau} = -1$ for out-of-plane flight.

Next, the algorithm computes states in \mathcal{P} where the command produced by the networks was α_{prev} and the time to loss of vertical separation was the value at the previous step, τ_{prev} . This requires iterating over the five possible networks that could have been used at the prior state (the loop on line 3). For each network (corresponding to α_{prevprev}), we check each quantized state in \mathcal{P} (line 6).


The `possible_quantized_states` returns a list of *quantized states*, which are 5-tuples of integers, $q = (dx, dy, \theta_{\text{own}}, v_{\text{own}}, v_{\text{int}})$. The dx and dy terms correspond to the difference in positions between the intruder and ownship, divided by the position quantum q_{pos} . The θ_{own} term is the heading angle divided by q_{θ} , and the velocities v_{own} and v_{int} are the fixed aircraft velocities, integer divided by q_{vel} . The function computes the possible quantized states by using linear programming to find \mathcal{P} 's bounding box, and then looping over possible quantized states to check for feasibility when intersected with \mathcal{AH} -polytope \mathcal{P} .

Line 7 runs the neural network corresponding to α_{prevprev} on quantized state q to check if the correct command (α_{prev}) is obtained. This process requires converting from the quantized state (a 5-tuple of integers) to continuous inputs for the neural network. To do this, we use Equation 3, noting that the θ_{own} is quantized using q_{θ} , θ_{int} is always 0, and the computation of ρ and θ uses the dequantized value of dx and dy ($x_{\text{int}} - x_{\text{own}}$ is taken to be $\frac{q_{\text{pos}}}{2} + dx * q_{\text{pos}}$).

When the network output matches the required α_{prev} command, line 8 adds the quantized state to the valid list of predecessors `predecessor_quanta`. Otherwise, line 12 sets the `all_correct` flag to `false`, since some of the quantized states are not valid predecessors. Line 10 checks if the predecessor state satisfies the initial state condition, in which case an unsafe path has been found. On this line, $\rho_{\text{min}}(q)$ is the minimum aircraft separation distance in the quantized state q , which must be greater than 60760 ft in an initial state.

After classifying each quantized predecessor state, either all quantized states had the correct output or some did not. Based on this, we either recursively call `check_state` on the entire set \mathcal{P} (line 16), or we split the set \mathcal{P} into parts, and only recursively call `check_state` on parts that had the correct output. On line 22, `quantized_to_state_set` returns the 8-d continuous states corresponding to the quantized state q , which is then intersected with \mathcal{P} before being recursively passed to `check_state`. When splitting is performed, it is possible that no states had the correct output (`predecessor_quanta` may be empty).

An illustration of the algorithm is provided in Figure 3. In the figure, the set \mathcal{P} is covered by nine quantized states returned by `possible_quantized_states` (the dots on the right side). Of these nine, eight have a correct output (blue

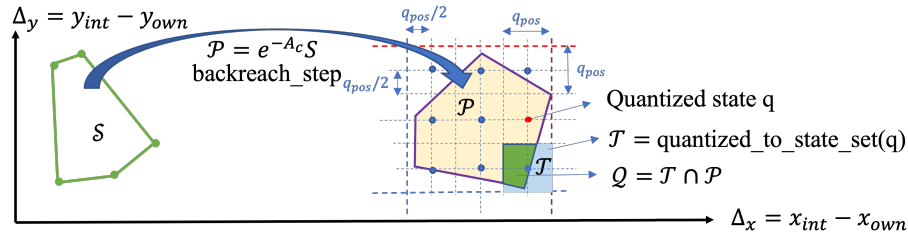Fig. 3: Illustration of Algorithm 1 given state set \mathcal{S} .

dots), and one has an incorrect output (red dot). In this case, the algorithm would split the set \mathcal{P} into eight parts and call `check_state` on each recursively⁴.

We next prove the described algorithm is sound with respect to the safety of the quantized closed-loop system.

Theorem 1 (Soundness). *If `check_state` returns safe for every partition, the quantized closed-loop system is safe.*

Proof. We proceed by contraction. Assume the quantized closed-loop system is unsafe and so there exists a finite path from an initial state to an unsafe state, $s_1 \xrightarrow{\alpha_1} s_2 \xrightarrow{\alpha_2} \dots \xrightarrow{\alpha_{n-1}} s_n$. Since the unsafe state partitioning covers the full set of unsafe states, the unsafe state s_n is in some partition. We can follow the progress of $s_n \in \mathcal{S}$, through `check_state` at each recursive call.

At each call, $s_i \in \mathcal{S}$ has a predecessor $s_{i-1} \in \mathcal{P}$ that gets to s_i using command α_{i-1} . In the call to `check_state`, α_{prev} will be α_{i-1} . The value of τ_{prev} is incremented at each call on line 2 and so always correctly corresponds to s_{i-1} . Since $s_{i-1} \in \mathcal{P}$, s_{i-1} will also be in one of the quantized states q_{i-1} checked on line 6. The existence of the counterexample path segment $\xrightarrow{\alpha_{i-2}} s_{i-1} \xrightarrow{\alpha_{i-1}} s_i$ means that the condition on line 7 will be true when $\alpha_{\text{prevprev}} = \alpha_{i-2}$, and so q_{i-1} will be added to `predecessor_quanta`. Since s_{i-1} is both in \mathcal{P} and in the state set corresponding to a quantized state in `predecessor_quanta`, it will be used in a recursive call to `check_state`. This argument can be repeated for all states in the unsafe path back to the initial state s_1 , which would have been returned as `unsafe` on line 10 rather than used in a recursive call. This contradicts the assumption that `check_state` returned safe for every partition. \square

3.3 Falsification of Original (Unquantized) System

The algorithm in the previous section can be used to efficiently find unsafe paths of the original, unquantized, closed-loop neural network control system. This is done by repeatedly calling the algorithm with smaller and smaller quantization constants q_{pos} , q_{vel} and q_{θ} and checking the quantized system for safety.

⁴ An implementation optimization could be to reduce this splitting into only three parts. Three is the minimum in this case, since \mathcal{AH} -polytopes must be convex.

At each step if the safety proof fails, with small modifications to `check_state` we can get the trace corresponding to the unsafe path for each partition. In particular, rather than simply returning `unsafe` on line 10, we can instead return the set of unsafe initial states `quantized_to_state_set(q) ∩ P`. A witness point inside this set can be obtained through linear programming⁵. This witness point is then executed on the original system, without quantization, checking for safety. If the witness point is safe in the non-quantized system, the quantization constants are refined by taking turns dividing each of them in half.

Theorem 2 (Completeness). *By following the falsification approach above and repeatedly refining q_{pos} , q_{vel} and q_{θ} , either we will prove the quantized system is safe or find an unsafe trace in the original, unquantized system.*

Proof. First, consider the case that the system is *robustly unsafe*, which we define as there existing a ball \mathcal{B}_{init} of initial states of radius $\delta > 0$ that all follow the same command sequence $\alpha_1, \alpha_2, \dots, \alpha_n$ and end in the unsafe set. Since all the initial states follow the same command sequence, the linear transformations corresponding to the commands $\alpha_1, \alpha_2, \dots, \alpha_n$, which we call $A_{c_1}, A_{c_2}, \dots, A_{c_n}$ can be multiplied together into a single matrix that transforms initial states to unsafe states, $A_C = A_{c_n} \dots A_{c_2} A_{c_1}$. The matrix A_C is invertible since all the transformations corresponding to each command $A_{c_1}, A_{c_2}, \dots, A_{c_n}$ are invertible. The matrix A_C being invertible means that since the volume of the ball in the initial states \mathcal{B}_{init} is nonzero, the corresponding set of states in the unsafe set is an ellipsoid with nonzero volume, which we call \mathcal{E}_{unsafe} . Through refinement of the quantization parameters q_{pos} , q_{vel} and q_{θ} , eventually a partition will be entirely contained in \mathcal{E}_{unsafe} . When this happens, every witness point of the quantized counterexample from that partition will be in \mathcal{B}_{init} , and so will be an initial state of an unsafe oath of the original, unquantized system.

Perhaps less practically, even if the original system is not robustly unsafe, the process still will theoretically terminate when finite-precision numbers are used in the non-quantized system, such as with air-to-air collision avoidance neural networks that use 32-bit floats. As the quantization values are halved, the difference between the unsafe state in the quantized and nonquantized system is also reduced, until it reaches numeric precision. \square

The second case may seem like one needs to split the entire state space up to machine precision, which would make it very impractical. However, if the goal is to search for counterexamples, then the process can first refine the regions that were found as unsafe using the previous quantization values, in a depth-first search manner. In this way, when the system is unsafe the process would not need to immediately refine the entire state space in order to find these counterexamples. Also keep in mind that the quantized system being safe is a valid outcome of this refinement process, and this does not mean that the original, unquantized system, is safe.

⁵ For witness points, we use the Chebyshev center of the six-dimensional state polytope (removing y_{int} and v_{int}^y since they are fixed at zero), as it helps avoid numerical issues that can occur at the boundaries of the set.

4 Evaluation

We implemented the approach and set out to prove the safety of quantized closed-loop air-to-air collision avoidance system⁶. We ran the measurements on an Amazon Web Services (AWS) Elastic Computing Cloud (EC2) server with a `c6i.metal` instance type, which has a 3.5 GHz Intel Xeon processor with 128 virtual CPUs, and 256 GB memory. The algorithm is easily parallelized as proofs for each partition of the unsafe states can be checked independently.

4.1 Complete Proof of Safety Attempt


We first attempted a proof of safety for the entire range of unsafe states for ACAS Xu. For this, we started with large quantization values, $q_{\text{pos}} = 500$ ft, $q_{\text{vel}} = 100$ ft/sec, and $q_{\theta} = 1.5$ deg. In this case, the unsafe near-mid-air collision circle of radius 500 ft can be covered with 4 partitions, the complete velocity range of the ownship [100, 1200] needs 11 partitions, the velocity of the intruder [0, 1200] needs 12 partitions, the heading angle of the ownship is divided into $\frac{360 \text{ deg}}{1.5 \text{ deg}} = 240$ partitions, and there are 5 choices for the α_{prev} and two possibilities to check for $\dot{\tau}$. Multiplying these together, we get a total of 1267200 partitions of the unsafe states, each of which we pass to `check_state` (Algorithm 1).

This quickly, within a minute, finds counterexamples in the quantized system. When the witness initial states of the quantized counterexample are replayed on the original non-quantized system, according to the falsification algorithm from Section 3.3, these were also found to be unsafe! The exact runtime before an unsafe case is found depends on the order in which the partitions are searched, but we found that although changing this did affect the counterexample produced, the runtime was usually less than a minute. Two of the unsafe cases are shown in Figure 4 in parts (a) and (b).


In the situation shown in Figure 4(a), the intruder starts beyond the range of the network ($\rho > 60780$ ft). As soon as the intruder gets in range, a turn is commanded, but the velocity of the ownship is slow and a collision still occurs. This situation looks like it could be fixed by increasing the range of the system beyond 60780 ft—likely requiring retraining the networks—to allow a turn to be commanded earlier. Alternatively, perhaps adding a “do not turn” option as a possible output would be another way to address this scenario (clear-of-conflict could allow the ownship to maneuver as desired which may be unsafe here).

Figure 4(b) shows another unsafe case found that is particularly concerning. This is a tail-chase scenario, although the ownship is already moving away from the straight-line trajectory of the intruder. The system nonetheless commands a turn and actively maneuvers the ownship aircraft back into the path of the intruder. This situation demonstrates one of the dangers of the collision risk metric used to evaluate the effectiveness of many air-to-air collision avoidance systems, which compares the number of near mid-air collisions (NMAC) with


⁶ The code and instructions to reproduce all the results are online: https://github.com/stanleybak/quantized_nn_backreach/releases/tag/NFM2022_submitted

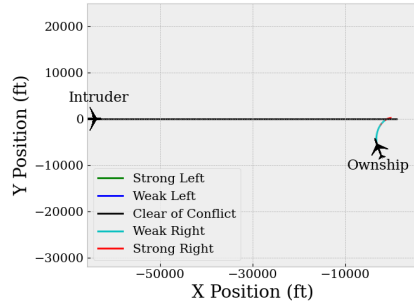


(a) Immediate Turn Command.

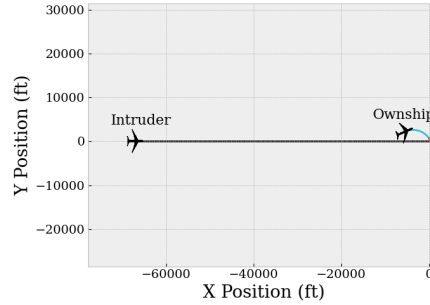 Video: <https://youtu.be/WZWPkIXfcm>


(b) Safety System Causes Crash.

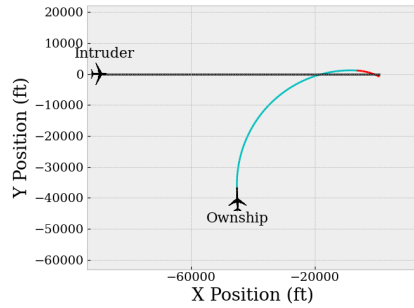 Video: https://youtu.be/dDwRiv_Kh2M

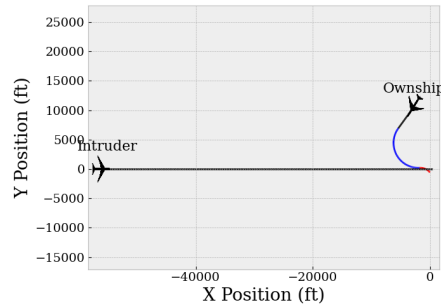 (c) Fast Ownship and $\tau > 0$.

 Video: https://youtu.be/F_bykLR91Jw


(d) Slow Intruder.

 Video: https://youtu.be/7B_-k0qpZTo

Fig. 4: Unsafe counterexamples found in the original non-quantized NNCS. Detailed traces of the counterexamples are provided in Appendix A.

and without the system using a large number of simulations. Although a system can be effective by this metric, in specific cases it may still create collisions that would not otherwise have occurred, as demonstrated in this scenario.

4.2 Proving Safety in More Limited Operating Conditions

As the proof of safety for the entire operating range failed, we next tried to prove safety in restricted operating conditions. Many of the unsafe situations found, including the two above, had a slow ownship velocity and a fast intruder. By making the ownship fast enough, we hypothesized collisions could be avoided.

When we restricted the range of v_{own} to be in $[1000, 1200]$ ft/sec, using $q_{pos} = 250$ ft, $q_{vel} = 50$ ft/sec, and $q_{\theta} = 1.5$ deg, we were able to guarantee safety of the quantized closed-loop neural network control system. The proof required checking 3.7 million cases and took about 32 minutes. The longest runtime for any single call to `check.state` (checking a single partition) was 63 seconds.

Reducing v_{own} further to [950, 1000] ft/sec made the quantized system unsafe. Following the falsification approach from Section 3.3, we refined the quantization parameters until we were able to find a counterexample in the original unquantized closed loop system. In this case, the ownship was moving with $v_{own} = 964.1$ ft/sec, and the time to loss of vertical separation τ was initially 75 secs (the quantized system was safe for in-plane flight, with $\dot{\tau} = 0$). This case is shown in Figure 4(c).

From the other side, we can alternatively attempt to prove safety under the assumption that the intruder is slow without restricting the ownship’s velocity. In this case, the method also finds unsafe counterexamples in the unquantized system, such as the 159 second trace shown in Figure 4(d) with $v_{int} = 390.1$ ft/sec. The full trace for this situation is provided in Appendix A.4 and has a peculiar characteristic. The command switch from weak-left to strong-right a few seconds before the collision corresponds to the relative position angle θ wrapping from $-\pi$ to π . This discontinuity in the network input between successive steps is a strong candidate root cause of the eventual near mid-air collision.

4.3 Comparison with Other Approaches

As far as we are aware, the proposed method is the first to provide safety guarantees while varying all of the operating conditions of the neural network compression of the collision avoidance system.

One related technique, based on computing discrete abstractions and forward reachability was able to provide safety guarantees for the similar Horizontal CAS [17]. This system is simpler to analyze: the inputs were modified to take in Cartesian state variables, the operating range was smaller ($\rho < 50000$), there were fewer neural networks in the system, each of which had half as many neurons per layer, and critically, fixed velocities of $v_{own} = 200$ and $v_{int} = 185$ were considered, rather than using velocity ranges. Despite these simplifications, analysis took 227 CPU hours, mostly on the neural network analysis step to analyze 74 million partitions. For a comparison, we analyzed the larger neural networks in this work with the proposed state quantization and backreachability method, using the same fixed v_{own} and v_{int} values. Using a quantized system with $q_{pos} = 250$ ft and $q_{\theta} = 1.5$ deg, the method proved safety of all 38400 partitions of the unsafe states in 60.6 seconds. Also note that while the Horizontal CAS discrete abstraction approach can sometimes prove safety, it would be poor at generating counterexamples, as abstract reachability overapproximates the true reachable set; abstract counterexamples do not correspond to real counterexamples. In contrast, the backwards reachability performed in Algorithm 1 is exact with respect to the quantized system, and the gap between the quantized and original system can be reduced by refining the quantization parameters, making it highly effective for counterexample generation.

We also compared our method with simulation-based analysis, which cannot provide guarantees about system safety but should be able to find unsafe counterexamples if enough simulations are attempted, as the system was shown to be unsafe. In earlier work [18], 1.5 million encounters were simulated for the

original neural network compression to evaluate the risk of collisions, sampling from probability distributions of actual maneuvers and taking into account sensor noise. We evaluated the same number of simulations without sensor noise and sampling over the entire set of operating conditions, in order to match the assumptions used in the safety proof. We generated uniform random initial states by considering an initial $\rho \in [60760, 63160]$ and θ, ψ, v_{own} and v_{int} in their entire operating range. When considering $\dot{\tau} = -1$, we assigned the initial value of τ between 25 and 160 seconds, as the unsafe case in Figure 4(d) was a 159 second trace. We repeated the process of running 1.5 million simulations one hundred times each for both $\dot{\tau} = -1$ and $\dot{\tau} = 0$, in order to account for statistical noise.

In the $\dot{\tau} = 0$ case, each batch of 1.5 million simulations found on average 17.07 unsafe paths. The unsafe cases were dominated by situations where the intruder velocity was low and the ownship velocity was high. The mean value of v_{int} was 997.8, with a standard deviation of 147.5. The lowest values of v_{int} over the unsafe cases in all 150 million simulations was 927.6, whereas Figure 4(d) showed a case with $v_{int} = 390.1$ found with our approach. The mean value of v_{own} in the unsafe cases was 133.4 with a standard deviation of 43.0. The greatest value of v_{own} over all the unsafe cases found with 150 million simulations was 452.3, whereas our approach found an in-plane case with $v_{own} = 881.6$.

The performance of simulation analysis for the out-of-plane case is even worse, as the initial state must also correctly choose the value of the time to loss of vertical separation τ in order to find a collision. Each batch of 1.5 million simulations with $\dot{\tau} = -1$ had on average 0.07 unsafe simulations. The maximum ownship velocity v_{own} in the unsafe cases had a mean of 175.4 with a standard deviation of 77.9. The greatest value of v_{own} over the unsafe cases found in all 150 million simulations was 343.0, whereas our approach found a case with $v_{own} = 964.1$, as shown before in Figure 4(c).

Overall, while simulation analysis may find some unsafe cases, it would be difficult to find the extreme velocity cases discovered with the proposed approach. Further, simulation analysis is incomplete and cannot prove safety for the system under subsets of operating conditions as was done in Section 4.2.

5 Related Work

Simulation-based Safety Analysis. The air-to-air collision avoidance system was originally evaluated using 1.5 million simulations [22] based on Bayesian statistical encounter models. This uses relaxed assumptions compared with our work, such as allowing for changes in acceleration. The output of such analysis is not a yes/no assessment of safety, as the system can clearly be unsafe if the intruder is faster than the ownship and maneuvers adversarially, but rather a risk score assessment of the change in safety compared to without using the system. Via simulation, given a bounded uncertainty in sensing and control, the probability of near-mid-air-collision was about 10^{-4} [18]. Although simulations show that the system may be unsafe, we do not know if the collision occurs due

to the uncertainty or the system itself. In this work, we could show that the system itself was unsafe, even if we have perfect sensing and control.

Verification of NNCS. The Verisig approach [14] verifies a NNCS by transforming a network with a sigmoidal neural network controller to an equivalent hybrid system that can be analyzed with Flow* [6], a well-known tool for verifying nonlinear hybrid systems. Another method [13,9] combines polynomial approximation of the neural network controller with the plant’s physical dynamics to construct a tight overapproximation of the system’s reachable set. The star set approach [29] shows that the exact reachable set of an NNCS with a linear plant model and a ReLU neural network controller can be computed, although this is expensive when initial states are large. These methods build upon open-loop neural network verification algorithms [23,31], which can be difficult to scale to large complex networks [3] and can sometimes lose soundness due to floating-point numeric issues [34]. The proposed quantization analysis only needs to execute neural networks, and so does not suffer from these problems.

Verification of the Closed-loop Air-to-Air Collision Avoidance System. Existing works have verified NNCS with a single neural network controller on a small set of initial states [16]. The closed-loop system involves switching between multiple neural networks and has a large set of initial states, creating a unique challenge for verification. The simplified Horizontal CAS system was analyzed using fast symbolic interval analysis for neural network controllers [33] to construct a discrete abstraction [17]. This method can consider sensor uncertainty, inexact turn commands, and pilot delay, although simplified assumptions are made, as discussed in Section 4.3. Recently, the same system as this work has been verified with extensions of the symbolic interval method [7] and with star-based reachability [24] in *mnv* [32] and *mnum* [1]. These approaches use forward reachability analysis and provide sound but not complete verification results. However, verification has only been demonstrated for specific scenarios with small sets of initial states, not the full operating conditions considered here.

6 Conclusion

In this work, we set out to prove the *closed-loop* safety of one of the most popular benchmarks for neural network verification methods, using a new algorithm based on state quantization and backreachability. In principle, the approach scaled sufficiently well to be able to verify the system under all valid initial states and aircraft velocities. However, the proof process instead found many unsafe scenarios where the original, unquantized system had near mid-air collisions, despite ideal assumptions on sensors and maneuvering. Compared with random simulation-based analysis, we could find counterexamples at more extreme velocities, as well as provide proofs of safety of the quantized closed-loop system in more limited scenarios.

The approach is could be attractive for certification. A system with a quantization layer behaves like a large lookup table, and the method is therefore

effective on any size network with any layer type, and may even be applicable to other machine learning approaches. The trade-off of quantization is usually a small degradation in performance of the controller, with a significant benefit of reducing analysis complexity and allowing for the possibility of verification.

Acknowledgement

This material is based upon work supported by the NSF EPSCoR First Award, the Air Force Office of Scientific Research and the Office of Naval Research under award numbers FA9550-19-1-0288, FA9550-21-1-0121, FA9550-22-1-0450 and N00014-22-1-2156. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the NSF, US Air Force or US Navy.

References

1. Bak, S.: nenum: Verification of relu neural networks with optimized abstraction refinement. In: NASA Formal Methods Symposium. pp. 19–36. Springer (2021)
2. Bak, S., Duggirala, P.S.: Hylaa: A tool for computing simulation-equivalent reachability for linear systems. In: Proceedings of the 20th International Conference on Hybrid Systems: Computation and Control. HSCC '17 (2017)
3. Bak, S., Liu, C., Johnson, T.: The second international verification of neural networks competition (VNN-COMP 2021): Summary and results. arXiv preprint arXiv:2109.00498 (2021)
4. Bak, S., Tran, H.D., Hobbs, K., Johnson, T.T.: Improved geometric path enumeration for verifying relu neural networks. In: Proceedings of the 32nd International Conference on Computer Aided Verification. Springer (2020)
5. Bak, S., Tran, H.D., Johnson, T.T.: Numerical verification of affine systems with up to a billion dimensions. In: Proceedings of the 22Nd ACM International Conference on Hybrid Systems: Computation and Control. pp. 23–32. HSCC '19, ACM, New York, NY, USA (2019)
6. Chen, X., Ábrahám, E., Sankaranarayanan, S.: Flow*: An analyzer for non-linear hybrid systems. In: International Conference on Computer Aided Verification. pp. 258–263. Springer (2013)
7. Clavière, A., Asselin, E., Garion, C., Pagetti, C.: Safety verification of neural network controlled systems. In: 2021 51st Annual IEEE/IFIP International Conference on Dependable Systems and Networks Workshops (DSN-W). pp. 47–54. IEEE (2021)
8. Duggirala, P.S., Viswanathan, M.: Parsimonious, simulation based verification of linear systems. In: International Conference on Computer Aided Verification. pp. 477–494. Springer (2016)
9. Dutta, S., Chen, X., Sankaranarayanan, S.: Reachability analysis for neural feedback systems using regressive polynomial rule inference. In: Proceedings of the 22nd ACM International Conference on Hybrid Systems: Computation and Control. pp. 157–168 (2019)
10. Forets, M., Schilling, C.: Conservative time discretization: A comparative study. arXiv preprint arXiv:2111.01454 (2021)

11. Hagemann, W.: Reachability analysis of hybrid systems using symbolic orthogonal projections. In: International Conference on Computer Aided Verification. pp. 407–423. Springer (2014)
12. Han, Z., Krogh, B.H.: Reachability analysis of large-scale affine systems using low-dimensional polytopes. In: International Workshop on Hybrid Systems: Computation and Control. pp. 287–301. Springer (2006)
13. Huang, C., Fan, J., Li, W., Chen, X., Zhu, Q.: Reachnn: Reachability analysis of neural-network controlled systems. *ACM Transactions on Embedded Computing Systems (TECS)* **18**(5s), 1–22 (2019)
14. Ivanov, R., Weimer, J., Alur, R., Pappas, G.J., Lee, I.: Verisig: verifying safety properties of hybrid systems with neural network controllers. In: Proceedings of the 22nd ACM International Conference on Hybrid Systems: Computation and Control. pp. 169–178 (2019)
15. Jia, K., Rinard, M.: Verifying low-dimensional input neural networks via input quantization. In: International Static Analysis Symposium. pp. 206–214. Springer (2021)
16. Johnson, T.T., Lopez, D.M., Benet, L., Forets, M., Guadalupe, S., Schilling, C., Ivanov, R., Carpenter, T.J., Weimer, J., Lee, I.: Arch-comp21 category report: Artificial intelligence and neural network control systems (ainncs) for continuous and hybrid systems plants. *EPiC Series in Computing* **80**, 90–119 (2021)
17. Julian, K.D., Kochenderfer, M.J.: Guaranteeing safety for neural network-based aircraft collision avoidance systems. In: 2019 IEEE/AIAA 38th Digital Avionics Systems Conference (DASC). pp. 1–10. IEEE (2019)
18. Julian, K.D., Kochenderfer, M.J., Owen, M.P.: Deep neural network compression for aircraft collision avoidance systems. *Journal of Guidance, Control, and Dynamics* **42**(3), 598–608 (2019)
19. Julian, K.D., Lopez, J., Brush, J.S., Owen, M.P., Kochenderfer, M.J.: Policy compression for aircraft collision avoidance systems. In: 2016 IEEE/AIAA 35th Digital Avionics Systems Conference (DASC). pp. 1–10. IEEE (2016)
20. Katz, G., Barrett, C., Dill, D.L., Julian, K., Kochenderfer, M.J.: Reluplex: An efficient SMT solver for verifying deep neural networks. In: International Conference on Computer Aided Verification. pp. 97–117. Springer (2017)
21. Kochenderfer, M.J., Chryssanthacopoulos, J.: Robust airborne collision avoidance through dynamic programming. Massachusetts Institute of Technology, Lincoln Laboratory, Project Report ATC-371 **130** (2011)
22. Kochenderfer, M.J., Edwards, M.W., Espindle, L.P., Kuchar, J.K., Griffith, J.D.: Airspace encounter models for estimating collision risk. *Journal of Guidance, Control, and Dynamics* **33**(2), 487–499 (2010)
23. Liu, C., Arnon, T., Lazarus, C., Barrett, C., Kochenderfer, M.J.: Algorithms for verifying deep neural networks. arXiv preprint arXiv:1903.06758 (2019)
24. Lopez, D.M., Johnson, T.T., Tran, H.D., Bak, S., Chen, X., Hobbs, K.: Verification of neural network compression of acas xu lookup tables with star set reachability. In: AIAA Scitech 2021 Forum. AIAA (January 2021)
25. Marston, M., Baca, G.: ACAS-Xu initial self-separation flight tests. <http://hdl.handle.net/2060/20150008347> (2015)
26. Olson, W.A.: Airborne collision avoidance system x. Tech. rep., MASSACHUSETTS INST OF TECH LEXINGTON LINCOLN LAB (2015)
27. Sadraddini, S., Tedrake, R.: Linear encodings for polytope containment problems. In: 2019 IEEE 58th Conference on Decision and Control (CDC). pp. 4367–4372. IEEE (2019)

28. Scott, J.K., Raimondo, D.M., Marseglia, G.R., Braatz, R.D.: Constrained zonotopes: A new tool for set-based estimation and fault detection. *Automatica* **69**, 126–136 (2016)
29. Tran, H.D., Cai, F., Diego, M.L., Musau, P., Johnson, T.T., Koutsoukos, X.: Safety verification of cyber-physical systems with reinforcement learning control. *ACM Transactions on Embedded Computing Systems (TECS)* **18**(5s), 1–22 (2019)
30. Tran, H.D., Lopez, D.M., Musau, P., Yang, X., Nguyen, L.V., Xiang, W., Johnson, T.T.: Star-based reachability analysis of deep neural networks. In: *International Symposium on Formal Methods*. pp. 670–686. Springer (2019)
31. Tran, H.D., Xiang, W., Johnson, T.T.: Verification approaches for learning-enabled autonomous cyber-physical systems. *IEEE Design & Test* (2020)
32. Tran, H.D., Yang, X., Manzanas, D., Musau, P., Nguyen, L., Xiang, W., Bak, S., Johnson, T.T.: Nnv: The neural network verification tool for deep neural networks and learning-enabled cyber-physical systems. In: *Proceedings of the 32nd International Conference on Computer Aided Verification*. Springer (2020)
33. Wang, S., Pei, K., Whitehouse, J., Yang, J., Jana, S.: Formal security analysis of neural networks using symbolic intervals. In: *27th USENIX Security Symposium*. pp. 1599–1614 (2018)
34. Zombori, D., Bánhelyi, B., Csendes, T., Megyeri, I., Jelasity, M.: Fooling a complete neural network verifier. In: *International Conference on Learning Representations* (2020)

A Unsafe Counterexample Details

Here, we provide detailed traces on the unsafe counterexamples found in the original unquantized neural network control system shown previously in Figure 4.

A.1 Counterexample Outside Range

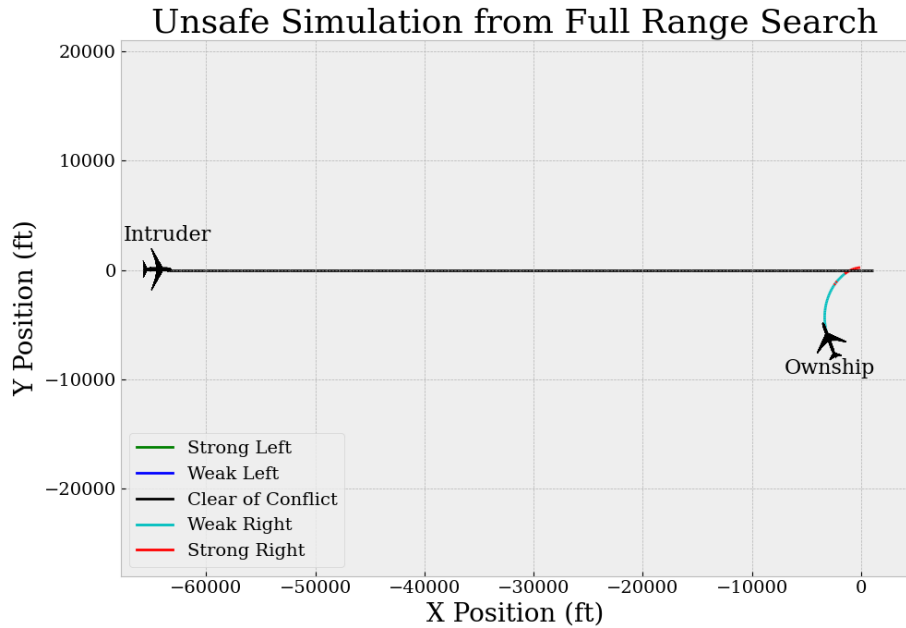


Fig. 5: The network advises the ownship to turn immediately once the intruder is in range, when ρ becomes less than 60760 ft, but a collision still occurs.

When doing a full proof of safety of the system, counterexamples were generated for the original, nonquantized system. In this scenario, the planes were at the same altitude, $\dot{\tau} = 0$, and the system commanded a turn as soon as the intruder was in range. Nonetheless a collision occurred. This indicates perhaps a larger range for ρ should be considered, which would require retraining the network with more data in this range. A visualization of the counterexample is shown in Figure 5. A video of the simulation is online: <https://youtu.be/WZWPkWIxfCM>. The full trace is provided in Table 2. Row 3 of the table show the system issuing a turn command as soon as the distance between aircraft ρ becomes less than 60760 ft.

Table 2: Unsafe case with immediate command. The initial state is $\rho = 62001.19897399513$ ft, $\theta = 1.105638365566048$ rad, $\psi = -1.9313853026445638$ rad, $v_{own} = 140.4154485909307$ ft/sec, and $v_{int} = 1113.19526$ ft/sec.

Step	α_{prev}	Cmd	ρ (ft)	θ (deg)	ψ (deg)
1	COC	COC	62001.2	63.35	-110.66
2	COC	COC	60831.1	63.36	-110.66
3	COC	WR	59661.0	63.37	-110.66
4	WR	WR	58492.6	64.88	-109.16
5	WR	WR	57327.4	66.39	-107.66
6	WR	WR	56165.7	67.90	-106.16
7	WR	WR	55007.4	69.42	-104.66
8	WR	WR	53852.5	70.94	-103.16
9	WR	WR	52701.1	72.46	-101.66
10	WR	WR	51553.2	73.98	-100.16
11	WR	WR	50408.8	75.51	-98.66
12	WR	WR	49268.0	77.03	-97.16
13	WR	WR	48130.8	78.56	-95.66
14	WR	WR	46997.3	80.09	-94.16
15	WR	WR	45867.3	81.63	-92.66
16	WR	WR	44741.0	83.16	-91.16
17	WR	WR	43618.4	84.70	-89.66
18	WR	WR	42499.5	86.24	-88.16
19	WR	WR	41384.3	87.79	-86.66
20	WR	WR	40272.7	89.33	-85.16
21	WR	WR	39164.9	90.88	-83.66
22	WR	WR	38060.7	92.44	-82.16
23	WR	WR	36960.3	93.99	-80.66
24	WR	WR	35863.6	95.55	-79.16
25	WR	WR	34770.6	97.11	-77.66
26	WR	WR	33681.2	98.67	-76.16
27	WR	WR	32595.6	100.24	-74.66
28	WR	WR	31513.6	101.81	-73.16
29	WR	WR	30435.2	103.38	-71.66
30	WR	WR	29360.5	104.96	-70.16
31	WR	WR	28289.4	106.54	-68.66
32	WR	WR	27221.9	108.13	-67.16
33	WR	WR	26157.9	109.72	-65.66
34	WR	WR	25097.5	111.32	-64.16
35	WR	WR	24040.5	112.92	-62.66
36	WR	WR	22987.0	114.53	-61.16
37	WR	WR	21937.0	116.14	-59.66
38	WR	WR	20890.3	117.76	-58.16
39	WR	SR	19847.0	119.39	-56.66
40	SR	WR	18808.6	122.52	-53.66
41	WR	SR	17775.0	124.16	-52.16
42	SR	WR	16746.0	127.30	-49.16
43	WR	WR	15721.5	128.96	-47.66
44	WR	WR	14700.0	130.62	-46.16
45	WR	WR	13681.4	132.30	-44.66
46	WR	WR	12665.7	134.00	-43.16
47	WR	WR	11652.8	135.72	-41.66
48	WR	WR	10642.7	137.46	-40.16
49	WR	SR	9635.3	139.25	-38.66
50	SR	SR	8631.7	142.57	-35.66
51	SR	SR	7632.8	145.92	-32.66
52	SR	SR	6638.5	149.34	-29.66
53	SR	SR	5648.3	152.84	-26.66
54	SR	SR	4661.9	156.46	-23.66
55	SR	SR	3679.3	160.32	-20.66
56	SR	SR	2700.4	164.66	-17.66
57	SR	SR	1726.2	170.27	-14.66
58	SR	SR	764.9	-178.03	-11.66
59	SR	SR	309.3	-50.16	-8.66

A.2 Counterexample with Safety System Causing Collision

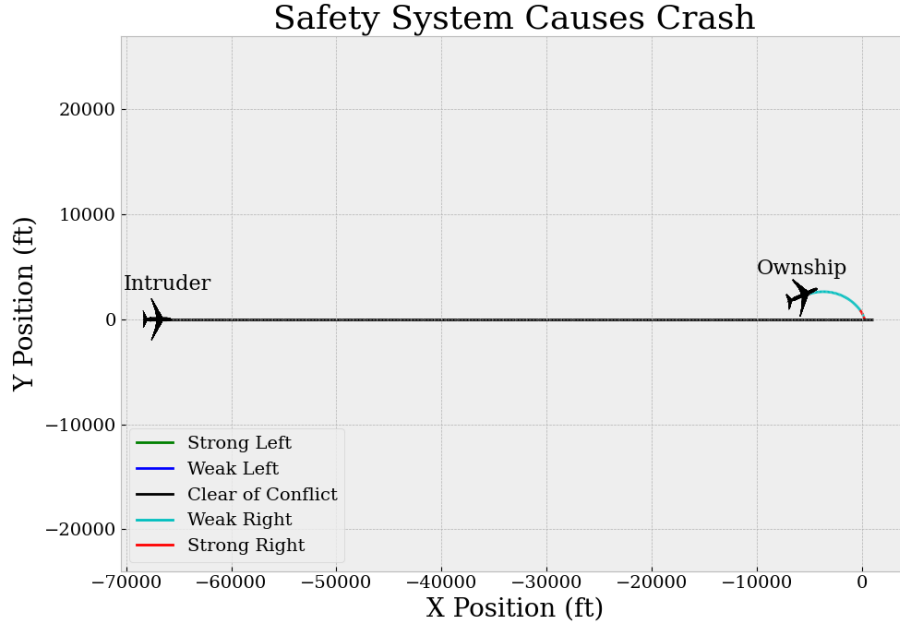


Fig. 6: The safety system advises the ownship to turn into the path of the intruder, causing a collision that would have otherwise not occurred.

In this scenario, the planes are at the same altitude, $\dot{\tau} = 0$, and the ownship has cleared the path of the intruder. Nonetheless, the system advises the ownship to turn, which eventually leads it back into the path of the intruder, causing a near mid-air collision. A visualization of the unsafe scenario is shown in Figure 6. A video of the simulation is online: https://youtu.be/dDwRiv_Kh2M. The full trace is provided in Table 3. The unrounded initial state is $\rho = 61462.16874158125$ ft, $\theta = 2.8797448888478536$ rad, $\psi = -0.2973898012094359$ rad, with velocities $v_{own} = 114.27575493691512$ ft/sec, and $v_{int} = 1100.31313$ ft/sec.

Table 3: Unsafe case where the safety system causes a crash.

Step	α_{prev}	Cmd	ρ (ft)	θ (deg)	ψ (deg)
1	COC	COC	61462.2	165.00	-17.04
2	COC	COC	60473.0	165.06	-17.04
3	COC	COC	59483.9	165.13	-17.04
4	COC	COC	58494.8	165.20	-17.04
5	COC	COC	57505.9	165.27	-17.04
6	COC	COC	56517.0	165.35	-17.04
7	COC	COC	55528.3	165.42	-17.04
8	COC	WR	54539.6	165.50	-17.04
9	WR	WR	53551.4	167.08	-15.54
10	WR	WR	52564.0	168.66	-14.04
11	WR	WR	51577.3	170.25	-12.54
12	WR	WR	50591.2	171.83	-11.04
13	WR	WR	49605.7	173.41	-9.54
14	WR	WR	48620.5	174.99	-8.04
15	WR	WR	47635.8	176.57	-6.54
16	WR	WR	46651.3	178.15	-5.04
17	WR	WR	45666.9	179.73	-3.54
18	WR	WR	44682.7	-178.69	-2.04
19	WR	WR	43698.5	-177.12	-0.54
20	WR	WR	42714.3	-175.54	0.96
21	WR	WR	41729.8	-173.96	2.46
22	WR	WR	40745.2	-172.38	3.96
23	WR	WR	39760.2	-170.80	5.46
24	WR	WR	38774.8	-169.23	6.96
25	WR	WR	37788.9	-167.65	8.46
26	WR	WR	36802.5	-166.08	9.96
27	WR	WR	35815.4	-164.50	11.46
28	WR	WR	34827.5	-162.92	12.96
29	WR	WR	33838.9	-161.35	14.46
30	WR	WR	32849.3	-159.78	15.96
31	WR	WR	31858.8	-158.20	17.46
32	WR	WR	30867.2	-156.63	18.96
33	WR	WR	29874.4	-155.06	20.46
34	WR	WR	28880.5	-153.48	21.96
35	WR	WR	27885.2	-151.91	23.46
36	WR	WR	26888.6	-150.34	24.96
37	WR	WR	25890.6	-148.77	26.46
38	WR	WR	24891.0	-147.20	27.96
39	WR	WR	23889.9	-145.63	29.46
40	WR	WR	22887.1	-144.06	30.96
41	WR	WR	21882.6	-142.48	32.46
42	WR	WR	20876.3	-140.91	33.96
43	WR	WR	19868.2	-139.34	35.46
44	WR	WR	18858.1	-137.77	36.96
45	WR	WR	17846.0	-136.19	38.46
46	WR	WR	16832.0	-134.62	39.96
47	WR	WR	15815.8	-133.04	41.46
48	WR	WR	14797.4	-131.46	42.96
49	WR	WR	13776.9	-129.87	44.46
50	WR	WR	12754.1	-128.28	45.96
51	WR	WR	11728.9	-126.69	47.46
52	WR	WR	10701.4	-125.08	48.96
53	WR	WR	9671.5	-123.46	50.46
54	WR	WR	8639.2	-121.83	51.96
55	WR	SR	7604.4	-120.17	53.46
56	SR	SR	6565.7	-116.98	56.46
57	SR	SR	5521.8	-113.74	59.46
58	SR	SR	4472.5	-110.43	62.46
59	SR	WR	3417.8	-106.96	65.46
60	WR	WR	2359.3	-104.60	66.96
61	WR	SR	1299.3	-100.87	68.46
62	SR	SR	253.5	-76.83	71.46

A.3 Counterexample with Fast Ownship

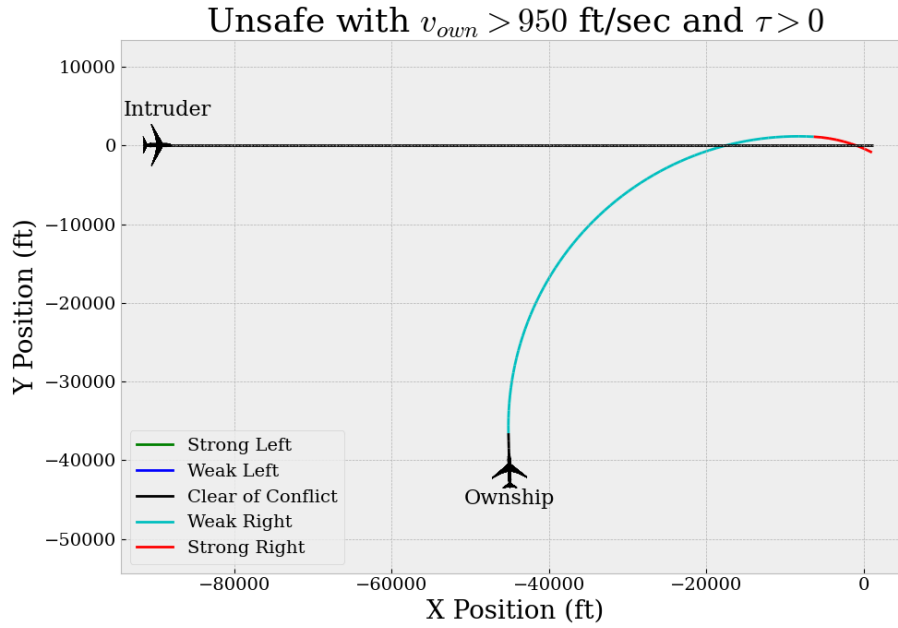


Fig. 7: Unsafe case with fast ownship ($v_{own} = 964.1$ ft/sec) and $\tau_{init} = 75$ sec.

Using the described quantized backreachability approach, we found an unsafe situation with $v_{own} > 950$ ft/sec. In this case, the system was safe for in-plane flight, when $\dot{\tau} = 0$, but unsafe when there was a difference in vertical velocity, $\dot{\tau} = -1$. A visualization of the counterexample is shown in Figure 7. A video of the simulation is online: https://youtu.be/F_bykLR9lJw. From the visualization, it looks like the collision was avoidable if the system did not continue to advise a right turn for the final few seconds. The full trace is provided in Table 4.

Table 4: Unsafe case with fast ownship with $v_{own} = 964.1$. The full initial state is $\rho = 61019.45806978694$ ft, $\theta = 0.8007909138337812$ rad, $\psi = -1.5953555128455696$ rad, $v_{own} = 964.0586611224201$ ft/sec, and $v_{int} = 1198.4375$ ft/sec.

Step	α_{prev}	τ	Net	Cmd	ρ (ft)	θ (deg)	ψ (deg)
1	COC	75	$N_{1,8}$	COC	61019.5	45.88	-91.41
2	COC	74	$N_{1,8}$	COC	59467.9	45.77	-91.41
3	COC	73	$N_{1,8}$	COC	57916.5	45.64	-91.41
4	COC	72	$N_{1,8}$	COC	56365.5	45.51	-91.41
5	COC	71	$N_{1,8}$	COC	54814.7	45.38	-91.41
6	COC	70	$N_{1,7}$	WR	53264.3	45.23	-91.41
7	WR	69	$N_{3,7}$	WR	51723.3	46.59	-89.91
8	WR	68	$N_{3,7}$	WR	50200.9	47.96	-88.41
9	WR	67	$N_{3,7}$	WR	48697.4	49.34	-86.91
10	WR	66	$N_{3,7}$	WR	47213.4	50.73	-85.41
11	WR	65	$N_{3,7}$	WR	45749.0	52.13	-83.91
12	WR	64	$N_{3,7}$	WR	44304.6	53.55	-82.41
13	WR	63	$N_{3,7}$	WR	42880.6	54.98	-80.91
14	WR	62	$N_{3,7}$	WR	41477.4	56.43	-79.41
15	WR	61	$N_{3,7}$	WR	40095.1	57.90	-77.91
16	WR	60	$N_{3,7}$	WR	38734.3	59.38	-76.41
17	WR	59	$N_{3,7}$	WR	37395.2	60.88	-74.91
18	WR	58	$N_{3,7}$	WR	36078.2	62.40	-73.41
19	WR	57	$N_{3,7}$	WR	34783.5	63.94	-71.91
20	WR	56	$N_{3,7}$	WR	33511.5	65.50	-70.41
21	WR	55	$N_{3,6}$	WR	32262.5	67.09	-68.91
22	WR	54	$N_{3,6}$	WR	31036.9	68.70	-67.41
23	WR	53	$N_{3,6}$	WR	29835.0	70.34	-65.91
24	WR	52	$N_{3,6}$	WR	28657.0	72.00	-64.41
25	WR	51	$N_{3,6}$	WR	27503.3	73.70	-62.91
26	WR	50	$N_{3,6}$	WR	26374.2	75.43	-61.41
27	WR	49	$N_{3,6}$	WR	25270.0	77.19	-59.91
28	WR	48	$N_{3,6}$	WR	24191.1	78.99	-58.41
29	WR	47	$N_{3,6}$	WR	23137.7	80.83	-56.91
30	WR	46	$N_{3,6}$	WR	22110.1	82.71	-55.41
31	WR	45	$N_{3,6}$	WR	21108.6	84.64	-53.91
32	WR	44	$N_{3,6}$	WR	20133.6	86.62	-52.41
33	WR	43	$N_{3,6}$	WR	19185.4	88.65	-50.91
34	WR	42	$N_{3,6}$	WR	18264.1	90.73	-49.41
35	WR	41	$N_{3,6}$	WR	17370.3	92.88	-47.91
36	WR	40	$N_{3,6}$	WR	16504.0	95.09	-46.41
37	WR	39	$N_{3,6}$	WR	15665.7	97.37	-44.91
38	WR	38	$N_{3,6}$	WR	14855.5	99.72	-43.41
39	WR	37	$N_{3,6}$	WR	14073.9	102.15	-41.91
40	WR	36	$N_{3,6}$	WR	13320.9	104.67	-40.41
41	WR	35	$N_{3,5}$	WR	12597.0	107.27	-38.91
42	WR	34	$N_{3,5}$	WR	11902.2	109.98	-37.41
43	WR	33	$N_{3,5}$	WR	11236.9	112.78	-35.91
44	WR	32	$N_{3,5}$	WR	10601.1	115.69	-34.41
45	WR	31	$N_{3,5}$	WR	9995.0	118.72	-32.91
46	WR	30	$N_{3,5}$	WR	9418.6	121.86	-31.41
47	WR	29	$N_{3,5}$	WR	8872.0	125.12	-29.91
48	WR	28	$N_{3,5}$	WR	8355.0	128.51	-28.41
49	WR	27	$N_{3,5}$	WR	7867.4	132.02	-26.91
50	WR	26	$N_{3,5}$	WR	7409.0	135.66	-25.41
51	WR	25	$N_{3,5}$	WR	6979.1	139.43	-23.91
52	WR	24	$N_{3,5}$	WR	6577.1	143.31	-22.41
53	WR	23	$N_{3,5}$	WR	6202.1	147.31	-20.91
54	WR	22	$N_{3,5}$	WR	5853.0	151.41	-19.41
55	WR	21	$N_{3,5}$	WR	5528.4	155.59	-17.91
56	WR	20	$N_{3,5}$	WR	5226.7	159.85	-16.41
57	WR	19	$N_{3,5}$	WR	4946.0	164.15	-14.91
58	WR	18	$N_{3,5}$	WR	4684.2	168.48	-13.41
59	WR	17	$N_{3,5}$	WR	4438.9	172.82	-11.91

60	WR	16	$N_{3,5}$	WR	4207.6	177.13	-10.41
61	WR	15	$N_{3,4}$	WR	3987.6	-178.59	-8.91
62	WR	14	$N_{3,4}$	WR	3776.1	-174.39	-7.41
63	WR	13	$N_{3,4}$	WR	3570.3	-170.27	-5.91
64	WR	12	$N_{3,4}$	WR	3367.4	-166.25	-4.41
65	WR	11	$N_{3,4}$	WR	3164.7	-162.36	-2.91
66	WR	10	$N_{3,4}$	WR	2959.6	-158.61	-1.41
67	WR	9	$N_{3,4}$	WR	2749.6	-155.00	0.09
68	WR	8	$N_{3,4}$	WR	2532.4	-151.56	1.59
69	WR	7	$N_{3,3}$	SR	2305.8	-148.29	3.09
70	SR	6	$N_{5,3}$	SR	2060.8	-144.01	6.09
71	SR	5	$N_{5,3}$	SR	1786.7	-140.67	9.09
72	SR	4	$N_{5,3}$	SR	1480.9	-138.70	12.09
73	SR	3	$N_{5,2}$	SR	1144.3	-139.22	15.09
74	SR	2	$N_{5,2}$	SR	788.1	-145.64	18.09
75	SR	1	$N_{5,2}$	SR	477.4	-171.30	21.09
76	SR	0	$N_{5,1}$	SR	498.5	132.55	24.09

A.4 Counterexample with $v_{int} < 400$ ft/sec

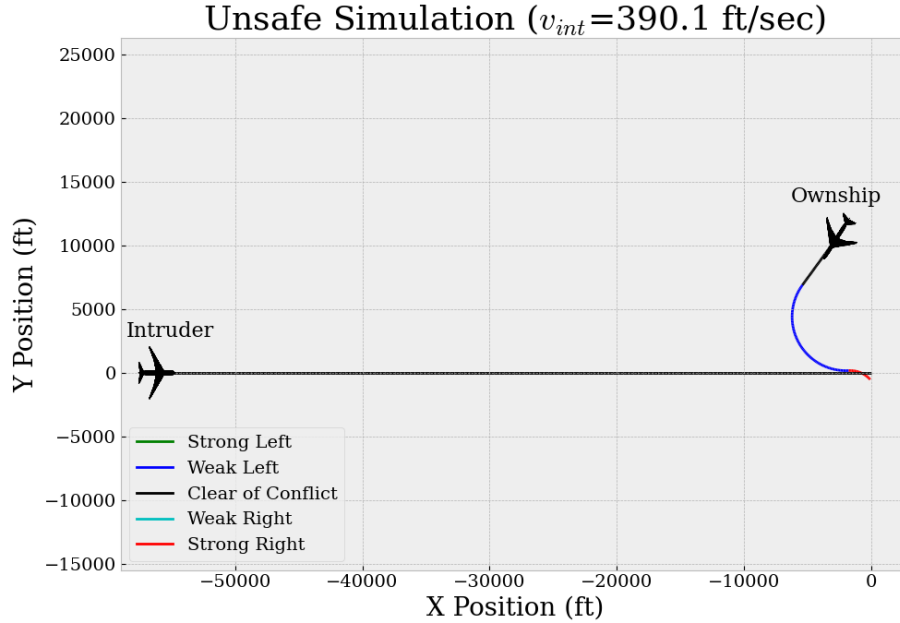


Fig. 8: Unsafe case with slow intruder. Aircraft are shown at the initial positions.

Using the described quantized backreachability approach, we found an unsafe situation with $v_{int} < 400$ ft/sec. A video of the simulation is online, <https://>

[//youtu.be/7B_-k0qpZTo](https://youtu.be/7B_-k0qpZTo), and a visualization of the counterexample is shown in Figure 8.

The 159 second trace is provided in Table 5. Examining the trace, an interesting observation is that the command switch from weak-left to strong right at step 142 corresponds to the relative position angle θ wrapping from $-\pi$ to π . This discontinuity in the network input between successive steps is likely the cause of the eventual near mid-air collision.

Table 5: Unsafe case with slow intruder with velocity $v_{int} = 390.1$ ft/sec and in-plane flight ($\tau = 0$ and $\dot{\tau} = 0$). The unrounded initial state is $\rho = 60959.597800102$ ft, $\theta = -0.7461997148243538$ rad, $\psi = 2.1997877266124295$ rad, $v_{own} = 110.84814862335269$ ft/sec, and $v_{int} = 390.10329256$ ft/sec.

Step	α_{prev}	Cmd	ρ (ft)	θ (deg)	ψ (deg)
1	coc	coc	60959.6	-42.75	126.04
2	coc	coc	60495.5	-42.75	126.04
3	coc	coc	60031.5	-42.75	126.04
4	coc	coc	59567.4	-42.75	126.04
5	coc	coc	59103.4	-42.75	126.04
6	coc	coc	58639.3	-42.75	126.04
7	coc	coc	58175.3	-42.75	126.04
8	coc	coc	57711.2	-42.75	126.04
9	coc	coc	57247.1	-42.75	126.04
10	coc	coc	56783.1	-42.75	126.04
11	coc	coc	56319.0	-42.75	126.04
12	coc	coc	55855.0	-42.75	126.04
13	coc	coc	55390.9	-42.75	126.04
14	coc	coc	54926.9	-42.75	126.04
15	coc	coc	54462.8	-42.75	126.04
16	coc	coc	53998.7	-42.75	126.04
17	coc	coc	53534.7	-42.74	126.04
18	coc	coc	53070.6	-42.74	126.04
19	coc	coc	52606.6	-42.74	126.04
20	coc	coc	52142.5	-42.74	126.04
21	coc	coc	51678.5	-42.74	126.04
22	coc	coc	51214.4	-42.74	126.04
23	coc	coc	50750.3	-42.74	126.04
24	coc	coc	50286.3	-42.74	126.04
25	coc	coc	49822.2	-42.74	126.04
26	coc	coc	49358.2	-42.74	126.04
27	coc	coc	48894.1	-42.74	126.04
28	coc	coc	48430.1	-42.74	126.04
29	coc	coc	47966.0	-42.73	126.04
30	coc	coc	47501.9	-42.73	126.04
31	coc	coc	47037.9	-42.73	126.04
32	coc	coc	46573.8	-42.73	126.04
33	coc	coc	46109.8	-42.73	126.04
34	coc	coc	45645.7	-42.73	126.04
35	coc	coc	45181.7	-42.73	126.04
36	coc	coc	44717.6	-42.73	126.04
37	coc	coc	44253.5	-42.73	126.04
38	coc	coc	43789.5	-42.73	126.04
39	coc	coc	43325.4	-42.73	126.04
40	coc	coc	42861.4	-42.72	126.04
41	coc	coc	42397.3	-42.72	126.04
42	coc	coc	41933.3	-42.72	126.04
43	coc	coc	41469.2	-42.72	126.04
44	coc	coc	41005.2	-42.72	126.04
45	coc	coc	40541.1	-42.72	126.04
46	coc	coc	40077.0	-42.72	126.04
47	coc	coc	39613.0	-42.72	126.04

48	COC	COC	39148.9	-42.71	126.04
49	COC	COC	38684.9	-42.71	126.04
50	COC	COC	38220.8	-42.71	126.04
51	COC	COC	37756.8	-42.71	126.04
52	COC	COC	37292.7	-42.71	126.04
53	COC	COC	36828.6	-42.71	126.04
54	COC	COC	36364.6	-42.71	126.04
55	COC	COC	35900.5	-42.70	126.04
56	COC	WL	35436.5	-42.70	126.04
57	WL	WL	34973.4	-44.20	124.54
58	WL	WL	34512.4	-45.71	123.04
59	WL	WL	34053.4	-47.21	121.54
60	WL	WL	33596.6	-48.72	120.04
61	WL	WL	33141.9	-50.24	118.54
62	WL	WL	32689.5	-51.76	117.04
63	WL	WL	32239.4	-53.28	115.54
64	WL	WL	31791.6	-54.80	114.04
65	WL	WL	31346.2	-56.33	112.54
66	WL	WL	30903.2	-57.87	111.04
67	WL	WL	30462.6	-59.40	109.54
68	WL	WL	30024.6	-60.94	108.04
69	WL	WL	29589.1	-62.49	106.54
70	WL	WL	29156.3	-64.04	105.04
71	WL	WL	28726.0	-65.59	103.54
72	WL	WL	28298.5	-67.15	102.04
73	WL	WL	27873.6	-68.71	100.54
74	WL	WL	27451.5	-70.27	99.04
75	WL	WL	27032.1	-71.84	97.54
76	WL	WL	26615.5	-73.41	96.04
77	WL	WL	26201.8	-74.99	94.54
78	WL	WL	25790.9	-76.57	93.04
79	WL	WL	25382.9	-78.16	91.54
80	WL	WL	24977.8	-79.75	90.04
81	WL	WL	24575.6	-81.34	88.54
82	WL	WL	24176.4	-82.94	87.04
83	WL	WL	23780.1	-84.54	85.54
84	WL	WL	23386.7	-86.14	84.04
85	WL	WL	22996.4	-87.75	82.54
86	WL	WL	22609.0	-89.37	81.04
87	WL	WL	22224.6	-90.99	79.54
88	WL	WL	21843.3	-92.61	78.04
89	WL	WL	21464.9	-94.24	76.54
90	WL	WL	21089.5	-95.87	75.04
91	WL	WL	20717.1	-97.50	73.54
92	WL	WL	20347.8	-99.14	72.04
93	WL	WL	19981.4	-100.78	70.54
94	WL	WL	19618.0	-102.42	69.04
95	WL	WL	19257.5	-104.07	67.54
96	WL	WL	18900.0	-105.72	66.04
97	WL	WL	18545.4	-107.38	64.54
98	WL	WL	18193.8	-109.04	63.04
99	WL	WL	17845.0	-110.70	61.54
100	WL	WL	17499.1	-112.37	60.04
101	WL	WL	17156.0	-114.04	58.54
102	WL	WL	16815.7	-115.71	57.04
103	WL	WL	16478.2	-117.38	55.54
104	WL	WL	16143.4	-119.06	54.04
105	WL	WL	15811.3	-120.74	52.54
106	WL	WL	15481.8	-122.42	51.04
107	WL	WL	15155.0	-124.10	49.54
108	WL	WL	14830.7	-125.78	48.04
109	WL	WL	14508.9	-127.47	46.54
110	WL	WL	14189.6	-129.16	45.04
111	WL	WL	13872.7	-130.84	43.54
112	WL	WL	13558.1	-132.53	42.04
113	WL	WL	13245.8	-134.22	40.54
114	WL	WL	12935.8	-135.91	39.04
115	WL	WL	12627.9	-137.60	37.54

116	WL	WL	12322.1	-139.29	36.04
117	WL	WL	12018.3	-140.98	34.54
118	WL	WL	11716.4	-142.67	33.04
119	WL	WL	11416.5	-144.35	31.54
120	WL	WL	11118.4	-146.03	30.04
121	WL	WL	10822.0	-147.71	28.54
122	WL	WL	10527.2	-149.39	27.04
123	WL	WL	10234.1	-151.06	25.54
124	WL	WL	9942.4	-152.73	24.04
125	WL	WL	9652.1	-154.39	22.54
126	WL	WL	9363.2	-156.05	21.04
127	WL	WL	9075.5	-157.70	19.54
128	WL	WL	8789.0	-159.34	18.04
129	WL	WL	8503.5	-160.98	16.54
130	WL	WL	8219.1	-162.60	15.04
131	WL	WL	7935.5	-164.22	13.54
132	WL	WL	7652.8	-165.82	12.04
133	WL	WL	7370.8	-167.40	10.54
134	WL	WL	7089.4	-168.98	9.04
135	WL	WL	6808.6	-170.53	7.54
136	WL	WL	6528.3	-172.06	6.04
137	WL	WL	6248.4	-173.57	4.54
138	WL	WL	5968.8	-175.05	3.04
139	WL	WL	5689.4	-176.50	1.54
140	WL	WL	5410.3	-177.92	0.04
141	WL	WL	5131.3	-179.29	-1.46
142	WL	SR	4852.3	179.39	-2.96
143	SR	SR	4573.4	-177.43	0.04
144	SR	SR	4294.2	-174.31	3.04
145	SR	SR	4014.5	-171.25	6.04
146	SR	SR	3733.9	-168.27	9.04
147	SR	SR	3452.1	-165.39	12.04
148	SR	SR	3168.9	-162.63	15.04
149	SR	SR	2884.1	-160.02	18.04
150	SR	SR	2597.5	-157.63	21.04
151	SR	SR	2309.1	-155.52	24.04
152	SR	SR	2019.2	-153.81	27.04
153	SR	SR	1728.2	-152.71	30.04
154	SR	SR	1437.5	-152.58	33.04
155	SR	SR	1149.9	-154.16	36.04
156	SR	SR	872.7	-159.06	39.04
157	SR	SR	626.1	-171.19	42.04
158	SR	SR	470.9	162.06	45.04