

Quantifying navigation complexity in transportation networks

Zhuojun Jiang, Lei Dong,* Lun Wu, and Yu Liu
*Institute of Remote Sensing and Geographical Information Systems,
School of Earth and Space Sciences, Peking University, Beijing, China.*
(Dated: February 4, 2022)

The complexity of navigation in large cities increases with the expansion of urban areas, which creates challenging transportation problems. Researchers have conducted many theoretical studies on urban navigation, but large-scale analyses based on actual mobility data are rare. Here, using 225 million subway trips from three major cities in China, we quantify navigation difficulty from an information perspective, which reveals that 1) people conserve a small number of repeatedly used routes and tend to prefer the simplest path, and 2) the navigation information in the real travel network (the local network) is much smaller than the theoretical value (the global network). By modelling routing behaviours in the growing networks, we show that while the global network becomes difficult to navigate, local navigability can still be improved. Moreover, there is a surprisingly universal linear relationship between the local and global navigation information, which allows the two metrics to predict each other. Our findings demonstrate how large-scale observations can quantify real-world navigation behaviours and could help evaluate transportation planning.

I. INTRODUCTION

With the expansion of transportation networks [1], the efficiency and navigability of cities have gained increasing concern [2–5]. In particular, the rapidly increasing number of edges (routes) in transportation networks has increased the complexity of navigation while making it easier for people to move around the city [6, 7]. However, interestingly, people are not “lost” in complex transportation networks, which makes us wonder how individuals navigate during network evolution. The exploration of this question has important implications for understanding the correlation between the navigability of transportation networks and people’s travel behaviour.

Quantifying the routing cost in networks has offered novel insights into the navigation problems of transportation networks [8–11], brain networks [12–14], social networks [15], wireless networks [16], and many other disciplines [17–20]. Among these studies, the information approach proposed by Rosvall et al. [9, 10] is an important starting point. By modelling navigation in the road network as a signal transmission process, Rosvall et al. developed a “search information” metric to quantify navigation difficulty [9, 10]. The search information can be easily understood as the number of yes or no questions that a traveller has to answer when locating a route from the bird’s-eye view of the map. However, previous studies usually assumed that travellers had global information of transportation networks [8–11, 17], ignoring the critical fact that travellers were restricted by the local information of the networks in the real world [21–26]. Thus, despite the abundant theoretical and simulation-based studies on global navigability and their implications in urban planning and network routing [3, 10, 27, 28], large-scale analyses of navigation from travellers’ local searches were rare.

Here, using 225 million subway ridership records from Beijing, Shanghai and Shenzhen (three large cities in China), we estimate the network route for each origin-destination (OD) record (Fig. 1) and infer a sub-network to represent the routing information accessed by travellers. By mapping the subway network into an information network, we calculate the search information (the measure of navigability) along the path in the information network that is transformed from the sub-network during the local search (Figs. 2e, f) or from the whole network during the global search (Figs. 2c, d). According to ref. [9], the $\log_2 k$ bit is the minimal information necessary to locate the next move from k options, where k corresponds to the node degree in the information network [Fig. 2d, at each node except the origin node of the path, the incoming path is excluded from the k options, resulting in an information value of $\log_2(k-1)$ bits]. Notably, the degree k of the same node may be smaller in the sub-network than in the global network, indicating that navigation with local search can be easier than with global search (Fig. 2).

We observe that most people only have a small number of route choices during a trip (Fig. 1e), which implies that people use a small sub-network when planning their routes. This directly results in lower local search costs than global search costs. Moreover, although both decision costs grow with the number of transfers in a trip, we find that the difficulty for people to find their way with local search does not keep increasing rapidly. Applying a simple route choice model to the historical subway networks of the three cities, we further investigate the impact of network growth on the decision information. As the network grows, we find that most trips’ local search information values remain unchanged or even decline while the global search information values increase. These differences suggest that the local navigability of a network can be improved, even if the global navigability is reduced during network growth. Moreover, we find a universal $3/4$ linear relationship between local search

* arch.dongl@gmail.com

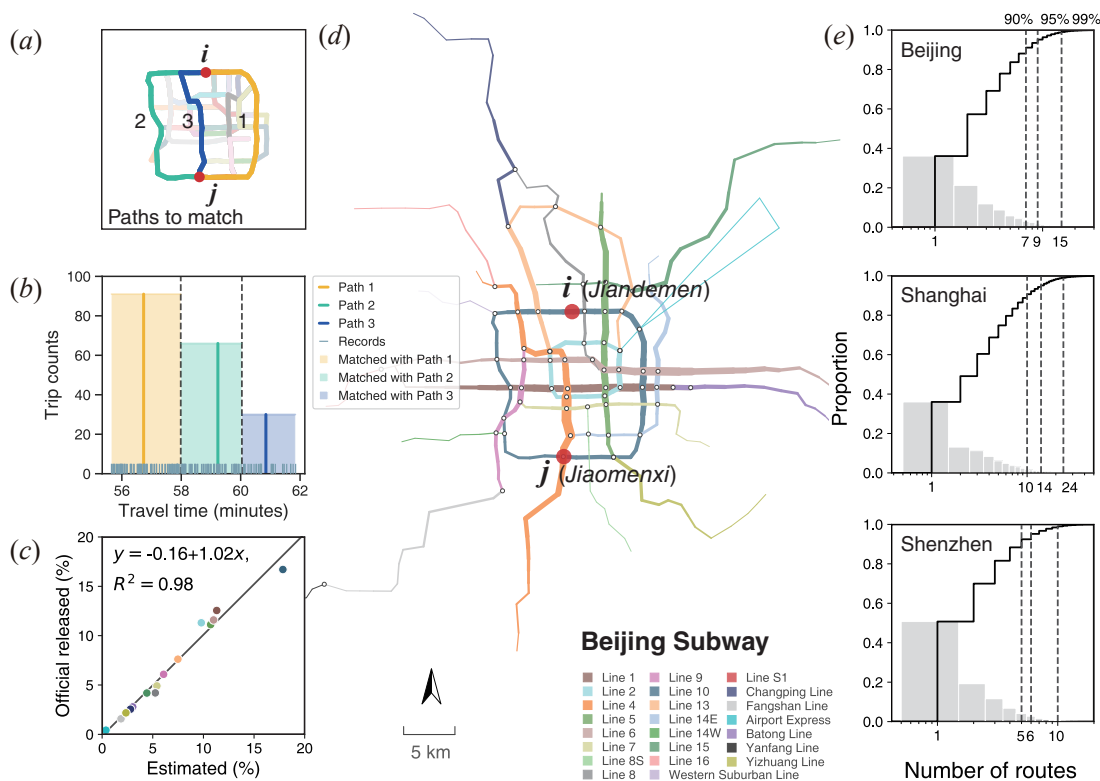


FIG. 1. Route matching based on smart card records of subway systems. (a) Paths from stations *i* to *j*. Three candidate paths are drawn in solid colours. (b) Route matching by the nearest travel time. Each record is matched to the path closest to it in terms of the time distance. (c) Correlation between the estimated flow and the official released flow on 16 lines in the Beijing subway. Each point represents a subway line. The flow is normalized by the summation value and indicates proportions in the plot. (d) The estimated flow map of the Beijing subway network. (e) The number of routes followed by travellers between stations in the three studied cities. The distributions are displayed in a histogram (grey) and a cumulative distribution (black), respectively. The dashed lines mark the number of routes followed by travellers between 90%/95%/99% of the station pairs.

information and global search information, reflecting the hidden correlation between these two metrics in the complex network. The local navigability revealed in this work complements the existing urban navigability studies and may help evaluate transportation planning and understand navigation in cities [29–31].

II. RESULTS

A. The conserved number of routes

We estimate travellers’ actual routes using the smart card data of the studied cities. First, for a given station pair, the top 10% and the bottom 10% records are trimmed according to the travel time distribution to exclude the abnormal data. Then, those paths whose temporal distances lie within the trimmed records are the candidate paths to be matched. Finally, we match each record to the path with the closest time distance (Figs. 1a, b). To verify the matching results, we aggregate the flows by subway lines and calculate the correlation between the matched results and the official published

number during the same period in Beijing [32]. The high goodness of fit ($R^2 \approx 0.98$) indicates the effectiveness of our matching method (Fig. 1c).

By grouping the taken routes according to station pairs, we obtain the number of routes between stations. Despite the large number of possible routes between a station pair, we find that most people only use a small part of them (Fig. 1e). For example, in 95% of the station pairs, people take no more than 9 routes in Beijing and 14 routes in Shanghai. People’s limited number of route choices has also been confirmed in other traveller groups [33, 34].

Given the limited number of routes for a destination, the travel flow is not randomly allocated. We find that more than 90% of people follow the simplest route to travel in the network (Fig. S1), i.e., the route with the fewest transfers [35]. As more transfers usually mean higher time costs due to walking and waiting for the next transfer [36], the simplest route can minimise transfer costs and tends to dominate people’s choice.

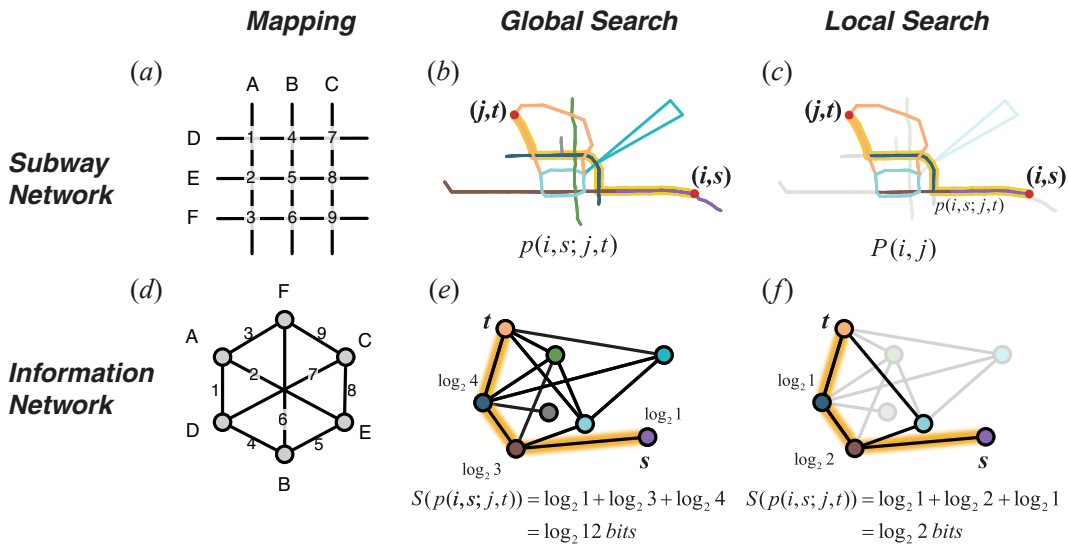


FIG. 2. Search information. (a) A simplified schematic of the subway network. (b) The corresponding information network of panel (a). Nodes represent subway lines (A-F), and edges represent transfer stations (1-9). (c) Route $p(i, s; j, t)$ (highlighted in yellow) from station i on line s to station j on line t . (d) Global search in the information network where a subway line is connected to other k lines. One needs to answer $\log_2 k$ yes or no questions to locate the next line or $\log_2(k-1)$ excluding the line that it has come from. (e) Local search. We delimit the sub-network for local search by the stations and lines within $P(i, j)$. Subway lines without consideration are in faded colours. (f) The information network in solid colours is mapped from the sub-network in panel (e). In the local search, the information needed to locate $p(i, s; j, t)$ is calculated based on the degree of nodes in the extracted information network. In contrast with the approximately 3.6 ($\log_2 12$) yes or no questions based on global search in panel (d), travellers only need to make one decision in the local search ($\log_2 2$), i.e., to decide traveling through the lines of dark blue or light blue.

B. Information measures

The conserved number of route choices observed in our data implies that people’s actual travel occurs within a limited, localized network. Inspired by this, we propose a sub-network to represent the routing information accessed by travellers for the trip between a given station pair ij . The sub-network is constructed from all the matched paths (including stations and lines) between the OD stations (Fig. 2e). Note that we use the term “route” to denote people’s route choices and the term “path” to denote the segments on the networks (the two terms are interchangeable).

First, we measure the navigation complexity in the information network via the information bits. Recall that a matched path $p(i, s; j, t)$ from i on line s to j on line t can be mapped to the information network (Fig. 2f), where each node represents a subway line, and each edge represents the transfer station of the connected lines. According to ref. [11], the total amount of information S needed to locate $p(i, s; j, t)$ in the information network is

$$S(p(i, s; j, t)) = \log_2 k_s + \sum_{n \in p(i, s; j, t)} \log_2(k_n - 1), \quad (1)$$

where k_s is the degree of node s . k_n is the degree of node n on path $p(i, s; j, t)$ (except s and t), and one has to locate the next move from the $k_n - 1$ options. S measures the difficulty of locating a particular path, and a

lower S means that the network has better navigability between the station pair. Note that when there are multiple matched paths between i and j , we calculate the station-level local search information (LSI) by performing the flow-weighted average on all the matched paths $P(i, j) = \{p(i, s; j, t)\}$ connecting i and j (see Materials and Methods). The value of LSI indicates how difficult it is for travellers to find their way from i to j based on local search.

Unlike the definition of local search, global search information (GSI) defines the information required to find the simplest path in the global information network [9, 11], i.e., the path with the fewest nodes from s to t . There may be multiple simplest paths between the stations; for simplicity, we use the fastest simplest path to define the station-level GSI according to ref. [11]. The calculation formula for the GSI is the same as equation (1), but the node degrees k_s and k_n are calculated in the information network transformed from the whole network.

Figure 3a shows that the local search information values of most station pairs (> 70%) are smaller than the theoretical global values. In the Beijing subway, the mean value of LSI and the mean value of GSI are approximately 1.6 bits and 4.0 bits, respectively, which indicates that travellers’ decision cost with local search is much smaller than that with global search. Similar results can also be found in Shanghai and Shenzhen (Fig. S2). The main reason for this is that the node degrees of the sub-

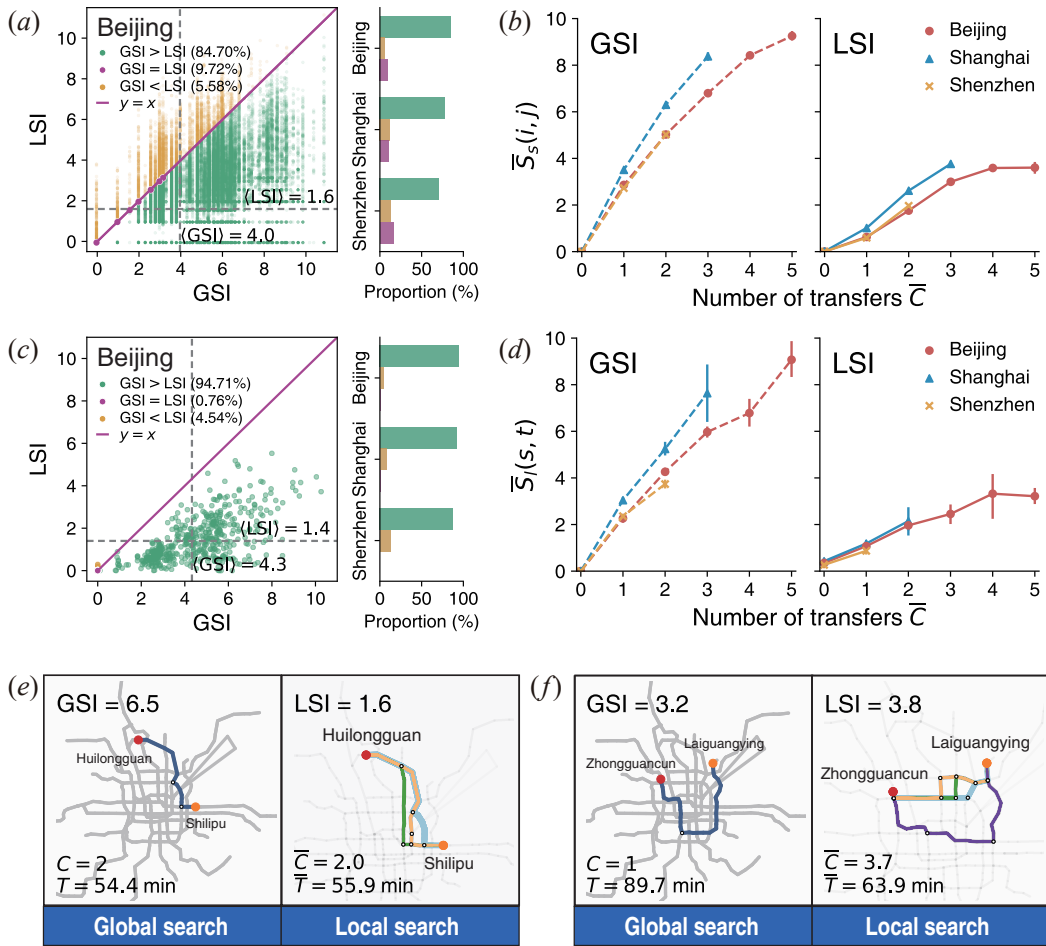


FIG. 3. Search information in the subway networks. (a) The station-level LSI and GSI. In the left panel, each dot represents a station pair, and $\langle \cdot \rangle$ denotes the average over all station/line pairs. In the right panel, the bars show the proportions of station pairs with $GSI > LSI$, $GSI = LSI$, and $GSI < LSI$ in the three cities. (b) The relationship between the average station-level search information and the number of transfers. (c) The line-level LSI and GSI. Both the results in Beijing (dots) and the other cities (bars) show that most line pairs have $GSI > LSI$. (d) The relationship between the average line-level search information and the number of transfers. The bars in panels (b, d) denote the 95% confidence intervals. (e) An example of a station pair (Huilongguan - Shilipu) whose $GSI > LSI$. For the global search, the number of transfers C and travel time T are calculated based on the simplest path (blue) in the whole network. For local search, the sub-network is constructed by the 3 matched paths. The number of transfers \bar{C} and travel time \bar{T} is the flow-weighted average of transfers between these matched paths. (f) An example of a station pair (Zhongguancun - Laiguangying) whose $GSI < LSI$. Between this station pair, people choose the paths with more transfers (right) instead of the simplest path (left), making the LSI exceed the GSI.

way lines in the sub-networks are smaller than those in the whole network. For example, from Huilongguan to Shilipu in Fig. 3e, the lines have fewer connections in the sub-network, and hence, have smaller degrees in the information network. When people select the next line to transfer, they spend fewer decision costs on the fewer line options.

Although the GSI is greater than the LSI between most stations, we find that a small number of station pairs in the three cities have LSI equal to GSI (Fig. 3a). Most of these station pairs are located on the same subway lines without any transfers, and hence the decision costs in local and global navigation are both 0. In addition,

only approximately 1% of the station pairs in each city have $GSI = LSI > 0$. Between these stations, each path in the sub-network happens to require the same amount of information as the simplest path in the global network. After averaging over all the actual paths in the sub-network, the station-level LSI is equal to the GSI.

A counter-intuitive finding is that there are still 5.6% (13%) station pairs with $LSI > GSI$ in the Beijing (Shenzhen) subway (Figs. 3a, S2). Figure 3f shows a typical example. From Zhongguancun to Laiguangying, most people choose the paths with 4 transfers rather than the simplest path with 1 transfer in the whole network. Since the search information is accumulated at each transfer

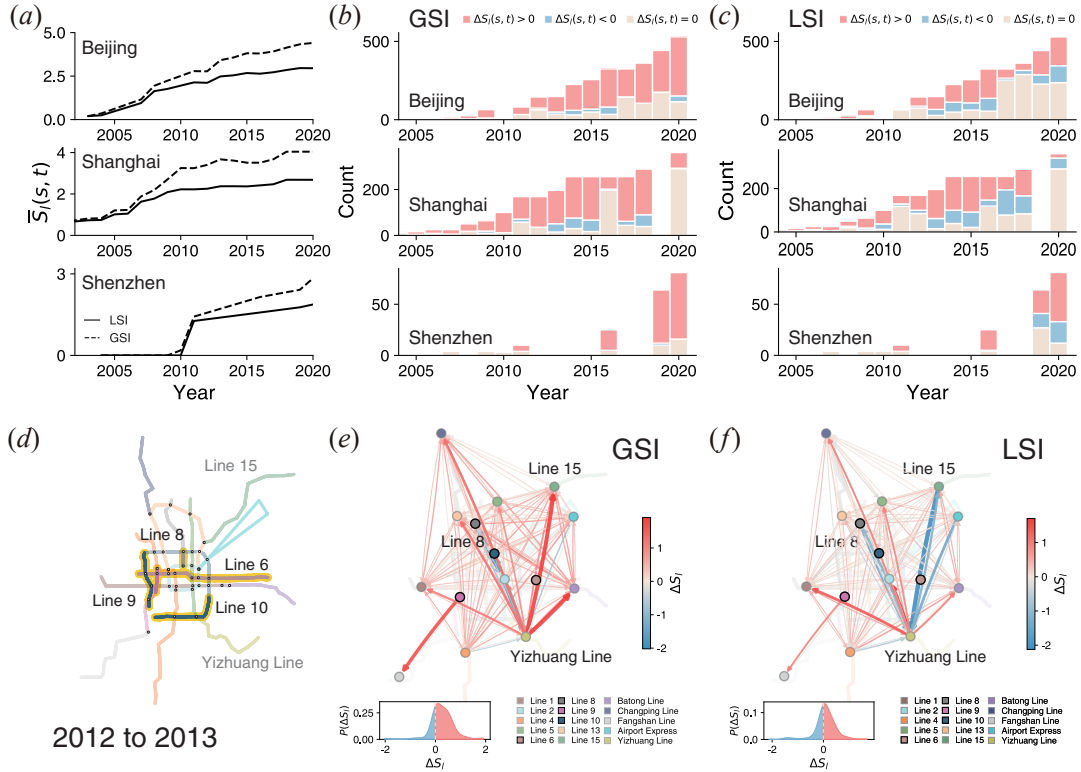


FIG. 4. Line-level search information. (a) The development of mean LSI and mean GSI. (b) Decomposing line-level GSI into three categories. Each bin represents the number of line pairs in the subway network of the year. The colours distinguish the line pairs whose GSI values increase (red), decrease (blue) or remain unchanged (pale) due to the network changes in that year. (c) Similar to panel (b), the LSI is decomposed into three categories. (d) The network changes in the Beijing subway from 2012 to 2013. The newly opened segments/lines are highlighted in yellow. (e, f) The impact of the network changes (d) on global navigability (e) and local navigability (f). The inter-line trips are drawn in the arcs that point from the start lines to the end lines. The colours indicate the differences in search information between 2012 and 2013. The extension of Line 10 connecting the Yizhuang Line makes navigation from the Yizhuang Line to other northern lines, such as Line 15 and Line 8, much easier (f), while it increases the difficulty of global navigation for most trips (e).

along the path, the increased number of transfers makes the LSI more likely to exceed the GSI. To understand people's choices of these complex paths, we investigate the travel time T , which is a key factor influencing the route choices apart from the number of transfers. The result shows that the actual paths (with more transfers) are much shorter in terms of travel time T than the simplest path (Fig. S4). This behaviour can also be interpreted as people trading higher navigation complexity for shorter times.

We further investigate the relationship between the number of transfers and navigation complexity. Figure 3b demonstrates that both LSI and GSI grow with the number of transfers, but the LSI grows considerably more slowly, and after the number of transfers reaches 4, the LSI stops increasing. The gradually flattening LSI is assumed to be correlated with the structure of the sub-networks. To verify this, we calculate the number of connections (node) K_u in the sub-network and find that K_u also tends to stabilise after the number of transfers exceeds 4 (Fig. S5). The small number of K_u is also

relevant to our finding in Fig. 1e that people have a very limited choice of routes, since it is these limited routes that the sub-network is composed of.

In addition to the complexity of navigation between stations, another important dimension is the complexity of navigation between lines because in subway travel, the most important decision is how to best reach the destination through the choice of lines (rather than stations). Therefore, we average the amount of information on all the route choices that start on line s and end on line t to obtain the line-level search information S_l between the line pair s to t (see Materials and Methods). In Figs. 3c and S6, we again observe that more than 85% of the line pairs have a lower LSI than the GSI. The growth rate of the LSI is still much slower, and especially when the inter-line trips require more than 4 transfers, the LSI changes little (Fig. 3d). The similar results between the station-level and line-level search information suggest that the small decision costs and the slow growth with the number of transfers are universal across navigation dimensions in local navigability.

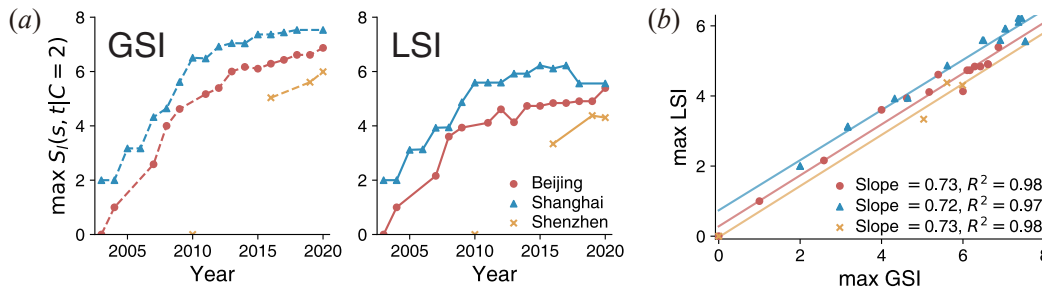


FIG. 5. The relationship between line-level LSI and GSI. (a) The development of maximum LSI and maximum GSI for locating the fastest simplest paths with $C = 2$ connections. (b) Maximum LSI versus maximum GSI. Each point represents the search information value of a year in panel (a). The maximum LSI is strongly correlated with the maximum GSI, and the slopes of the fitting lines for the three cities are approximately 0.73 ($\approx 3/4$).

C. Evolution of navigation complexity

Subway systems in China have changed dramatically over the past two decades, giving us the opportunity to investigate the impact of network growth on navigation. To better understand the navigation complexity in historical networks without real-world trip data, we model people’s navigation behaviours using a simple route choice model [37]. The model translates people’s route choice behaviour in two key steps: 1) generating a choice set, including the alternative paths that people consider for a trip and 2) making the route decision on the choice set. In the first step, we assume that people’s routing information comes from the choice set of m alternative paths generated by the repeated shortest path algorithm [38]. In the second step, we further assume the fastest simplest path (among the m paths) can represent the final route choice and use this simplest path to measure the local navigability.

Using the subway network data of Beijing, Shanghai and Shenzhen from 2000 to 2020, we apply the navigation model in each city. Specifying the size of m in the model is challenging for route choice modelling in the field of transportation, and it is usually based on laboratory settings due to the lack of empirical support [37, 39]. Here, based on our empirical findings (Fig. 1e), we use $m = 9$ routes in Beijing, $m = 14$ routes in Shanghai, and $m = 6$ routes in Shenzhen to characterise the choice sets.

Figure 4a shows that both local and global search information values increase over time as the network grows larger, but the growth rate of LSI is substantially lower than that of GSI. To obtain a closer look at the changes, we classify the trips into three groups based on the changes in value from the search information. The results show that for global search, the search information of the vast majority of trips is increasing (Fig. 4b). In Beijing, for example, more than 70% of the inter-line trips have increased GSI. However, for local search, we observe that most trips are not affected or are even easier to navigate during network growth (Fig. 4c). Especially since 2017, more than half of the inter-line trips

have unchanged or reduced LSI each year in Beijing and Shanghai, which reflects a great improvement in the local navigability. When looking at the specific trips (Figs. 4d-f), we also find that adding subway lines can facilitate local navigation, even if the difficulty of global navigation increases.

Figure 4 focuses on the average value of the search information, while the maximum value of the search information is also essential for a transportation network, since the maximum value determines the navigation obstacle. Similar to Fig. 4a, figure 5a shows that the maximum values of LSI and GSI increase as the network grows. In particular, the 8-bit upper limit of the GSI previously found in New York City [11] can also be verified in Shanghai: The maximum GSI of the Shanghai subway network is considerably close to 8 bits, and the growth tends to flatten (Fig. 5a). In addition to these specific values, we find a universal linear relationship with a slope of $3/4$ between these two metrics despite the apparent complexity of network dynamics (Fig. 5b). This finding expresses a very tight quantitative constraint on navigation behaviours and allows the local search information to be predicted by global search information. Given the 8-bit upper limit of the GSI and the $3/4$ relationship, we estimate that the upper limit of the local search is approximately 6 bits, which is verified in the three cities (Fig. 5a).

The 6-bit local search information can be linked to the number of connections in the network. According to ref.[11], the approximate relationship between search information S_l and the number of connections K_u of the network is $S_l = \log_2 K_u$ when considering paths with $C = 2$ connections (note that this equation is derived assuming that the subway network is close to a regular lattice, see [11] for details). We also observe similar relationships between $\bar{S}_l(s, t|C = 2)$ and the number of connections in the dynamic networks of the three cities (Fig. 6b). Therefore, the 6-bit limit implies that people are disturbed by 64 (2^6) connections in the sub-network during the search of the most complex trips.

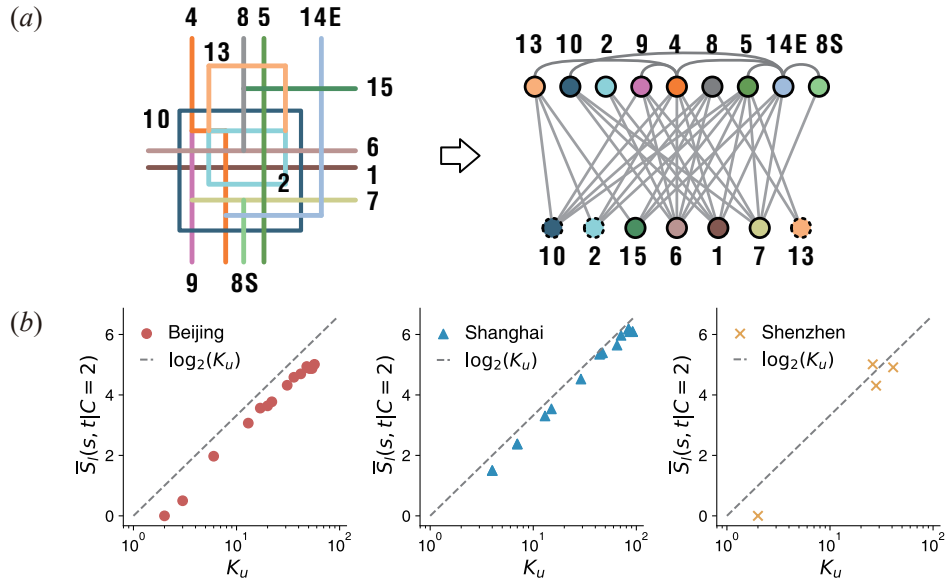


FIG. 6. Line-level search information and the number of network connections. (a) Beijing subway network. Beijing subway lines have a grid-like structure (left), and the information network is similar to the bipartite map (right). As loop lines (Lines 2/10/13) act both as horizontal and vertical lines, we express them as two points (solid and dashed) with the same colour in the information network. (b) Considering a path with 2 connections, the average amount of line-level search information needed to locate the simplest path is close to $S_l = \log_2 K_u$, where K_u is the number of edges in the information network or the number of connections in the subway network [11].

III. DISCUSSION

In this work, we characterise travellers' route choices from large-scale datasets and find that 1) travellers' decision cost for wayfinding with local search is much smaller than that with the theoretical global search; 2) as the number of transfers or travel time increases, the decision cost for local search does not continue to grow as rapidly as global search (Fig. S7). The limited cognition of humans determines that the amount of information they process for navigation does not always increase rapidly as the complexity of the routes increases [11, 40, 41].

In analysing the effect of network growth on decision information, we use a simple route choice model with a key parameter m , which represents the amount of candidate paths for a trip. To validate the robustness of the results, we conduct tests on different values of m . Although a larger m indicates a larger sub-network, we find that the local search information values all have similar flattening trends (Figs. S9, S10).

From a practical point of view, the local navigability defined in this work is helpful to evaluate transportation planning. We observe that these difficult-to-navigate trips are usually between subway lines on the opposite corner of the city (Fig. S11), where there is a lack of direct connection. However, the OD pairs with the largest difference between LSI and GSI are also related to the suburban lines, but they are usually on the same side of the city (Fig. S12), which may be attributed to the loop

subway line that connects them. The differences between LSI and GSI reflect that adding loops or direct lines may be an effective way to reduce the local navigation difficulty between suburbs far less than the theoretical global navigation.

Our work has implications for understanding human navigation in cities through large-scale datasets [42, 43]. With the help of big data, quantifying real-world navigation behaviours may shed light on research in spatial cognition and psychology [44–46], which is more based on experimental data from volunteer participants [47–49]. Our understanding of navigation complexity is still limited; especially due to the limitations of the data, we only study the subway network, which is a relatively simple public transportation network. Further research on multimodal networks (e.g., subways, buses and other modes of transportation) and spatial cognition mechanisms will provide a deeper understanding of urban navigation [29–31].

MATERIALS AND METHODS

Data

The 225 million smart card records include 10.8 million users of the Beijing subway in May 2019, 10.3 million users of the Shanghai subway in April 2015, and 2.7 million in the Shenzhen subway in October 2017 (Table S1).

Each record consists of a card identification, timestamps of the enter and exit, and names of the enter and exit stations and lines. Considering that congestion during rush hours may bias the estimation of entry and exit times, we filter out the peak hour records (from 7 am to 9 am and from 5 pm to 7 pm).

The subway network data includes 15 snapshots of the Beijing subway from 2003 to 2020, 18 snapshots of Shanghai from 2000 to 2020, and 8 snapshots of Shenzhen from 2004 to 2020 (Tables S2-4). We obtain the stations and lines from the official online subway maps. The coordinates of the stations and the travel time between stations are collected from Baidu Maps.

Subway network

In the subway network, nodes represent stations, and edges represent subway lines connecting the two consecutive stations. We set the in-vehicle time between a connected station pair as the temporal attribute of the edge and further assume that the travel time between the same adjacent stations between 2000 and 2020 is equal to the value in 2020 (not considering the effect of train speed increases).

Travel time estimation

To estimate the temporal distance of a specific path p_{ij} from stations i to j , we decompose the travel time into three parts: the in-vehicle time, transfer delay, and access/egress delay. We estimate each time separately: the in-vehicle time $T_{p_{ij}}^{veh}$ is obtained by the sum of the in-vehicle times on each edge; the transfer delay is assumed to be the product of the number of transfers $C_{p_{ij}}$ and the average transfer delay T_{trans} , and the access/egress delay is assumed to be a constant value T_{const} . By summing up the times, the temporal distance of p_{ij} is

$$T_{p_{ij}}^{est} = T_{p_{ij}}^{veh} + C_{p_{ij}} \times T_{trans} + T_{const}, \quad (2)$$

where $T_{p_{ij}}^{veh}$ and $C_{p_{ij}}$ can be obtained from the subway network data. Although we assume that the average transfer delay T_{trans} and the access/egress delay T_{const} are constant at all stations, they are still difficult to observe. To solve this issue, we need to find some trips to be able to know their $T_{p_{ij}}^{est}$ s and estimate T_{trans} and T_{const} as two regression coefficients. To do so, we assume that the trip with the least number of transfers among the k shortest paths is the most time-efficient trip, which is the shortest (arrival time - departure time) that can be derived from the data. This trip is also known as the Pareto-optimal trip [50]. Here, we use $k = 3$ and we also

test on different ks (Fig. S13). $T_{p_{ij}}^{est}$ can then be estimated by the mean travel time of the time-efficient trips. We then conduct the regression on the inputs of all station pairs to estimate the coefficients T_{trans} and T_{const} based on equation (2).

Search information

We measure the difficulty of navigating a subway network based on search information [9] and quantify the navigation complexity at the station level and line level by aggregating the information needed to follow a path.

Station-level search information

The station-level search information is measured by averaging over all route choices $P(i, j) = \{p(i, s; j, t)\}$ from stations i to j . Since locating each path $p(i, s; j, t)$ in $P(i, j)$ may require different amounts of information, we adopt a flow-weighted method for the aggregation

$$S_s(i, j) = \frac{\sum_{P(i, j)} S(p(i, s; j, t)) \cdot w(p(i, s; j, t))}{\sum_{P(i, j)} w(p(i, s; j, t))}. \quad (3)$$

For a given station pair i to j , LSI is calculated based on all the matched paths, and $w(p(i, s; j, t))$ is the weight value defined by the normalised flow on $p(i, s; j, t)$. For the GSI, the fastest simplest path is assumed to be the route choice between i and j according to ref. [11], and hence, only the single path is in $P(i, j)$, which simplifies equation (3) to $S_s(i, j) = S(p(i, s; j, t))$.

Line-level search information

Similarly, we summarise the line-level search information by averaging over all route choices from line s to line t

$$S_l(s, t) = \frac{\sum_{\{P(i, j)\}} S(p(i, s; j, t)) \cdot w(p(i, s; j, t))}{\sum_{\{P(i, j)\}} w(p(i, s; j, t))}. \quad (4)$$

For the LSI, $\{P(i, j)\}$ contains all the matched paths whose origin station i starts at line s and destination station j ends at line t . For the GSI, $\{P(i, j)\}$ contains all the fastest simplest paths between these stations.

DATA AND CODE AVAILABILITY

The data and code used for route matching and search information calculation are available at <https://github.com/Jzjsnow/navi-complexity>.

[1] H. Sun, J. Wu, L. Wu, X. Yan, and Z. Gao, Estimating the influence of common disruptions on urban rail transit

networks, Transportation Research Part A: Policy and

- Practice **94**, 62 (2016).
- [2] M. Gendreau, G. Laporte, and J. A. Mesa, Locating rapid transit lines, *Journal of Advanced Transportation* **29**, 145 (1995).
 - [3] M. Boguñá, D. Krioukov, and K. C. Claffy, Navigability of complex networks, *Nature Physics* **5**, 74 (2009).
 - [4] L. Dong, R. Li, J. Zhang, and Z. Di, Population-weighted efficiency in transportation networks, *Scientific Reports* **6**, 26377 (2016).
 - [5] V. Latora and M. Marchiori, Efficient behavior of small-world networks, *Physical Review Letters* **87**, 198701 (2001).
 - [6] S. Çolak, A. Lima, and M. C. González, Understanding congested travel in urban areas, *Nature Communications* **7**, 10793 (2016).
 - [7] R. Gallotti and M. Barthelemy, Anatomy and efficiency of urban multimodal mobility, *Scientific Reports* **4**, 6911 (2015).
 - [8] J. Barberillo and J. Saldaña, Navigation in large subway networks: An informational approach, *Physica A: Statistical Mechanics and its Applications* **390**, 374 (2011).
 - [9] M. Rosvall, A. Trusina, P. Minnhagen, and K. Sneppen, Networks and cities: An information perspective, *Physical Review Letters* **94**, 028701 (2005).
 - [10] M. Rosvall, A. Grönlund, P. Minnhagen, and K. Sneppen, Searchability of networks, *Physical Review E* **72**, 046117 (2005).
 - [11] R. Gallotti, M. A. Porter, and M. Barthelemy, Lost in transportation: Information measures and cognitive limits in multilayer navigation, *Science Advances* **2**, e1500445 (2016).
 - [12] A. Avena-Koenigsberger, B. Misić, and O. Sporns, Communication dynamics in complex brain networks, *Nature Reviews Neuroscience* **19**, 17 (2018).
 - [13] E. Amico, A. Arenas, and J. Goñi, Centralized and distributed cognitive task processing in the human connectome, *Network Neuroscience* **3**, 455 (2019).
 - [14] M. Rajapandian, E. Amico, K. Abbas, M. Ventresca, and J. Goñi, Uncovering differential identifiability in network properties of human brain functional connectomes, *Network Neuroscience* **4**, 698 (2020).
 - [15] K. Sneppen, A. Trusina, and M. Rosvall, Hide-and-seek on complex networks, *Europhysics Letters* **69**, 853 (2005).
 - [16] M. Boushaba, A. Hafid, and M. Gendreau, Node stability-based routing in wireless mesh networks, *Journal of Network and Computer Applications* **93**, 1 (2017).
 - [17] M. Zanin, J. M. Buldú, P. Cano, and S. Boccaletti, Disorder and decision cost in spatial networks, *Chaos: An Interdisciplinary Journal of Nonlinear Science* **18**, 023103 (2008).
 - [18] H. Yin, R. G. Clegg, and R. J. Mondragón, Simplification of networks by conserving path diversity and minimisation of the search information, *Scientific Reports* **10**, 19150 (2020).
 - [19] J. I. Perotti and O. V. Billoni, Smart random walkers: The cost of knowing the path, *Physical Review E* **86**, 011120 (2012).
 - [20] D. O. Cajueiro, Optimal navigation in complex networks, *Physical Review E* **79**, 046103 (2009).
 - [21] S. H. Lee and P. Holme, Exploring maps with greedy navigators, *Physical Review Letters* **108**, 128701 (2012).
 - [22] M. Ben-Akiva, A. De Palma, and K. Isam, Dynamic network models and driver information systems, *Transportation Research Part A: General* **25**, 251 (1991).
 - [23] K. W. Axhausen, A. Zimmermann, S. Schönfelder, G. Rindsfüser, and T. Haupt, Observing the rhythms of daily life: A six-week travel diary, *Transportation* **29**, 95 (2002).
 - [24] T. Gärling and K. W. Axhausen, Introduction: Habitual travel choice, *Transportation* **30**, 1 (2003).
 - [25] Y. Boumenir, F. Georges, G. Rebillard, J. Valentin, and B. Dresch-Langley, Wayfinding through an unfamiliar environment, *Perceptual and Motor Skills* **111**, 829 (2010).
 - [26] M. Akbarzadeh and E. Estrada, Communicability geometry captures traffic flows in cities, *Nature Human Behaviour* **2**, 645 (2018).
 - [27] G. Laporte, J. A. Mesa, and F. A. Ortega, Optimization methods for the planning of rapid transit systems, *European Journal of Operational Research* **122**, 1 (2000).
 - [28] K.-K. Kleineberg and D. Helbing, Collective navigation of complex networks: Participatory greedy routing, *Scientific Reports* **7**, 2897 (2017).
 - [29] R. McKinlay, Technology: Use or lose our navigation skills, *Nature* **531**, 573 (2016).
 - [30] C. Bongiorno, Y. Zhou, M. Kryven, D. Theurel, A. Rizzo, P. Santi, J. Tenenbaum, and C. Ratti, Vector-based pedestrian navigation in cities, *Nature Computational Science* **1**, 678 (2021).
 - [31] L. Alessandretti, A new computational model for human navigation, *Nature Computational Science* **1**, 642 (2021).
 - [32] Beijing Subway, Daily ridership of Beijing subway, <https://www.bjsubway.com/support/cxyd/klxx/index.html> (2016), accessed: 14 September 2021.
 - [33] P. H. Bovy and E. Stern, *Route Choice: Wayfinding in Transport Nnetworks*, Vol. 9 (Springer Science & Business Media, 2012).
 - [34] A. Lima, R. Stanojevic, D. Papagiannaki, P. Rodriguez, and M. C. González, Understanding individual routing behaviour, *Journal of The Royal Society Interface* **13**, 20160021 (2016).
 - [35] M. P. Viana, E. Strano, P. Bordin, and M. Barthelemy, The simplicity of planar networks, *Scientific Reports* **3**, 3495 (2013).
 - [36] J. Van der Waard, The relative importance of public transport trip time attributes in route choice, in *PTRC Summer Annual Meeting, 16th, 1988, Bath, United Kingdom* (1988).
 - [37] C. G. Prato and S. Bekhor, Modeling route choice behavior: How relevant is the composition of choice set?, *Transportation Research Record: Journal of the Transportation Research Board* **2003**, 64 (2007).
 - [38] J. Y. Yen, Finding the k shortest loopless paths in a network, *Management Science* **17**, 712 (1971).
 - [39] P. H. L. Bovy, On modelling route choice sets in transportation networks: A synthesis, *Transport Reviews* **29**, 43 (2009).
 - [40] H. A. Simon, *Models of Bounded Rationality: Empirically Grounded Economic Reason*, Vol. 3 (MIT press, 1997).
 - [41] G. A. Miller, The magical number seven, plus or minus two: Some limits on our capacity for processing information., *Psychological Review* **63**, 81 (1956).
 - [42] E. Manley, J. Addison, and T. Cheng, Shortest path or anchor-based route choice: a large-scale empirical analysis of minicab routing in London, *Journal of Transport Geography* **43**, 123 (2015).
 - [43] Y. Xu and M. C. González, Collective benefits in traffic during mega events via the use of information technolo-

- gies, *Journal of The Royal Society Interface* **14**, 20161041 (2017).
- [44] M. S. Ramming, Network knowledge and route choice, Ph. D. Thesis, Massachusetts Institute of Technology (2001).
- [45] R. A. Epstein, E. Z. Patai, J. B. Julian, and H. J. Spiers, The cognitive map in humans: Spatial navigation and beyond, *Nature Neuroscience* **20**, 1504 (2017).
- [46] E. R. Chrastil and W. H. Warren, From cognitive maps to cognitive graphs, *PLoS ONE* **9**, e112544 (2014).
- [47] M. Stangl, I. Kanitscheider, M. Riemer, I. Fiete, and T. Wolbers, Sources of path integration error in young and aging humans, *Nature Communications* **11**, 2626 (2020).
- [48] D. Anggraini, S. Glasauer, and K. Wunderlich, Neural signatures of reinforcement learning correlate with strategy adoption during spatial navigation, *Scientific Reports* **8**, 10110 (2018).
- [49] W. Liao, A. U. Kemloh Wagoum, and N. W. F. Bode, Route choice in pedestrians: Determinants for initial choices and revising decisions, *Journal of The Royal Society Interface* **14**, 20160684 (2017).
- [50] R. Kujala, C. Weckström, M. N. Mladenović, and J. Saramäki, Travel times and transfers in public transport: Comprehensive accessibility analysis based on Pareto-optimal journeys, *Computers, Environment and Urban Systems* **67**, 41 (2018).