

Improved Fitness Dependent Optimizer for Solving Economic Load Dispatch Problem

Barzan Hussein Tahir¹ · Tarik A. Rashid² · Hafiz Tayyab Rauf³ · Nebojsa Bacanin⁴ · Amit Chhabra⁵ · S. Vimal⁶ · Zaher Mundher Yaseen^{7,8,9*}

¹ Department of Computer Science and Engineering, University of Kurdistan Helwer, Erbil, Iraq; E-mail: barzan.husseintahir@ukh.edu.krd

² Department of Computer Science and Engineering, University of Kurdistan Helwer, Erbil, Iraq; E-mail: tarik.ahmed@ukh.edu.krd

³ Centre for Smart Systems, AI and Cybersecurity, Staffordshire University, Stoke-on-Trent, UK3; E-mail: hafiztayyabrauf093@gmail.com

⁴ Singidunum University, Danijelova 32, Belgrade, 11000, Serbia; E-mail: nbacanin@singidunum.ac.rs

⁵ Department of Computer Engineering and Technology, Guru Nanak Dev University, Amritsar-INDIA; E-mail: amit.cse@gndu.ac.in

⁶ Department of Artificial Intelligence and Data Science, Ramco Institute of Technology, North Venganallur Village, Rajapalayam - 626 117, Virudhunagar District, Tamilnadu, India; E-mail: vimal@ritrijpm.ac.in

⁷ Department of Earth Sciences and Environment, Faculty of Science and Technology, Universiti Kebangsaan Malaysia, Bangi 43600, Selangor, Malaysia

⁸ Adjunct Research Fellow, USQ's Advanced Data Analytics Research Group, School of Mathematics Physics and Computing, University of Southern Queensland, QLD 4350, Australia

⁹ New era and Development in Civil Engineering Research Group, Scientific Research Center, Al-Ayen University, Thi-Qar 64001, Iraq; E-mail: yaseen@alayen.edu.iq (corresponding author)

Abstract

Economic Load Dispatch depicts a fundamental role in the operation of power systems, as it decreases the environmental load, minimizes the operating cost, and preserves energy resources. The optimal solution to Economic Load Dispatch problems and various constraints can be obtained by evolving several evolutionary and swarm-based algorithms. The major drawback to swarm-based algorithms is premature convergence towards an optimal solution. Fitness Dependent Optimizer is a novel optimization algorithm stimulated by the decision-making and reproductive process of bee swarming. Fitness Dependent Optimizer (FDO) examines the search spaces based on the searching approach of Particle Swarm Optimization. To calculate the pace, the fitness function is utilized to generate weights that direct the search agents in the phases of exploitation and exploration. In this research, the authors have carried out Fitness Dependent Optimizer to solve the Economic Load Dispatch problem by reducing fuel cost, emission allocation, and transmission loss. Moreover, the authors have enhanced a novel variant of Fitness Dependent Optimizer, which incorporates novel population initialization techniques and dynamically employed sine maps to select the weight factor for Fitness Dependent Optimizer. The enhanced population initialization approach incorporates a quasi-random Sabol sequence to generate the initial solution in the multi-dimensional search space. A standard 24-unit system is employed for experimental evaluation with different power demands. Empirical results obtained using the enhanced variant of the Fitness Dependent Optimizer demonstrate superior performance in terms of low transmission loss, low fuel cost, and low emission allocation compared to the conventional Fitness Dependent Optimizer. The experimental study obtained $7.94E-12$, the lowest transmission loss using the enhanced Fitness Dependent Optimizer. Correspondingly, various

standard estimations are used to prove the stability of Fitness Dependent Optimizer in phases of exploitation and exploration.

Keywords: FDO · Chaotic Maps · Premature Convergence. Optimization Algorithms. Fitness Dependent Optimizer

1. Introduction

After the development of computers, the main objective was to investigate unknown solutions and find the best possible solution. During World War II, Alan Turing broke a cipher of Germany named Enigma by using an algorithm used for searching. [1]. Many challenges arose in solving problems in real life due to the improvements in working methods and the exciting acceleration in the extent of computations. Hence, techniques based on numerical programming and conventional logic emerged to overcome the drawbacks of instantly and capably resolving complicated problems [2]. Various algorithms like optimization problems have been designed to manage these limitations. The best possible solution was gained through the optimization method by studying its parameter. All the possible values of present solutions were expressed as a set one of which is the fittest solution. Usually, problems of optimization are solved to design algorithms of optimization [3]. Optimization algorithms are classified into two groups i.e., stochastic algorithms and deterministic algorithms [4], [5]. Deterministic algorithms generate a group of related answers when the iterations are started by using an introductory initial point all this happened by using inclination [6]. On the other hand, stochastic algorithms constantly generate distinct answers with related values in the absence of inclination. Diversely, concluding values have a slight difference. There are two categories of stochastic algorithms i.e. metaheuristic and heuristic [7], [8].

Heuristic algorithms use the trial-and-error method to find a solution, and it is

supposed that these algorithms will consume reasonable time to reach a solution [9], [10]. Moreover, heuristic algorithms are aimed to utilize various methods in local examinations and techniques of randomization [11]. Further analysis and advancements were made in heuristic algorithms and converted to metaheuristic algorithms [12], [13]. The novel collections of algorithms have better performance than heuristic algorithms; accordingly, the affix of 'meta' that means 'far off' was linked with these algorithms.

Recently, available problems of the real world have turned complicated in considerations of cost, time, and space; it is not possible to traverse all credible solutions. Hence, fast and low-cost techniques are required [14], [15]. Thus, scientists studied the natural events and behaviors of animals to resolve these issues, like how ants select their paths, how fish, flies, or birds chase their prey, and the working of gravity. So, all the algorithms inspired by nature are called nature-inspired algorithms [16]. FDO algorithm that is also known as fitness-dependent optimizer was introduced by Jaza Abdullah and Tarik Rashid in 2019. FDO algorithm studies the bee swarms' reproduction practices and follows the activities of swarms. This algorithm finds out the best solution among the pool of solutions [17]. Intelligent computations are rising in various areas of research because of their capability to integrate with large complex and interconnected systems with high speed and accuracy.

Economic load dispatch (ELD) is the most vital and significant field of power system planning and operation [18], [19]. The chief aim of ELD was to list a group of real power provided by resources of online generation to satisfy the lacked demand whenever needed under a group of limitations [20], regarding system and unit technical constraints with the least production cost. In general, the ELD problem can be validated as an extremely non-linear and non-smooth stifled problem of optimization usually for huge systems. The cost of fuel is concerned with the varying costs of the generation of electricity.

The main purpose of addressing the ELD problem is to determine the necessary output power to satisfy the system's requirements in such a way that the cost is limited to its possible minimum value and limits, such as Prohibited Operating Zone (POZ) and Valve-Point Effects (VPE) [20]. There is a need for efficient ways of producing electricity. Increasing the cost of fuel makes the method of power production expensive. Advanced systems are therefore expected to propose an economical generation, delivery, and transmission method while keeping electrical limitations in mind. The total device requirement is divided into several units by ELD, which reduces the total cost of generation. Several complications exist while obtaining the ELD problem's global best solution; results are less accurate due to the non-linear nature of classical methods, confined to convergence issues, and best local solutions [6].

The major drawback of some techniques like evolutionary computing is premature convergence [21]. In heuristics, exploitation, and exploration perform a significant role. The capacity of an algorithm to hunt globally is called exploration and the ability to search locally is known as exploitation [22]. The stability of exploration and exploitation highly affects the swarm-based algorithms' performance. Smaller exploration and extreme exploitation lead to premature convergence, on the other hand, more limited exploitation and higher exploration can cause barriers to gaining the best solution [23].

In this research, by reducing fuel expense, emission allocation, and transmission loss, the authors have implemented FDO to solve the ELD problem. Similarly, authors have enhanced a new FDO variant that consolidates specific techniques of population initialization and manipulates sinus maps to pick the FDO weight factor dynamically. The enhanced population initialization method combines a quasi-random Sobol sequence to generate the initial solution for the multi-dimensional search space. A typical 24-unit device is

implemented with different power demands for preliminary evaluation. The observational results obtained by implementing the Enhanced FDO variant illustrate the outstanding performance compared to the standard FDO in low transmission loss, low fuel cost, and low emission allocation.

2 Related Work

In this section, various studies have been reported similar to the enhanced approach but with different evolutionary and swarm-based algorithms i.e PSO, BA, DE, GA, BCO, and other combinations of the recent state-of-the-art algorithms.

Authors carried out a study to suggest a method for the solution of ELD problems and to contrast it with various available solutions [24]. Their enhanced method owns the following characteristics, managing issues of non-differentiability, all the problems caused by PBC are also resolved, and problems of multi-objective nature of PBC are also resolved. They implemented their approach on 5 generation systems, the achieved outcomes proved that more effective Pareto-curve is gained. An enhanced algorithm inspired by nature i.e Bat algorithm that offers firm convergence and excellent computational performance was conducted by [7]. Yang enhanced the BAT algorithm in 2010 after inspiring by bat's echolocation behavior. They stated that this bat quality enables the bat to locate the prey, i.e., various insects, even in the absence of light. Their enhanced method aimed to reduce the total cost of generation in the case of a thermal power plant.

In another research, an enhanced version of GA by utilizing mutation and crossover for the solution of CHPED problems was adopted by [25]. They stated that primary GA is grown in three phases. In their first phase, they did not include the process of selection to bypass population diversity loss, while in the second phase, they utilized two various

crossover operations to dig data about parents and produce possible children. In the third phase, they used the operation of mutation to substitute children with children of other parents. They proved that their Enhanced algorithm is the best substitute for the CHPED problem. Another study [26], was carried out to propose a novel quantum bat algorithm (QBA) based on quantum computing; its main purpose was to solve the problem of multi-objective combined economic emission dispatch (CEED). To minimize the system's nonlinearities, they represented CEED by utilizing the function of the cubic criterion. Their primary concern was the eruption of CO₂, NO_x, and NO_x and load dispatch. Thus, it is known as a multi-objective problem of optimization. Their outcomes proved that QBA is the best solution for the problem of CEED as compared to different available solutions. An improved self-adaptable differential evolution algorithm integrating with multiple mutation strategies (ADE-MMS) as a solution to ELD problems [27]. They suggested a strategy to improve and explore of basic DE problem. Their Enhanced method has 3 expansions of DE. Further, they suggested an approach to manage constraints of equality of problems of ED. Their algorithm enhances the speed of convergence as well as maintains a balance between exploration and exploitation. ADE-MMS is proved by them to be the most suitable solution.

Novel Differential Evolution algorithm was Enhanced in a study [28], for the solution of simultaneous power flow OARPD problems for renewable generators. Their Enhanced algorithm i.e., DEa-AR utilized a combination of arithmetic crossover and performed scaling based on Laplace distribution. For evaluation of their approach, they utilized the IEEE 57-bus system in various situations. The outcomes of their simulations verified that the suggested method could be used for solving OARPD problems with sources that are efficiently renewable and can provide optimum solutions. Qiao & Liu, [29] have carried out to propose a combined framework of EVs and wind farms (WEV) that reduced the over and

underestimation of wind power by utilizing the discharging and charging capability of EVs. They designed a dynamic economic emission dispatching based on the WEV system (WE_DEED). They utilized their algorithm for the solution of complicated problems of WE_DEED. While they handle the limitations of WE_DEED through their Enhanced algorithm. They verified their algorithm on various 10 unit systems.

Authors enhanced a novel technique [30], for thermal plants' dispatch generating powers based on motion optimization algorithm (IMA). They achieved ELD being an objective function through implementing IMA. For the testing phase, multiple instances of various units of thermal plants were utilized to examine the execution of their algorithm. Their preceding outcomes were matched with various approaches.

A detailed description of related ELD applications concerning different evolutionary approaches is given in Table 1.

Table 1 Detailed description of related ELD applications concerning different evolutionary approaches.

Sr.	Ref	Proposed Technique	Dataset
1	[7]	BAT algorithm	-
2	[26]	Quantum bat algorithm (QBA)	-
3	[31]	Artificial bee colony algorithm	-
4	[32]	Bat Algorithm (BA) and Artificial Bee Colony (ABC) with Chaotic based Self-Adaptive (CSA) search strategy (CSA-BA-ABC)	23 benchmark function and three CHPED problems
5	[25]	Improved genetic algorithm using novel crossover and mutation (IGA-NCM)	-
6	[33]	Learner Non-dominated Sorting Genetic Algorithm (NSGA-RL)	10 famous multi-objective functions
7	[34]	Chaotic-crisscross differential evolution (CCDE)	Generalized test functions and two

			practical hydrothermal system problems
8	[35]	Differential Evolution algorithm (DEA)	IEEE-30 bus system
9	[29]	Dynamic economic emission dispatching based on WEV system (WE_DEED)	10 unit systems.
10	[27]	Self-adaptable differential evolution algorithm integrating with multiple mutation strategies (ADE-MMS)	4 DE algorithms are tested on the ten ELD problems with diverse complexities
11	[28]	Differential Evolution the algorithm denoted as DEa-AR	IEEE 57-bus system
12	[32]	Modified crow search algorithm (MCSA)	Five different well-known test systems
13	[36]	Multi-objective Multi-Verse Optimization algorithm	140 bus system
14	[24]	Multi-objective economic and environmental dispatch problem (EEDP)	Five generation systems
15	[37]	Coyote Optimization Algorithm (COA)	Power system consisting thermal generator
16	[30]	Motion optimization algorithm (IMA)	Several cases of Different units of thermal plants

3 Methodology

3.1 Problem Formulation

Emission can be included in economic dispatch's formulation in a variety of methods. Combined economic and emission dispatch (CEED) is one of the methods that are expressed as a problem of multi-objective optimization used to reduce emission and fuel costs to satisfy demand and avoid losses [38].

3.1.1 Combined Emission and Economy Dispatch (CEED)

CEED problem can be expressed as [39].

$$\sum_{i=1}^N P_i - P_l - P_d \quad (1)$$

$$FC = \sum_{i=1}^N a_i P_i^2 + b_i P_i + c_i \quad (2)$$

$$EC = \sum_{i=1}^N a_i P_i^2 + b_i P_i + c_i \quad | \text{Cost function} \quad (3)$$

$$P_l = \sum_{i=1}^N \sum_{j=1}^N B_{ij} P_j P_i + \sum_{j=1}^N B_{0j} P_j + B_{00} \quad (4)$$

where P_d represents total load demand, P_l shows total transmission loss and P_i is the power produced by i th generator. Total fuel cost is denoted by FC and total emission is denoted with EC. In equation 2, a_i , b_i and c_i represent fuel cost coefficients. From eq 3, the cost function depends on the problem nature, it can be quadratic, square, sinusoidal, or any other function.

Referred to equation 4, B_{ij} Coefficients or load flow can be utilized to find transmission losses denoted as P_l . Where B_{0j} is coefficients vector of B_{ij} and a value B_{00} . The price penalty factor is utilized to transform the problem of multi-objective optimization into a single-objective optimization problem as follows:

$$f(FC, EC) = \text{Minimize} (FC + EC) \quad (5)$$

Each plant or price penalty factor can be found for a specific demand as follows:

- i. The ratio between the average fuel cost and the average emission of the maximum power capacity of that plant is found:

$$b_i = \frac{FC_i(U_i)}{EC_i(U_i)}, i = 1, 2, n \quad (6)$$

where (U_i) is i th unit of plant capacity.

- ii. Plants are arranged in ascending order based on the value of the price penalty factor.

- iii. Each unit (U_i) maximum capacity is added one at a time, beginning from the lowest value of b_i , unit until $\sum P_i \geq P_d$.
- iv. At this point b_i , linked with the last unit of the process is the price penalty factor 'b', Rs/Kg for the provided demand of the load.

3.1.2 Emission Controlled Economic Dispatched (ECED)

Emission-controlled economic dispatch (ECED) is another method to reduce the economy related to a specific limit of emission concerning a specific demand. ECED problem's primary concern is to discover the cost-effective placement of plants while fulfilling the losses and demand and keeping the permissible limit of emission; FC needs to be reduced directed to equation 1, i.e., power balance constraint and emission limit constraint expressed as equation 7.

$$f(FC) = \sum_{i=1}^N P_i - P_l - P_d, P_l \leq P_i \leq P_d, EC \leq E_{limit} \quad (7)$$

Here the system's total emission limit is denoted by E_{limit} .

3.2 Bee Swarming

This extraordinary insect is one of the most remarkable creatures since the old times. Honeybees have been the topic of scientific research. Moreover, multiple books and experiments have been carried out about honeybees; for instance, Ribbands published "Behavior and the Social Life of Honeybees" in 1953. "Anatomy of the Honey Bee" was written by Snodgrass in 1956, and Thomas D. Seeley wrote "the wisdom of hive" in 1995. The anatomy of a bee is shown in Figure 1. A process known as swarming is carried out to form new honeybee colonies:

- i. The old colony is left by queen bees among some workers and scout bees.
- ii. A swarming cycle is shown in Figure 2. A collection of thousands to tens

of thousands of bees make up a swarm.

- iii. They make a cluster around the queen in some branch or a tree and twenty-fifty scouts are sent out to discover some new proper hives.
- iv. Finally, under the supervision of the scout's bees, all other bees fly to the new hive.

Scout bees check a hive for various standards to meet, such as, it must be wide enough to hold the entire swarm, the entrance must be small and must be at the bottom of the hive, and must get a particular amount of heat from sunlight [40]. Processes of decision-making of scout bees are the source of inspiration. When they find various proper hives, they select the best among them. The source of communication between scouts is the movement of their wings and legs, which is called bee dance. The new hive is selected after the agreement of 80% of the scouts [40].

In terms of algorithms, every hive utilized by a scout demonstrates a feasible solution of an artificial search agent, while the fittest hive expresses a global optimum solution which is represented in Table 2. The characteristics of the hive, like its size, size of entrance, location of the entrance can be viewed as a solution's fitness function. The process of collective decision-making of scouts is expressed as fitness weight (f_w) in the algorithm.

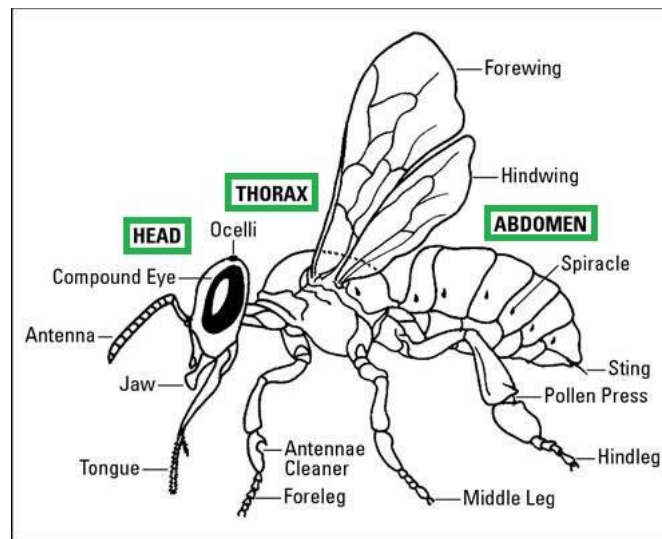


Fig. 1: Honey Bee Anatomy [17].

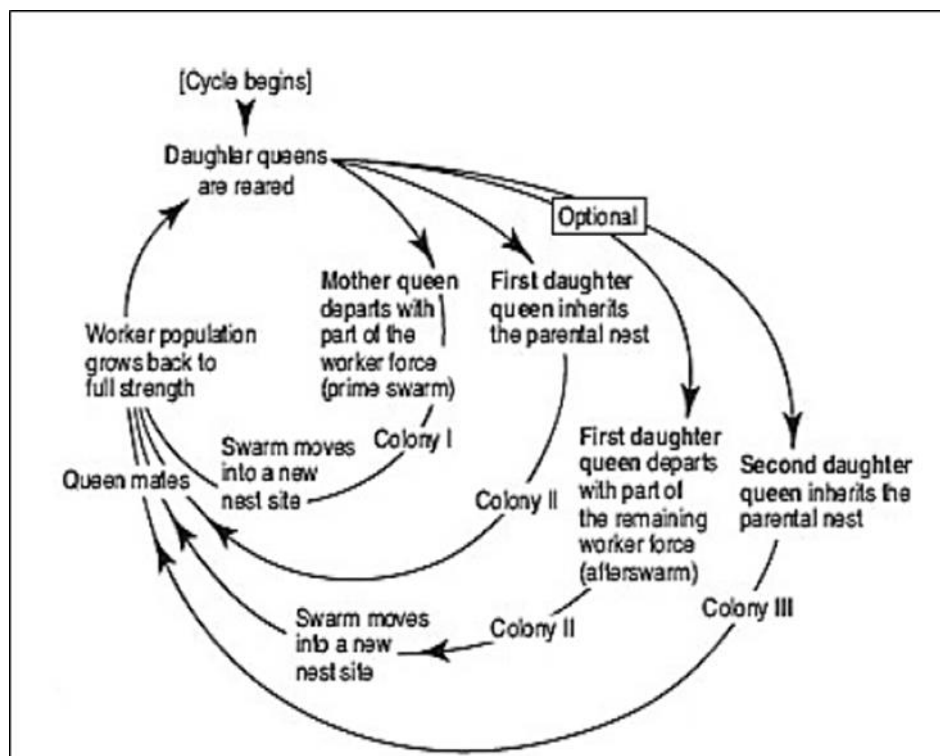


Fig. 2 Bee Swarming Process Cycle [17].

Table 2 FDO related Bee Biological characteristics.

Sr.	Nature	Algorithm
1	Selected hive	Global Solution
2	Scout collective decision	Objective Weight
3	Hive specification	Objective function

4	Hive	Solution found
5	Scout bee	Search agent

3.3 Fitness Dependent Optimizer

The reproduction process of swarm bees is replaced by this algorithm. The major portion of the algorithm is obtained from hive exploring the process of scout bees from a pool of suitable options. The algorithm starts with the random initialization of the artificial scout population within the search space of $X_i (i = 1, 2, \dots, n)$; the position of every scout expresses a recently recognized hive. Scout bees keep on finding the more suitable hive; once they find a better hive, they neglect the previous better hive; the same is the case with the algorithm. Whenever it discovers a new, more suitable solution than the earlier determined solution is neglected. If they cannot find any other better solution than the previous one, they will consider the current solution as the best solution.

A mechanism of fitness weight and random walk is used to randomly explore the landscape by artificial scouts in this algorithm. The following equation expresses the movement of artificial scout bees.

$$X_{i,t+1} = X_{i,t} + pace \quad (8)$$

Here i denotes the current search agent, x denotes an artificial scout bee (search agent), $pace$ denotes the direction and movement rate, and t denotes the current iteration of the artificial scout bee. $pace$ usually depends on fw i.e. fitness weight while $pace$'s direction fully depends on a random mechanism. Therefore, minimization problems' fw can be measured as:

$$fw = \left| \frac{x_{i,t}^* fitness}{x_{i,t} fitness} \right| - wf \quad (9)$$

The current best global solution's fitness function value is denoted by $x_{i,t}^* fitness$, current solution's fitness function value is denoted by $x_{i,t} fitness$, the weight factor is expressed as fw which can have only 0 or 1 value and is used to control fw . If $fw=1$ then it shows a low possibility of coverage and a high level of convergence. But if it is equal to 0, then it will not have any effect on equation (3.9), so it can be ignored, if the variable is $fw=0$ it will present us a more stable search. However, it reverses as the value of the fitness function entirely depends on the optimization problem. But, the value of fw must be in the range of $[0, 1]$; still, in some situations when $fw = 1$, for instance, if the recent solution is the global best solution or global best solution and the recent solution is same or hold similar fitness value. Furthermore, a possibility exists when $fw = 0$, if $x_{i,t}^* fitness = 0$. Lastly, it must bypass the chances to divide a number with 0 in case $x_{i,t} fitness$, so, it must follow the following rules:

$$\left\{ \begin{array}{l} fw = 1 \text{ or } fw = 0 \text{ or } x_{i,t} fitness = 0, pace = x_{i,t} * r \quad (10) \\ fw > 0 \text{ and } fw < 1 \left\{ \begin{array}{l} r < 0, pace = (x_{i,t} - x_{i,t}^*) * fw * -1 \quad (11) \\ r \geq 0, pace = (x_{i,t} - x_{i,t}^*) * fw \quad (12) \end{array} \right. \end{array} \right\}$$

where, a random number with a range of $[-1, 1]$ is denoted by r . The random walk can be implemented in a variety of ways but here Levy flight is selected as its good distribution curve offers stable movements [22]. According to FDO mathematical complexity: its time complexity for every iteration is $O(p * n + p * CF)$, here p denotes the size of the population, problem dimensions are denoted by n , and cost of the objective function is CF . Space complexity for every iteration is $O(p * CF + p * pace)$, here $pace$ denotes the best previous paces stored. From this point, the time complexity of FDO is proportional to the number of iterations. Though, space complexity will remain identical throughout the sequence of iterations. For the calculation of objective value, FDO owns a simple tool for calculations; it only calculates one random number and fitness weight for every agent [41]. Similarly, DA

alignment, attraction, separation, some random values, and distraction are required to be calculated, while a majority of them are accumulative and the value of one depends on the value of others making the calculations complicated [42].

3.3.1 *Single-objective optimization-based FDO*

FDO with single-objective optimization problems (FDOSOOP) starts with the initialization of artificial scouts on random locations of search landscape by utilizing lower and upper boundaries. For each iteration. It selects the global best solution, after that each artificial scout bee is computed by using equation (9). Then the value of fw is examined to decide whether it is 1 or 0 and if $x_{i,t fitness}=0$. $pace$ is generated by utilizing equation (10). But, a random number denoted by r of range $[-1, 1]$ will be generated if $fw > 0$ and $fw < 1$. For calculation of $pace$ Equation (10) will be utilized if the value of r is less than 0 and value of fw will have a negative sign, however, for $r \geq 0$, the pace will be calculated with the help of equation (12) and fw will have a positive sign. Random selection of signs for fw will ensure the random search of artificial bees in all directions.

In FDO, direction and size of pace are controlled by the randomization method; however, only the direction of pace is usually controlled by this method; in such situations, the pace's size depends on fw . Whenever scout bees find a new solution, it is compared with the current solution to determine if it is better or not based on a fitness function. The earlier solution is neglected if, the better latest solution is obtained. Similarly, if it is not better than the previous value of pace, it will be used by the scout bee to continue. On the other hand, if a better solution cannot be achieved by utilizing the previous value of $pace$, then the current solution will be continued by FDO to the next iteration. In FDO, whenever a solution is acquired, the value is saved for utilization in the next iteration. Two minor alterations are required for the implementation of FDO in maximization problems. Equation (9) should be

replaced by Equation (13) as it is the inverse variant of Equation (9).

$$fw = \left| \frac{x_{i,t} \text{ fitness}}{x_{i,t}^* \text{ fitness}} \right| - wf \quad (13)$$

Then the criteria for the selection of the best solution must be altered. The statement "if ($X_{t+1,i} \text{ fitness} < X_{t,i} \text{ fitness}$)" needs to be replenished with "if ($X_{t+1,i} \text{ fitness} > X_{t,i} \text{ fitness}$)".

3.3.2 Multi-objective optimization-based FDO

Multi-objective optimization problems (FDOMOOP) FDO begins with the initialization of artificial scouts into two-dimensional search space (X_i, Y_i). Each scout bee in the search space of (X_i, Y_i) can be defined as $X_i (i = 1, 2, \dots, n)$ and $Y_i (i = 1, 2, \dots, n)$. Then the value of fw is examined to decide whether its 1 or 0 and if $x_{i,t} \text{ fitness} = 0$ or $y_{i,t} \text{ fitness} = 0$. In both cases, the

pace can be generated as $fw = \left| \frac{x_{i,t} \text{ fitness}}{x_{i,t}^* \text{ fitness}} \right| - wf$ and $fw = \left| \frac{y_{i,t} \text{ fitness}}{y_{i,t}^* \text{ fitness}} \right| - wf$.

3.4 Enhanced Method

Multi-dimensional and multi-objective optimization algorithms tend to perform better for solving the linear and non-linear constraint problems than the single-dimensional and single-objective optimization algorithms, especially in the case of ELD, when both the emission rate and fuel cost need to be minimized to approach the total loss and power demand. FDO is a multi-objective metaheuristic algorithm and, therefore, best suitable for solving constrained ELD problems. It can be implied to complex problems with non-linear approximation. In this thesis, the authors have carried out FDO to solve the ELD problem by minimizing fuel cost, emission allocation, and Transmission Loss. Besides, authors have employed a novel variant of FDO which incorporates novel population initialization techniques and employed sine maps to select the weight factor for FDO dynamically.

3.4.1 Population Initialization

The swarm or group of swarms needs to be fired randomly to obtain their initial fitness solution in the optimization process. The entire process is called population initialization. The most conventional method to assign an initial location to each individual is through a random number generator following the normal distribution. However, the major drawback to using the random number generator is premature convergence and abnormal exploration and exploitation. The random number generator developed a random number between the interval of 0 and 1. The probability of obtaining an optimal solution in the case of local minima is reduced when the initial locations are directed far from the solution, and each individual requires more steps and iterations to seek the entire solution. The swarm can be stuck into premature convergence during the searching process and lead to poor exploration. Similarly, as opposed to this, the probability of obtaining a global solution in the case of global minima is diminished when the primary positions are delivered too near around the search space while the solution is out of search space; hence each individual requires more steps and iterations to seek the entire solution and can be stuck into the premature convergence and leads to poor exploitation.

3.4.2 Quasi-Random Sequence Initialization

Quasi-Random is a distinction of n -rows that occupies n -dimensional search space. It is also called a low-disparity sequence. However, the usual standard quasi-random sequences and odd numbers all give consistently suitable sequences. There is a significant distinction between these two patterns, aside from the standardized manner. An identical arbitrary generator on $(0, 1)$ will deliver sequences, so every preliminary has a similar likelihood of producing a point on equivalent subintervals, for instance $[(0, 1/2), (1, 1/2)]$. In this manner, it is attainable for n preliminaries to inadvertently all extend in the top half of the range, while the $(n+1)$ points fall

inside the other of the two parts with a likelihood of 1/2. While this is not the situation with the quasi-random sequences, the generated sequences are obliged by a low-inconsistency prerequisite that has a net impact on centers being created in a profoundly connected way. To avoid the premature convergence problem in FDO, authors have carried out one of the quasi-random sequences called the Sobol sequence for the population's initialization.

3.4.3 Quasi-Random Sequence Initialization

Sobol sequence is a low discrepancy sequence that was first Enhanced by mathematicians in Russia in 1967 [43]. It mimics the random distribution by appropriating a base of two to shape progressively better uniform edges of the required interval and afterward reorder the directions in each measurement. Following are prime steps to generate the Sobol sequences S^d

- i. Let S^d be the hypercube with the interval of $S^d = [0,1]^d$ and d -dimensional. The approximation function f^{opr} is integrated over the hypercube S^d .
- ii. The Sobol sequence termed as *Sobol* $[x, y]$ can be generated using the following equation over the nonlinear approximation of S^d .

$$\lim_{x \rightarrow \infty} \frac{1}{x} \sum_{i=1}^x f(S_i) = \int_{S^d} f \quad (14)$$

- iii. It is a notable pattern against each dimensional vector that for the whole to reach towards the indispensable points S^d . Furthermore, the second great feature would be that the forecasts of x in the low range of the dimensioned face of S^d cover most of the search area in terms of optimization.
- iv. Subsequently, the comparable center of S^d does not meet the criteria because in lower measurements numerous focuses will be at a similar spot, in this way unnecessary for the vital estimation.

The comparison of FDO population initialization with random numbers following the Sobol distribution and the uniform distribution is presented in Figures 3 and 4 respectively. The following equation is used in the standard FDO for the swarm to select their initial locations to seek the entire optimal solution.

$$Random_i(i = 1,2, \dots n) \therefore [0,1] \quad (15)$$

In the Enhanced FDO, authors have selected the interval of [0, 1] for generating both sequences uniform and Sobol sequences in the process of FDO population initialization. The Enhanced equation for initializing the swarm in FDO is presented below:

$$Sobol_i(i = 1,2, \dots n) \therefore [0,1] \quad (16)$$

where [0,1] in Equations 15 and 16 represent the standard limits of both generated sequences. The uniform random positions can be seen in Figure 3 with very random locations and ill-patterned sequences which may lead to poor exploitation. As compared to the uniform random, the Sobol sequence comes up with a well-patterned sequence in Figure 4 which may lead the swarm to converge maturely.

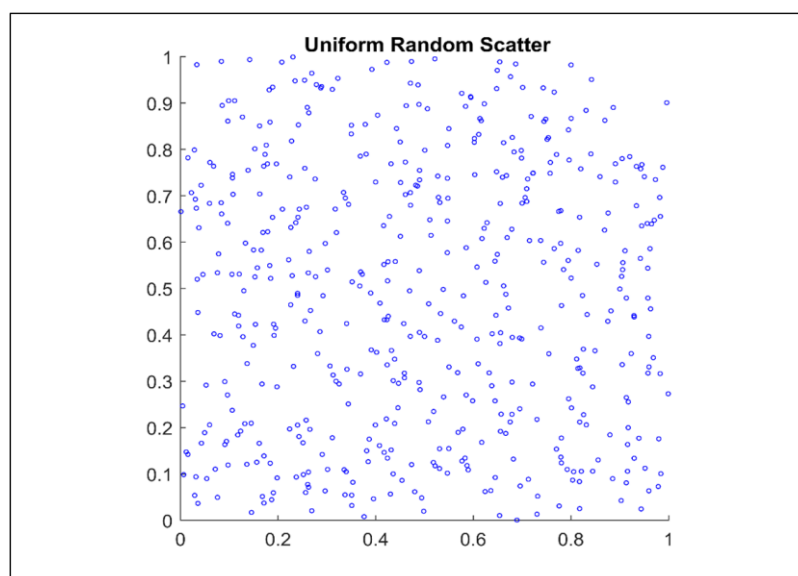


Fig. 3 Population initialization with random number generator following the uniform sequence.

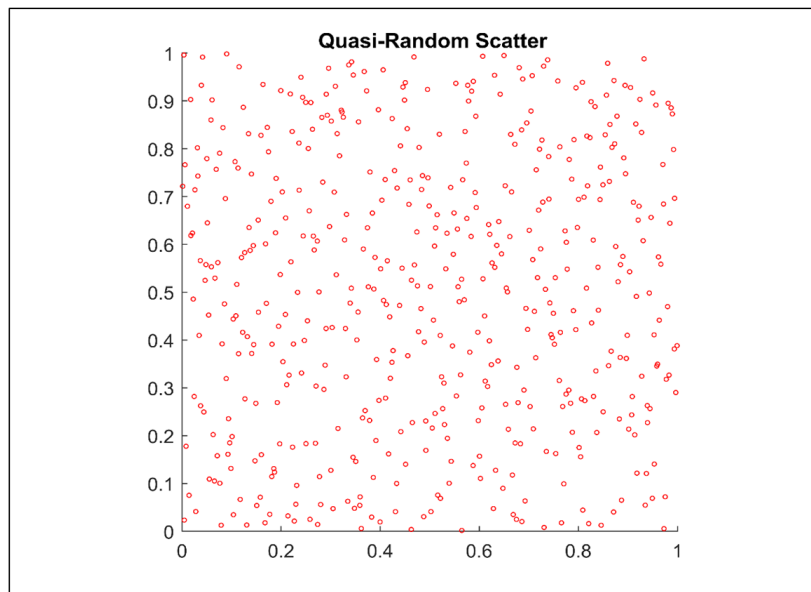


Fig. 4 Population initialization with Sobol sequence following the random distribution.

3.4.4 Enhanced approach for updating Weight factor

The weight factor is revealed as wf which can have particularly 0 or 1 utility and is utilized to control wf . If wf belongs to absolute 1 then it confers a low probability of coverage and a high level of convergence. However, if the weight factor wf belongs to 0, then it will not have any influence on equation 17, so it can be ignored, if the variable is $wf = 0$ it will present us a more stable search. However, it reverses as the value of the fitness function entirely depends on the optimization problem.

$$fw = \left| \frac{x_{i,t}^* fitness}{x_{i,t} fitness} \right| - 0 \quad (17)$$

However, in unusual circumstances, when the weight factor belongs to absolute one as shown in equation 18, for instance, if the new solution is the global best solution or local best solution and the new solution is identical or operates similar fitness value.

$$fw = \left| \frac{x_{i,t}^* fitness}{x_{i,t} fitness} \right| - 1 \quad (18)$$

fw should be balanced enough to control the exploitation and exploration for the controlled convergence rate when leads to absolute 0 fw and absolute 1 fw . For this, the authors produce a chaotic effect by using sine maps to the weight factor fw between the interval of [0,1].

3.4.5 Chaotic Sine Map

Chaotic maps produce uncontrolled groupings during the metaheuristic algorithm. The authors practiced the benefit of a chaotic sine pattern to update the weight factor [22]. The sine map is chaotic and used to produce a quarter effect between the interval of 0 and 1. When the weight factor becomes skewed towards 0, the sine wave covers the low balance and controls the low convergence rate. Similarly, when the weight factor becomes skewed towards 1, the sine wave covers the high balance and controls the high convergence rate. This phenomenon iteratively maintains the balance with optimal weight factor throughout the last epoch. A chaotic sign map can be defined as:

$$S_{map} = \frac{m}{4} \sin(\pi x_i) \quad (19)$$

where $0 < m < 4$ is the controlling factor. The author chooses $m = 0.3$ with the most optimal sequence. In terms of weight factor the equation becomes:

$$w_s = \frac{m}{4} \sin(\pi fw) \quad (20)$$

The Enhanced variant of FDO utilized the following equation to update the fitness weight fw .

$$fw = \left| \frac{x_{i,t}^* fitness}{x_{i,t} fitness} \right| - w_s \quad (21)$$

The flowchart of the Enhanced FDO along the ELD application is presented in Figure 5.

4 Application Results

4.1 Data Set Overview

The performance of the Enhanced variant of FDO is evaluated through 24 units taken from the 18-unit system and 20 unit system with each of the 6 unit case study chunks by optimizing the fitness function enlisted in Equation 1. The parameter sets used in the experiment for each unit are listed below:

Total number of units used in the experiment = 24, Total power demand = 400, 700, Number of iterations = 100, 200, Population size = Number of Bee scouts = 50, the Beta coefficient used for 24 units according to each chunk of 6 units in the exploring capacity with a power demand of 400 MW and 700 MW are presented as follows:

$$Beta\ coefficient = 1e^{-4} \times \begin{bmatrix} 1.4. 17. 15. 19. 26. 22 \\ . 17. 60. 13. 16. 15. 20 \\ . 15. 13. 65. 17. 24. 19 \\ . 19. 16. 17. 71. 30. 25 \\ . 26. 15. 24. 30. 69. 32 \\ . 22. 20. 19. 25. 32. 85 \end{bmatrix} \quad (22)$$

Detail of 24 units used to minimize the fuel cost, emission allocation, and Transmission Loss with 400 and 700 power load is presented in Table 2. In table 2, P_{min} and P_{max} represent the lower and upper plant limits. Where other parameters can be defined as $a = \frac{\$}{MW^2}$, $b = \frac{\$}{MW}$, $c = \$$.

The data set used for the simulation consists of two chunks with 12 generating thermal units each. The first 12 generating units (1 to 12) are taken from Sys_18 U with all plant limitations and beta coefficients as represented in Equation (22).

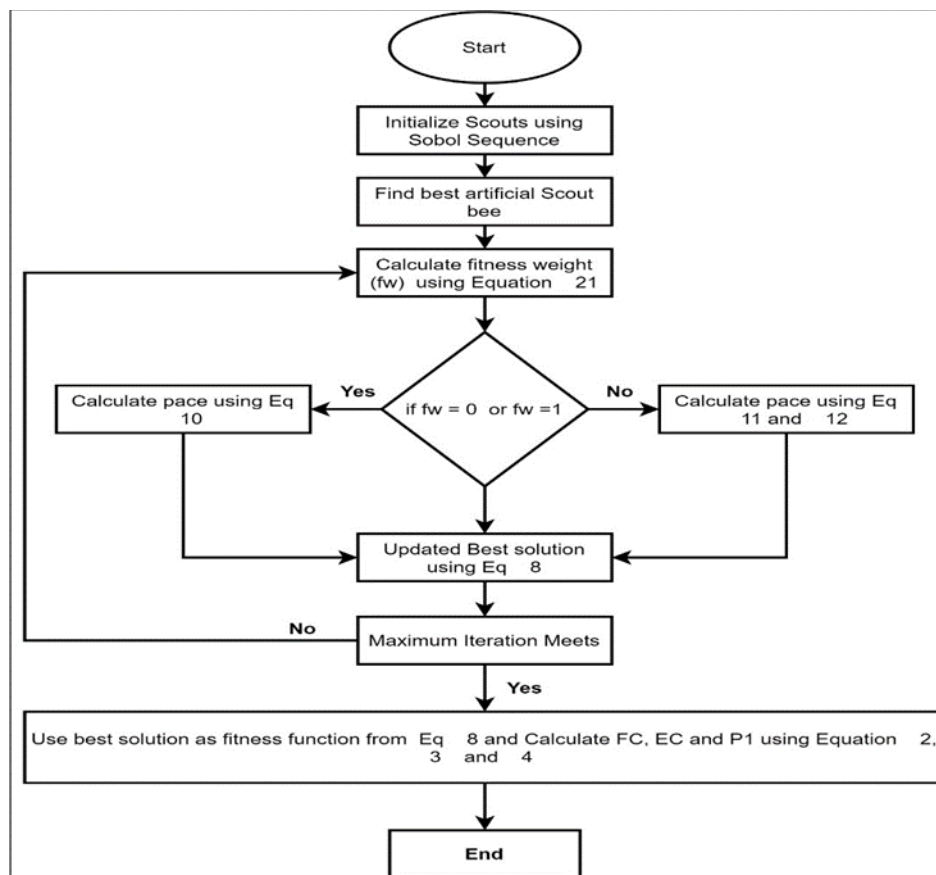


Fig. 5 Flowchart for Enhanced FDO algorithm along with ELD application.

Similarly, the last 12 generating thermal units (13 to 24) are taken from Sys_20 U with all plant limitations and beta coefficients as described in Equation (22). All thermal units employed for the empirical analysis are ramp-limits-free and do not endure in the prohibited zone for the smooth objective function. Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 100 epochs with a power demand of 400 and 700 are presented in Tables 3 and 4. The Total fuel error and the transmission cost are the minimum global fitness achieved by optimizing the ELD problem as $\text{Minimize } f(FC, EC), \exists, \sum_{i=1}^N P_i = P_d + P_l, L_i \leq P_i \leq U_i$. Similarly, in Table 4 and 5, a Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 200 epochs with a power demand of 400 and 700 are presented. Certainly, for our problem statement, the accentuation is to distinguish which epoch setting

requires the most minimal fuel cost and Transmission Loss to discover arrangements of a specific worthy quality. Furthermore, the Power demand is also analyzed in a roundabout way, to give in any event a complex reflection of the complexities of the various calculations considered in our relative examination.

The obtained results certainly take the fact that the population initialization and optimal fitness factor of FDO make some impact on the global best of FDO as compared to the Enhanced variant of FDO in terms of optimal allocation emission. The reason behind developing each thermal generation chunk with 6 units is to investigate the impact of greater dispersion on the total fuel cost and minimum error. To visualize the obtained results emission allocation results, a Convergence comparison of FDO with the Enhanced variant of FDO on the first 6 thermal units with 100 epochs and different power demands are illustrated in Figure 6.

Table 3 Twenty-four units used with a chunk of 6 units in the exploring capacity with a power demand of 400 MW and 700 MW.

Unit s	<i>P</i> <i>min</i>	<i>P</i> <i>max</i>	a	B	C
1	7	15	0.602842	22.45526	85.74158
2	7	45	0.602842	22.45526	85.74158
3	13	25	0.214263	22.52789	108.9837
4	16	25	0.077837	26.75263	49.06263
5	16	25	0.077837	26.75263	49.06263
6	3	14.7 5	0.734763	80.39345	677.73
7	3	14.7 5	0.734763	80.39345	677.73
8	3	12.2 8	0.514474	13.19474	44.39
9	3	12.2 8	0.514474	13.19474	44.39
10	3	12.2 8	0.514474	13.19474	44.39
11	3	12.2	0.514474	13.19474	44.39

8					
12	3	24	0.657079	56.70947	574.9603
13	150	600	0.00068	18.19	1000
14	50	200	0.00071	19.26	970
15	50	200	0.0065	19.8	600
16	50	200	0.005	19.1	700
17	50	160	0.00738	18.1	420
18	20	100	0.00612	19.26	360
19	25	125	0.0079	17.14	490
20	50	150	0.00813	18.92	660
21	50	200	0.00522	18.27	765
22	30	150	0.00573	18.92	770
23	100	300	0.0048	16.69	800
24	150	500	0.0031	16.76	970

Moreover, Convergence comparison (Transmission Loss) of FDO with the Enhanced variant of FDO on the 24 thermal units with (100, 200 epochs) and different power demands are demonstrated in Figures 7 and 8. To validate the achieved results on the ELD problem (FDO vs Enhanced FDO), this research used an ANOVA test. The main reason behind performing the ANOVA test is to find the significant difference between the standard and Enhanced FDO in terms of minimization. The additional reason to perform the ANOVA test is to determine which parameter delivers outcomes with critical contrasts, considering the target value accomplished by Enhanced FDO from each run of the considerable number of tests performed. Graphical representation of one-way ANOVA Test comparison (optimal allocation emission) of FDO with the Enhanced variant of FDO on the 24 thermal units with (100,200 epochs) and several power demands are illustrated in Figures 8 and 9, respectively.

Table 4 Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 100 epochs and 400 power demand. The optimal values are exhibited in boldface.

Units

Power Demand = 400

**Optimal Allocation Emission
(lbs)**

	FDO	Enhanced FDO
1	70.44063664	69.91458228
2	69.28036315	68.72201216
3	38.43849912	37.87285707
4	31.18554733	30.67657178
5	31.07224457	30.56379958
6	160.2587123	162.2504561
Total Fuel Cost (\$)	2.05E+05	2.04E+05
Transmission Loss	0.676	2.79E-04
7	111.6951678	111.360789
8	44.39	44.39
9	44.39	44.39
10	44.39	44.39
11	44.39	44.39
12	111.431507	111.0794924
Total Fuel Cost (\$)	1.05E+05	1.04E+05
Transmission Loss	0.6867	2.81E-04
13	18.32981341	18.24689868
14	59.0172677	58.85809285
15	58.93086524	58.77200905
16	58.7043227	58.5458324
17	58.92968203	58.77222232
18	146.7176828	146.8052033
Total Fuel Cost	1.25E+06	1.24E+06
Transmission Loss	0.6296	2.59E-04
19	122.1815342	122.1372312
20	62.6886485	62.53294149
21	62.13776388	61.98118821
22	103.4629522	103.3564131
23	30.48017867	30.36716223
24	19.70886257	19.62533477

Total Fuel Cost (\$)	1.31E+06	1.30E+06
Transmission Loss	0.6599	2.71E-04

Table 5 Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 100 epochs and 700 power demand. The optimal values are exhibited in boldface.

Units	Power Demand = 700	
	Optimal Allocation Emission (<i>lbs</i>)	
	FDO	Enhanced FDO
1	85.7416	85.74158
2	85.7416	85.74158
3	108.9837	83.36202838
4	49.0626	49.06263
5	49.0626	49.06263
6	525.6109	347.0304788
Total Fuel Cost (\$)	6.51E+05	6.46E+05
Transmission Loss	2.2609	9.27E-04
7	259.65771	258.266736
8	44.39	44.39
9	44.39	44.39
10	44.39	44.39
11	44.39	44.39
12	265.4517495	264.1743532
Total Fuel Cost (\$)	4.50E+05	4.45E+05
Transmission Loss	2.6695	0.0011
13	33.35092403	33.16801208
14	104.2882238	103.890753
15	104.0208305	103.6249588
16	103.3245773	102.9315033
17	103.1925346	102.8020805
18	253.7447758	253.5834798
Total Fuel Cost (\$)	3.73E+06	3.71E+06
Transmission Loss	1.9219	7.88E-04

19	210.6754314	210.3359493
20	110.5273588	110.1212242
21	109.860002	109.4539346
22	181.2722755	180.8655902
23	54.11026706	53.84868486
24	35.56430084	35.37544006
Total Fuel Cost (\$)	3.92E+06	3.90E+06
Transmission Loss	2.0096	8.23E-04

Table 6 Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 200 epochs and 400 power demand. The optimal values are exhibited in boldface.


Units	Power Demand = 400	
	Optimal Allocation Emission (lbs)	
	FDO	Enhanced FDO
1	69.91436113	69.91435917
2	68.72177747	68.72177539
3	37.87262247	37.87262039
4	30.67636117	30.67635931
5	30.56358919	30.56358733
6	162.251291	162.2512984
Total Fuel Cost (\$)	2.04E+05	2.04E+05
Transmission Loss	2.45E-06	2.69E-12
7	111.3606533	111.360652
8	44.39	44.39
9	44.39	44.39
10	44.39	44.39
11	44.39	44.39
12	111.0793492	111.079348
Total Fuel Cost (\$)	1.04E+05	1.04E+05

Transmission Loss	2.47E-06	2.72E-12
13	18.24686486	18.24686456
14	58.85802787	58.85802729
15	58.7719442	58.77194362
16	58.5457677	58.54576712
17	58.77215804	58.77215747
18	146.8052396	146.8052399
Total Fuel Cost (\$)	1.24E+06	1.24E+06
Transmission Loss	2.27E-06	2.50E-12
19	122.1372134	122.1372132
20	62.53287799	62.53287743
21	61.98112435	61.98112378
22	103.3563698	103.3563694
23	30.36711614	30.36711573
24	19.62530071	19.62530041
Total Fuel Cost (\$)	1.30E+06	1.30E+06
Transmission Loss	2.38E-06	2.62E-12

Table 7 Comparison of simulation results on the ELD problem (FDO vs Enhanced FDO) with nonlinear optimization on 200 epochs and 400 power demand. The optimal values are exhibited in boldface.


Units	Power Demand = 700	
	Optimal Allocation Emission (<i>lbs</i>)	
	FDO	Enhanced FDO
1	85.74158	85.74158
2	85.74158	85.74158
3	83.36112205	83.36111401
4	49.06263	49.06263
5	49.06263	49.06263
6	347.0304661	347.030466
Total Fuel Cost (\$)	6.46E+05	6.46E+05
Transmission Loss	8.15E-06	8.95E-12
7	258.266172	258.266167

8	44.39	44.39
9	44.39	44.39
10	44.39	44.39
11	44.39	44.39
12	264.1738376	264.173833
Total Fuel Cost (\$)	4.45E+05	4.45E+05
Transmission Loss	9.57E-06	1.05E-11
13	33.16793762	33.16793696
14	103.8905912	103.8905898
15	103.6247976	103.6247962
16	102.9313433	102.9313419
17	102.8019216	102.8019202
18	253.5834156	253.583415
Total Fuel Cost (\$)	3.71E+06	3.71E+06
Transmission Loss	6.92E-06	7.60E-12
19	210.3358119	210.3358107
20	110.121059	110.1210576
21	109.4537694	109.453768
22	180.8654252	180.8654237
23	53.84857844	53.8485775
24	35.37536322	35.37536254
Total Fuel Cost (\$)	3.90E+06	3.90E+06
Transmission Loss	7.23E-06	7.94E-12

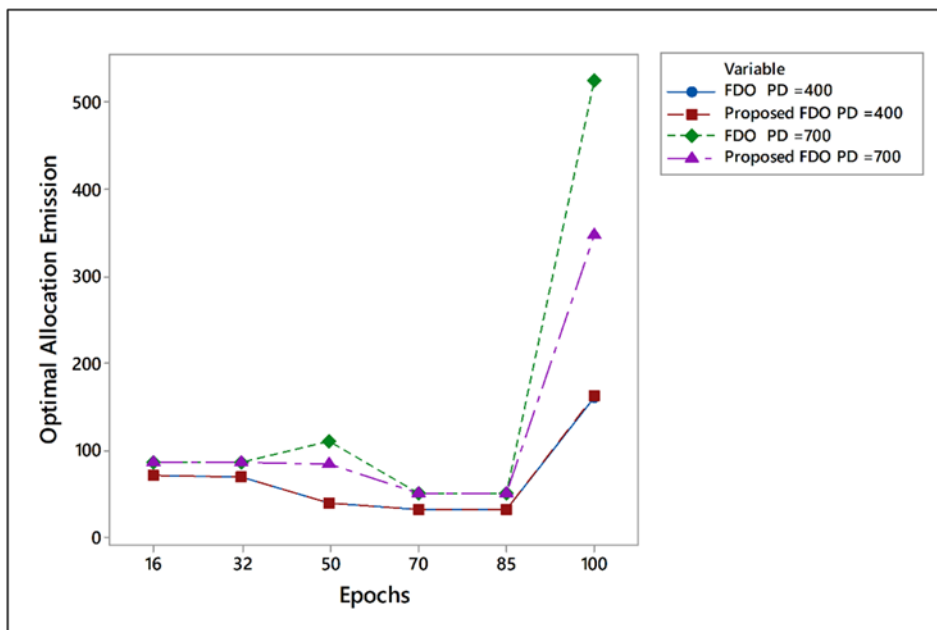

1
2
3
4

Fig. 6 Convergence comparison (optimal allocation emission) of FDO with the Enhanced variant of FDO on the first 6 thermal units with 100 epochs and different power demands.

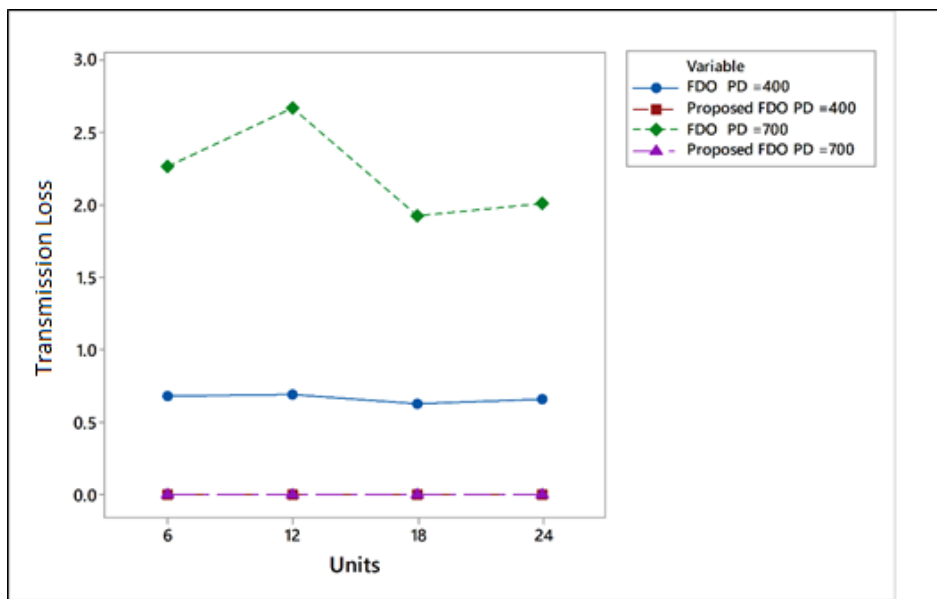

5
6
7
8


Fig. 7 Convergence comparison (Transmission Loss) of FDO with the Enhanced variant of FDO on the 24 thermal units with 100 epochs and different power demands.

4.2 Optimal Allocation Emission

9
10
11

It is earlier mentioned that each chunk of thermal units are tested on 100 independent runs with 100 and 200 epochs considering two different combinations of power demand. The


12 authors observed a significant improvement in the optimal power allocation generated by the
 13 Enhanced FDO for the first 6 thermal units as compared to the conventional FDO (Referred
 14 to Table 4). All 5 units' results obtained by Enhanced FDO outperformed FDO except the 6th
 15 unit with 162.2504561 optimal emission allocation on 100 epochs and 400 power demand.
 16 As contrasted to the first chunk of thermal units, the performance of the Enhanced algorithm
 17 was observed less when optimizing emission allocation. It can be seen from Table 4 that only
 18 thermal units 7 and 12 gained better emission rates, which lead to greater divergence of the
 19 whole population. However, thermal units 8, 9, 10, and 11 show equal empirical performance
 20 for both FDO and Enhanced FDO with a 44.3 emission rate.

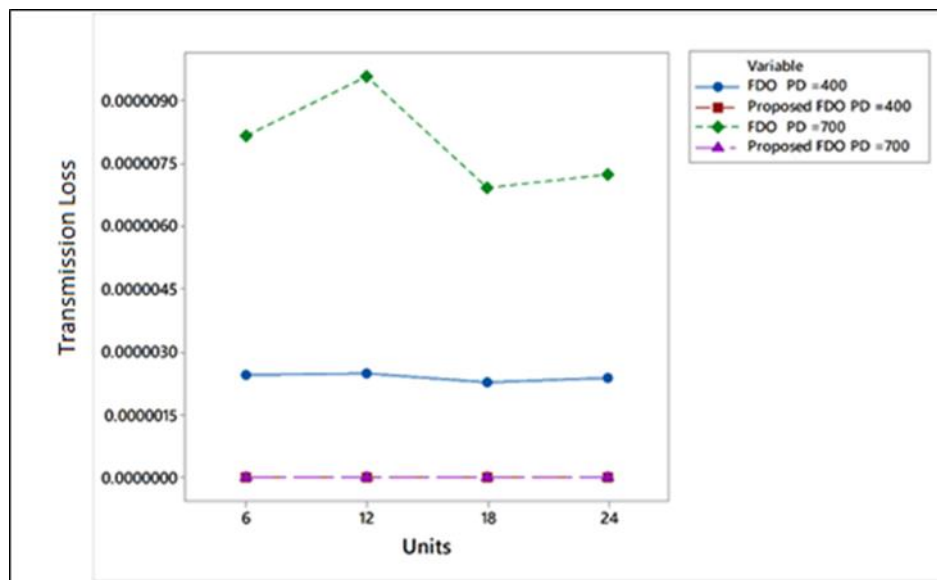

21

22 **Fig. 8** Convergence comparison (Transmission Loss) of FDO with the Enhanced
 23 variant of FDO on the 24 thermal units with 200 epochs and different power demands.

24

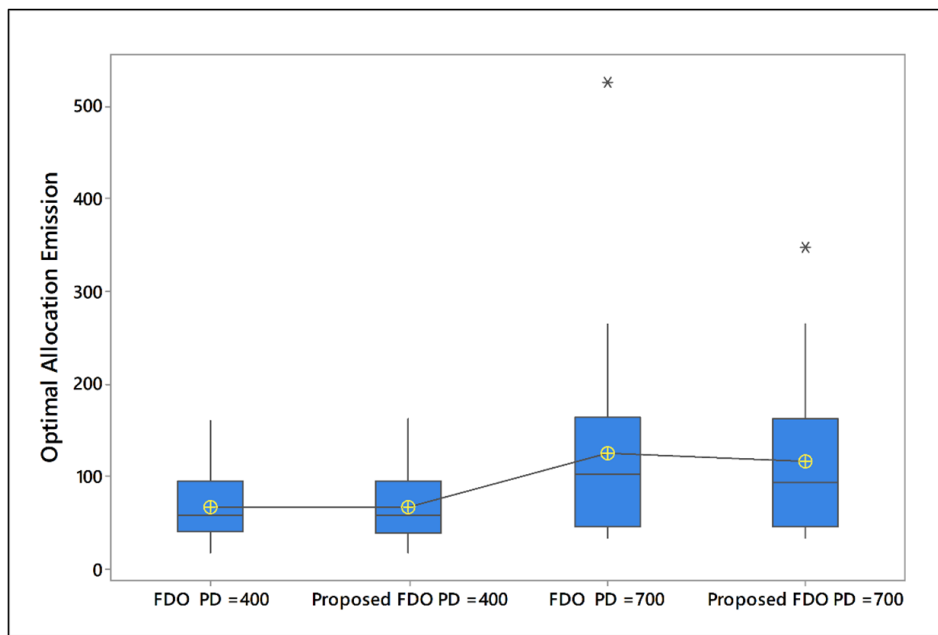

25

26

Fig. 9 One-way ANOVA Test comparison (optimal allocation emission) of FDO with the Enhanced variant of FDO on the 24 thermal units with 100 epochs and different power demands.

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49


50

In the case of the third chunk, thermal units 13 to 18, the emission allocation rate is not significantly improved using Enhanced FDO instead of the standard FDO. The Enhanced version obtained 18 with unit 13, 58 with units 14, 15, 16, 17, and 58 with unit 18, respectively, on 100 epochs and 400 power demand, which shows a slight improvement. This slight impact of Enhanced FDO reveals the impact of robust population initialization on the ELD emission allocation. Lastly, the fourth chunk of the thermal unit from Table 4 exhibits outstanding results of the Enhanced algorithm on the entire parameter setting except for the last thermal unit with a 19.62533477 emission rate.

From Table 5, when power demand raised 400 to 700, the Enhanced algorithm also improves the swarm convergence, and hence the optimal fitness factor works here. This phenomenon shows the inverse divergence of the global best computed with the Enhanced fitness factor, which leads to the emission allocation of the thermal units 3 and 6 from 68.72201216, 162.2504561 to 83.36202838 and 347.0304788, respectively. Similarly,

43 premature convergence is highly tackled by the Enhanced algorithm when seeing a
 44 significant decrease in the average optimal allocation for the first six thermal units. Tables
 45 5 and 6 show similar convergence behavior of Enhanced FDO compared to the FDO using
 46 200 epochs with 400 and 700 power demand. However, the optimal fitness factor produces
 47 less impact than the effect produced when testing on 100 epochs. This can be due to the
 48 dimension reduction that occurs in higher generations.

49

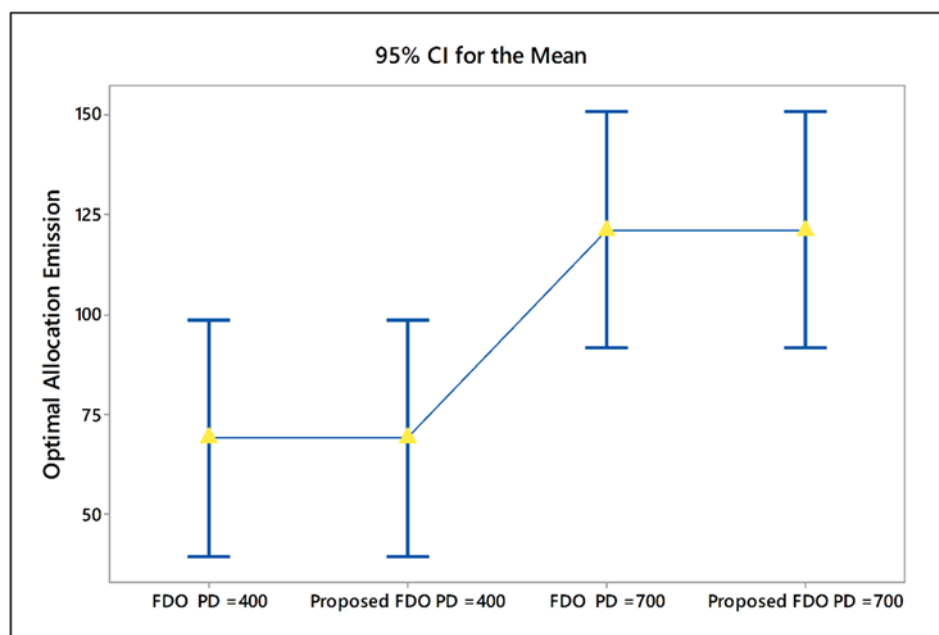

50

51 **Fig. 10** One-way ANOVA Test comparison (optimal allocation emission) of FDO
 52 with the Enhanced variant of FDO on the 24 thermal units with 200 epochs and
 53 different power demands.

54 4.3 Fuel Cost

55 Fuel cost minimization on the same hydro energy and power demand is a big issue when
 56 several units are mimicking in parallel. This can be optimized by considering the current fuel
 57 cost as the global best for each of the individuals in the FDO. However, the minimal risk is
 58 premature convergence which leads to double computing cases and wastage of time with the cost
 59 approximately equal to the standard fuel cost. Robust population initialization decreases the
 60 chance of premature convergence. Hence the Enhanced FDO used optimal fitness factors in
 61 combination with the Sobol operator to minimize the fuel cost.

62

63 It can also be observed in Tables 3 to 5 that the fuel cost difference between FDO and
64 Enhanced FDO is notable for all 24 thermal units on 100 and 200 epochs with a power demand
65 of 400 and 700 sequentially. However, this significant minimal difference in cost can impact the
66 whole unit generation cost. The trends for each chunk of the thermal unit from Table 4 to 6, confirm
67 the directly proportional relationship between the power demand and the fuel cost directly. The
68 minimization range is constant between them which explicates the strong divergence and influential
69 fitness factor. Increasing power demand will lead the fuel cost to increase with a constant
70 proportion of difference produced by FDO and Enhanced FDO.

71 4.4 Transmission Loss

72 Transmission error is essential for significant distance potential transmission and it grows with
73 an expansion in the measure of capacity to be dispatched. Therefore, the utilization of
74 inexhaustible force from the sustainable plants close to the heap focuses diminishes the
75 transmission losses. Appropriating the sustainable power sources all through the working time
76 frames as opposed to utilizing them during their accessible period will assist with diminishing
77 both expense and the transmission loss.

78 Compared to the optimal emission allocation and fuel cost, the authors have received
79 the best optimal transmission loss results. The Enhanced algorithm FDO reduced the loss with
80 a 60 % rate on average. The authors can perceive that in Table 4, FDO minimizes the loss to
81 0.676, 0.6867, 0.6296, and 0.6296 for four chunks of the thermal unit with 100 epochs and 400
82 power demand as compared to the Enhanced FDO, which reduces it to 2.79E-04, 2.81E-04,
83 2.59E-04, and 2.71E-04 for four chunks of the thermal unit with 100 epochs and 400 power
84 demand sequentially. Enhanced DFO significantly outperformed standard FDO for
85 minimization transmission loss.

86 Likewise, the Enhanced algorithm FDO decreased the loss by a 300 % rate regularly.
87 The study can comprehend that in Table 5, FDO minimizes the loss to 2.2609, 2.6695, 1.9219,
88 and 2.0096 for four chunks of the thermal unit with 100 epochs and 700 power demand as
89 contrasted to the intended FDO, which overcome it to 9.27E-04, 0.0011, 7.88E-04, and 8.23E-
90 04 for four chunks of the thermal unit with 100 epochs and 700 power demand sequentially.
91 Tables 6 and 7 explicitly formulate the same trends between standard and Enhanced FDO with
92 200 significant differences in Transmission error on 200 epochs and 400 and 700 power
93 demand. Figure 6 confirms the optimal convergence comparison in the case of optimal
94 allocation emission (FDO with the Enhanced variant of FDO0 on the first six thermal units
95 with 100 epochs and different power demands. Figures 7 and 8 dispense the clear-cut
96 Transmission Loss difference. Units are presented on the X-axis while Transmission Loss is
97 enlisted on Y-axis.

98 To validate the obtained results, ANOVA statistical analysis for Figures 9 and 10
99 reinforces the best performance of the Enhanced FDO algorithm and encourages the solution
100 for other constraints as well. The box representation for Enhanced FDO with 400 power
101 demand is proved as an optimal solution with optimal chunk. Similarly, the interval plot
102 representation for Enhanced FDO with 700 power demand is determined as an optimal solution
103 with an optimal chunk.

104 **5. Conclusion**

105 This research work introduced a variant of the FDO algorithm motivated by scout bees in the
106 hive exploring the process of seeking food from a pool of suitable options. The Enhanced
107 variant is utilized to solve the economic load dispatch problem. FDO and its modified version
108 are motivated to upgrade the minimization capability during weight optimization of economic
109 loads dispatch. Each individual of the scout bee is represented as output power generated
110 through each thermal unit. The study deals with three types of constraints in this work: power

111 balance capacity, transmission loss, and optimal emission allocation. In the beginning, the
112 exploration executed by Enhanced FDO is dependent on a simplistic fitness factor that delivers
113 a less optimal solution by sticking into local minima and transforms some of its decision
114 variables through their constraint violation. After applying the Sobol operator for population
115 initialization and chaotic sin map for the optimal fitness, redistribution power operators are
116 connected. The Enhanced operator ensures the feasibility of a probable solution that the thermal
117 unit will take as an input and barely estimate the balance power constraint. Furthermore, the
118 Enhanced population initialization approach consolidates a quasi-random Sobol sequence to
119 create the initial solution in the multi-dimensional search space. A regular 24-unit system is
120 applied with diverse power demands for experimental evaluation. Experiential results acquired
121 utilizing the Enhanced variant of FDO confirm the superior performance in terms of low
122 transmission loss, low fuel cost, and low emission allocation compared to the standard FDO.
123 As a part of our future work, the authors are inspired by the hybridization of FDO with other
124 metaheuristic algorithms such as BA, DE, and PSO. The authors aimed to take the best qualities
125 from BA as local search capability, DE as optimal mutation factor, and PSO as inertia weight
126 and incorporate them in FDO to achieve the best results. Furthermore, the authors are also
127 interested in the fine-tuning of FDO parameters in combination with ELD constraint and their
128 hyperparameter tuning. Additionally, the hybridized version of FDO will be evaluated to
129 investigate the influence of objective evaluations on dimension reduction.

130 **Abbreviations**

131 Economic load dispatch (ELD), Prohibited Operating Zone (POZ), Valve-Point Effects (VPE),
132 quantum bat algorithm (QBA), combined economic emission dispatch (CEED), evolution
133 algorithm integrating with multiple mutation strategies (ADE-MMS), EVs and wind farms
134 (WEV), Dynamic economic emission dispatching based on WEV system (WE_DEED),
135 motion optimization algorithm (IMA), Bat Algorithm (BA), Artificial Bee Colony (ABC),
136 Chaotic based Self-Adaptive (CSA), Learner Non-dominated Sorting Genetic Algorithm
137 (NSGA-RL), Chaotic-crisscross differential evolution (CCDE), Differential Evolution
138 algorithm (DEA), Self-adaptable differential evolution algorithm integrating with multiple
139 mutation strategies (ADE-MMS), Modified crow search algorithm (MCSA), Multi-objective

140 economic and environmental dispatch problem (EEDP), Coyote Optimization Algorithm
 141 (COA), Combined economic and emission dispatch (CEED), Emission-controlled economic
 142 dispatch (ECED), Fitness Dependent Optimizer (FDO), FDO with single-objective
 143 optimization problems (FDOSOOP), Multi-objective optimization problems (FDOMOOP).

144

145 **Funding:** The research received no funds.

146 **Conflict of Interest** The authors declare that they have no conflict of interest.

147 **Data Availability:** Data can be shared upon request from the corresponding author

148 References

- 149 [1] T. Sale, “Alan Turing at Bletchley Park in world war II,” in *Alan Turing: Life and*
 150 *Legacy of a Great Thinker*, Springer, 2004, pp. 441–462.
- 151 [2] G. G. Wang, S. Deb, and L. D. S. Coelho, “Earthworm optimisation algorithm: a bio-
 152 inspired metaheuristic algorithm for global optimisation problems,” *Int. J. Bio-Inspired*
 153 *Comput.*, vol. 12, no. 1, p. 1, 2018, doi: 10.1504/ijbic.2018.093328.
- 154 [3] A. Sheta, H. Faris, M. Braik, and S. Mirjalili, “Nature-Inspired Metaheuristics Search
 155 Algorithms for Solving the Economic Load Dispatch Problem of Power System: A
 156 Comparison Study,” *Applied Nature-Inspired Computing: Algorithms and Case*
 157 *Studies*. Springer Singapore, pp. 199–230, 2019. doi: 10.1007/978-981-13-9263-4_9.
- 158 [4] M. Ali *et al.*, “Coupled online sequential extreme learning machine model with ant
 159 colony optimization algorithm for wheat yield prediction,” *Sci. Rep.*, vol. 12, no. 1, pp.
 160 1–23, 2022.
- 161 [5] I. Ahmadianfar, S. Shirvani-Hosseini, A. Samadi-Koucheksaraee, and Z. M. Yaseen,
 162 “Surface water sodium (Na⁺) concentration prediction using hybrid weighted
 163 exponential regression model with gradient-based optimization,” *Environ. Sci. Pollut.*
 164 *Res.*, pp. 1–26, 2022.
- 165 [6] M. Alrashidi, S. Rahman, and M. Pipattanasomporn, “Metaheuristic optimization
 166 algorithms to estimate statistical distribution parameters for characterizing wind
 167 speeds,” *Renew. Energy*, vol. 149, pp. 664–681, 2020, doi:
 168 10.1016/j.renene.2019.12.048.
- 169 [7] L. A. Wulandhari, S. Komsiyah, and W. Wicaksono, “Bat Algorithm Implementation
 170 on Economic Dispatch Optimization Problem,” *Procedia Comput. Sci.*, vol. 135, pp.
 171 275–282, 2018, doi: 10.1016/j.procs.2018.08.175.
- 172 [8] A. A. Ewees, M. A. Gaheen, Z. M. Yaseen, and R. M. Ghoniem, “Grasshopper
 173 Optimization Algorithm with Crossover Operators for Feature Selection and Solving
 174 Engineering Problems,” *IEEE Access*, 2022.
- 175 [9] I. Ahmadianfar, S. Shirvani-Hosseini, J. He, A. Samadi-Koucheksaraee, and Z. M.
 176 Yaseen, “An improved adaptive neuro fuzzy inference system model using conjoined
 177 metaheuristic algorithms for electrical conductivity prediction,” *Sci. Rep.*, vol. 12, no.
 178 1, pp. 1–34, 2022.
- 179 [10] N. Mahmoudi *et al.*, “Mutating fuzzy logic model with various rigorous meta-heuristic

- 180 algorithms for soil moisture content estimation,” *Agric. Water Manag.*, vol. 261, p.
181 107342, 2022.
- 182 [11] I. Fister, X. S. Yang, J. Brest, and D. Fister, “A brief review of nature-inspired
183 algorithms for optimization,” *Elektrotehnikski Vestnik/Electrotechnical Review*. 2013.
- 184 [12] J. Yuste, A. Duarte, and E. G. Pardo, “An efficient heuristic algorithm for software
185 module clustering optimization,” *J. Syst. Softw.*, p. 111349, 2022.
- 186 [13] V. Raman and N. S. Gill, “Review of different heuristic algorithms for solving
187 Travelling Salesman Problem.,” *Int. J. Adv. Res. Comput. Sci.*, vol. 8, no. 5, 2017.
- 188 [14] G. Dhiman and V. Kumar, “Seagull optimization algorithm: Theory and its
189 applications for large-scale industrial engineering problems,” *Knowledge-Based Syst.*,
190 vol. 165, pp. 169–196, 2019.
- 191 [15] G. Dhiman and A. Kaur, “STOA: a bio-inspired based optimization algorithm for
192 industrial engineering problems,” *Eng. Appl. Artif. Intell.*, vol. 82, pp. 148–174, 2019.
- 193 [16] R. Storn and K. Price, “Differential evolution—a simple and efficient heuristic for
194 global optimization over continuous spaces,” *J. Glob. Optim.*, pp. 341–359, 1997, doi:
195 10.1023/A:1008202821328.
- 196 [17] J. M. Abdullah and T. Ahmed, “Fitness Dependent Optimizer: Inspired by the Bee
197 Swarming Reproductive Process,” *IEEE Access*, vol. 7, pp. 43473–43486, 2019, doi:
198 10.1109/access.2019.2907012.
- 199 [18] W.-K. Hao, J.-S. Wang, X.-D. Li, M. Wang, and M. Zhang, “Arithmetic optimization
200 algorithm based on elementary function disturbance for solving economic load dispatch
201 problem in power system,” *Appl. Intell.*, pp. 1–27, 2022.
- 202 [19] A. Ramadan, M. Ebeed, S. Kamel, M. I. Mosaad, and A. Abu-Siada, “Technoeconomic
203 and Environmental Study of Multi-Objective Integration of PV/Wind-Based DGs
204 Considering Uncertainty of System,” *Electronics*, vol. 10, no. 23, p. 3035, 2021.
- 205 [20] T. A. A. Victoire and A. E. Jeyakumar, “Hybrid PSO–SQP for economic dispatch with
206 valve-point effect,” *Electr. Power Syst. Res.*, vol. 71, no. 1, pp. 51–59, 2004, doi:
207 10.1016/j.epsr.2003.12.017.
- 208 [21] A. A. E. Tawfiq, M. O. A. El-Raouf, M. I. Mosaad, A. F. A. Gawad, and M. A. E.
209 Farahat, “Optimal reliability study of grid-connected PV systems using evolutionary
210 computing techniques,” *IEEE Access*, vol. 9, pp. 42125–42139, 2021.
- 211 [22] X. Yang, *Nature-Inspired Metaheuristic Algorithms*. 2010.
- 212 [23] X. Yang and A. Hossein Gandomi, “Bat algorithm: a novel approach for global
213 engineering optimization,” *Eng. Comput.*, vol. 29, no. 5, pp. 464–483, 2012, doi:
214 10.1108/02644401211235834.
- 215 [24] E. Gonçalves, A. R. Balbo, D. N. da Silva, L. Nepomuceno, E. C. Baptista, and E. M.
216 Soler, “Deterministic approach for solving multi-objective non-smooth Environmental
217 and Economic dispatch problem,” *Int. J. Electr. Power Energy Syst.*, vol. 104, pp. 880–

- 218 897, 2019, doi: 10.1016/j.ijepes.2018.07.056.
- 219 [25] D. Zou, S. Li, X. Kong, H. Ouyang, and Z. Li, “Solving the combined heat and power
220 economic dispatch problems by an improved genetic algorithm and a new constraint
221 handling strategy,” *Appl. Energy*, vol. 237, pp. 646–670, 2019, doi:
222 10.1016/j.apenergy.2019.01.056.
- 223 [26] F. P. Mahdi, P. Vasant, M. Abdullah-Al-Wadud, V. Kallimani, and J. Watada,
224 “Quantum-behaved bat algorithm for many-objective combined economic emission
225 dispatch problem using cubic criterion function,” *Neural Comput. Appl.*, vol. 31, no.
226 10, pp. 5857–5869, 2018, doi: 10.1007/s00521-018-3399-z.
- 227 [27] Q. Zhang, D. Zou, N. Duan, and X. Shen, “An adaptive differential evolutionary
228 algorithm incorporating multiple mutation strategies for the economic load dispatch
229 problem,” *Appl. Soft Comput.*, vol. 78, pp. 641–669, 2019, doi:
230 10.1016/j.asoc.2019.03.019.
- 231 [28] N. H. Awad, M. Z. Ali, R. Mallipeddi, and P. N. Suganthan, “An efficient Differential
232 Evolution algorithm for stochastic OPF based active–reactive power dispatch problem
233 considering renewable generators,” *Appl. Soft Comput.*, vol. 76, pp. 445–458, 2019,
234 doi: 10.1016/j.asoc.2018.12.025.
- 235 [29] B. Qiao and J. Liu, “Multi-objective dynamic economic emission dispatch based on
236 electric vehicles and wind power integrated system using differential evolution
237 algorithm,” *Renew. Energy*, vol. 154, pp. 316–336, 2020, doi:
238 10.1016/j.renene.2020.03.012.
- 239 [30] T.-T. Nguyen, M.-J. Wang, J.-S. Pan, T. Dao, and T.-G. Ngo, “A Load Economic
240 Dispatch Based on Ion Motion Optimization Algorithm,” *Advances in Intelligent
241 Information Hiding and Multimedia Signal Processing*. Springer Singapore, pp. 115–
242 125, 2019. doi: 10.1007/978-981-13-9710-3_12.
- 243 [31] Tehzeeb-ul-Hassan, T. Alquthami, S. E. Butt, M. F. Tahir, and K. Mehmood, “Short-
244 term optimal scheduling of hydro-thermal power plants using artificial bee colony
245 algorithm,” *Energy Reports*, vol. 6, pp. 984–992, 2020, doi:
246 10.1016/j.egy.2020.04.003.
- 247 [32] F. Mohammadi and H. Abdi, “A modified crow search algorithm (MCSA) for solving
248 economic load dispatch problem,” *Appl. Soft Comput.*, vol. 71, pp. 51–65, 2018, doi:
249 10.1016/j.asoc.2018.06.040.
- 250 [33] T. C. Bora, V. C. Mariani, and L. dos S. Coelho, “Multi-objective optimization of the
251 environmental-economic dispatch with reinforcement learning based on non-dominated
252 sorting genetic algorithm,” *Appl. Therm. Eng.*, vol. 146, pp. 688–700, 2019, doi:
253 10.1016/j.applthermaleng.2018.10.020.
- 254 [34] M. Kaur, J. S. Dhillon, and D. P. Kothari, “Crisscross differential evolution algorithm
255 for constrained hydrothermal scheduling,” *Appl. Soft Comput.*, vol. 93, p. 106393,
256 2020, doi: 10.1016/j.asoc.2020.106393.
- 257 [35] S. T. Suganthi, D. Devaraj, K. Ramar, and S. Hosimin Thilagar, “An Improved

- 258 Differential Evolution algorithm for congestion management in the presence of wind
 259 turbine generators,” *Renew. Sustain. Energy Rev.*, vol. 81, pp. 635–642, 2018, doi:
 260 10.1016/j.rser.2017.08.014.
- 261 [36] B. K. Panigrahi, P. N. Suganthan, and S. Das, *Swarm, Evolutionary, and Memetic*
 262 *Computing: 5th International Conference, SEMCCO 2014, Bhubaneswar, India,*
 263 *December 18-20, 2014, Revised Selected Papers*, vol. 8947. Springer, 2015.
- 264 [37] U. Guvenc and E. Kaymaz, “Economic Dispatch Integrated Wind Power Using Coyote
 265 Optimization Algorithm,” *2019 7th International Istanbul Smart Grids and Cities*
 266 *Congress and Fair (ICSG)*. IEEE, 2019. doi: 10.1109/sgcf.2019.8782354.
- 267 [38] I. N. Trivedi, P. Jangir, M. Bhoje, and N. Jangir, “An economic load dispatch and
 268 multiple environmental dispatch problem solution with microgrids using interior search
 269 algorithm,” *Neural Comput. Appl.*, vol. 30, no. 7, pp. 2173–2189, 2016, doi:
 270 10.1007/s00521-016-2795-5.
- 271 [39] V. S. Aragón, S. C. Esquivel, and C. A. Coello Coello, “An immune algorithm with
 272 power redistribution for solving economic dispatch problems,” *Inf. Sci. (Ny)*, vol. 295,
 273 pp. 609–632, 2015, doi: 10.1016/j.ins.2014.10.026.
- 274 [40] K. M. Schultz, K. M. Passino, and T. D. Seeley, “The mechanism of flight guidance in
 275 honeybee swarms: subtle guides or streaker bees?,” *J. Exp. Biol.*, vol. 211, no. 20, pp.
 276 3287–3295, 2008, doi: 10.1242/jeb.018994.
- 277 [41] S. Kirkpatrick, “Optimization by simulated annealing: Quantitative studies,” *J. Stat.*
 278 *Phys.*, 1984, doi: 10.1007/BF01009452.
- 279 [42] S. Mirjalili, A. H. Gandomi, S. Z. Mirjalili, S. Saremi, H. Faris, and S. M. Mirjalili,
 280 “Salp Swarm Algorithm: A bio-inspired optimizer for engineering design problems,”
 281 *Adv. Eng. Softw.*, vol. 114, pp. 163–191, 2017, doi: 10.1016/j.advengsoft.2017.07.002.
- 282 [43] I. M. Sobol’, “On the distribution of points in a cube and the approximate evaluation of
 283 integrals,” *USSR Comput. Math. Math. Phys.*, vol. 7, no. 4, pp. 86–112, 1967, doi:
 284 10.1016/0041-5553(67)90144-9.
- 285