

Butterflies : A new source of inspiration for futuristic aerial robotics

Chakravarthi Jada, Lokesh Ch.R.S, Ashok Urlana, Shridi Swamy Yerubandi ,
Kantha Rao Bora, Gouse Basha Shaik, Pavan Baswani, Balaraju Karri
RGUKT-Nuzvid, India
cv@rguktn.ac.in

I. INTRODUCTION

Nature is an inhabitant for enormous number of species. All the species do perform complex activities with simple and elegant rules for their survival. The property of emergence of collective behavior is remarkably supporting their activities. One form of the collective behaviour is the swarm intelligence - all agents poses same rules and capabilities. This equality along with local cooperation in the agents tremendously leads to achieving global results. Some of the swarm behaviours in the nature includes birds formations , fish school maneuverings, ants movement. Recently, one school of research has studied these behaviours and proposed artificial paradigms such as Particle Swarm Optimization (PSO), Ant Colony Optimization (ACO), Glowworm Swarm Optimization (GSO) etc, [1] [4]. Another school of research used these models and designed robotic platforms to detect (locate) multiple signal sources such as light, fire, plume, odour etc. Kinbots platform [4] is one such recent experiment. In the same line of thought, this extended abstract presents the recently proposed butterfly inspired metaphor and corresponding simulations, ongoing experiments with outcomes.

II. BUTTERFLIES AS NEW INSPIRATION

The close watch of bizarre flying of the butterflies in the nature leads to many queries. The state of art indicated that, butterflies mainly does the communication for the sake of mating. Butterflies mates based on either patrolling (Fig 1.a) - where the female butterflies reflect UV to male butterflies based on the distances, and the male will respond, or perching (Fig 1.b) - where the male sit at the hill top and search in its territory among females passing by, and further they use other traits such as size and fluttering to select the mate. By considering the above mentioned behaviours and virtual simulations done by sowmya et. al [3], chakravarthi et. al [2] proposed **Butterfly Mating Optimization (BMO)** for simultaneously capturing all local optima of multimodal functions. BMO basically uses patrolling mating behaviour. BMO algorithm does not distinguish between male and female. Hence the “butterfly in nature named as Bfly in the search space”. The four phases of the algorithm are: (a). UV updation: each Bfly updates its UV value in proportion to the fitness (signal strength) value at the present location of Bfly. (b). UV distribution: each Bfly distribute its UV to the remaining Bflies according to the distance from its location. (c). l-mate

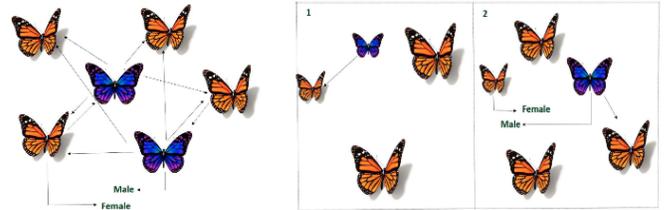


Fig. 1. Pictorial representation (a). Patrolling (b). Perching

selection: each Bfly select its l-mate (local) as per the UV and fitness values [2]. (d). Movement: each Bfly moves towards its l-mate to a step-size specified. See [2] for more understanding of the mathematics of the phases.

III. SIMULATIONS AND EXPERIMENTS

The BMO algorithm has formulated to capture the local optima of multimodal functions. To check the efficacy of the algorithm, it has been applied to 3-D multimodal function. Fig 2.a, b, c shows the 3-D function, emergence of all Bflies, UV convergence for all the iterations. Though the BMO shares some features with GSO algorithm, it has got its own distinctive qualities, and results are quite impressive in terms of smoothness in the emergence paths and l-mate selection variation. By looking at the efficacy of the BMO, we built mobile robotic swarm - BflyBots, which mimic the Bflies in the BMO. Various experiments are conducted to detect the single fluorescent signal source. Fig 3.a shows the swarm of four mobile BflyBots. Fig 3.b, c shows the emergence paths of all bots and fluorescence convergence for all time steps.

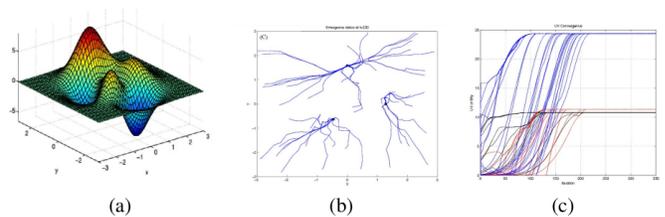


Fig. 2. (a). Function (b). Emergence (c). UV convergence

A. RESULTS AND DISCUSSION

The experimental results indicating the efficacy of the BMO in detecting the light source. We checked it with varying initial locations of the four bots. The experiments also conducted by varying step-size in the process of detection, and found that smoothness and time of co-location are effecting. Currently, we are increasing the number of bots and looking forward to conduct experiments to see the efficacy of the paradigm in detecting multiple light sources. In the same line of thought, we also planned to modify the algorithm for the sake of capturing dynamically dislocating light sources. We also planned to take a step to make our trails to embedded the model into multi-quad rotor swarm, which could suits to many practical applications.

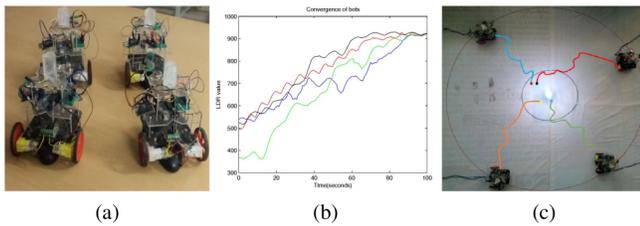


Fig. 3. (a). BflyBot swarm (b). Luminescence convergence (c). Bots emergence

REFERENCES

- [1] E.Bonabeau, M. Dorigo, G.Theraulaz, "Swarm Intelligence: From Natural to Artificial Systems", "Oxford University Press", "1990"
- [2] Jada, Chakravarthi, Anil Kumar Vadathya, Anjumara Shaik, Sowmya Charugundla, Parabhaker Reddy Ravula, and Kranthi Kumar Rachavarapu. "Butterfly Mating Optimization." In Intelligent Systems Technologies and Applications, pp. 3-15. Springer International Publishing, 2016.
- [3] Ch Sowmya, Anjumara Shaik, Chakravarthi Jada, Anil Kumar V, Butterfly communication strategies:a prospect of soft-computing techniques, Neural Networks IJCNN, 2014 International Joint Conference on. IEEE, 2016.
- [4] Krishnanand, K. N., and D. Ghose. "A glowworm swarm optimization based multi-robot system for signal source localization." Design and control of intelligent robotic systems. Springer Berlin Heidelberg, 2009. 49-68.