

Branching Subset Simulation

Hugh J. Kinnear and F.A. DiazDelaO

Abstract

Subset Simulation is a Markov chain Monte Carlo method that was initially conceived to compute small failure probabilities in structural reliability problems. This is done by iteratively sampling from nested subsets on the input space of a performance function. Subset Simulation has since been adapted to perform as a sampler in other realms such as optimisation, Bayesian updating and history matching. In all of these contexts, it can be that either the geometry of the input domain or the nature of the corresponding performance function cause Subset Simulation to suffer from ergodicity problems. This paper proposes an enhancement to Subset Simulation called Branching Subset Simulation. The proposed framework uses a nearest neighbours algorithm and Voronoi diagrams to partition the input space, and recursively begins Branching Subset Simulation anew in each partition. It is shown that Branching Subset Simulation is less likely than Subset Simulation to suffer from ergodicity problems and has improved sampling efficiency.

1 Introduction

Structural reliability methods aim to evaluate exceedance probabilities of the form

$$P_F = \int_{\mathbb{R}^d} \mathbb{1}_F(\mathbf{x}) f(\mathbf{x}) d\mathbf{x}, \quad (1)$$

where $\mathbf{x} \in \mathbb{R}^d$ is a random sample representing a set of parameters that describe a physical system, $f(\cdot)$ is the probability density function of the random samples called the *parameter distribution*, $g : \mathbb{R}^d \rightarrow \mathbb{R}$ is the *performance function* that models the behaviour of a system for a given set of parameters and $F = \{\mathbf{x} \in \mathbb{R}^d : g(\mathbf{x}) \geq b\}$ is an *exceedance region* defined by a threshold $b \in \mathbb{R}$. It is typical to assume that the parameter distribution is a standard multivariate normal distribution. This convention is helpful for proving properties of structural reliability methods and is justified by techniques such as the Nataf transformation [13].

Practical challenges such as high dimensional parameter spaces, small exceedance probabilities and a computationally expensive performance function exclude using numerical integration to evaluate the integral in Equation 1. These difficulties have motivated the development of numerous structural reliability methods [17].

First and second order reliability methods simplify the exceedance probability calculation by approximating the performance function with its Taylor expansion [7][11]. Another approach is to build a surrogate for the performance function. The response surface method models the performance function as a quadratic polynomial [5] and supervised machine learning algorithms including neural networks [18] and support vector machines [14] have been used to learn the performance function. Monte Carlo methods are another family of techniques, the simplest being Direct Monte Carlo (DMC). For small exceedance probabilities, the coefficient of variation (c.o.v.) of the DMC estimator can be very large and in response, variance reduction algorithms

have been developed. Importance sampling generates samples from an approximation of the parameter distribution [12], adaptive sampling changes the sampling density dynamically [6] and directional sampling transforms the problem into a polar coordinate system [3][9].

Subset Simulation (SuS) is a variance reduction technique that explores the parameter space using Markov chains [2]. SuS has the ability to not only calculate the size of a region of interest, but also to sample from it. This has led to SuS being adapted for application use in many different contexts beyond reliability analysis, including optimisation [10], history matching [8] and Bayesian inference [19]. SuS always exploits the locally highest performing regions of the parameter space and examples have been constructed to show this can lead to ergodicity problems [4]. Modifications of SuS have been proposed which make it more resilient against over exploitation of the input space. Fitness based seed selection promotes exploration of lower performing regions [1], sequential space conversion constructs control variates which can provide global information about the performance function [16] and spectral embedding-based reliability methods build a surrogate performance function and partition of the parameter space which highlight important regions [20].

This paper proposes an enhancement to SuS called Branching Subset Simulation (BSuS). The idea is to dynamically partition the parameter space and then in each set of the partition restart the algorithm recursively. Promising regions of the parameter space that SuS would otherwise ignore have a greater chance of being explored because of this improvement. Additionally, BSuS is naturally parallelisable and the hyper parameters of each parallel run can be adjusted independently resulting in greater sampling efficiency. This paper is organised as follows. Section 2 reviews Markov chains and the original SuS algorithm. BSuS and the BSuS estimator are introduced in Section 3. In Section 4 an example is presented where BSuS outperforms SuS and the paper is concluded in Section 5.

2 Subset Simulation

2.1 The Original Algorithm

In general, variance reduction techniques improve on the efficiency of a DMC estimator by sampling from an adjusted parameter distribution. Naturally, the estimator that is constructed from these samples must account for the adjustment. First, the sampling strategy of SuS will be explained, and then the estimation of exceedance probabilities from the samples will be covered.

Exceedance regions defined by low thresholds will have high exceedance probabilities and so variance reduction techniques like SuS are not required to efficiently estimate them. It follows that variance reduction techniques are applied when attempting to estimate exceedance probabilities defined by high thresholds, and so the sampling strategy of variance reduction techniques should be constructed in such a way that they efficiently produce the desirable high performing samples. One basic assumption that can be used to inform the choice of sampling strategy is that regions near high performing samples have a better performance than regions near low performing samples. In light of this assumption, it would be useful to be able to sample in the neighbourhood of the current highest performing samples. The basic idea of SuS is to use Markov chains, which perform a localised version of sampling, exactly as required. Markov chains can be designed to produce samples from any distribution, known as the chain's stationary distribution, for which the probability density function is known up to some scaling constant. The Metropolis algorithm is a fundamental example of a Markov chain algorithm. It begins by first taking a step from a starting sample \mathbf{x} , to some candidate \mathbf{x}' in the parameter space. The candidate is sampled from a symmetrical random distribution, called the *proposal distribution*, centered at the chain's current position. The proposal distribution is denoted $q(\cdot|\mathbf{x})$ and for the rest of the

paper a standard normal distribution will be used as the proposal distribution. Next, the acceptance ratio, $\min(1, f(\mathbf{x}')/f(\mathbf{x}))$, is computed and used as the mean parameter of a Bernoulli distribution. Finally, the Bernoulli distribution is sampled from; if the sample is equal to 1, then the candidate is accepted and returned, otherwise the candidate is rejected and the starting sample is returned. This process is summarised in Algorithm 1.

Algorithm 1 Metropolis

Input

Candidate: $\mathbf{x} \in \mathbb{R}^d$

Stationary distribution: $f(\mathbf{x})$

Proposal distribution: $q(\cdot|\mathbf{x})$

```

1: procedure METROPOLIS( $\mathbf{x}$ )
2:   Sample  $\mathbf{x}' \sim q(\cdot|\mathbf{x})$ 
3:    $\theta \leftarrow \min(1, f(\mathbf{x}')/f(\mathbf{x}))$ 
4:    $\alpha \leftarrow \text{BERNOULLI}(\theta)$ 
5:   if  $\alpha = 0$  then
6:      $\mathbf{x}' \leftarrow \mathbf{x}$ 
7:   return  $\mathbf{x}'$ 
```

Many different Markov chain strategies have been proposed for SuS [15][21]. The examples in this paper use the Modified Metropolis algorithm [2] which is summarised in Algorithm 2. This algorithm takes advantage of the special structure of the probability density functions which SuS targets, and so it is able to have good sampling efficiency in high dimensions. The ideas of this paper do not depend on the particular Markov chain algorithm chosen and so a generic step function will be used: $\text{STEP}_f : \mathbb{R}^d \rightarrow \mathbb{R}^d$, where f is the stationary distribution of the Markov chain. Given a starting sample $\mathbf{x} \in \mathbb{R}^d$, the next member of the chain will be $\text{STEP}_f(\mathbf{x})$.

Algorithm 2 Modified Metropolis

Input

Candidate: $\mathbf{x} \in \mathbb{R}^d$

Target distribution: $f(\mathbf{x}) = \mathbb{1}_F(\mathbf{x}) \prod f_i(x_i)$

Proposal distribution: $q(\cdot|\mathbf{x})$

```

1: procedure MODIFIEDMETROPOLIS( $\mathbf{x}$ )
2:   for  $1 \leq i \leq d$  do
3:     Sample  $x'_i \sim q(\cdot|x_i)$ 
4:      $\theta \leftarrow \min(1, f(\mathbf{x}')/f(\mathbf{x}))$ 
5:      $\alpha \leftarrow \text{BERNOULLI}(\theta)$ 
6:     if  $\alpha = 0$  then
7:        $x'_i \leftarrow x_i$ 
8:    $\mathbf{x}' \leftarrow (x'_1, \dots, x'_d)$ 
9:   if  $\mathbb{1}_F(\mathbf{x}) = 0$  then
10:     $\mathbf{x}' \leftarrow \mathbf{x}$ 
11:  return  $\mathbf{x}'$ 
```

The SuS algorithm is based on creating a sequence of levels with *level size* $n \in \mathbb{N}$, where a *level* is a member of the set $L = \{\mathbf{X} \subset \mathbb{R}^d : |\mathbf{X}| = n\}$. The *initial level* \mathbf{X}^0 is created by sampling n times from the parameter distribution. The performance function is then evaluated at each sample in the the initial level. The top $n_c = np$ performing samples are chosen as seeds

for the next level, where $p \in (0, 1]$ is a parameter called the *level probability*. Note this requires n and p to be chosen such that n_c is an integer. The performance of the lowest performing seed becomes the first intermediate threshold b_1 , which defines the first intermediate region $F_1 = \{\mathbf{x} \in \mathbb{R}^d : g(\mathbf{x}) \geq b_1\}$. A Markov chain of length $n_s = p^{-1}$ is then created from each of the seeds using the step function STEP_{f_1} where $f_1(x) = f(x)\mathbb{1}_{F_1}(x)$. Note that p must be chosen so that n_s is an integer. The union of these Markov chains determines the next level \mathbf{X}^1 . The process is repeated to create all subsequent levels. Namely, to create \mathbf{X}^k , seeds are chosen from \mathbf{X}^{k-1} . The seeds define an intermediate threshold b_k and an intermediate region F_k , which defines a target distribution f_k . The level is then created from the seeds using the STEP_{f_k} function. This process continues until a stopping condition is met.

The choice of stopping condition is context dependent. In structural reliability problems, there is a specified performance threshold b_\star which defines an exceedance region F_\star called the *failure region*. In this context, the goal is to estimate the *probability of failure*, which is the exceedance probability of the failure region, and so the algorithm should only be stopped once enough samples have been produced in the failure region such that the estimator is sufficiently accurate. Explicitly, the algorithm stops on level m if

$$\sum_{\mathbf{x} \in \mathbf{X}^m} \mathbb{1}_{F_\star}(\mathbf{x}) \geq n_c. \quad (2)$$

In other contexts where SuS is used, a predefined threshold might not exist. In those cases, some type of convergence criteria is used. Again, the ideas in this paper do not depend on which particular stopping condition is chosen and so a generic stopping function will be used:

$$\text{STOP} : L \rightarrow \{\mathbf{True}, \mathbf{False}\}.$$

The output of the algorithm is the sequence of levels it creates, $(\mathbf{X}^k)_{k=0}^m$. The complete SuS procedure is summarised in Algorithm 3.

2.2 Estimating Exceedance Probabilities

The output levels $\mathbf{X}^0, \dots, \mathbf{X}^m$ of SuS can be used to estimate any exceedance probability P_F defined by a threshold b and exceedance region F . The levels correspond to a sequence of intermediate thresholds, b_1, \dots, b_m , which in turn defines a sequence of intermediate regions F_1, \dots, F_m . Let $b_0 = -\infty$, $F_0 = \mathbb{R}^d$ and $m' = \max(\{k : b_k < b\})$. Since $F_0, F_1, \dots, F_{m'}, F$ is a decreasing sequence of sets, Bayes' Theorem can be used to obtain an expression for the exceedance probability:

$$P_F = \mathbb{P}(F_1|F_0)\mathbb{P}(F_2|F_1)\dots\mathbb{P}(F_{m'}|F_{m'-1})\mathbb{P}(F|F_{m'}). \quad (3)$$

The idea of the SuS estimator is to construct an estimator for each of the terms in the above expansion of the exceedance probability, which are denoted as $P_1, P_2, \dots, P_{m'+1}$ respectively, and then take their product.

Algorithm 3 Subset Simulation

InputLevel size: $n \in \mathbb{N}$ Level probability: $p \in (0, 1]$ Parameter distribution: $f : \mathbb{R}^d \rightarrow \mathbb{R}$ Performance function: $g : \mathbb{R}^d \rightarrow \mathbb{R}$ **Definitions** $n_c \leftarrow np$ $n_s \leftarrow p^{-1}$ **Subroutines**STOP: $L \rightarrow \{\mathbf{True}, \mathbf{False}\}$ STEP: $\mathbb{R}^d \rightarrow \mathbb{R}^d$

```

1: procedure SUBSETSIMULATION( $n, p, f, g$ )
2:   Sample  $\mathbf{x}_1^0, \dots, \mathbf{x}_n^0 \sim f$ 
3:    $\mathbf{X}^0 \leftarrow (\mathbf{x}_i^0)_{i=1}^n$ 
4:    $m \leftarrow 0$ 
5:   while STOP( $\mathbf{X}^m$ ) is False do
6:     let  $\mathbf{x}'_1, \dots, \mathbf{x}'_n$  be a relabelling of  $\mathbf{X}^m$  such that  $g(\mathbf{x}'_1) \geq \dots \geq g(\mathbf{x}'_n)$ 
7:      $m \leftarrow m + 1$ 
8:      $b_m \leftarrow g(\mathbf{x}'_{n_c})$ 
9:      $F_m \leftarrow \{\mathbf{x} \in \mathbb{R}^d : g(\mathbf{x}) \geq b_m\}$ 
10:     $f_m(\mathbf{x}) \leftarrow f(\mathbf{x}) \mathbb{1}_{F_m}(\mathbf{x})$ 
11:    for  $1 \leq i \leq n_c$  do
12:       $\mathbf{x}_{i,1}^m \leftarrow \mathbf{x}'_i$ 
13:      for  $2 \leq j \leq n_s$  do
14:         $\mathbf{x}_{i,j}^m \leftarrow \text{STEP}_{f_m}(\mathbf{x}_{i,j-1}^m)$ 
15:     $\mathbf{X}^m \leftarrow ((\mathbf{x}_{i,j}^m)_{i=1}^{n_c})_{j=1}^{n_s}$ 
16:  return  $(\mathbf{X}^k)_{k=0}^m$ 

```

Definition 2.1 (SuS Estimator). Given a decreasing sequence of sets $F_0, F_1, \dots, F_m, F_{m+1}$, a sequence of levels $\mathbf{X}^0, \dots, \mathbf{X}^m$ each of size n , an estimator \hat{P} is a SuS estimator for $\mathbb{P}(F_{m+1}|F_0)$ with respect to the density function f if it has the following product form:

$$\hat{P} = \prod_{i=1}^{m+1} \hat{P}_i,$$

$$\hat{P}_i = \frac{1}{n} \sum_{\mathbf{x} \in \mathbf{X}^{i-1}} \mathbb{1}_{F_i}(\mathbf{x})$$

where $x \sim f|F_i$ for all \mathbf{X}^i .

It can be shown that SuS estimators are consistent and asymptotically unbiased [2]. By using the sequence of levels $\mathbf{X}^0, \dots, \mathbf{X}^{m'}$ a SuS estimator can be used to estimate the required exceedance probability:

$$P_F = \mathbb{P}(F) = \mathbb{P}(F|F_0) \approx \hat{P}_F = \prod_{i=1}^{m'+1} \hat{P}_i = p^{m'} \hat{P}_{m'+1}, \quad (4)$$

where the last equality holds since $\hat{P}_k = p$ for $1 \leq k \leq m'$ due to the adaptive choice of intermediate thresholds.

The first estimator in the product, \hat{P}_1 , is a DMC estimator, the c.o.v of which is given by:

$$\delta_1 = \sqrt{\frac{1 - P_1}{nP_1}}. \quad (5)$$

An estimation of the c.o.v, $\hat{\delta}_1$, can be made by substituting \hat{P}_1 for P_1 in Equation 5.

The rest of the estimators in the product are Markov Chain Monte Carlo (MCMC) estimators. Normally Markov Chain methods require a burn-in period before the samples have the target distribution. SuS however has a property known as perfect sampling, since the seeds of the chains will always have been sampled according to the target distribution. This means that there is no burn-in period and all the samples can be used in the calculation. Assuming that samples generated by different chains are uncorrelated through the indicator function $\mathbb{1}_{F_k}$ the c.o.v of the MCMC estimators is given by

$$\delta_k = \sqrt{\frac{1 - P_k}{nP_k}}(1 + \gamma_k), \quad (6)$$

where γ_k is a factor accounting for the correlation between samples in the same chain. An estimator for the c.o.v., $\hat{\delta}_k$ for $2 \leq k \leq m' + 1$, can be obtained by substituting γ_k for an estimation $\hat{\gamma}_k$ and P_k for \hat{P}_k in Equation 6 [2].

Since the samples generated by Markov chains are correlated, MCMC estimators will have a higher c.o.v. than DMC estimators given the same number of samples. The *effective sample size* of an MCMC estimator is $n/(1 + \gamma_k)$. The higher the correlation of the chains, the lower the effective number of samples. A common estimator used for the c.o.v. of the SuS estimator δ is

$$\hat{\delta} = \sqrt{\sum_{k=1}^{m+1} \hat{\delta}_k^2}. \quad (7)$$

3 Branching Subset Simulation

3.1 Motivation

At any given level of a SuS run the highest performing samples are chosen as seeds. SuS then creates the next level by exploring the parameter space in the regions that are close to the seeds. This is often a sensible course of action. However, there are cases where low performing regions must be traversed in order to reach high performing regions, and so SuS can fail to properly populate the parameter space.

Let the *design point* be the point in an exceedance region with highest probability density. For an accurate estimation of the exceedance probability, it is critical that the neighbourhood of the design point is populated. A good example in the structural reliability context of SuS giving inaccurate estimations was described in [4]. In this example, the parameter space is two-dimensional and the standard bi-variate normal distribution is used as the parameter distribution. The performance function is a piecewise linear function given by $g(x) = -\min(g_1(x), g_2(x))$ where

$$g_1(x) = \begin{cases} 4 - x_1 & x_1 > 3.5, \\ 0.85 - 0.1x_1 & x_1 \leq 3.5, \end{cases} \quad (8)$$

$$g_2(x) = \begin{cases} 0.5 - 0.1x_2 & x_2 > 2, \\ 2.3 - x_2 & x_2 \leq 2. \end{cases} \quad (9)$$

Note that the function has been multiplied by -1 since this paper uses the convention that SuS attains progressively higher intermediate thresholds. The failure region is defined by the threshold $b = 0$. A single run of SuS using level size of $n = 500$, level probability of $p = 0.1$, and the stopping condition in Equation 2 can be seen in Figure 1. In the region populated by the initial level, SuS produces samples in the positive x_2 direction since it has steepest gradient. However, further from the mean of the parameter distribution the performance function begins to increase more rapidly in the positive x_1 direction, meaning this is where the design point is located.


Eventually, SuS manages to produce some samples in the failure region and the stopping condition is satisfied. Despite this, the high density area of the failure region has not been explored and so the estimate for the probability of failure is not accurate. In a test of 50 runs, SuS managed to populate the neighbourhood of the design point only 9 times. The mean estimation of the probability of failure for the 41 degenerate runs was 2.13×10^{-7} . For reference, a DMC estimator using 10^7 samples calculated the probability of failure as 3.12×10^{-5} .

3.2 Proposed Algorithm


BSuS is a modification to the SuS algorithm that aims to more fully explore the parameter space. The idea is to create a partition of the parameter space at each level. Then, in each set of the partition, a new level is created using as seeds the highest performing samples in that set. This process continues recursively on all the new levels. SuS creates levels in series and chooses seeds as the globally highest performing samples. BSuS creates parallel levels that branch out and chooses the locally best performers as seeds. Of course, the choice of partition at each level is critical. This will be dealt with later, but for now a generic partition function will be defined:

$$\text{PARTITION} : L \rightarrow \mathbf{Part}(\mathbb{R}^d), \quad (10)$$


where $\mathbf{Part}(\mathbb{R}^d)$ denotes the set of all possible partitions of \mathbb{R}^d . During a BSuS run the partition function is used on each level after it has been created. If a partition consisting of one set is

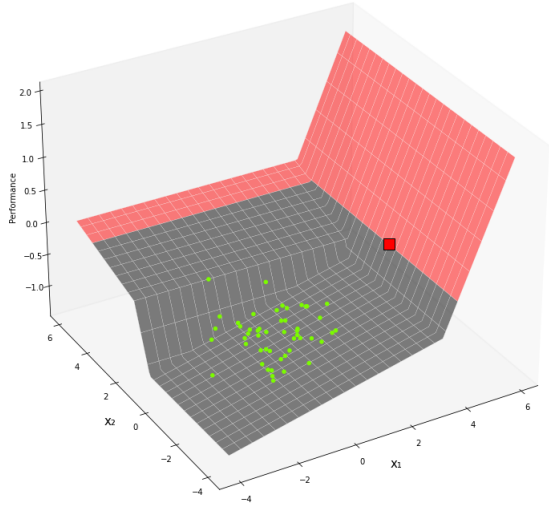


(a) Initial level

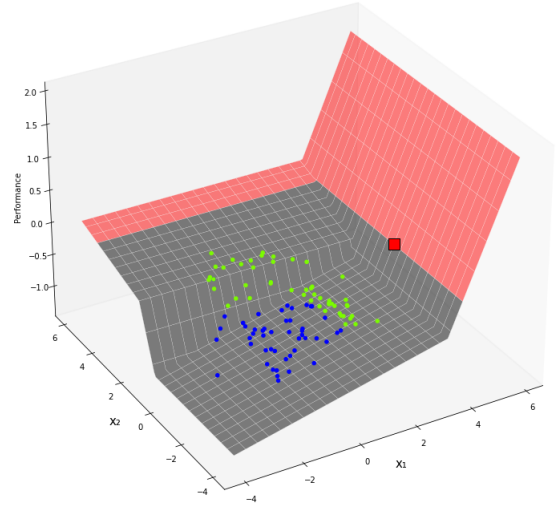

(b) Level 1

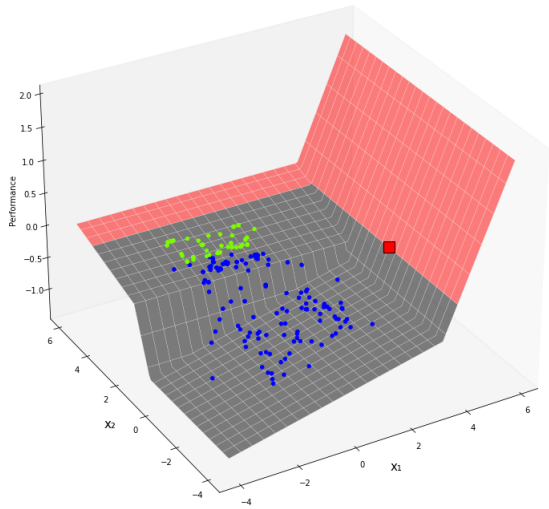

(c) Level 3

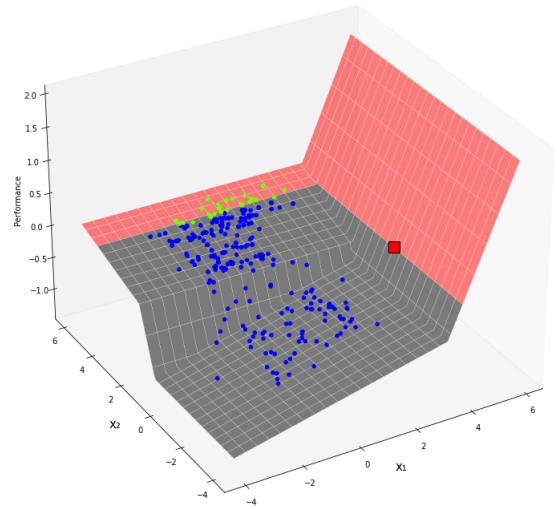

(d) Level 6

Figure 1: SuS running on the piecewise linear function. The failure region is shown in red and the design point is represented by the red square. Only every 10th sample has been plotted for clarity. The green samples are the level that has just been added.

returned, the algorithm carries on as a normal SuS would. If a proper partition of the parameter space is returned, A_1, \dots, A_{n_p} , then the algorithm branches. There will be an independent BSuS run, called a *branch*, started in each set of the partition. Starting with A_1 , the algorithm first creates the initial level \mathbf{X}^0 of the branch by sampling uniformly with replacement n times from the set $A_1 \cap \mathbf{X}^m$, where \mathbf{X}^m is the level that caused the branching. Now a new run of BSuS begins with this initial level and the indicator function $\mathbb{1}_{A_1}(\mathbf{x})$ that keeps the samples produced confined to the correct partition. Note that the indicator function also applies to any branches that this branch might create. This process is repeated for all the sets of the partition.

The output of the algorithm is a branch called the *initial branch*. A branch is a two dimensional object that contains a sequence of levels and a sequence of branches. If a branch does not split, i.e. the levels of the branch never produce a proper partition, then levels are returned along with the empty set to keep the dimension of the output consistent. The BSuS procedure is summarised in Algorithm 4.

3.3 Calculating Exceedance Probabilities

The output of BSuS, the initial branch $\mathbf{B} = ((\mathbf{X}^k)_{k=0}^m, (\mathbf{B}^l)_{l=1}^{n_p})$, can be used to compute any exceedance probability P_F defined by a threshold b and exceedance region F . There are two equivalent ways of defining the BSuS estimator, recursively and non-recursively. It is easier to prove statistical properties using the non recursive definition, however it is easier to understand and implement the recursive definition. Here the non-recursive definition will be discussed.

Note that there is a finite number of branches contained in the output of BSuS. For each branch the following procedure is carried out. A branch has an associated set of intermediate thresholds b_0, b_1, \dots, b_m where b_0 is the threshold used to construct the initial level of the branch. For the initial branch $b_0 = -\infty$. Let $m' = \max(\{k : b_k < b\})$. If $m' = m$ and the branch splits then carry onto the next branch. If not, then a *terminating* branch has been found. Since eventually there must be a branch which does not split, there will be at least one terminating branch. For every terminating branch carry out the following procedure. The branches that a branch contains are defined as its *children*. The branch that contains a branch is called the *parent branch*. Let $\mathbf{B}_1, \dots, \mathbf{B}_s$ denote a sequence of branches where each subsequent branch is the child of the branch before it. \mathbf{B}_1 is the initial branch and \mathbf{B}_s is a terminating branch. Let the members of such a sequence be called the *ancestors* of the terminating branch. The ancestors can be determined uniquely for any terminating branch. For any branch, let the set which the samples of the branch are confined to (due to the indicator function) be called the *confining set* of the branch. The sequence of confining sets A_1, \dots, A_s associated with the ancestors is decreasing. For each ancestor \mathbf{B}_j denote the associated sequence of intermediate regions as $(F_i^j)_{i=0}^{m_j}$. Truncate the last sequence, $(F_i^s)_{i=0}^{m_s}$, such that $m_s = m'$, where m' is defined for each terminating branch as before. Similarly, the ancestors define a sequence of levels $\mathbf{X}^1, \dots, \mathbf{X}^{m^*}$ where $m^* = m_1 + \dots + m_s + s$. Since the sequence of sets

$$\begin{aligned} & (F_0^1 \cap A_1), (F_1^1 \cap A_1) \dots (F_{m_1-1}^1 \cap A_1), (F_{m_1}^1 \cap A_1), \\ & (F_0^2 \cap A_2), (F_1^2 \cap A_2) \dots (F_{m_2-1}^2 \cap A_2), (F_{m_2}^2 \cap A_2), \\ & \vdots \\ & (F_0^s \cap A_s), (F_1^s \cap A_s) \dots (F_{m_s-1}^s \cap A_s), (F_{m_s}^s \cap A_s), (F \cap A_s), \end{aligned}$$

is decreasing, together with the entire sequence of levels, they can be used to construct a SuS estimator for $P(F \cap A_s)$. Let T be the number of terminating branches and let $\hat{P}_1, \dots, \hat{P}_T$

Algorithm 4 Branching Subset Simulation

InputLevel size: $n \in \mathbb{N}$ Level probability: $p \in (0, 1]$ Parameter distribution: $f : \mathbb{R}^d \rightarrow \mathbb{R}$ Performance function: $g : \mathbb{R}^d \rightarrow \mathbb{R}$ **Definitions** $n_c \leftarrow np$ $n_s \leftarrow p^{-1}$ **Subroutines**STOP: $L \rightarrow \{\mathbf{True}, \mathbf{False}\}$ STEP: $\mathbb{R}^d \rightarrow \mathbb{R}^d$ PARTITION: $L \rightarrow \mathbf{Part}(\mathbb{R}^d)$

```

1: procedure BRANCHINGSUBSETSIMULATION
2:   Sample  $\mathbf{x}_1^0, \dots, \mathbf{x}_n^0 \sim f(x)$ 
3:    $\mathbf{X} \leftarrow (\mathbf{x}_i^0)_{i=1}^n$ 
4:    $I(\mathbf{x}) \leftarrow \mathbb{1}_{\mathbb{R}^d}(\mathbf{x})$ 
5:   CREATEBRANCH( $\mathbf{X}, I$ )

6: procedure CREATEBRANCH( $\mathbf{X}, I$ )
7:    $\mathbf{X}^0 \leftarrow \mathbf{X}$ 
8:    $m \leftarrow 0$ 
9:   while STOP( $\mathbf{X}^m$ ) is False do
10:     $A_1, \dots, A_{n_p} \leftarrow \text{PARTITION}(\mathbf{X}^m)$ 
11:    if  $n_p > 1$  then
12:      for  $1 \leq l \leq n_p$  do
13:         $\mathbf{X} \leftarrow$  Uniformly sample  $n$  times from  $A_l \cap \mathbf{X}^m$ 
14:         $I(\mathbf{x}) \leftarrow I(\mathbf{x}) \mathbb{1}_{A_l}(\mathbf{x})$ 
15:         $\mathbf{B}^l \leftarrow \text{CREATEBRANCH}(\mathbf{X}, I)$ 
16:         $\mathbf{B} \leftarrow ((\mathbf{X}^k)_{k=0}^m, (\mathbf{B}^l)_{l=1}^{n_p})$ 
17:      return  $\mathbf{B}$ 
18:    Let  $\mathbf{x}'_1, \dots, \mathbf{x}'_n$  be a relabelling of  $\mathbf{X}^m$  such that  $g(\mathbf{x}'_1) \geq \dots \geq g(\mathbf{x}'_n)$ 
19:     $m \leftarrow m + 1$ 
20:     $b_m \leftarrow g(\mathbf{x}'_{n_c})$ 
21:     $F_m \leftarrow \{\mathbf{x} \in \mathbb{R}^d : g(\mathbf{x}) \geq b_m\}$ 
22:     $f_m(\mathbf{x}) \leftarrow f(\mathbf{x}) \mathbb{1}_{F_m}(\mathbf{x}) I(\mathbf{x})$ 
23:    for  $1 \leq i \leq n_c$  do
24:       $\mathbf{x}_{i,1}^m \leftarrow \mathbf{x}'_i$ 
25:      for  $2 \leq j \leq n_s$  do
26:         $\mathbf{x}_{i,j}^m \leftarrow \text{STEP}_{f_m}(\mathbf{x}_{i,j-1}^m)$ 
27:       $\mathbf{X}^m \leftarrow ((\mathbf{x}_{i,j}^m)_{i=1}^{n_c})_{j=1}^{n_s}$ 
28:     $\mathbf{B}^1 \leftarrow \emptyset$ 
29:     $\mathbf{B} = ((\mathbf{X}^k)_{k=0}^m, \mathbf{B}^1)$ 
30:    return  $\mathbf{B}$ 

```

be the SuS estimators created from the terminating branches. Since the confining sets of the terminating branches can be taken together to form a partition of the entire parameter space, a sensible suggestion for an estimator of the exceedance probability can be given as:

$$P_F \approx \hat{P}_F = \sum_{i=1}^T \hat{P}_i. \quad (11)$$

It is shown in Appendix A that this estimator is asymptotically unbiased and consistent by Proposition A.1 and Proposition A.2 respectively.

Any pair \hat{P}_i, \hat{P}_j can be rewritten as $\hat{P}_i = \hat{P}_{ij} \hat{P}_a$, $\hat{P}_j = \hat{P}_{ij} \hat{P}_b$, where \hat{P}_{ij} can be thought of as a common root estimator. Let δ_{ij} be the c.o.v. of \hat{P}_{ij} , which can be estimated by a standard SuS c.o.v. estimator $\hat{\delta}_{ij}$. Let $\hat{\delta}_{ii}$ denote the c.o.v estimator of \hat{P}_i . Then a practical c.o.v. estimator for BSuS, justified by Proposition A.3, is given as

$$\delta \approx \hat{\delta} = \sqrt{\sum_{i,j=1}^T \hat{\delta}_{ij}^2}. \quad (12)$$

3.4 Partition Algorithm

A possible partition strategy will now be described. First, for each sample in the current level the kn nearest neighbours are found where k is a parameter called the *neighbour percent*. If a sample is the highest performer when compared to all of its neighbours then it is defined as a local maximum. Next, a Voronoi diagram is constructed: for each local maxima \mathbf{x}_i define a subset of the parameter space


$$A_i = \{\mathbf{x} \in \mathbb{R}^d : \|\mathbf{x} - \mathbf{x}_i\| \leq \|\mathbf{x} - \mathbf{x}_j\| \quad \forall j\}. \quad (13)$$

The lower the neighbour percent, the more the algorithm explores. On the other hand, in the extreme case when $k = 1$ the algorithm is identical to SuS. Any metric could be used to construct the distance matrix and the Voronoi diagram, and not necessarily the same one for each. As in most contexts situated in euclidean space, the obvious choice of metric is the Euclidean metric, and this is the metric used in the examples in this paper.


4 Numerical Example

Figure 2 shows a run of BSuS on the piecewise linear function with neighbour percent $k = 0.2$. The algorithm populates the initial level by sampling from the parameter distribution exactly in the same way as SuS. The difference however is that the partition function is run on the level, and two local maxima are found. The partition is defined using a Voronoi diagram. One set of the partition contains the current highest performing seeds, whilst the other contains lower performing seeds and the design point. This means the region around the design point can be explored without being overrun by the samples in the other set of the partition.


Each branch eventually terminates and the neighbourhood of the design point is populated. There is a superfluous second split in this example. This will not affect any exceedance probability calculations but does decrease sampling efficiency.

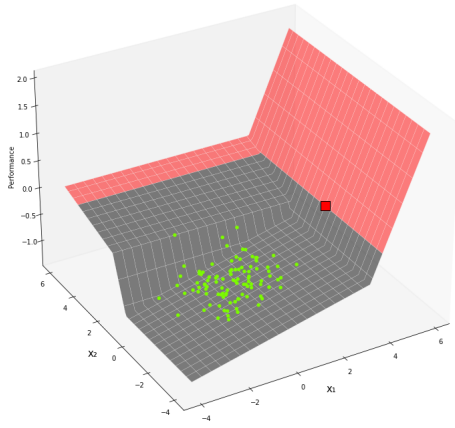


(a) Initial Level

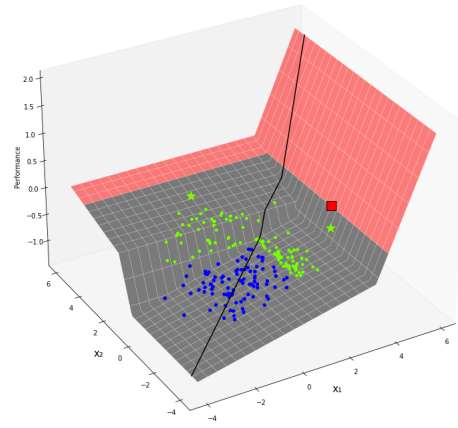


(b) First branching

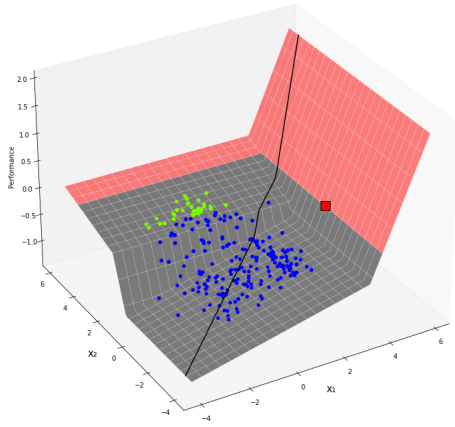


(c) Populating first branch

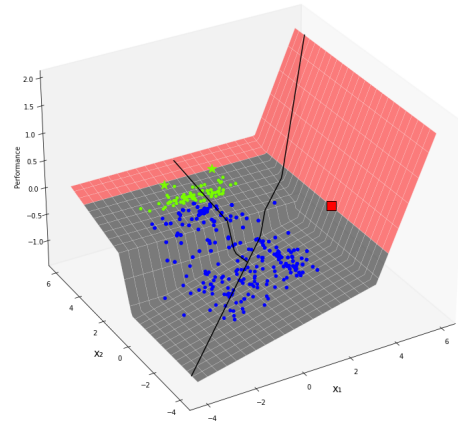

(d) Second branching

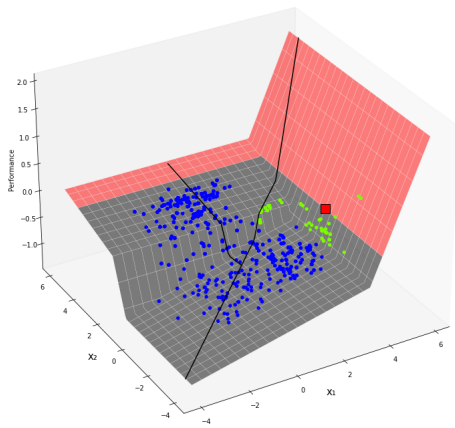

(e) Populating second branch

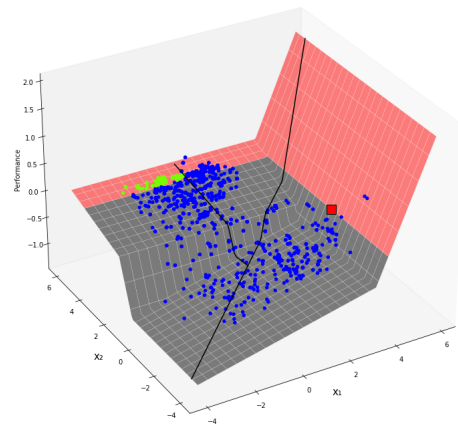

(f) Terminating final branch

Figure 2: Branching Subset simulation running on the piecewise linear function. The failure region is shown in red and the design point is represented by the red square. Only every 10th sample has been plotted. The black line indicates the partition boundary. The green stars represent the local maxima.

5 Conclusion

This paper has proposed BSuS, and enhancement of SuS that allows the user to explicitly control the exploitation and exploration trade-off. BSuS only has one additional parameter, the neighbour percent, which is easily interpretable: the lower the value the more exploration, the higher the value the more exploitation, where a value of 1 returns exactly SuS. Basic statistical properties of the resulting BSuS estimator have also been proved.

The piecewise linear function exposes the ergodicity issues of SuS since the design point is located in a direction in which SuS is not inclined to travel. On the other hand, BSuS is able to create a partition of the parameter space with a set dedicated to the design point, guaranteeing proper population of its neighbourhood. In this manuscript, BSuS was applied using the Euclidean distance. The natural enhancement to the proposed algorithm is to make it efficient in higher dimensions. This is currently under development.

References

- [1] Azam Abdollahi et al. “Subset simulation method including fitness-based seed selection for reliability analysis”. In: *Engineering with Computers* 37.4 (2021), pp. 2689–2705.
- [2] Siu-Kui Au and James L. Beck. “Estimation of small failure probabilities in high dimensions by subset simulation”. In: *Probabilistic Engineering Mechanics* 16.4 (2001), pp. 263–277.
- [3] Peter Bjerager. “Probability Integration by Directional Simulation”. In: *Journal of Engineering Mechanics* 114.8 (1988). Publisher: American Society of Civil Engineers, pp. 1285–1302.
- [4] Karl Breitung. “The geometry of limit state function graphs and subset simulation: Counterexamples”. In: *Reliability Engineering & System Safety* 182 (2019), pp. 98–106.
- [5] C. G. Bucher and U. Bourgund. “A fast and efficient response surface approach for structural reliability problems”. In: *Structural Safety* 7.1 (1990), pp. 57–66.
- [6] Christian G. Bucher. “Adaptive sampling — an iterative fast Monte Carlo procedure”. In: *Structural Safety* 5.2 (1988), pp. 119–126.
- [7] Ove Dalager Ditlevsen and H. O. Madsen. *Structural Reliability Methods*. John Wiley & Sons Ltd, 1996.
- [8] Z. T. Gong et al. “History Matching with Subset Simulation”. In: *International Journal for Uncertainty Quantification* 11.5 (2021), pp. 19–38.
- [9] Frank Grooteman. “An adaptive directional importance sampling method for structural reliability”. In: *Probabilistic Engineering Mechanics* 26.2 (2011), pp. 134–141.
- [10] Hong-Shuang Li. “Subset simulation for unconstrained global optimization”. In: *Applied Mathematical Modelling* 35.10 (2011), pp. 5108–5120.
- [11] Henrik O. Madsen, Steen Krenk, and Niels Lind. *Method of Structural Safety*. 2006.
- [12] Robert E. Melchers and C. Q. Li. “A benchmark study on importance sampling techniques in structural reliability: S. Engelund and R. Rackwitz (Munich, Germany), Structural safety, 12(4) (1993) 255–276”. In: *Structural Safety* 14.4 (1994), pp. 299–302.
- [13] A. NATAF. “Determination des Distribution des marges sont Donnees”. In: *Comptes Rendus de l Academie des Sciences* 225 (1962), pp. 42–43.
- [14] Qiujiang Pan and Daniel Dias. “An efficient reliability method combining adaptive Support Vector Machine and Monte Carlo Simulation”. In: *Structural Safety* 67 (2017), pp. 85–95.
- [15] Iason Papaioannou et al. “MCMC algorithms for Subset Simulation”. In: *Probabilistic Engineering Mechanics* 41 (2015), pp. 89–103.
- [16] Mohsen Rashki. “SESC: A new subset simulation method for rare-events estimation”. In: *Mechanical Systems and Signal Processing* 150 (2021), p. 107139.
- [17] Abdulhakim Shittu, Athanasios Kolios, and Ali Mehmanparast. “A Systematic Review of Structural Reliability Methods for Deformation and Fatigue Analysis of Offshore Jacket Structures”. In: *Metals - Open Access Metallurgy Journal* 11 (2020), p. 50.
- [18] Abdulhakim Adeoye Shittu et al. “Structural reliability assessment of offshore wind turbine support structures subjected to pitting corrosion-fatigue: A damage tolerance modelling approach”. In: *Wind Energy* 23.11 (2020), pp. 2004–2026.
- [19] Daniel Straub and Iason Papaioannou. “Bayesian Updating with Structural Reliability Methods”. In: *Journal of Engineering Mechanics* 141.3 (2015). Publisher: American Society of Civil Engineers, p. 04014134.

- [20] P.-R. Wagner et al. “Rare event estimation using stochastic spectral embedding”. In: *arXiv:2106.05824 [cs, stat]* (2021).
- [21] Ziqi Wang, Marco Broccardo, and Junho Song. “Hamiltonian Monte Carlo methods for Subset Simulation in reliability analysis”. In: *Structural Safety* 76 (2019), pp. 51–67.

A Sum of SuS Estimators

Proposition A.1. *If an estimator \hat{P} of P is the sum of SuS estimators, $\hat{P} = \sum_{t=1}^T \hat{P}_t$, where \hat{P}_t is estimating P_t and $P = \sum_{t=1}^T P_t$ then*

$$\left| \mathbb{E} \left[\frac{\hat{P} - P}{P} \right] \right| = O \left(\frac{1}{n} \right), \quad (14)$$

thus \hat{P} is asymptotically unbiased.

Proof.

$$\begin{aligned} \left| \mathbb{E} \left[\frac{\hat{P} - P}{P} \right] \right| &= \left| \mathbb{E} \left[\frac{\sum_{t=1}^T \hat{P}_t - P}{\sum_{t=1}^T P_t} \right] \right| \\ &\leq \left| \mathbb{E} \left[\sum_{t=1}^T \frac{\hat{P}_t - P_t}{P_t} \right] \right| \\ &= \left| \sum_{t=1}^T \mathbb{E} \left[\frac{\hat{P}_t - P_t}{P_t} \right] \right| \\ &\leq \sum_{t=1}^T \left| \mathbb{E} \left[\frac{\hat{P}_t - P_t}{P_t} \right] \right| \\ &= O \left(\frac{1}{n} \right) \end{aligned}$$

□

Proposition A.2. *If an estimator \hat{P} of P is the sum of SuS estimators, $\hat{P} = \sum_{t=1}^T \hat{P}_t$, where \hat{P}_t is estimating P_t and $P = \sum_{t=1}^T P_t$ and δ is the c.o.v. of \hat{P} then*

$$\delta^2 = \mathbb{E} \left[\frac{\hat{P} - P}{P} \right]^2 \leq \sum_{i,j=1}^T \delta_i \delta_j \rho_{ij} = O \left(\frac{1}{n} \right), \quad (15)$$

thus \hat{P} is a consistent estimator.

Proof.

$$\begin{aligned} \mathbb{E} \left[\frac{\hat{P} - P}{P} \right]^2 &= \mathbb{E} \left[\frac{(\sum_{t=1}^T \hat{P}_t - P)^2}{(\sum_{t=1}^T P_t)^2} \right] \\ &= \mathbb{E} \left[\frac{\sum_{i,j=1}^T (\hat{P}_i - P_i)(\hat{P}_j - P_j)}{\sum_{i,j=1}^T P_i P_j} \right] \\ &\leq \mathbb{E} \left[\sum_{i,j=1}^T \frac{(\hat{P}_i - P_i)(\hat{P}_j - P_j)}{P_i P_j} \right] \\ &= \sum_{i,j=1}^T \delta_i \delta_j \rho_{ij} \\ &= O \left(\frac{1}{n} \right) \end{aligned}$$

□

Proposition A.3. *If $\hat{P}_1 = \hat{P}\hat{P}_a$, $\hat{P}_2 = \hat{P}\hat{P}_b$ are estimators where $\hat{P}_a, \hat{P}_b, \hat{P}$ are pairwise independent, $\delta, \delta_1, \delta_2$ are the respective c.o.v. variables, σ is the standard deviation of \hat{P} and ρ is the correlation between \hat{P}_1 and \hat{P}_2 then*

$$\delta_1 \delta_2 \rho = \delta^2 \quad (16)$$

Proof.

$$\begin{aligned} \delta_1 \delta_2 \rho &= \frac{\mathbb{E}[\hat{P}^2 \hat{P}_a \hat{P}_b] - \mathbb{E}[\hat{P} \hat{P}_a] \mathbb{E}[\hat{P} \hat{P}_b]}{\mathbb{E}[\hat{P}_1] \mathbb{E}[\hat{P}_2]} \\ &= \frac{\mathbb{E}[\hat{P}_a] \mathbb{E}[\hat{P}_b] \sigma^2}{\mathbb{E}[\hat{P}_1] \mathbb{E}[\hat{P}_2]} \\ &= \delta^2 \end{aligned}$$

□